




CAB-011
Cable Adapter
SMA(F) to Ipex 1.13 MHF (U.FL) 100mm

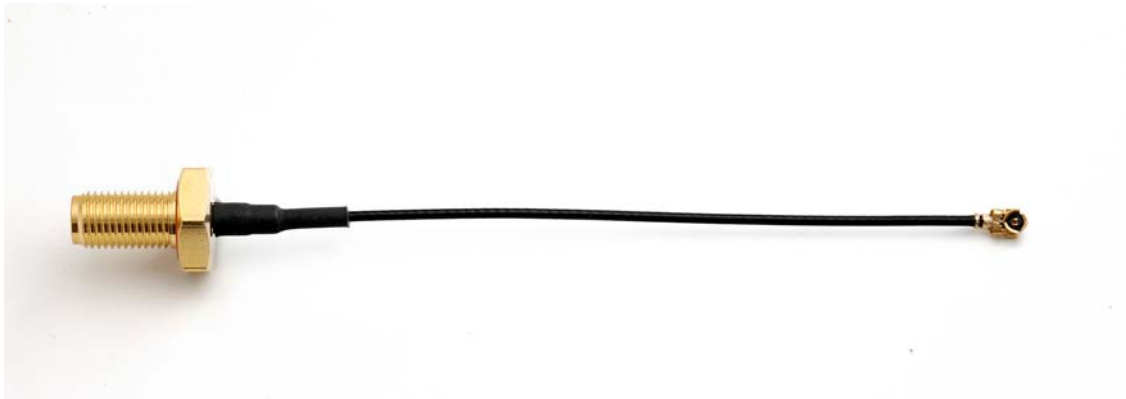

Side View

Taoglas cable adapters can be customised for every application. You choose the connector, cable type, and the cable length. Cables used are high grade low loss cables and are electrically tested before shipping. Samples are available upon request and are available to ship with Taoglas antennas.

SMA connectors are sub miniature RF connectors with threaded couplings which offer broadband performance from DC to 18 GHz. Ipex connectors are micro RF connectors with snap-on couplings onto PCB board. The MHF plugs are compatible with Hirose U.FL receptacles.

Features

Cable

- Ipex 1.13 Coax High mesh fully shielded
Heat shrink sleeve

Connector

- Start : SMA Female Straight
- End : Ipex 1.13 MHF 90 deg Plug (100% Hirose U.FL compatible)



Outline Drawing

