CAB-701
Cable Adapter
Hirose H.FL to SMA(F) 100mm 1.48 Coax

Taoglas cable adapters can be customised for every application. You choose the connector, cable type, and the cable length. Cables used are high grade low loss cables and are electrically tested before shipping. Samples are available upon request and are available to ship with Taoglas antennas.

SMA connectors are sub miniature RF connectors with threaded couplings which offer broadband performance from DC to 18 GHz. Hirose H.FL connectors are micro RF connectors with snap-on couplings ideal for internal to PCB board connections. ROHS compliant.

Features

Cable

- 1.48mm Diameter Coax — High mesh fully shielded, Heat shrink sleeve

Connector

- Start : SMA(M) Straight
- End : Hirose H.FL 90 deg

Outline Drawing

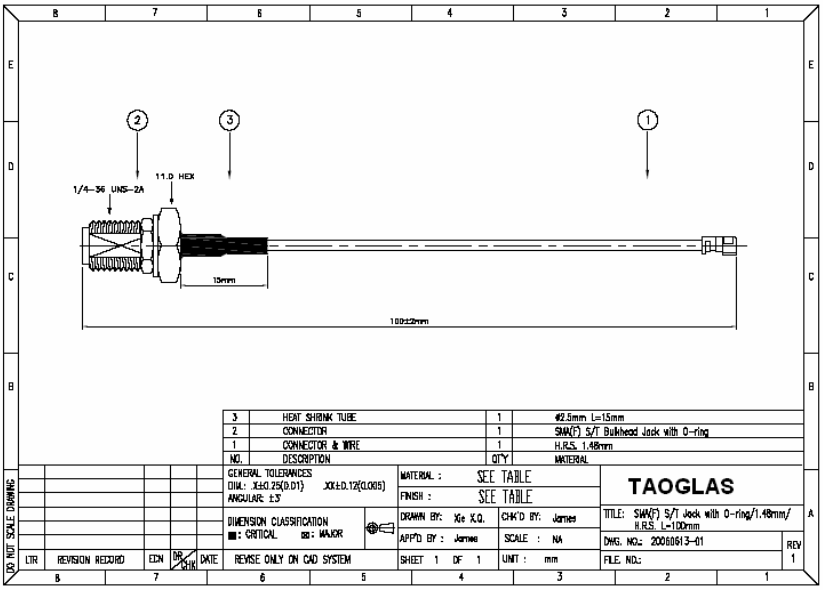

©Copyright 2006 by Taoglas Limited. All Rights Reserved.
Unit 3, Enniscorthy Technology Centre, Mile House Road,
Enniscorthy, Co. Wexford, Ireland.
www.taoglas.com