



# TAOGLAS®



# Datasheet

## All-band GNSS Embedded Quad Helix Antenna

**Part No:**  
EAHP.125.01.0100D

### Description

Embedded Active Quad Helix Antenna for GNSS L1/L2/L5/L6 with L-Band

### Features:

Supports GPS L1/L2/L5, Galileo L1/E5/E5a/E5b, GLONASS G1/G2/G3, BeiDou B1/B2a/B2b, and upper L-band (1540-1555MHz)

Input voltage : 2.0 - 5.5V

Dimensions:  $\varnothing$ 60mm \* 31.52mm

Cable: 100mm RG-174

Connector: SMA(M)

Custom Cables and Connectors Available


RoHS & Reach Compliant

<b>1.</b>	<b>Introduction</b>	<b>3</b>
<b>2.</b>	<b>Specification</b>	<b>4</b>
<b>3.</b>	<b>Antenna Characteristics</b>	<b>6</b>
<b>4.</b>	<b>Radiation Patterns</b>	<b>14</b>
<b>5.</b>	<b>Mechanical Drawing</b>	<b>21</b>
<b>6.</b>	<b>Packaging</b>	<b>22</b>
<b>7.</b>	<b>Installation Guidelines</b>	<b>23</b>
<hr/>		
	Changelog	24

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



# 1. Introduction

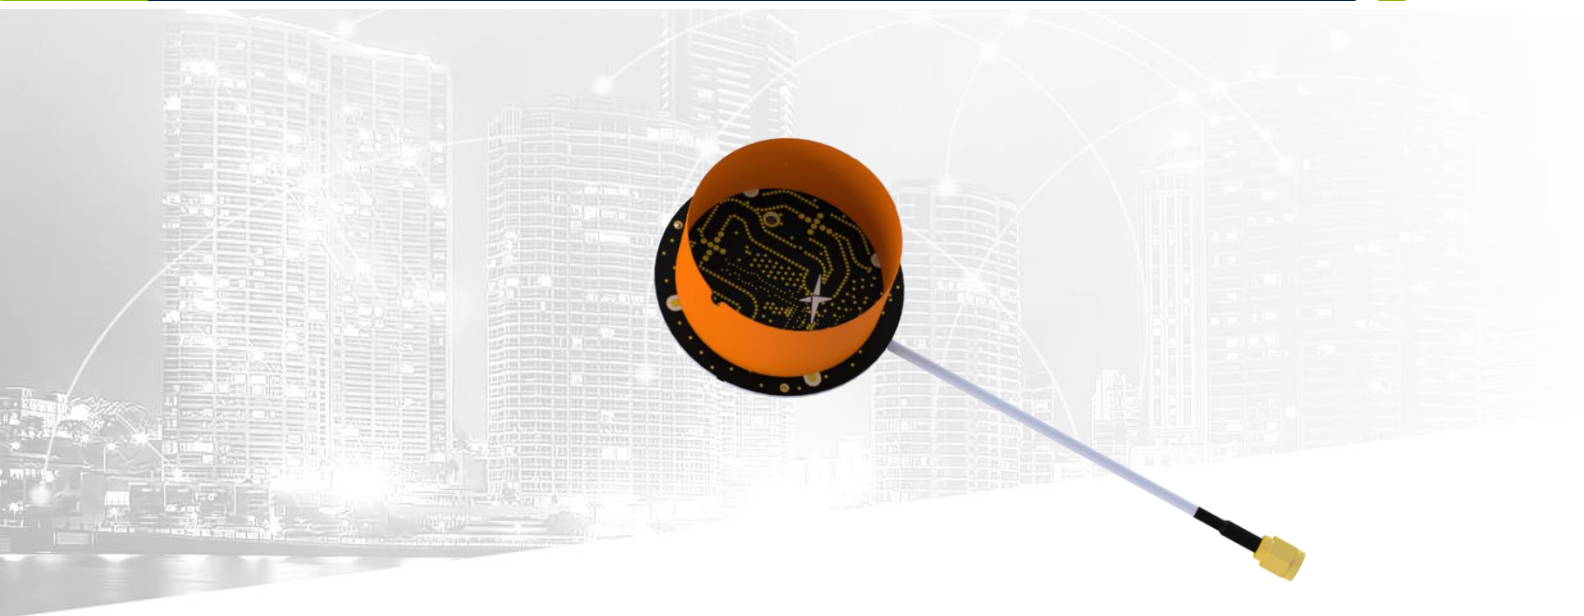

The EAHP.125 is an embedded all-band GNSS Quadrifilar Helix antenna. It covers the full GNSS L1/L2/L5/L6 spectrum while also covering the L-Band for correction services deployed by U-Blox and other providers. The EAHP.125 has right hand circular polarization which improves sensitivity, rejecting left hand circular polarized reflections commonly experienced in urban environments.

The EAHP.125 is a dual stage active GNSS antenna, thus saving time for the customer as they don't need to create a complicated active circuit to be used in conjunction with their GNSS receiver/module, for multiband GNSS this can be a difficult process so it will save design time for users.

The EAHP.125 is extremely compact at just 31.5mm in height and 60mm in diameter. It is also very lightweight due to its lightweight construction. The height and weight constraints of many devices often don't allow for a large ceramic antenna. For example, UAVs and other robotic applications often will have weight restrictions to maximize battery life and, so the optimum solution is the EAHP.125.

Typical Applications include:


- UAVs and Drones
- Robotics and Autonomous
- Transportation
- Aerospace
- Surveying

The EAHP.125 installation method is detailed in section 7 of this datasheet and requires an adhesive pad (supplied with the antenna) to ensure the antenna is secured in place when it is installed in a device. Any movement of the antenna within the device may cause damage to the antenna which will affect performance. Contact Taoglas if you are unsure of any installation requirements or require more details.

The cable and connector are fully customizable, for further information please contact your Regional Taoglas Customer support team.

## 2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	■	■		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	■	■	■		
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	■	■	■	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	■	■	■	■
L-Band	L-Band 1542 MHz				
	■				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	■	■	■	■	
IRNSS (Regional)	L5 1176.45 MHz				
	■				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	■	■	■	■

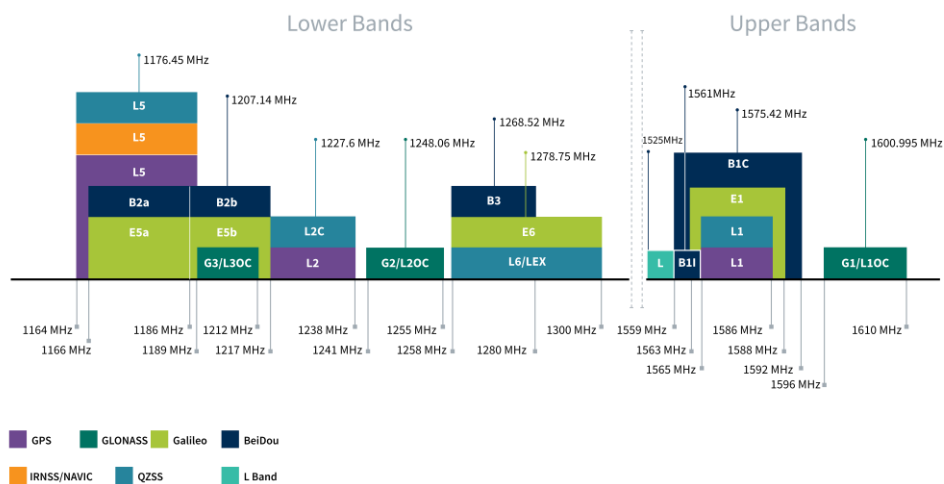

GNSS Bands and Constellations


GNSS Electrical						
Frequency (MHz)	1176.45	1227.6	1542	1561	1575.42	1603
Passive Antenna Efficiency (%)	35.7	33.25	57.2	58.11	55.33	49.94
Passive Antenna Gain at Zenith (dBic)	0.0	-0.08	0.74	0.42	1.74	1.65
Axial Ratio (dB)	1.19	1.02	1.03	2.15	2.01	0.64
PCO (cm)	0.59	0.51	0.26	0.25	0.22	0.19
PCV (cm)	1.08	1.0	0.96	0.86	0.88	0.9
Group Delay Mean (ns)	-3.99	-4.12	-1.96	-4.57	-2.98	-2.43
Group Delay Variation (ns)	3	3	8	1	4	1
Noise Figure (dB)	2.28	2.08	3.20	2.78	2.96	3.15
Polarization	RHCP					
Impedance	50 Ω					

Mechanical	
Dimensions	Ø60mm x 31.52mm
Weight	TBD
Material	FR4
Cable	RG-174
Connector	SMA(M)


Environmental	
Operation Temperature	-40 - +85°C
Storage Temperature	-40 - +85°C
RoHs & REACH Compliant	Yes

### 3. Antenna Characteristics


#### 3.1 Block Diagram

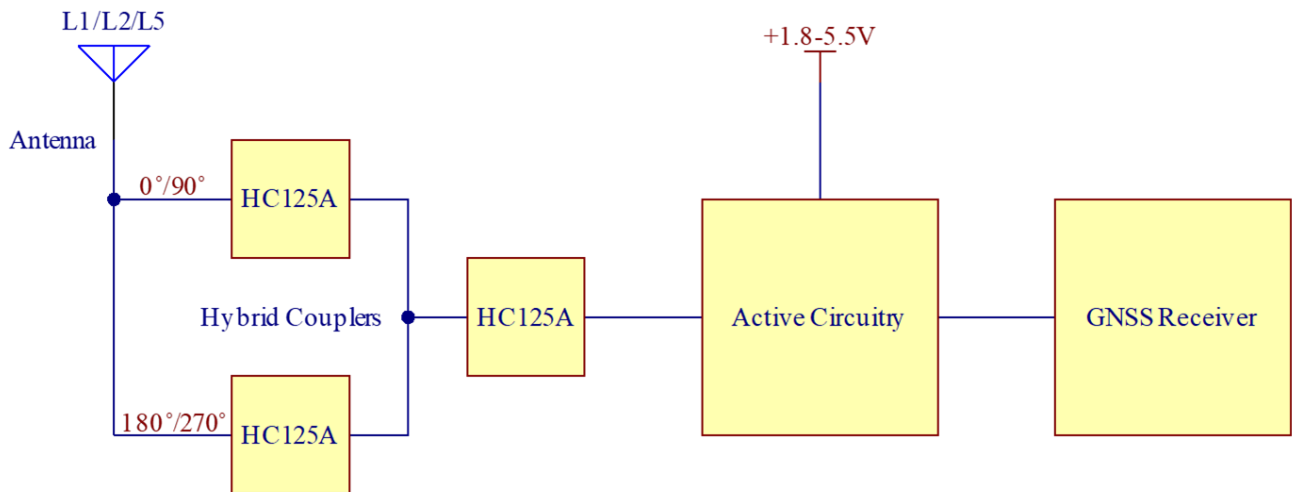


#### 3.2 Return Loss

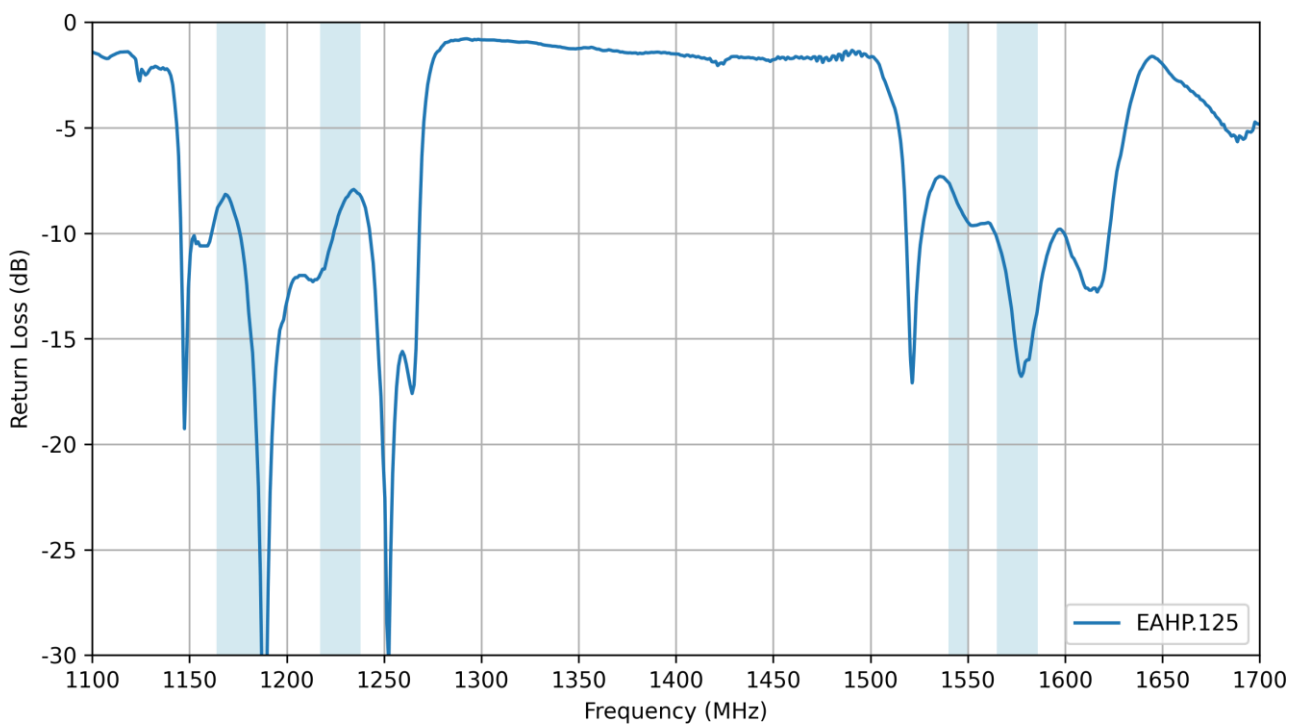


### 3.3 VSWR

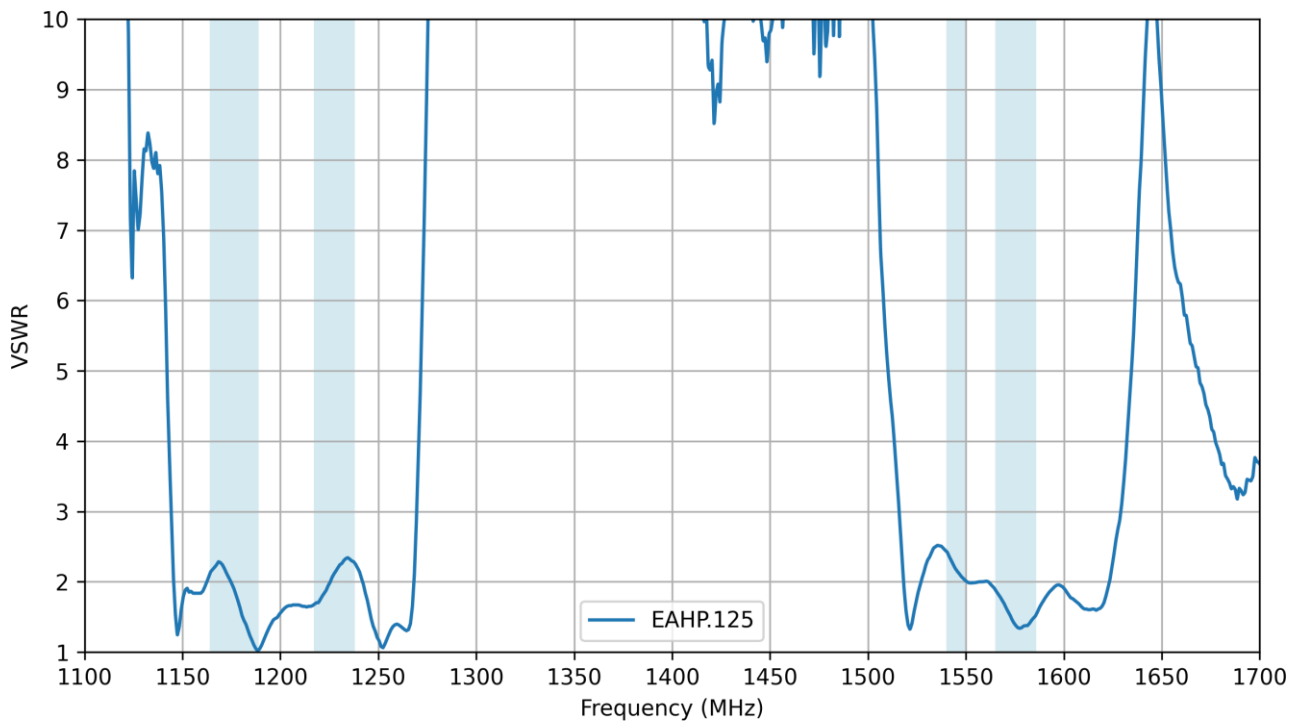


### 3.4 Efficiency

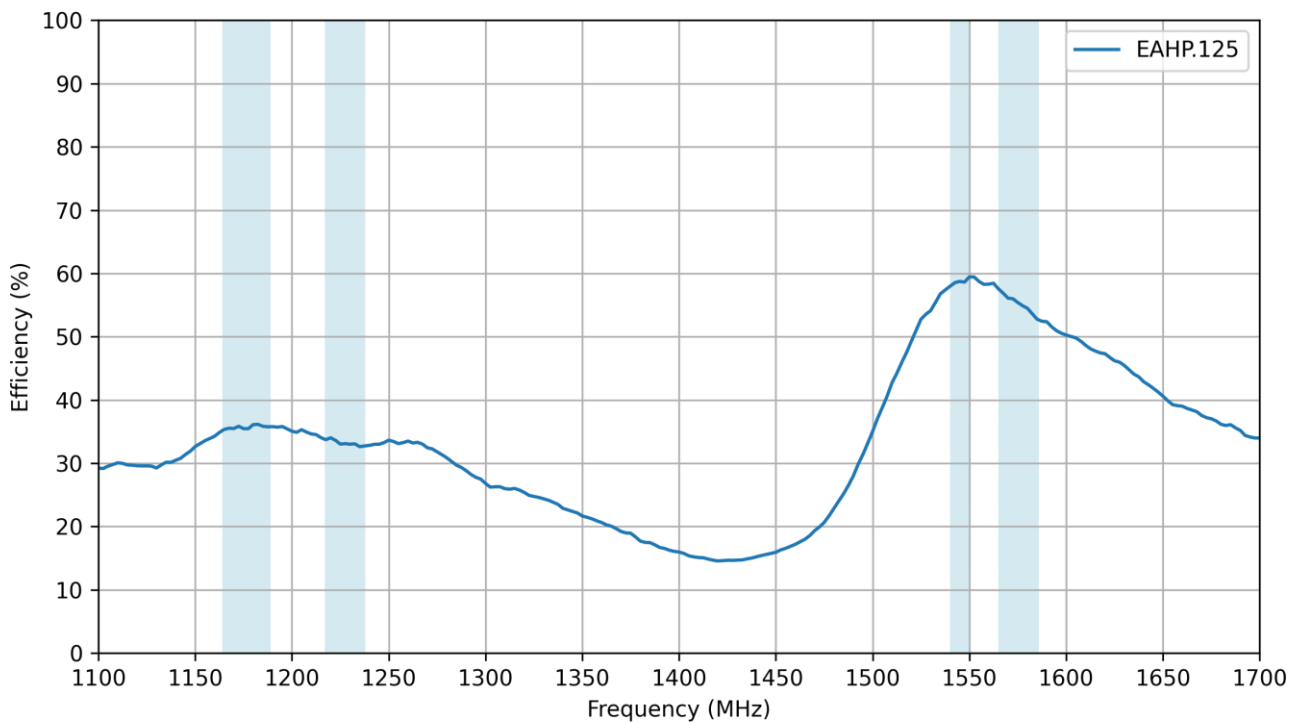

### 3.5 Average Gain

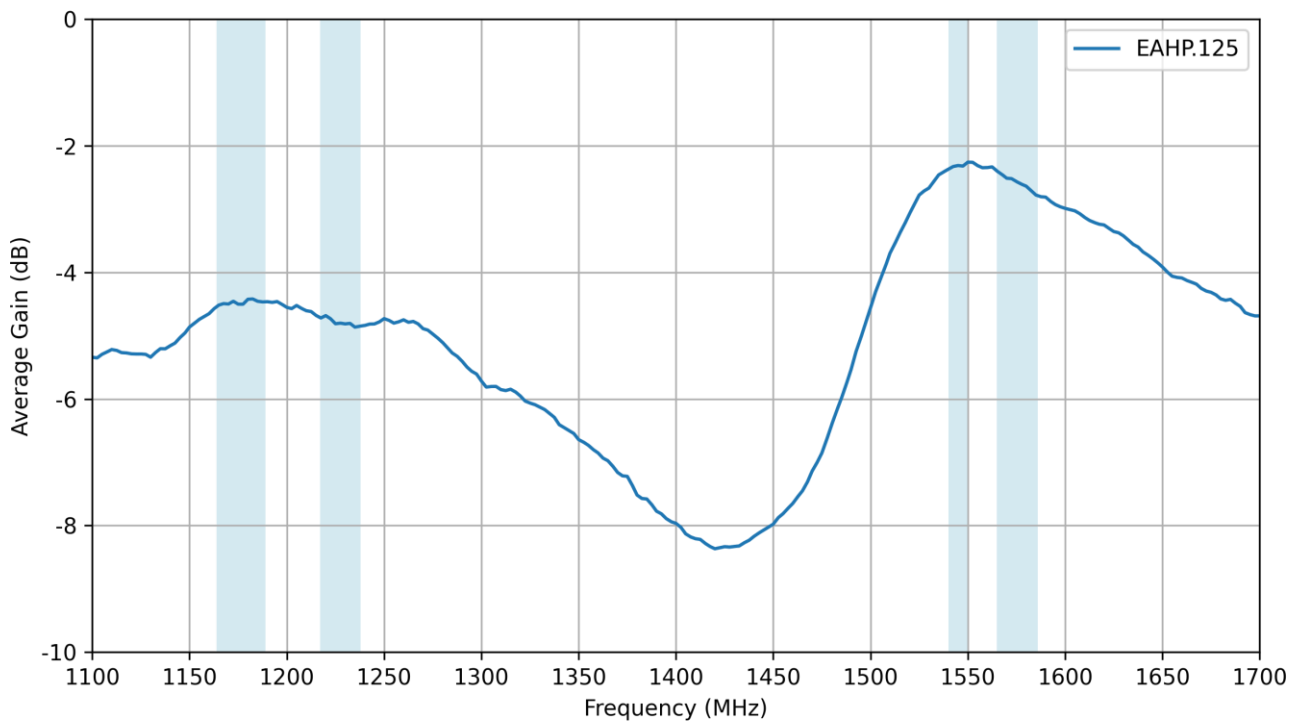


### 3.6 Peak Gain

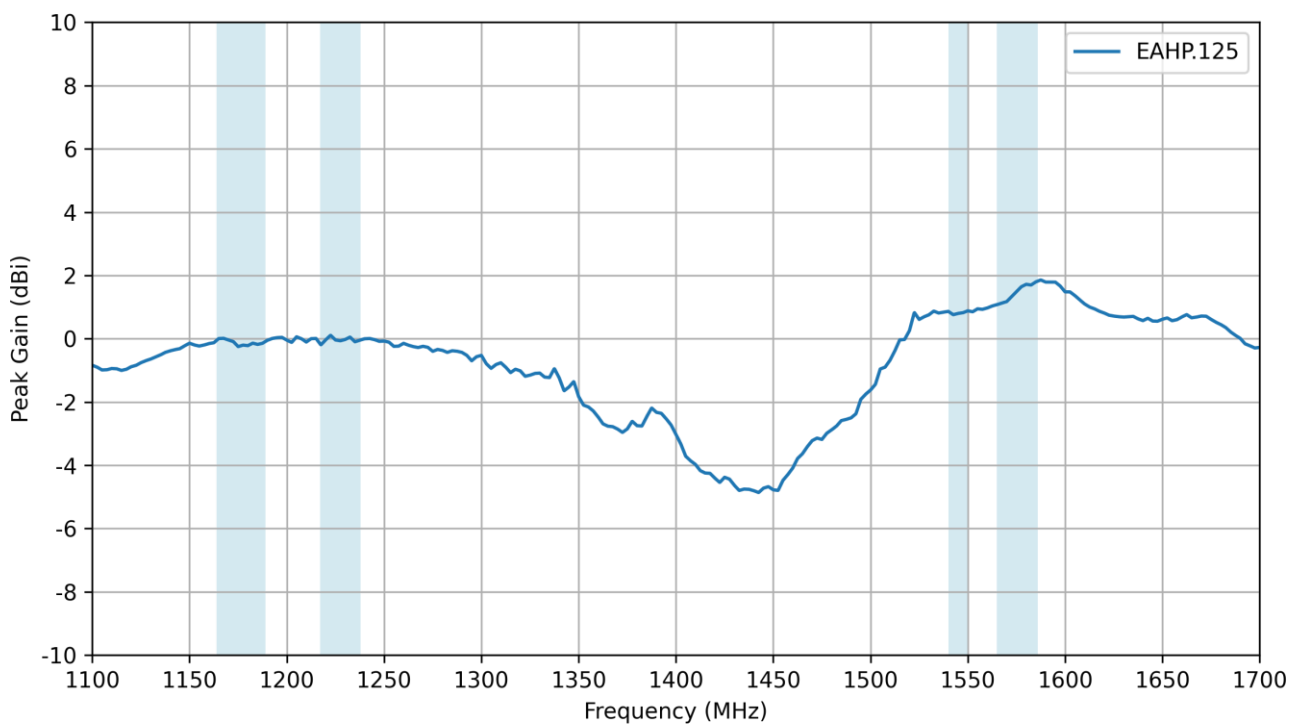





### 3.7 Axial Ratio

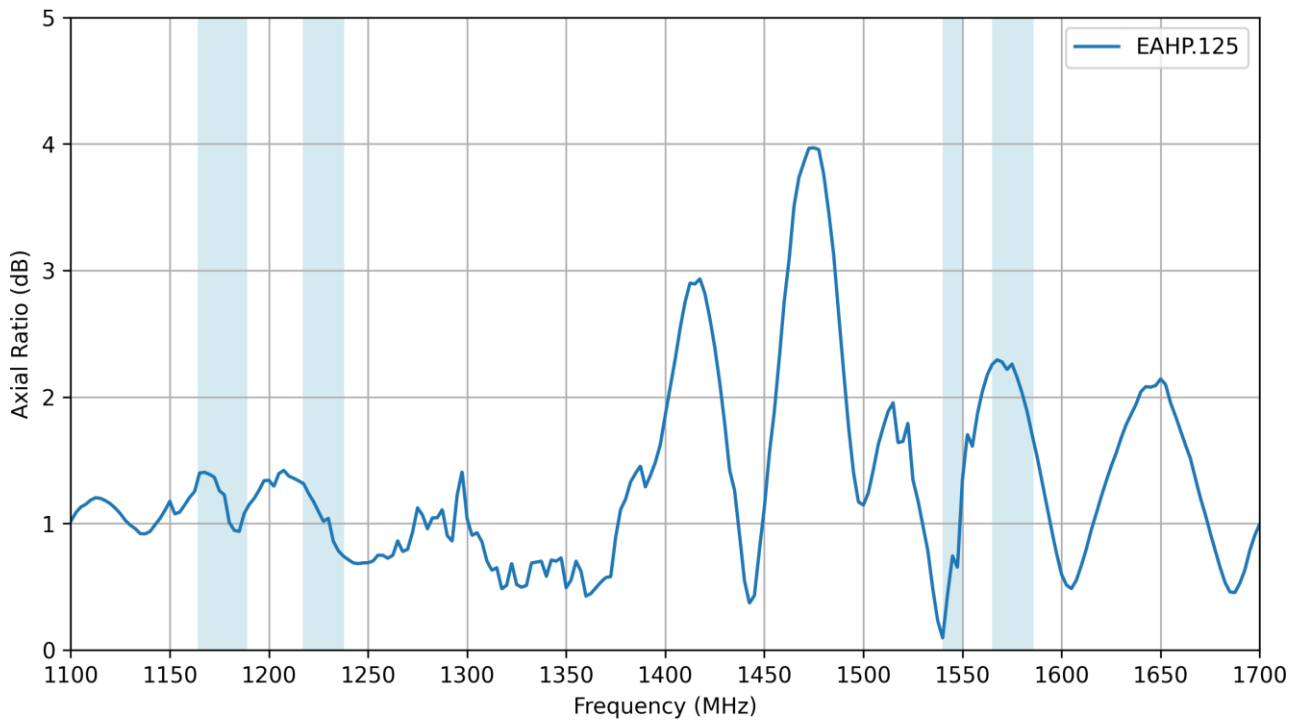


### 3.8 Axial Ratio vs Angle for Phi=0

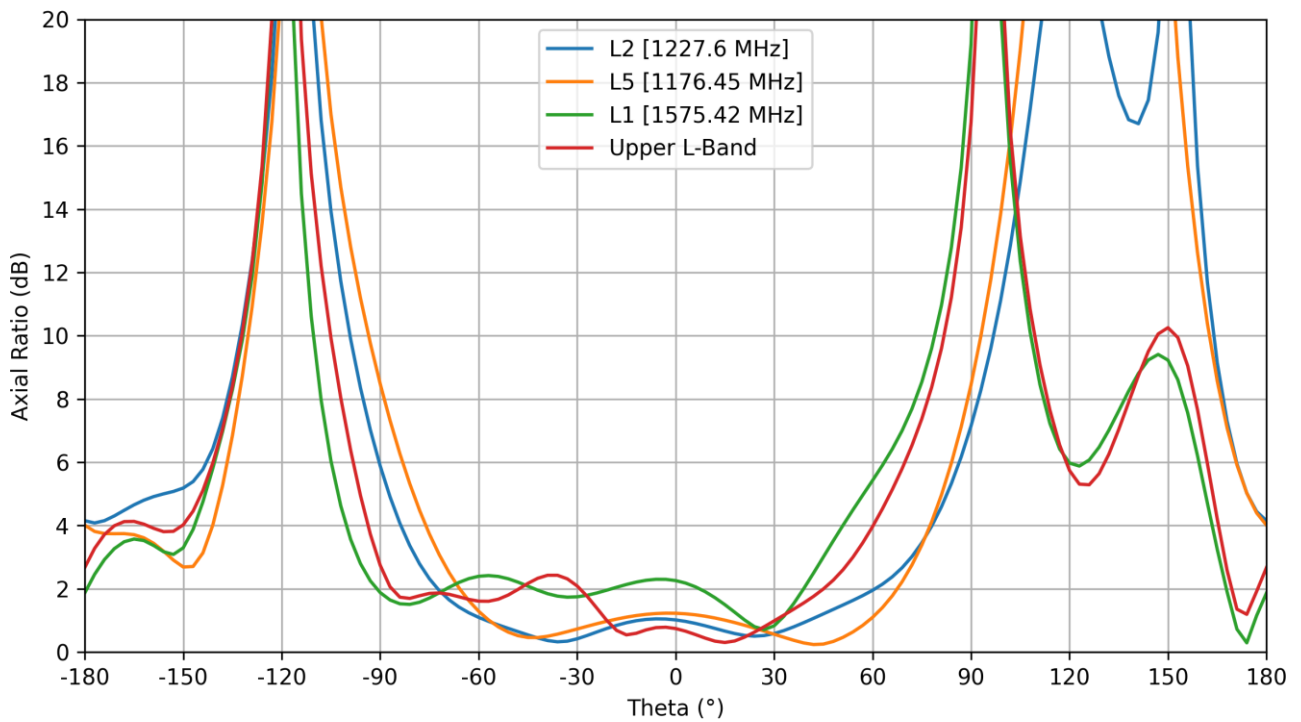


### 3.9 Axial Ratio vs Angle for Phi=90

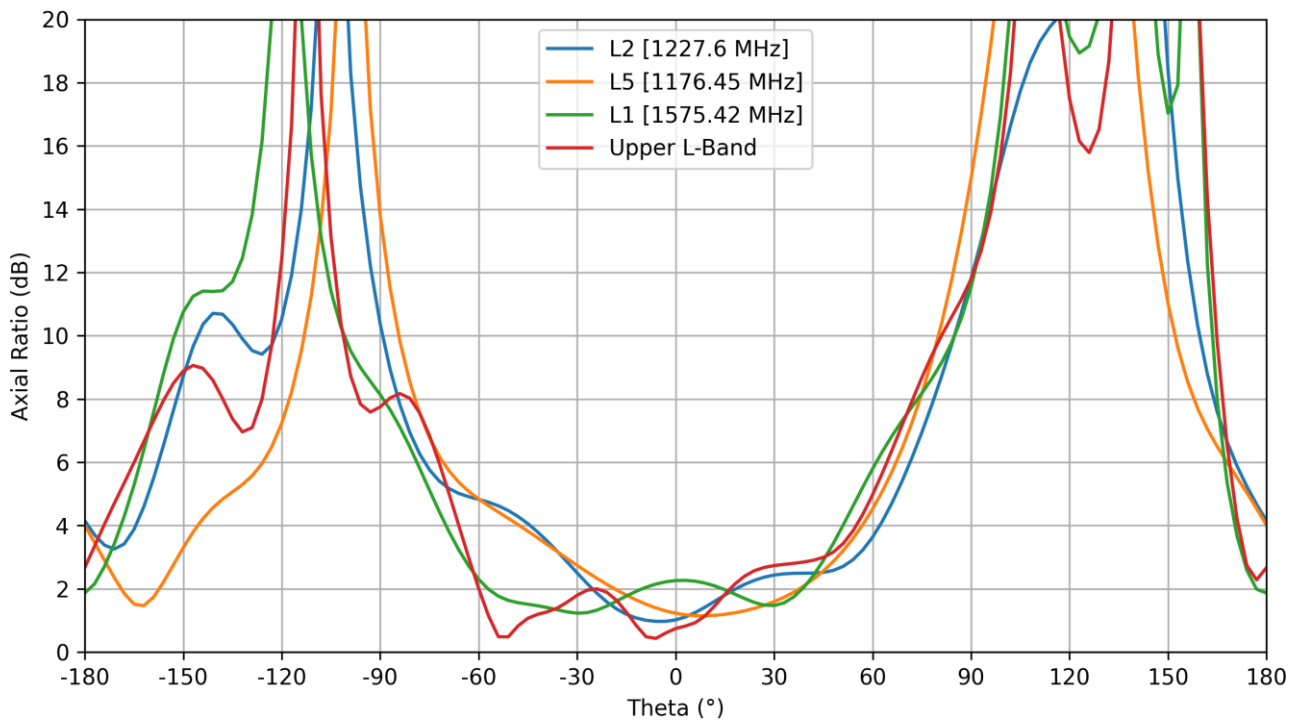


### 3.10 PCO

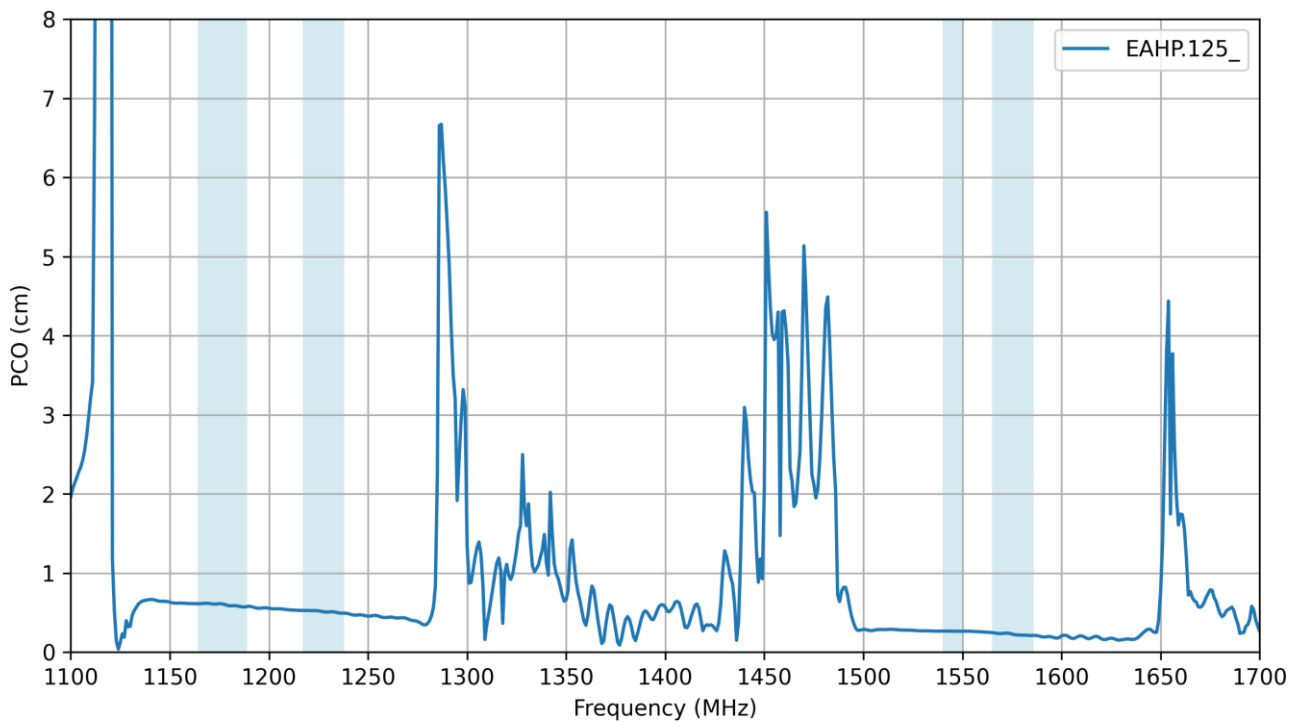


### 3.11 PCV

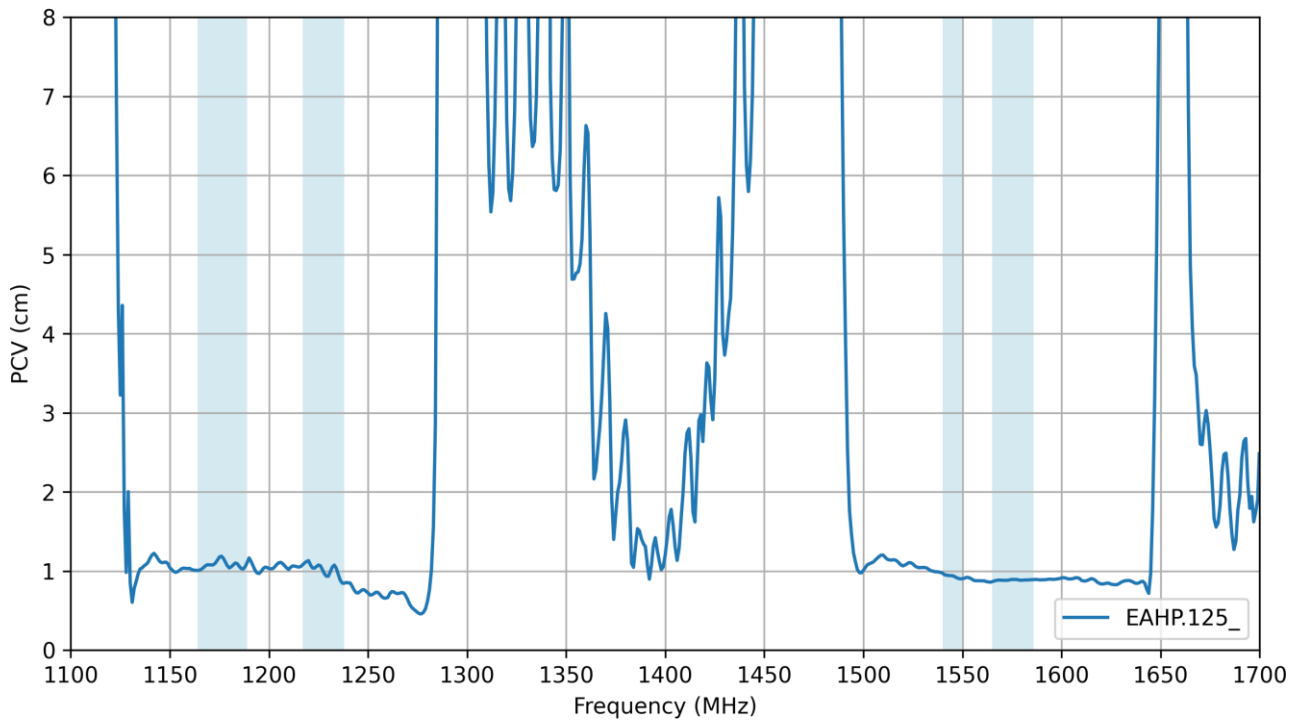


### 3.12 Noise Figure (Low band)

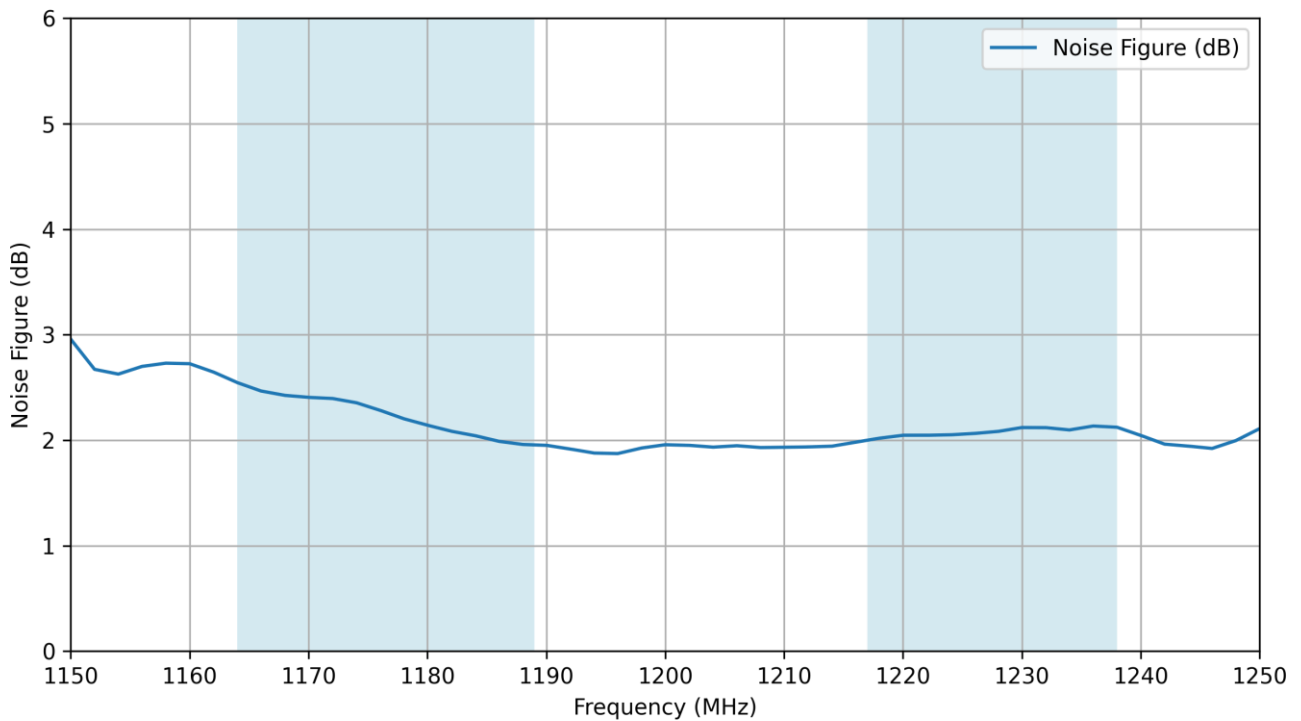


### 3.13 Noise Figure (High band)

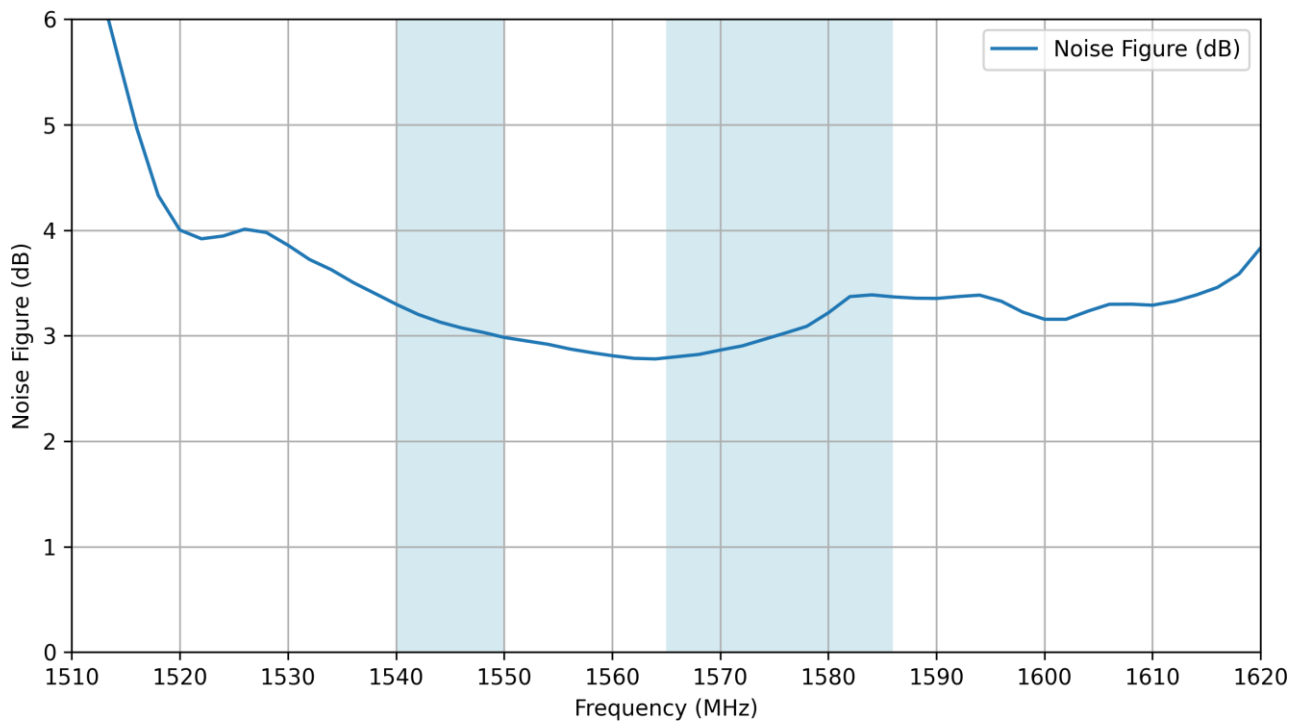


### 3.14 Gain (Low band)

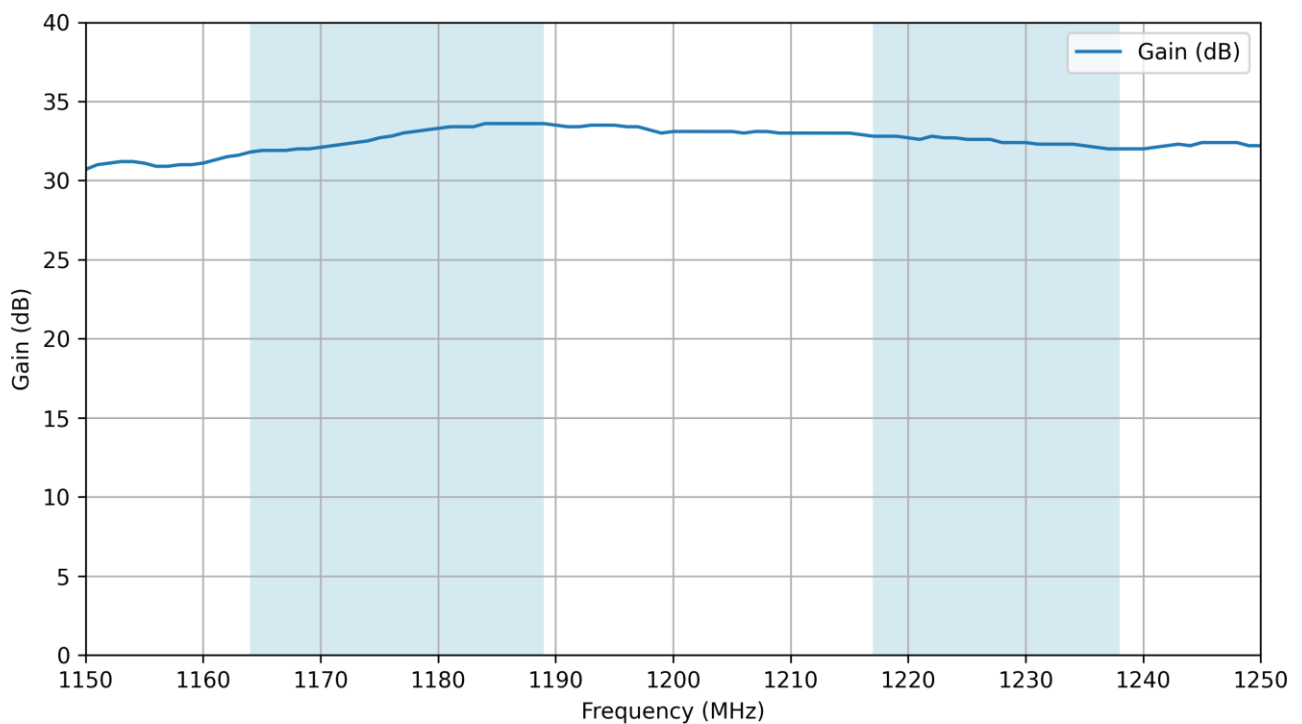

### 3.15 Gain (High band)


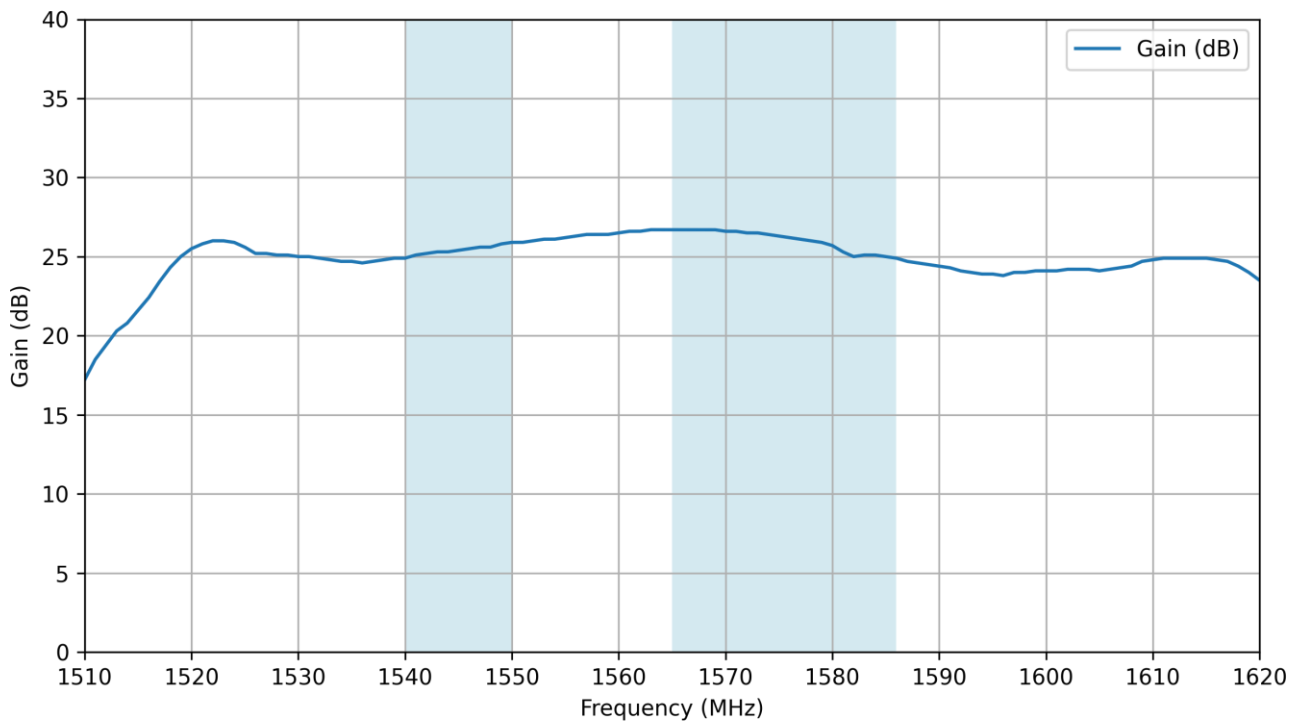


### 3.16 Out Of Band Rejection


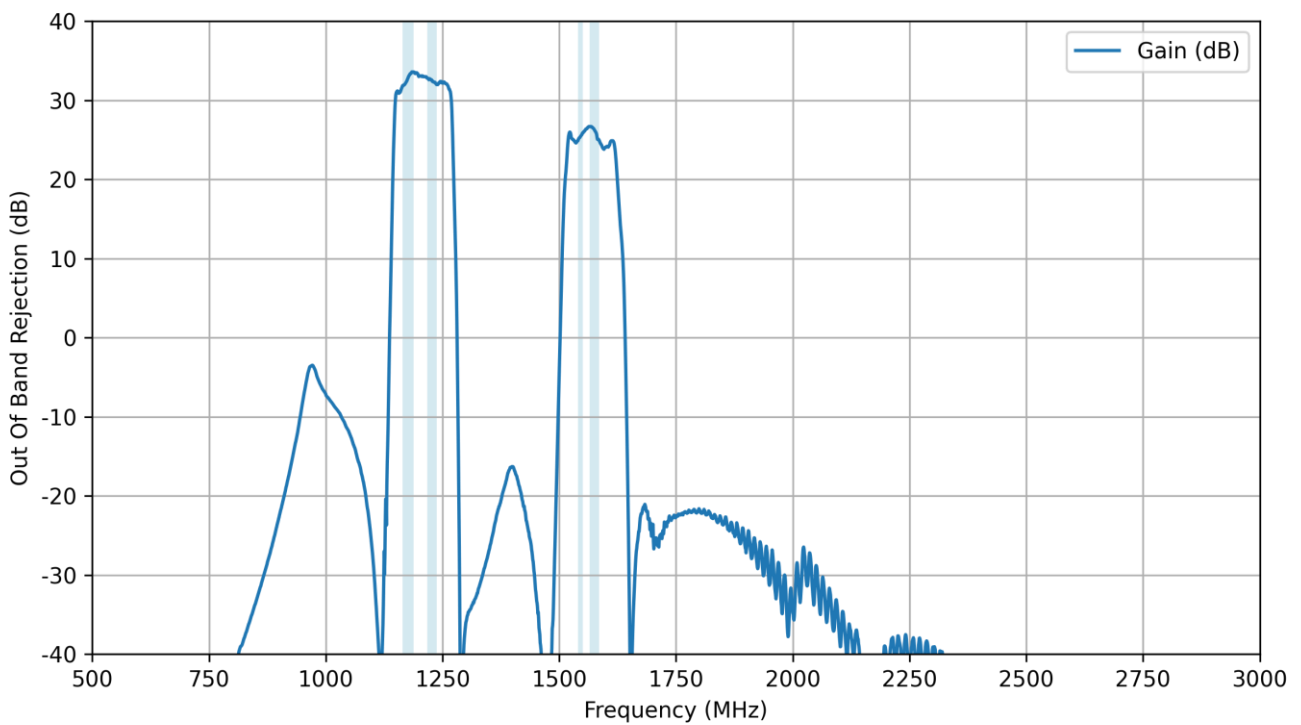


## 4. Radiation Patterns



### 4.1 Test Setup

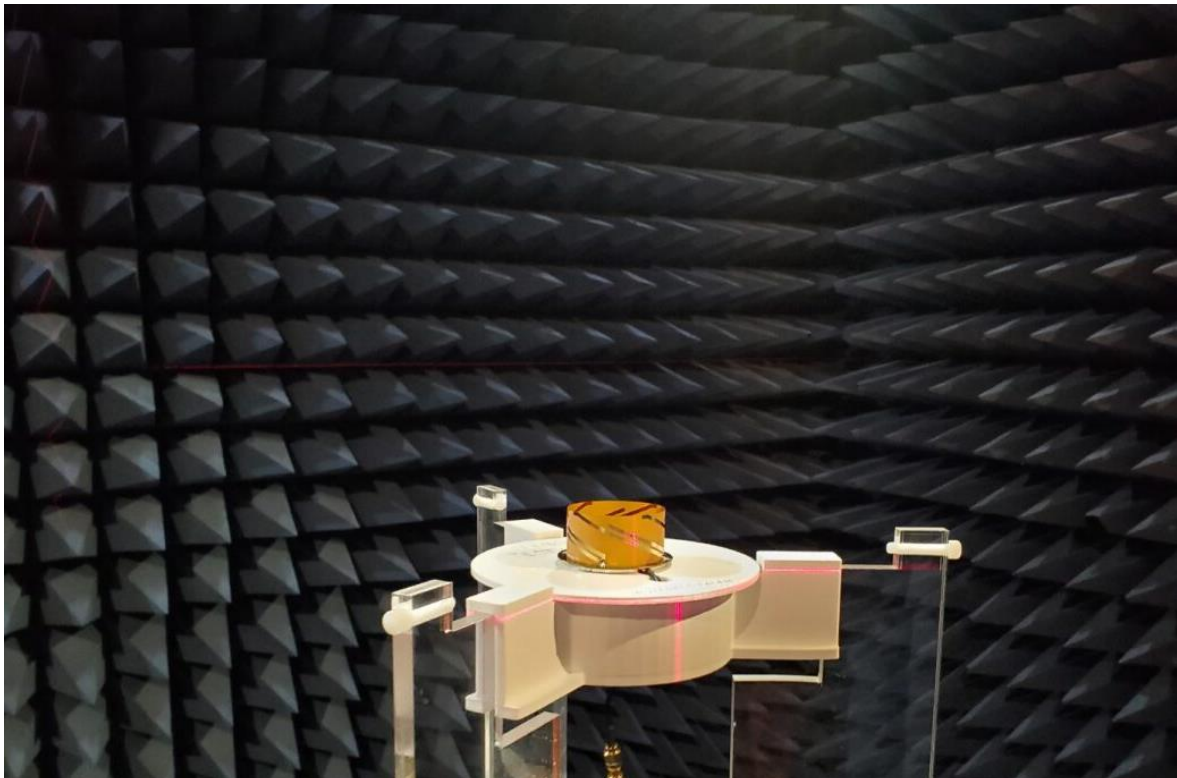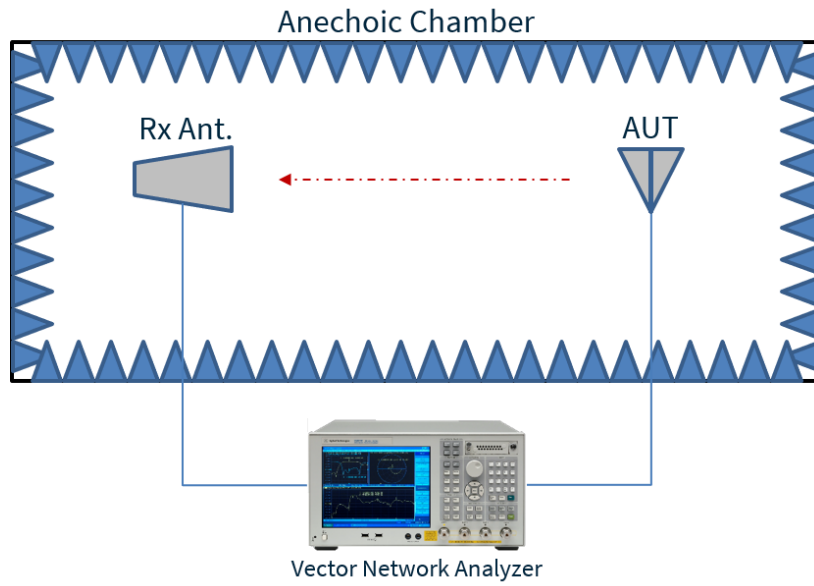

## 4.2 Patterns at 1176 MHz

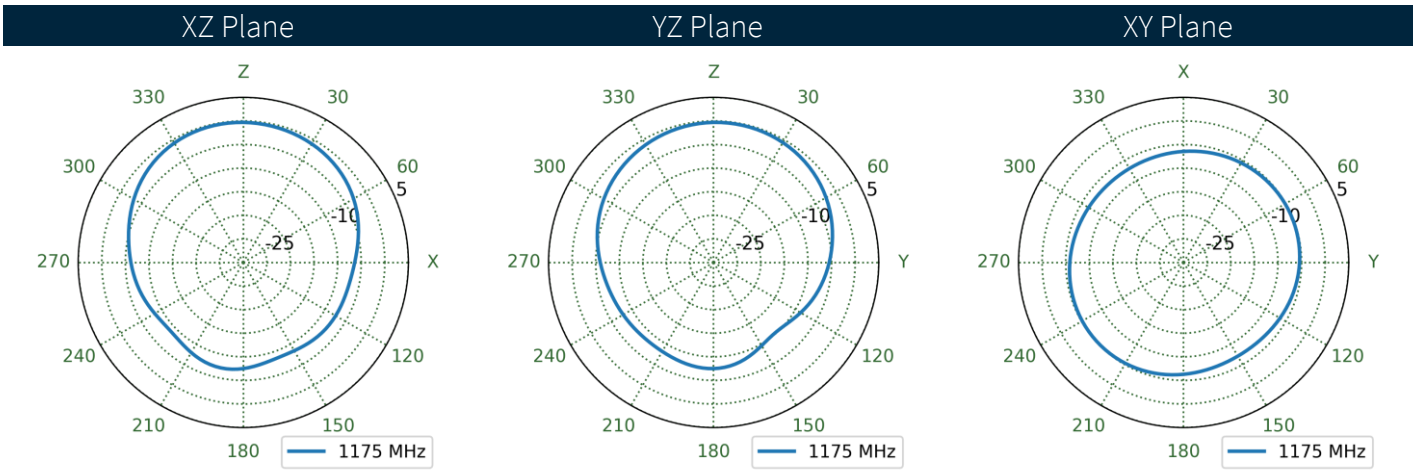
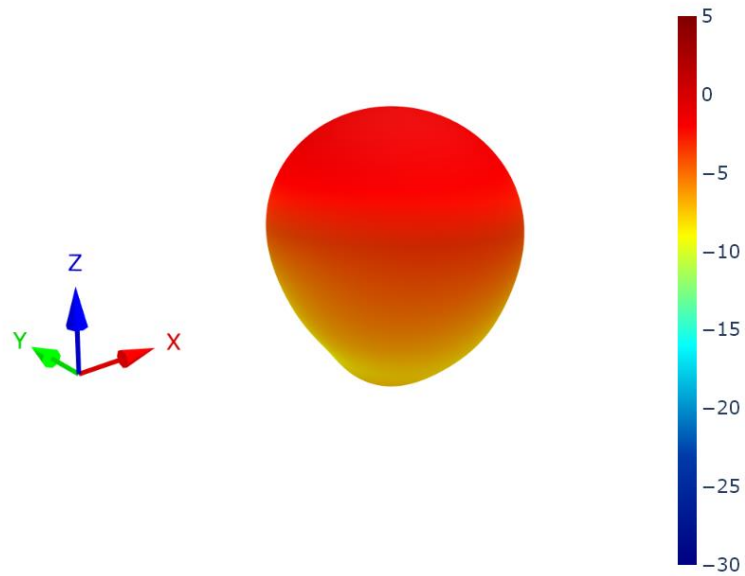


4.3 Patterns at 1227 MHz

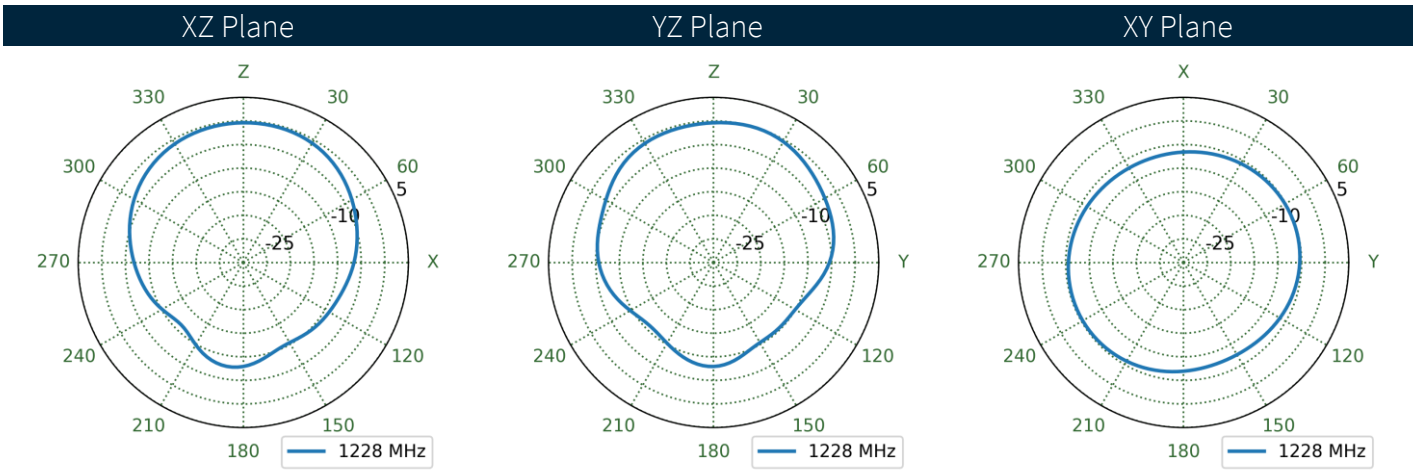
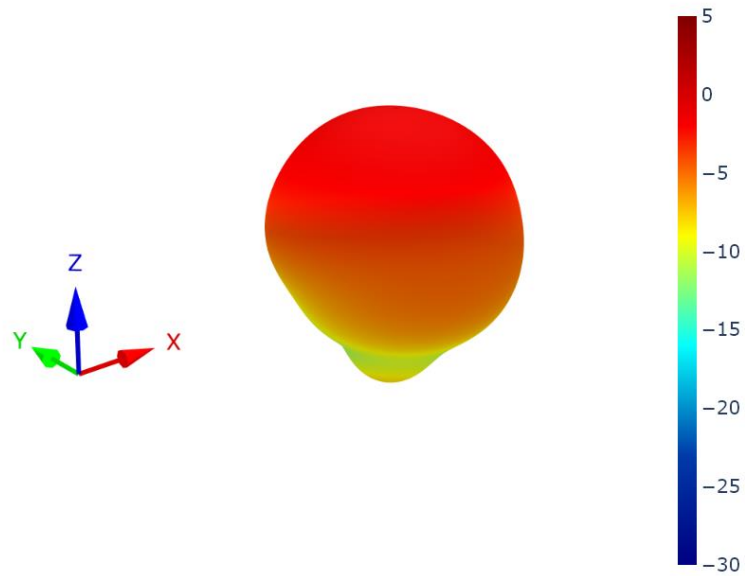






4.4 Patterns at 1545 MHz

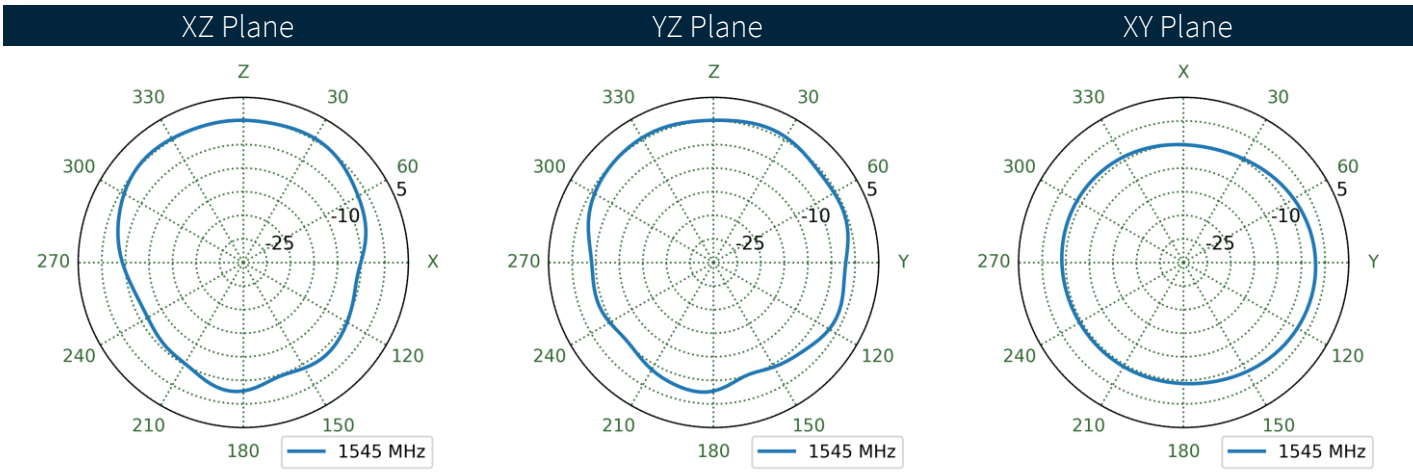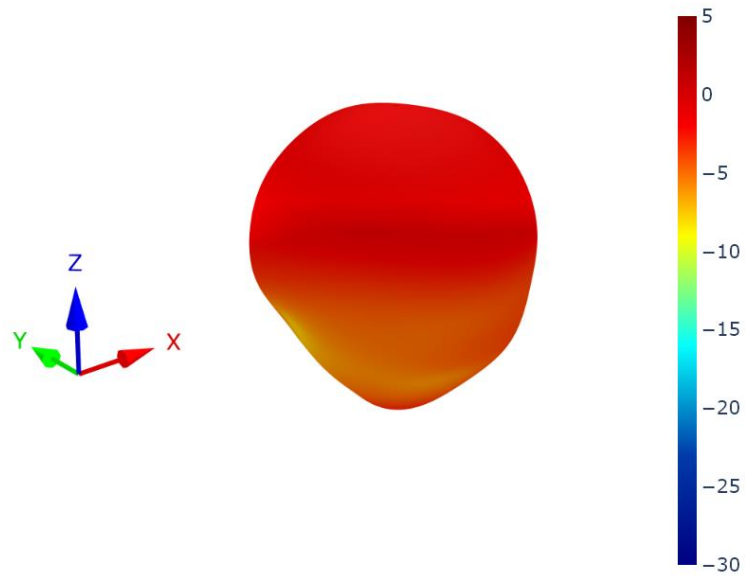



4.5 Patterns at 1561 MHz

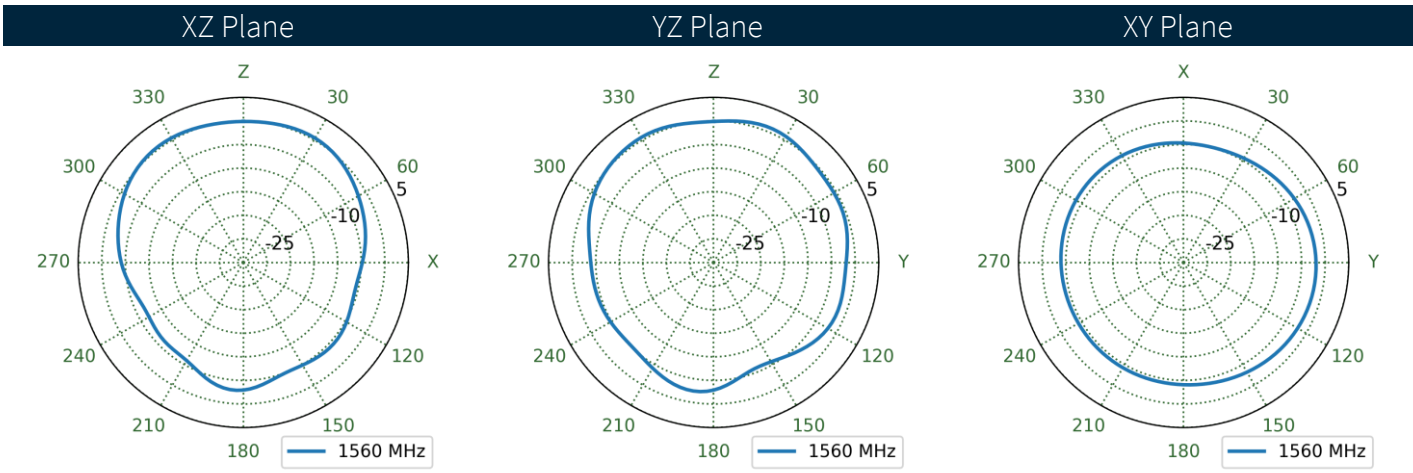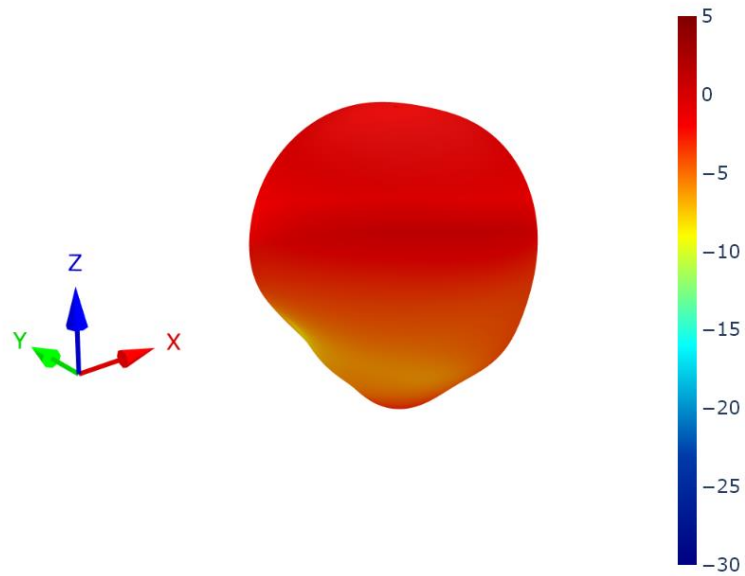



4.6 Patterns at 1575 MHz

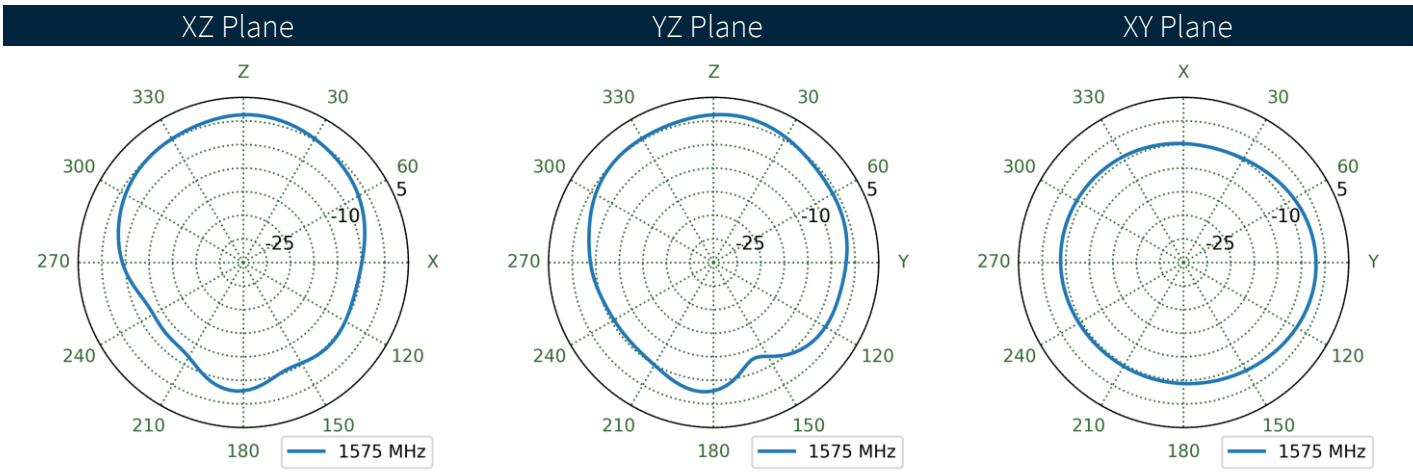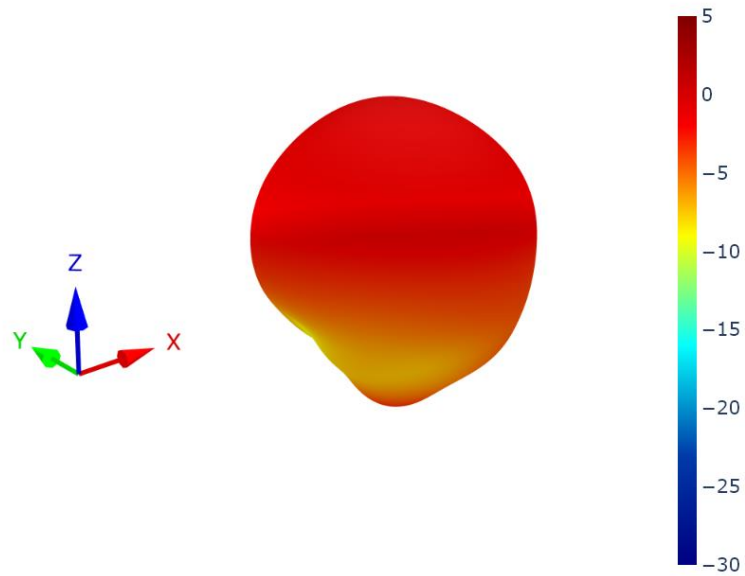

4.7 Patterns at 1602 MHz

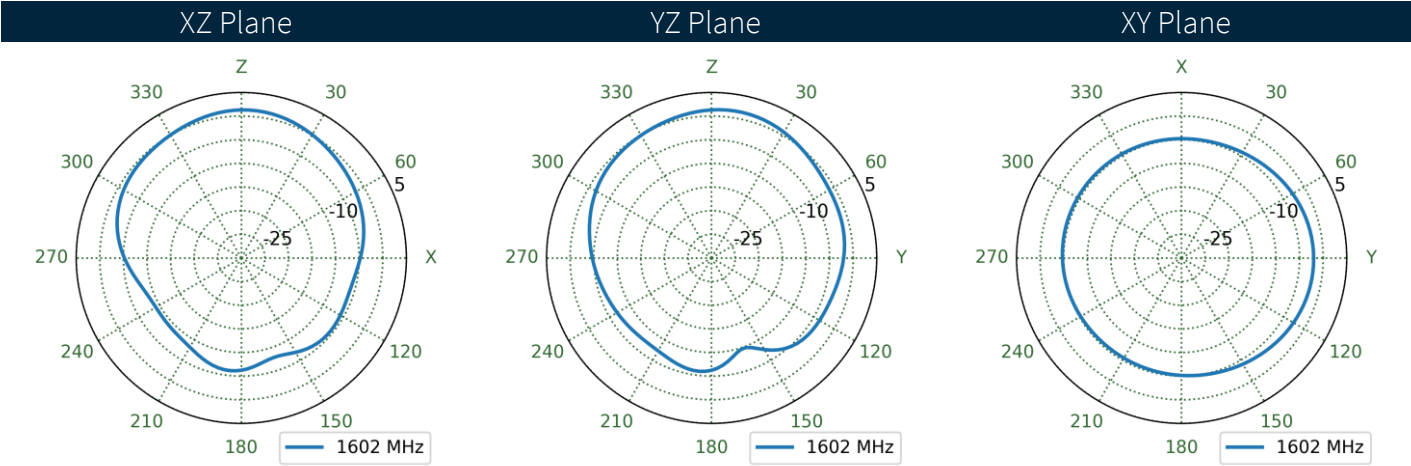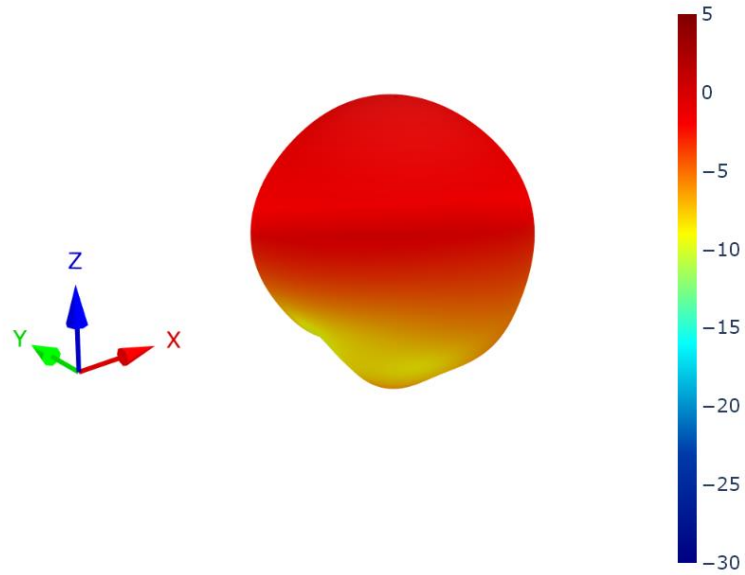

# 5. Mechanical Drawing

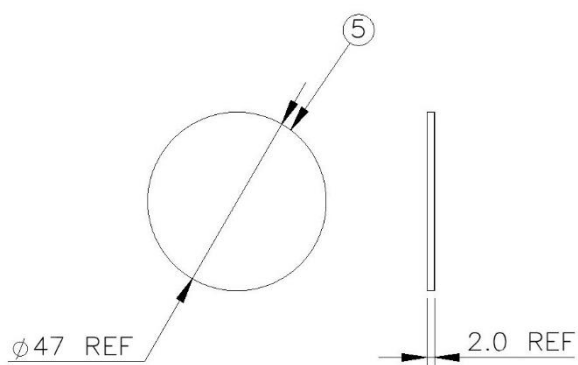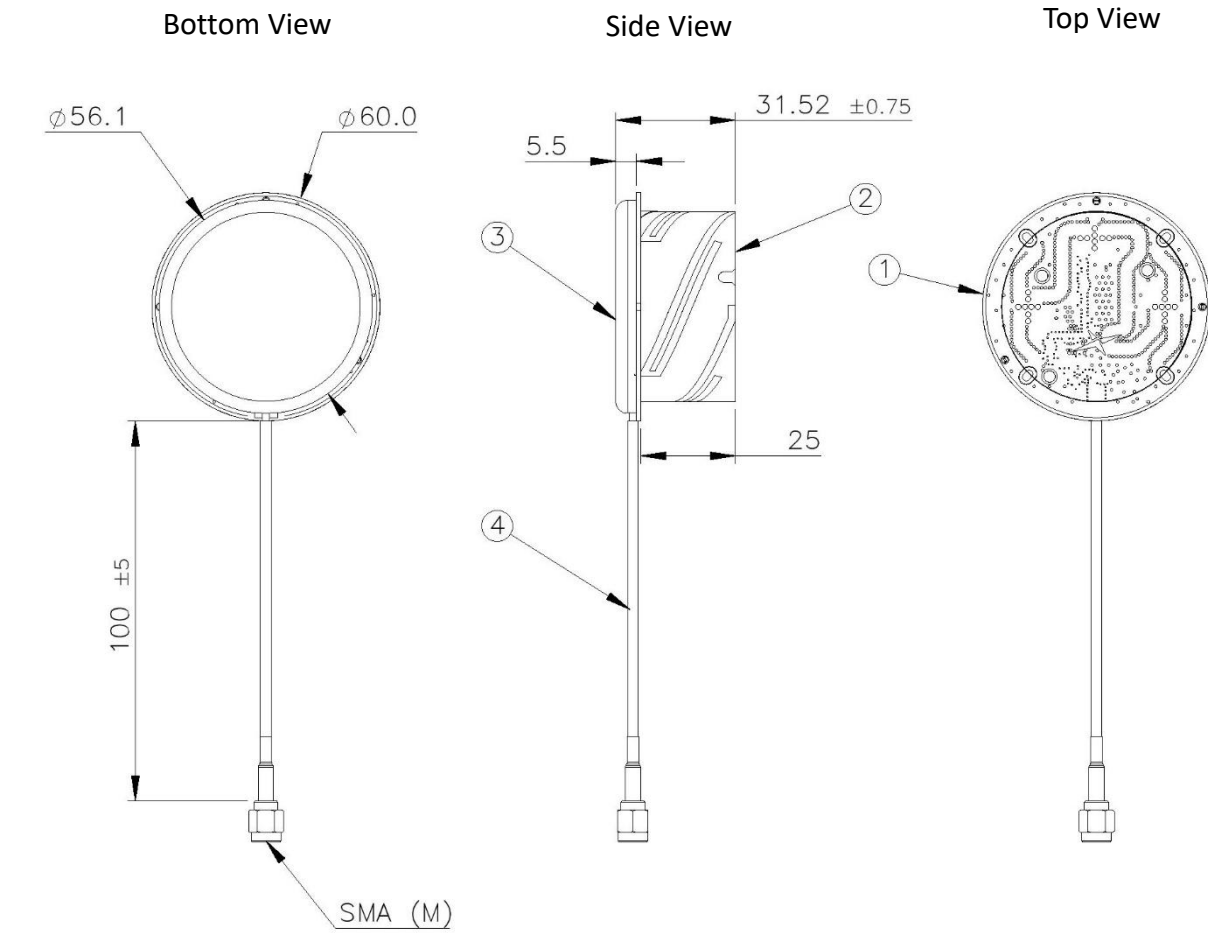

DOUBLE ADHESIVE FOAM  
SUPPLIED UNASSEMBLED


FN	DESCRIPTION	MATERIAL	FINISH	QTY.
1	PCB Assy, EAHP.125	FR-4	NA	1
2	EAHP.125 Flex Antenna	POLYIMIDE	NA	1
3	Shield ADFGP	SPT	EPT	1
4	Cable Assy, RG-174, 100 mm Lg, SMA(M)	NA	NA	1
5	Double Adhesive Foam	3M 9448HK	NA	1

## 6. Packaging

1pc EAHP.125.01.0100D per PE Bag  
 Dimensions - 135\*130\*140mm  
 Weight - 75g




24pcs EAHP.125.01.0100D per Carton  
 Dimensions - 588\*296\*142mm  
 Weight – 2Kg

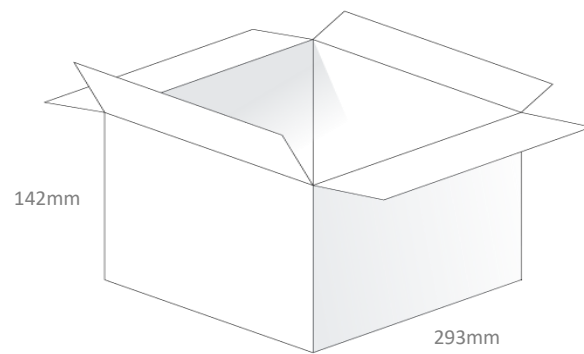

## 7. Installation Guidelines

### ANTENNA INSTALLATION PROCESS

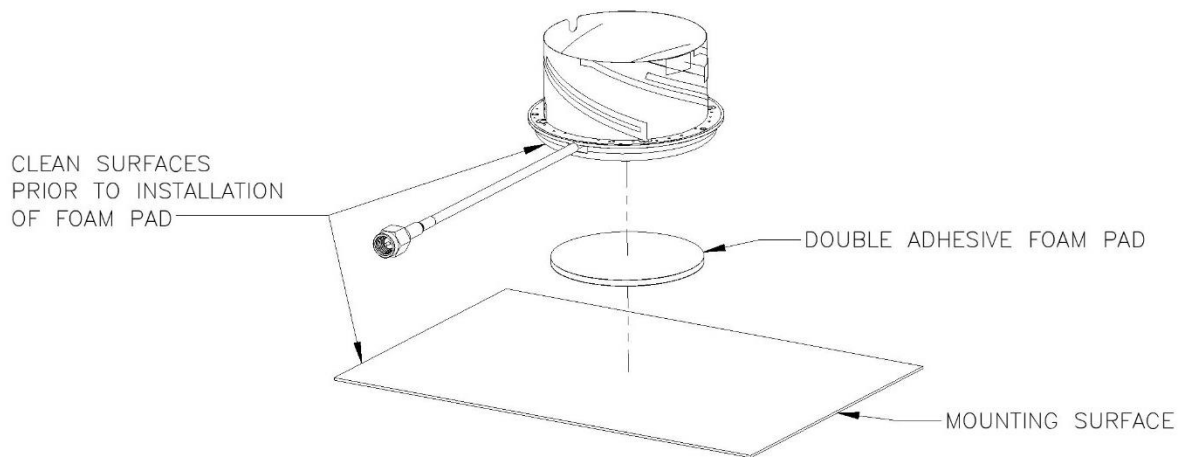

Changelog for the datasheet

**SPE-24-8-001 - EAHP.125.01.0100D**

**Revision: A (Original First Release)**

Date: 2024-01-02

Notes: Initial release.

Author: Gary West

**Previous Revisions**






[www.taoglas.com](http://www.taoglas.com)

