




Specification

# SPECIFICATION

- Part No. : **AP.17B.07.0040A**
- Model No. : **AP.17B.01**
- Product Name : **17mm Two Stage GPS Active Patch Antenna Module**
- Features : 22.2mm\*23.8mm\*7.8mm  
40mm 1.13 U.FL (IPEX MHFI)  
3V±0.5 12mA typical  
25dB LNA  
Tested in Free space  
ROHS Compliant

Photo :

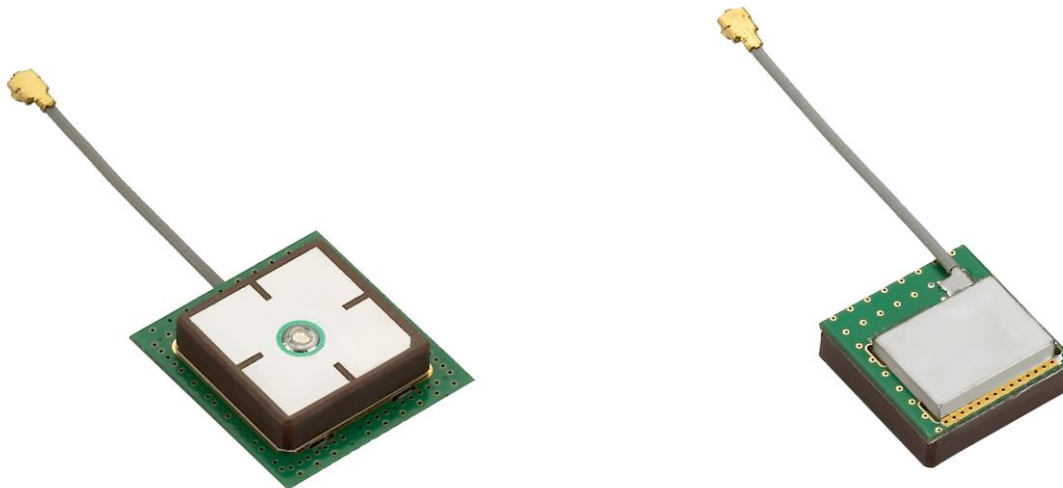

## REVISION STATUS

Version	Date	Page	Revision Description	Prepared	Approved
01	May 11 <sup>th</sup> 2007	All	New format	TW Product Centre	Ronan Quinlan



## Specification

# 1.0 Introduction

Designed for onboard integration with GPS receivers, this powerful miniaturized GPS Active Antenna module combines an advanced 17mm squared ceramic patch antenna with two stage 25dB LNA and ultra thin cable and connector. Taoglas active antenna modules utilize XtremeGain™ technology for the highest sensitivity in the industry. The AP.17B is optimized for asset tracking, navigation and remote monitoring applications.

## 2.1 Rated Environmental Conditions

No	Parameter	Specification
2.1.1	Operation Temperature	-20°C to + 65°C
2.1.2	Storage Temperature	-30°C to + 75°C
2.1.3	Relative Humidity	40% to 95%

## 2.2 Electrical Specifications

No	Parameter	Specification
2.2.1	Input Voltage	Min:2.7V Typ.: 3.0V Max: 3.3V
2.2.2	Current Consumption	At 3.0V Typ.: 12mA Max: 15mA

## 2.3 Electrical Specifications- Antenna

No	Parameter	Specification
2.3.1	Frequency Range	1575.42MHz +/- 1.023 MHz
2.3.2	Gain	+1.0dBi Typ. @90°
2.3.3	Polarization	RHCP
2.3.4	Output Impedance	50Ω

## 2.4 Electrical Specifications- LNA

No	Parameter	Specification
2.4.1	Centre Frequency	1575.42MHz +/- 1.023 MHz
2.4.2	Gain	24dB Min. 25dB Typ.
2.4.3	Noise Figure	1.4dB Typ. 1.8dB Max
2.4.4	Output Impedance	50Ω



Specification

2.4.5	Output VSWR	2.0 Max.
2.4.6	Amplifier MMIC	NEC $\mu$ PC8215TU

## 2.5 Cable & Connector

No	Parameter	Specification
2.5.1	RF Cable	$\varnothing$ 1.13 RF Coaxial Cable L=40mm $\pm$ 1.5mm
2.5.2	RF Connector	I-PEX(MHF) - U.FL Comp.


## 2.6 Electrical Specifications- Overall

No	Parameter	Specification
2.6.1	Frequency Range	1575.42MHz +/- 1.023 MHz
2.6.2	Gain	At 90° 26 $\pm$ 4dBi
2.6.3	Output Impedance	50 $\Omega$
2.6.4	VSWR	2.0 Max.



Specification

### 3. Drawing

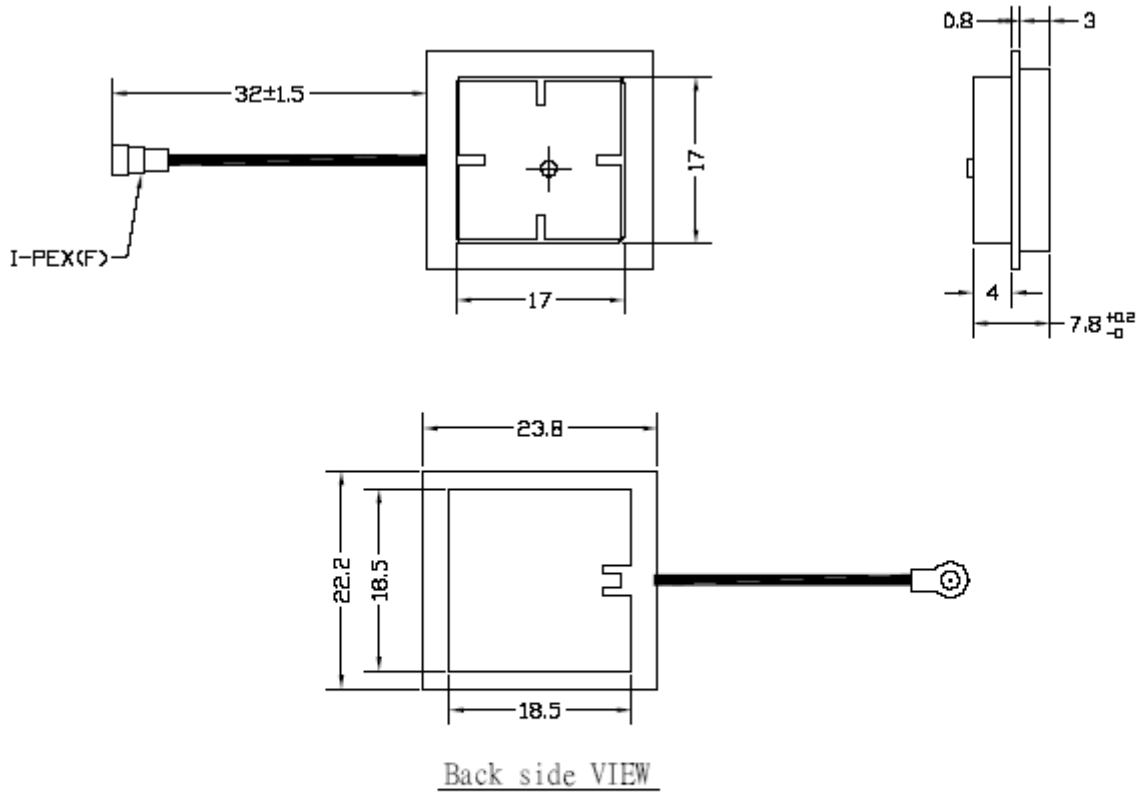

Unit:mm

Tolerance : +/- 0.1