



Specification

# SPECIFICATION

- Part No. : FLA.01.07.0045A
- Product Name : Flexible PCB Penta-Band GSM Loop Antenna,  
850/900/1800/1900/2100MHz  
45mm 1.13cable, IPEX MHFII
- Feature : Very low profile Penta-Band GSM  
Adhesive tape for easy mounting  
RoHS compliant



Version	Date	Page	Revision Description	Prepared	Approved
A	Oct 23 2009	All	New product	TW Product Centre	Zita Lin



## Specification

### I. Introduction

The FLA.01 antenna is a penta-band cellular antenna that is embedded inside medical devices and can achieve high performance, particularly with customization. The technology can be applied to any frequency including licence free bands such as 433MHz, 868MHz, 915MHz, 2.4GHz and higher. With the FLA antenna, medical device designers can ensure their devices now achieve reliable, consistent wireless connections for transmitting patient data and also meet healthcare industry tests.

The FLA flexible circuit antenna is particularly suited to the healthcare market because it can conform to any shape or size, a mechanical advantage for medical devices, which come in different shapes, and sizes. To achieve the best possible performance for an individual healthcare product, antenna customization can improve device efficiency even further.

### II. Specification

	AMPS	GSM	DCS	PCS	3G
Band (MHz)	824-894MHz	880-960MHz	1710-1880MHz	1850-1990MHz	1920-2170MHz
Avg. Efficiency %	23.91%	22.62%	21.12%	27.02%	27.14%
Impedance	50 Ohm				
VSWR	≤2.5				
Radiation Pattern	Omi-Directional				
Polarization	Linear				
FPCB	H:65.7mm*37mm(at widest)*0.8mm				
Connector	IPEX MHFII				
Cable	Ø1.13				
Cable Length	45 mm				
Adhesive Tape	3M 467				
Operation					
Temperature	-40°C ~ +85°C				
Storage Temperature	-30°C ~ +95°C				

\*tested in reference Device


\*results will vary dependant on the environment/Ground Plane size



### III. Electrical Property

#### Antenna Efficiency

FLA.01 with 45mm cable in Reference Device

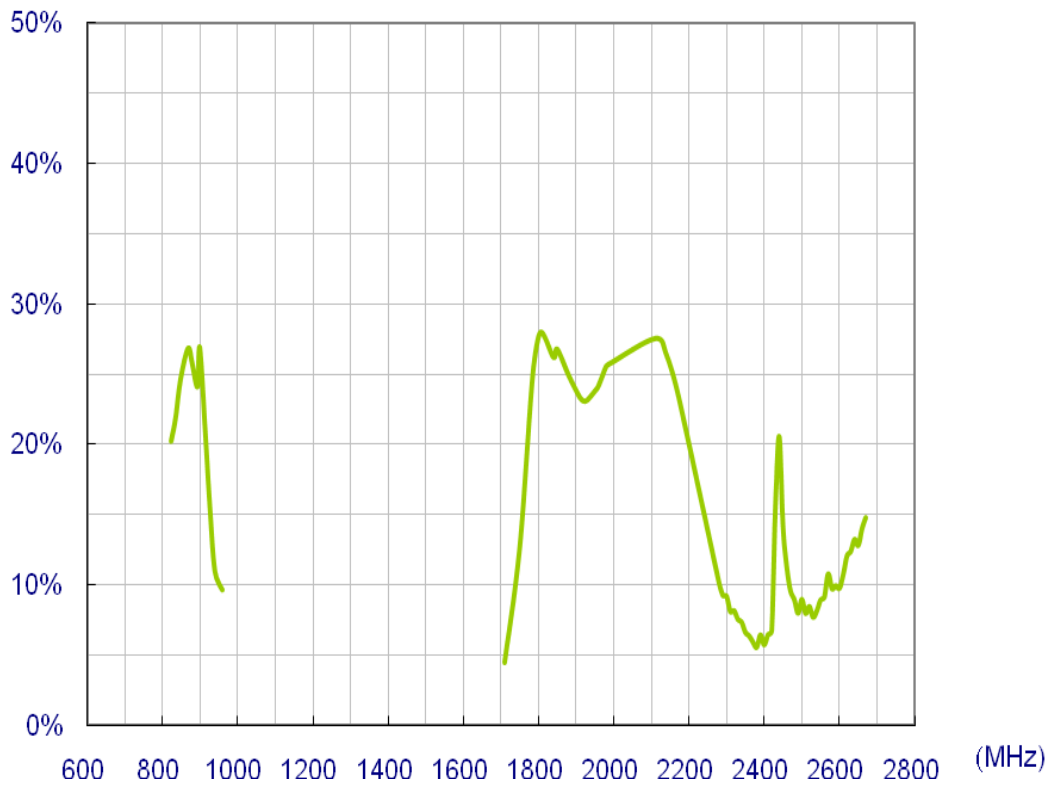



Specification


Frequency	E Total. dB	Efficiency	Efficiency . dB
824000000	1.78	20.22%	-6.94
836000000	2.26	21.92%	-6.59
849000000	2.9	24.64%	-6.08
869000000	3.19	26.84%	-5.71
880000000	2.69	25.76%	-5.89
894000000	1.96	24.10%	-6.18
900000000	2.17	26.88%	-5.7
915000000	0.08	20.76%	-6.83
925000000	-2.07	16.29%	-7.88
940000000	-6.13	10.98%	-9.59
960000000	-6.46	9.63%	-10.16
1710000000	-7.41	4.45%	-13.51
1750000000	-2.91	12.59%	-9
1785000000	0.54	24.95%	-6.03
1805000000	0.82	27.97%	-5.53
1840000000	1.12	26.20%	-5.82
1850000000	1.28	26.77%	-5.72
1880000000	1	24.92%	-6.03
1910000000	0.95	23.34%	-6.32
1920000000	0.88	23.08%	-6.37
1930000000	0.85	23.15%	-6.35
1950000000	0.78	23.79%	-6.24
1960000000	0.77	24.18%	-6.16
1980000000	0.96	25.56%	-5.92
1990000000	1.03	25.75%	-5.89
2110000000	0.68	27.53%	-5.6
2140000000	0.89	26.39%	-5.79
2170000000	1	23.67%	-6.26

\*Tested in reference Device




## IV. Radiation Patterns

H-plane radiation

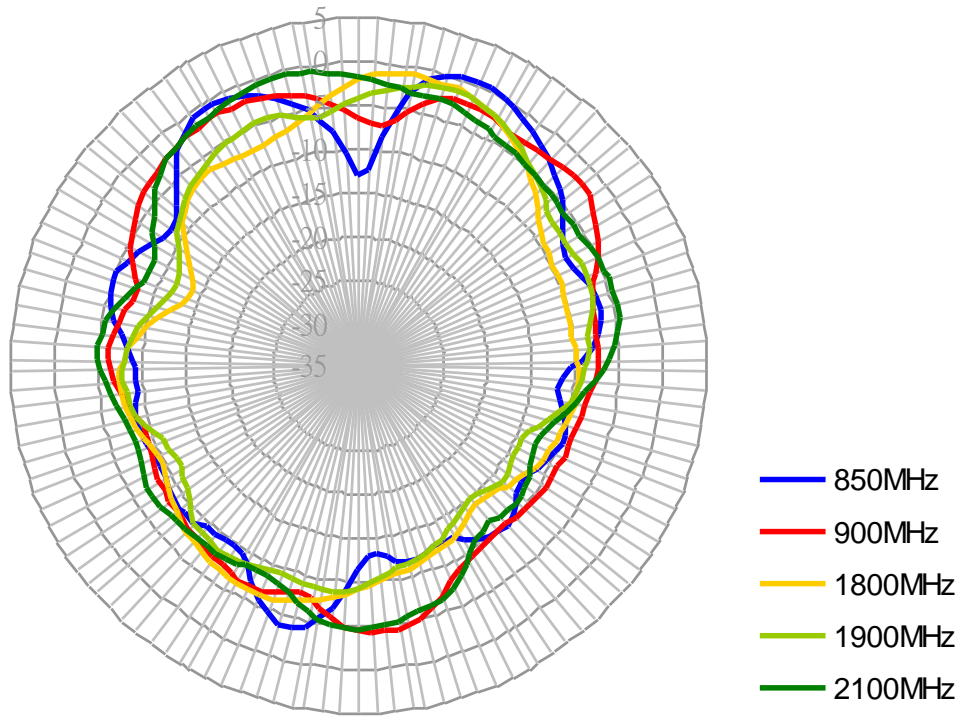

E-plane radiation

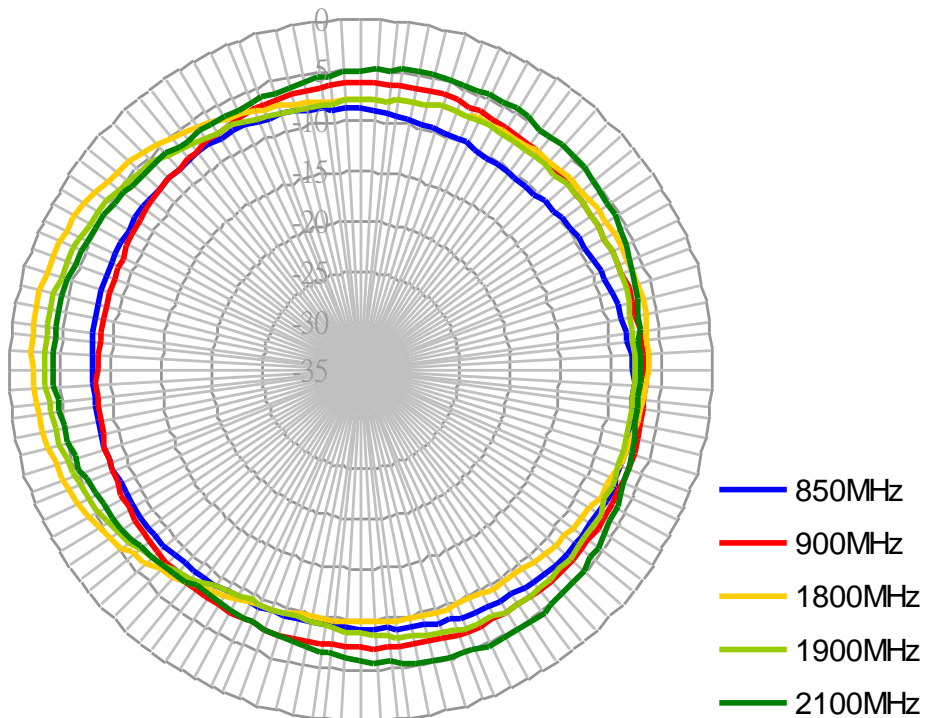



## V. Drawing and Dimensions

