



TAOGLAS®



Datasheet

Synergy 6-in-1 Antenna

Part No:
MA1506.AK.001

Description

Synergy 6-in-1 Next-Generation Combination GNSS, 2*5G/4G, 3*Wi-Fi® Permanent Mount Antenna with 5m Braided Cable Assembly

Features:

- 2 x 5G/4G MIMO Antenna
- 3 x Wi-Fi 2.4GHz/5GHz MIMO Antenna
- 1 x Active GPS/GLONASS/BeiDou Antenna Front End GNSS SAW Filter
- IP67 Rated Waterproof Enclosure
- High Efficiency/Peak Gain Outdoor Antenna
- Cable: 300mm RG-174 with 4700mm TGC-200
- Connectors: SMA(M) / RP-SMA(M)
- RoHS & REACH Compliant

1.	Introduction	3
2.	Specification	4
3.	Mechanical Drawing	8
4.	Installation Guidelines	9
5.	Packaging	11
6.	Antenna Characteristics	12
7.	Radiation Patterns	24
<hr/>		
	Changelog	59

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The Taoglas Synergy MA1506 is a 6-in-1 next-generation permanent mount antenna designed for vehicle roof applications. It has a fully IP67 rated waterproof robust PC enclosure and base. The 6 antennas inside support 5G/4G, GPS/GLONASS/BeiDou, Wi-Fi (2.4GHz/5GHz). This outstanding patent-pending antenna delivers powerful MIMO antenna technology for 5G/4G, Wi-Fi 2.4/5.8/7.125GHz 802.11n and the emerging 802.11ac, and an optimized GPS/GLONASS/BeiDou patch antenna for location. The 5G/4G antennas also include backward compatibility to work at most worldwide 2G and 3G bands.

Typical Applications:

- Next Generation OEM Automotive Connectivity
- Multimedia, Navigation and Telematics Systems
- V2V, V2X and Fleet Management Applications
- Real-time HD Video Streaming
- First Net Responder Routers

The MA1506 is ideal for applications that require highly sophisticated antennas for real-time streaming applications that demand high-speed video uplink and downlink into the cabin of the vehicle. These challenges are resolved by the highly efficient, high gain MIMO antennas, with high isolation, all of which is necessary to achieve the required signal to noise ratio and throughput.

The MA1506 can also be customized for your particular wireless application and frequency band, subject to NRE and MOQ. There are 5 x RG-316 cables, terminating in SMA(M) connectors for 5G/4G MIMO 2X2, and RP SMA(M) for Wi-Fi MIMO 3X3. There is an RG-174 cable for GNSS terminating in an SMA(M) connector.

All cable lengths and connector types are fully customizable. The Synergy MA1506 can be supplied with low loss TGC-200 cable extensions for longer cable runs. Contact your regional Taoglas customer support team for more information.

2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	□	□		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	■	□	□		
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	□	□	□	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	■	□	□	□
L-Band	L-Band 1542 MHz				
	□				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	■	□	□	□	
IRNSS (Regional)	L5 1176.45 MHz				
	□				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	□	■	□	□



GNSS Bands and Constellations

GNSS Electrical			
Frequency (MHz)	1561	1575.42	1602
VSWR (max.)	2.5	2.5	2.5
Passive Antenna Efficiency (%) (Without cable loss)	40.02	48.39	44.29
Passive Antenna Gain at Zenith (dBic) (Without cable loss)	3.75	4.44	4.54
Axial Ratio (dB)	20	11	15
Polarization	RHCP		
Impedance	50Ω		
Cable	RG-174		
Connector	SMA(M)		

LNA and Fi4G-5Gr Electrical Properties			
Frequency (MHz)	1561	1575.42	1602
VSWR (max.)	2.0:1	2.0:1	2.0:1
Gain@1.8V	28.8 dB	28.8 dB	28 dB
Gain@3.0V	29 dB	29 dB	28.3 dB
Gain@5.5V	29.6 dB	29.4 dB	28.7 dB
Noise@1.8V	2.8 dB	2.3 dB	2.8 dB
Noise@3.0V	2.8 dB	2.2 dB	2.8 dB
Noise@5.5V	2.9 dB	2.3 dB	2.8 dB
Power consumption@1.8V	8.7 mA		
Power consumption@3.0V	9.0 mA		
Power consumption@5.5V	11 mA		

Total Specification (Through Antenna, SAW Fi4G-5Gr and LNA)			
Frequency (MHz)	1561	1575.42	1602
Gain@3V (dBic)	31.7 ± 3	32.4 ± 3	32.4 ± 3
Output Impedance	50Ω		






4G-5G Electrical									
Band	Frequency (MHz)	Measurement	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
5G NR/4G Band 71	617-698	4G-5G 1	23.6	-6.28	0.16	50 Ω	Linear	Omni directional	2W
		4G-5G 2	29.3	-5.34	0.89				
4G/3G Band 12,13,14,17,28,29	698-824	4G-5G 1	34.7	-4.59	1.90				
		4G-5G 2	39.8	-4.00	2.37				
4G/3G/NB-IoT/Cat M Band 5,8,18,19,20,26,27	824-960	4G-5G 1	37.3	-4.28	3.18				
		4G-5G 2	41.3	-3.84	3.11				
5G NR/4G Band 21,32,74,75,76	1427-1518	4G-5G 1	43.4	-3.62	3.53				
		4G-5G 2	44.6	-3.51	4.11				
4G/3G Band 1,2,3,4,9,23,25,35,39,66	1710-2200	4G-5G 1	33.5	-4.75	4.37				
		4G-5G 2	32.6	-4.87	3.01				
4G/3G Band 7,30,38,40,41	2300-2690	4G-5G 1	45.9	-3.39	4.86				
		4G-5G 2	40.6	-3.92	4.28				
LTE5200/Wi-Fi5800	5150-5925	4G-5G 1	53.1	-2.75	7.14				
		4G-5G 2	62.5	-2.04	7.47				
5G NR/4G Band 22,42,48,77,78,79	3300-5000	4G-5G 1	44.3	-3.53	7.07				
		4G-5G 2	51.6	-2.87	7.88				

Wi-Fi Electrical									
Band	Frequency (MHz)	Measurement	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
Wi-Fi - 2GHz	2400-2500	Wi-Fi 1	46.3	-3.35	3.38	50 Ω	Linear	Omni directional	2W
		Wi-Fi 2	39.9	-3.99	3.51				
		Wi-Fi 3	48.4	-3.15	4.49				
Wi-Fi - 5GHz	5150-5850	Wi-Fi 1	54.5	-2.63	6.52				
		Wi-Fi 2	52.3	-2.82	6.18				
		Wi-Fi 3	57.8	-2.38	7.10				
Wi-Fi - 6GHz	5925-7125	Wi-Fi 1	59.9	-2.23	7.73				
		Wi-Fi 2	39.8	-4.00	5.99				
		Wi-Fi 3	50.0	-3.01	7.02				

Mechanical	
Height	57.47mm
Planner Dimension	Ø160mm
Casing	PC
Cable	0.3m RG-174 with 4.7m TGC-200 for 4G-5G – Fully Customizable 0.3m RG-174 with 4.7m TGC-200 for Wi-Fi – Fully Customizable 0.3m RG174 with 4.7m TGC-200 for GNSS – Fully Customizable
Connector	4G-5G: SMA-Plug – Fully Customizable Wi-Fi: RP-SMA-Plug – Fully Customizable GNSS: SMA-Plug – Fully Customizable
Thread Diameter	M22
Sealant	Rubber Stopper and O-Ring
Weight	2.1Kg

Environmental	
Ingress Protection	IP67
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
Relative Humidity	Non-condensing 65°C 95% RH
Cable Pull	RG-174 4 Kg

3. Mechanical Drawing

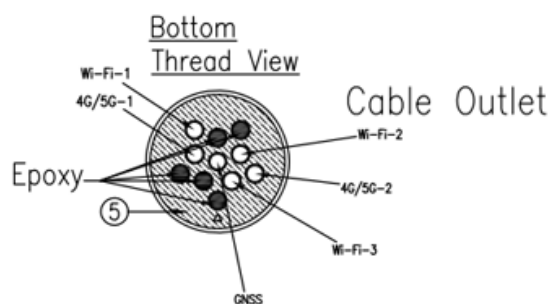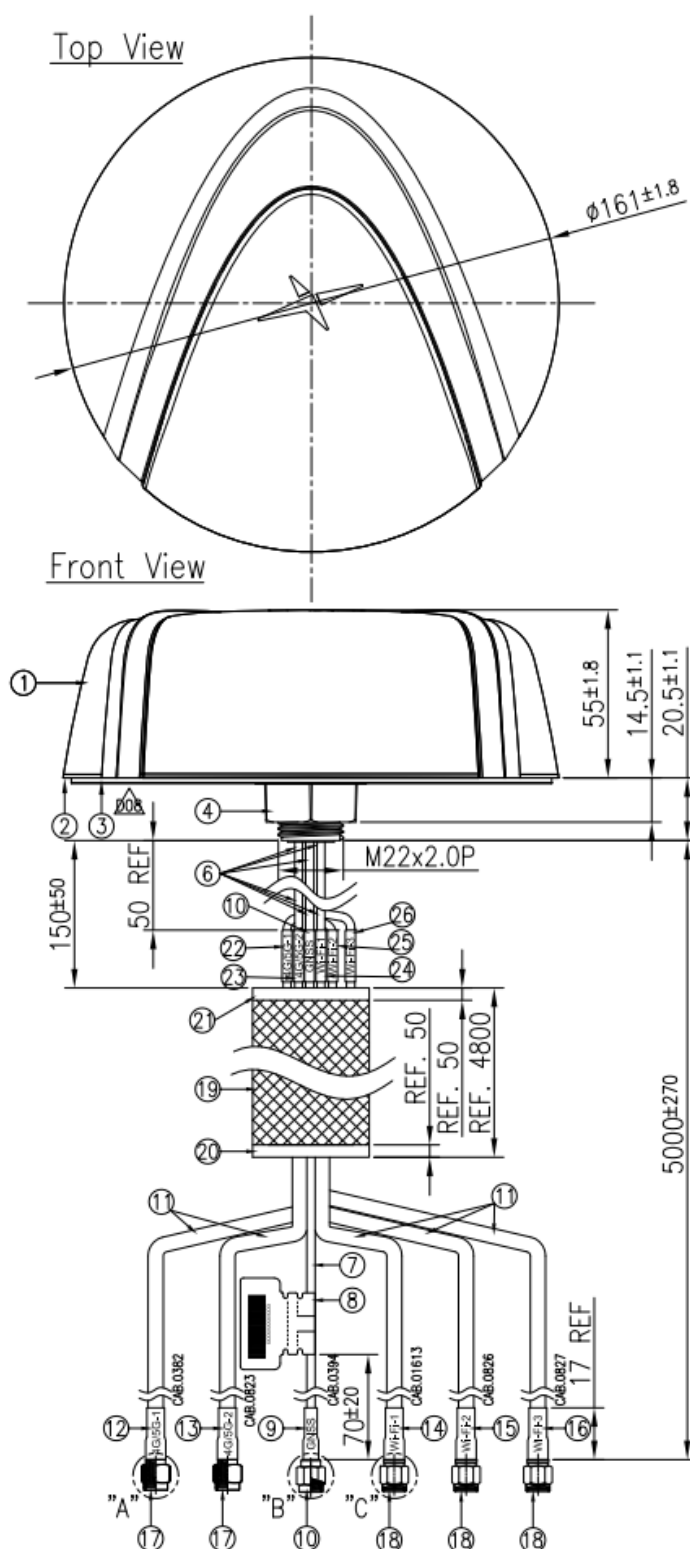

	Name	P/N	Material	Finish	QTY
1	Top Plastic Shell	000118G080000A	PC	Black / Grey	1
2	Bottom Plastic	000118G100000A	PC	Black	1
3	Double Sided Adhesive	001022J060000A	4308x31948 151	Black Foam/White Liner	1
4	Nut_M22	000418H020000A	Nylon	Black	1
5	Rubber	000718H010000A	Silicone Rubber	Black	1
6	RG174 Coaxial Cable (MA1506A011)	301315C000000A	PVC	Black	6
7	RG174 Coaxial Cable (CAB.0394)	301315C000000A	PVC	Black	1
8	Empty Label	001015G000000A	PEPA	White	1
9	Heat Shrink Tube (GNSS)	001316C000000A	PE	Blue Tube/White Text	2
10	SMA(M)ST	2002160000098A	Brass	Au Plated	1
11	TGC-200 Coaxial Cable	306718E000000A	PE	Black	5
12	Heat Shrink Tube (4G/5G-1)	001319G050000A	PE	Red Tube/White Text	1
13	Heat Shrink Tube (4G/5G-2)	001319G060000A	PE	Red Tube/White Text	1
14	Heat Shrink Tube (Wi-Fi-1)	001316L060000A	PE	Yellow Tube/Black Text	1
15	Heat Shrink Tube (Wi-Fi-2)	001316L070000A	PE	Yellow Tube/Black Text	1
16	Heat Shrink Tube (Wi-Fi-3)	001316L090000A	PE	Yellow Tube/Black Text	1
17	SMA(M)ST	2002160020098A	Brass	Au Plated	2
18	SMA(M)ST_RP	2002160030098A	Brass	Au Plated	3
19	Centenary Braid	001313J000049A	BSPET	Black	1
20	Heat Shrink Tube	001319H080000A	PE With Glue	Black	1
21	Heat Shrink Tube	001320C010000A	PE With Glue	Black	1
22	Heat Shrink Tube (4G/5G-1)	001319G000000A	PE	Red Tube/White Text	1
23	Heat Shrink Tube (4G/5G-2)	001319G010000A	PE	Red Tube/White Text	1
24	Heat Shrink Tube (Wi-Fi-1)	001316C060000A	PE	Yellow Tube/Black Text	1
25	Heat Shrink Tube (Wi-Fi-2)	001316C070000A	PE	Yellow Tube/Black Text	1
26	Heat Shrink Tube (Wi-Fi-3)	001318C000000A	PE	Yellow Tube/Black Text	1

4. Installation Guidelines

A Introduction

The Taoglas Synergy is an external permanent mount combination antenna that can be provided with combinations of 5G/4G, active GNSS with front end saw and dual-band Wi-Fi. The Synergy is available with two versions of the enclosure, one designed specifically for the Ford Interceptor, both supplied with 3M adhesive, along with an M22 threaded boss for surface attachment. The Synergy is ideal for vehicle panels of up to 6mm(0.23") thick with a threaded boss length of 20.5mm(0.81"). The Synergy is IP67 rated and includes an O-Ring to seal from any water ingress.



Electrical Safety

The Synergy contains an active GPS/GNSS antenna.
Rated voltage: 3-5VDC Rated current: 20mA maximum

The supply to this device must be provided with overcurrent protection of 1A maximum.

Power consumption@1.8V (mA) 8.7 mA

Power consumption@3.0V (mA) 9.0 mA

Power consumption@5.5V (mA) 11 mA

B Mounting & Location

For prime performance, the Synergy is recommended to be fitted on a conductive metal panel. When fitting on a non-metallic panel, a conductive metal ground plane of suitable size should be fitted underneath the mounting panel to achieve a better level of performance. Optimum ground plane size is 300mm x 300mm(11.8" x 11.8"). When mounting on a vehicle roof panel ensure to mount on a flat surface, and measure for central position. Care should be taken to mount the Synergy antenna as far as possible from other roof-mounted features such as the aircon unit, light bar etc.




Sealing

In order to ensure that the installation is properly sealed against the mounting surface care must be taken regarding curvature of the mounting panel. It is highly recommended to install the antenna on a clean, flat and level surface. After installation the compression of the rubber boot against the mounting panel should be checked and a small bead of neutral cure silicone sealant can be applied around the periphery of the mounting boot if required.

C Surface Preparation

When preparing to drill the hole, mask the area around the hole position to protect the surface. Drill a pilot hole and increase the hole size to $\varnothing 24\text{mm}$ ($\frac{7}{8}"$). Ensure the drill bit does not contact the headliner. Deburr and clean the area around the hole carefully removing all waste.

Remove paint and primer from under panel surface to ensure adequate contact with washer and nut. Apply petroleum jelly or paint around cut edge of the hole to prevent corrosion



D Adhesive Patch

On the underside of the antenna there is a 3M adhesive patch. Peel away the 3M adhesive protection and feed the cables through the hole. Position the antenna over the hole and press down onto the panel with pressure. This adhesion will make ensure will be securely mounted and will also allow for extremely minimal curvature on the roof of a vehicle.



E Securing the Mount

A split nut is used to easily fit onto the thread through the cables. The nut is attached from the underside of the panel, it should easily twist onto the thread and then secured in place with a final tighten with a spanner. After tightening, double check the antenna to make sure that it is properly secured but take care not to over tighten, damaging the threads on the screw.



F Cable Routing and Connection

The Cables supplied are RG-174 for the GNSS feed and TGC-200 for the other feeds. The heatshrink will denote which cable is which for ease of installation. Connect each individual connector to the correct port of the router, if any cable is unused please fit a 50Ω terminator to the individual connection.



G Notices



Caution

To comply with FCC RF Exposure requirements in section 1.1310 of the FCC Rules, antennas used with this device must be installed to provide a separation distance of at least 20 cm from all persons to satisfy RF exposure compliance.



Warning

Do not operate the equipment in an explosive atmosphere.



European Waste Electronic Equipment Directive 2012/19/EU

Please ensure that your old Waste Electricals and Electronics are recycled do not throw them away into standard waste.



Hazardous Substances Directive (RoHS) 2011/65/EU / 2015/863/EU Radio Equipment Directive (RED) 2014/53/EU


Harmonised Standards and References:

EN 301 489-1 (V2.2.3): ElectroMagnetic Compatibility (EMC) standard for radio equipment and services;
Part 1: Common technical requirements; Harmonised Standard for ElectroMagnetic Compatibility


Waiver: This document represents information compiled by Taoglas to the best of our current knowledge. This is not intended to be used as a representation or warranty of fitness of the products described for any particular purpose. This document details guidelines for general information purposes only. When planning installations, always seek specialist advice and ensure that the products are always installed by a properly qualified installer in accordance with applicable regional laws and regulations.

All copyrights, trademarks and any other intellectual property rights related are owned by Taoglas Group Holdings Limited.


5. Packaging



1pc MA1506.AK.001 per PE Bag
Weight: 2.1Kg

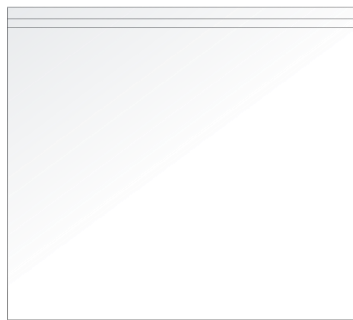


4pcs MA1506.AK.001 per Carton
Carton Dimensions: 740*370*300mm
Weight: 9.3Kg

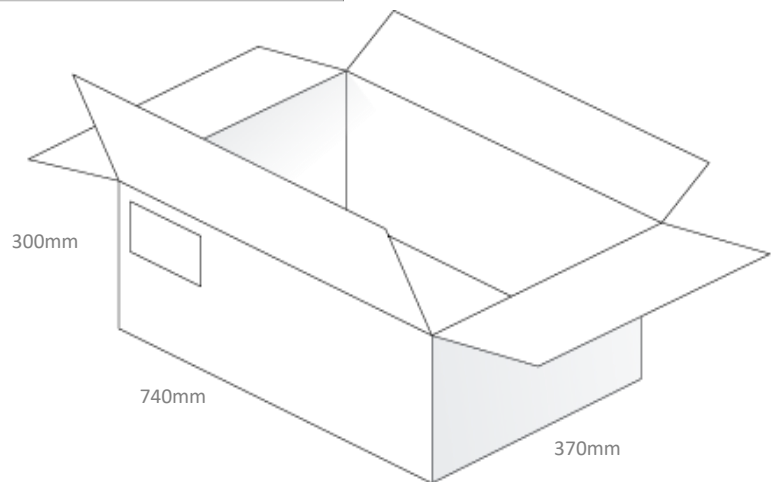


6. Antenna Characteristics


6.1 Block Diagram (Active Antenna)

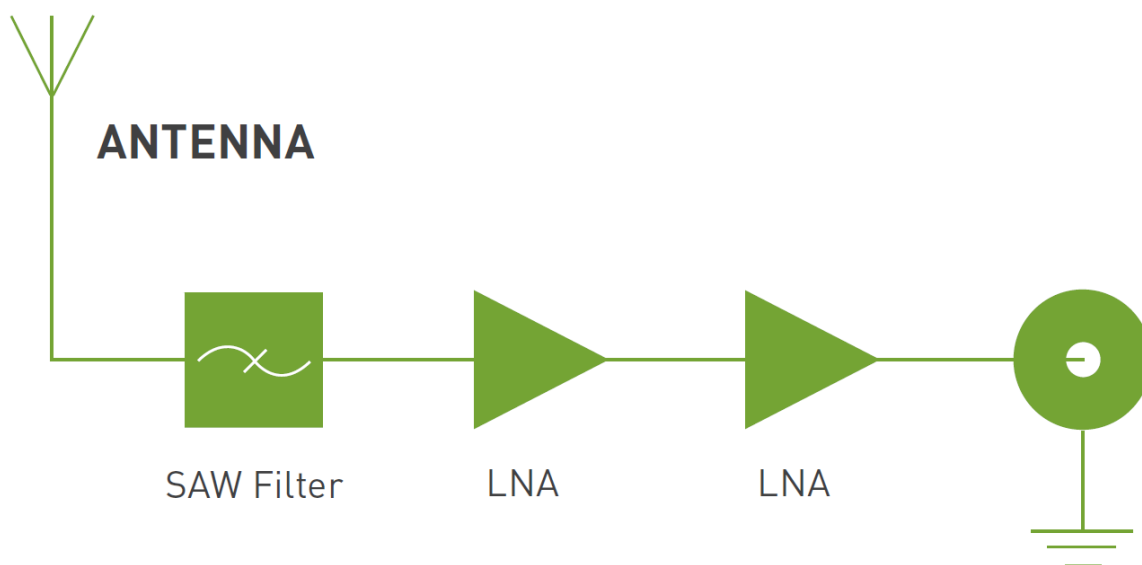


6.2 GNSS – Return Loss (Passive)

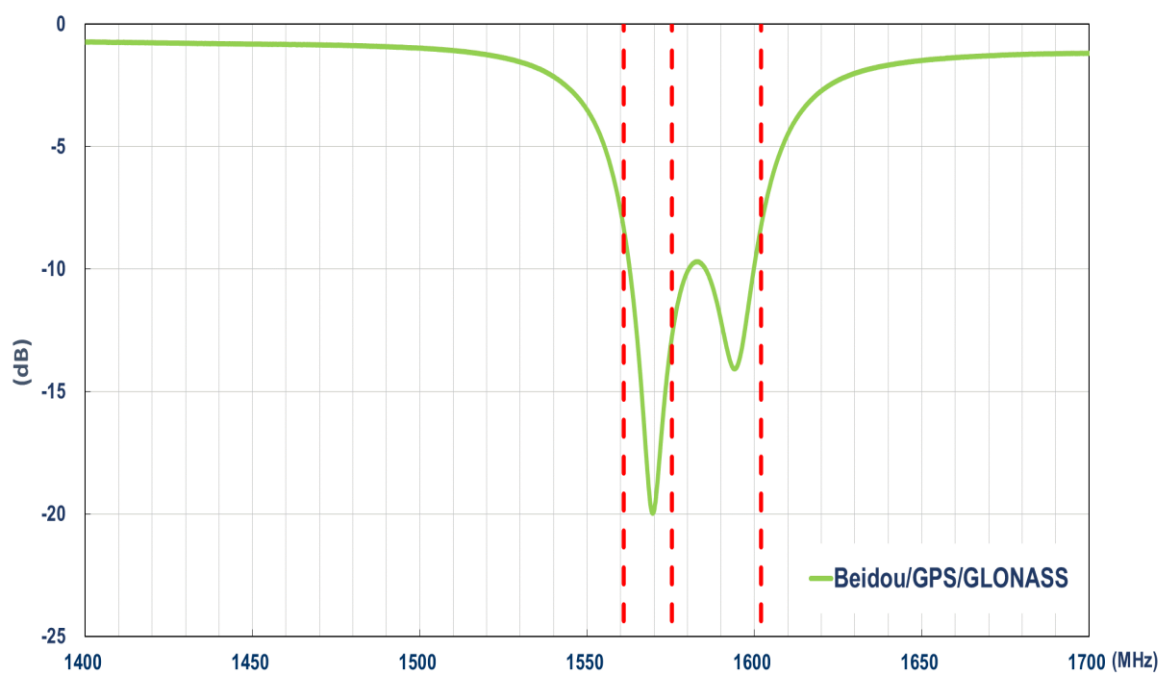


6.3 GNSS – Efficiency (Passive)

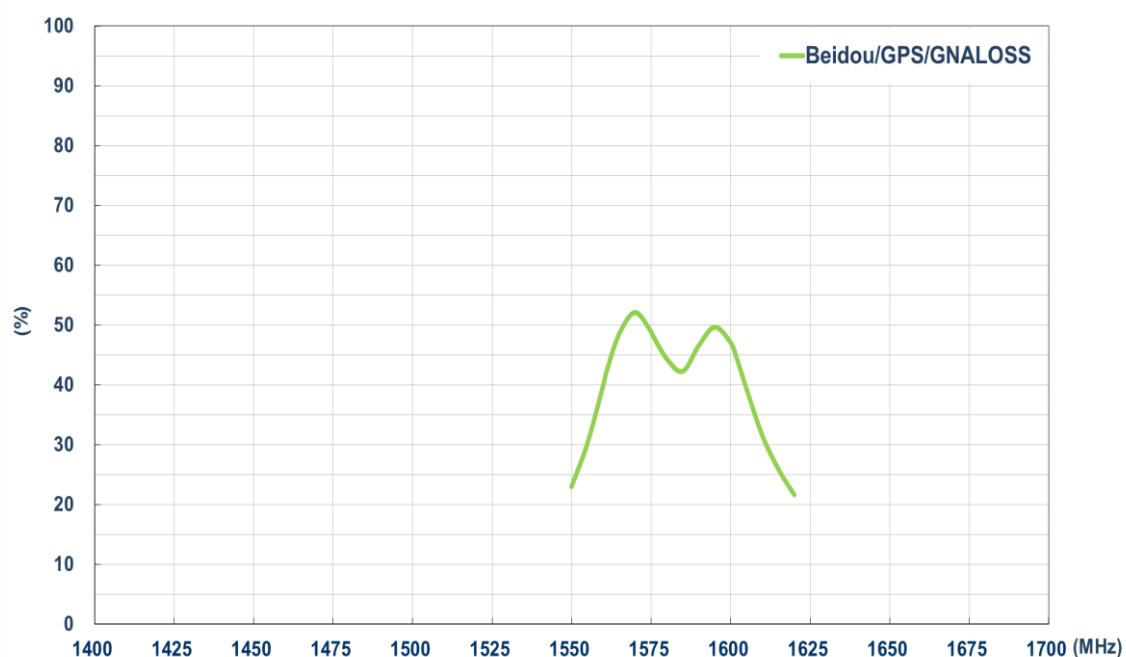

6.4 GNSS – Average Gain (Passive)

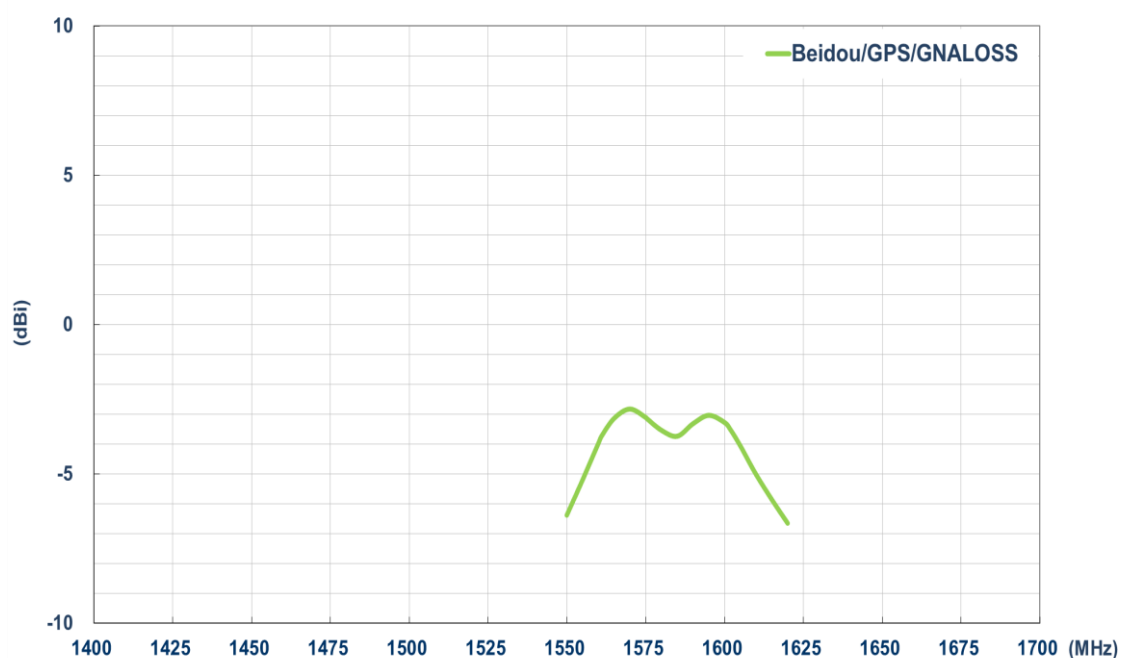


6.5 GNSS – Peak Gain (Passive)

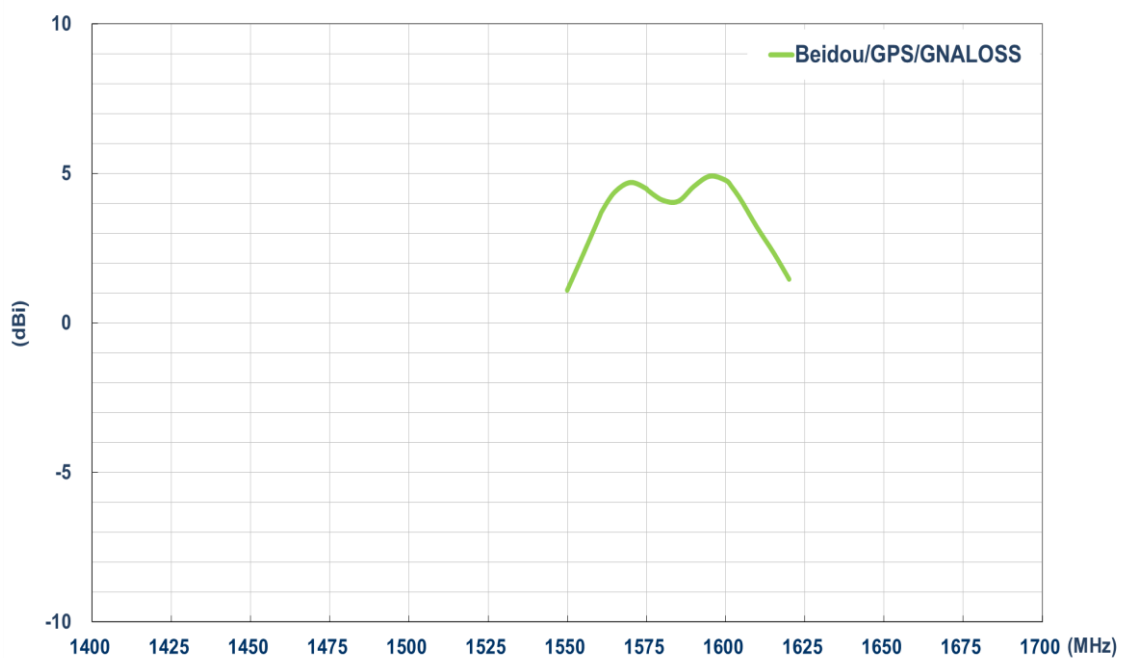


6.6 GNSS – Axial Ratio

XZ- Plane

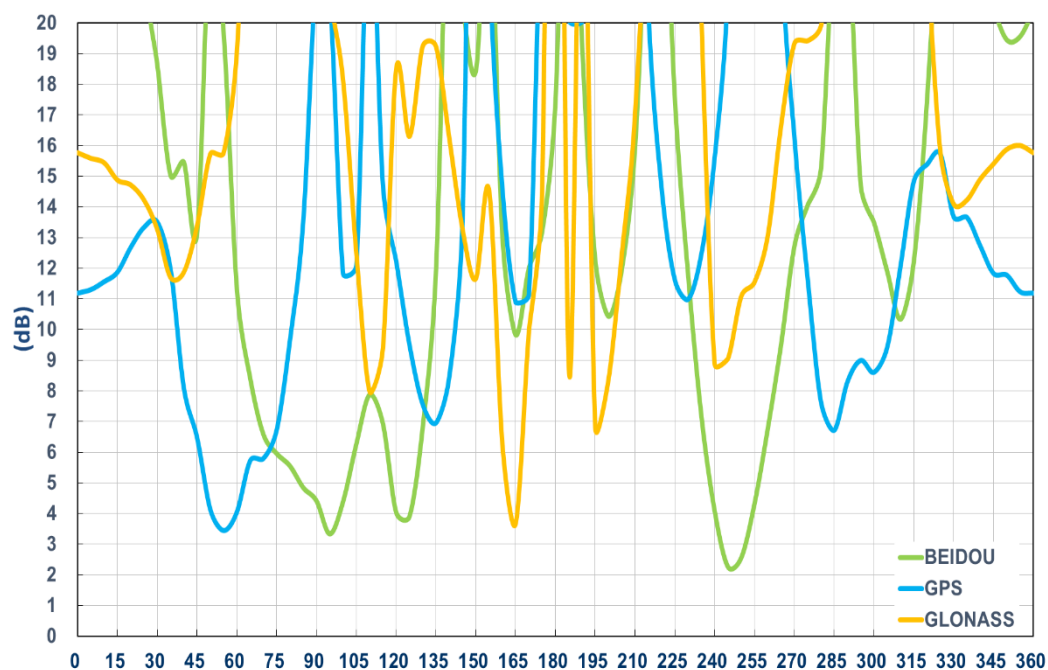


6.7 GNSS – Axial Ratio


YZ- Plane

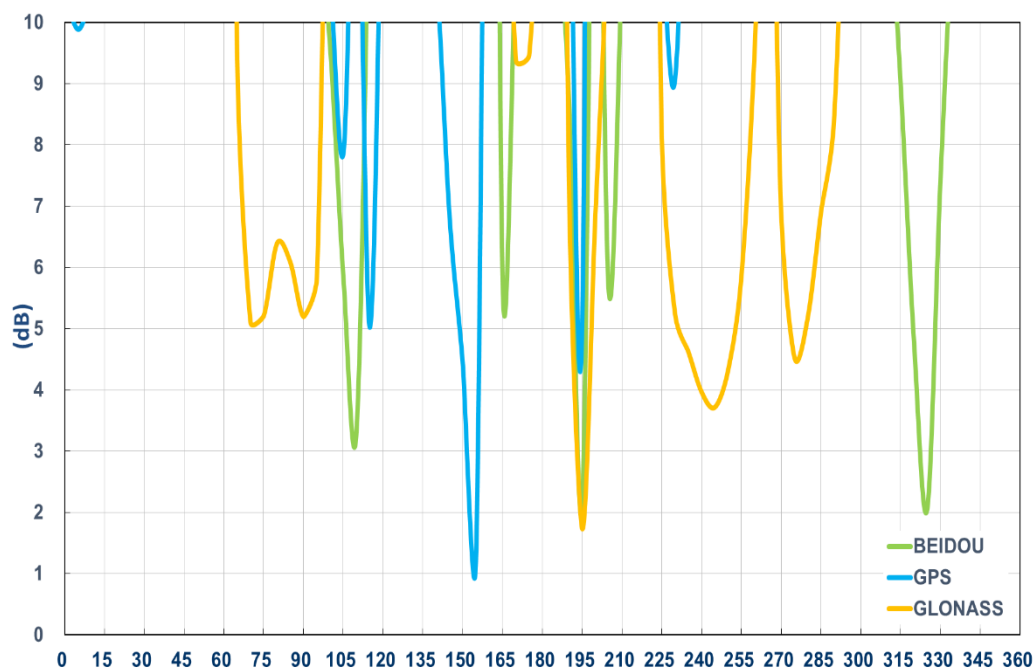


6.8 GNSS – LNA Gain @ 3.0V

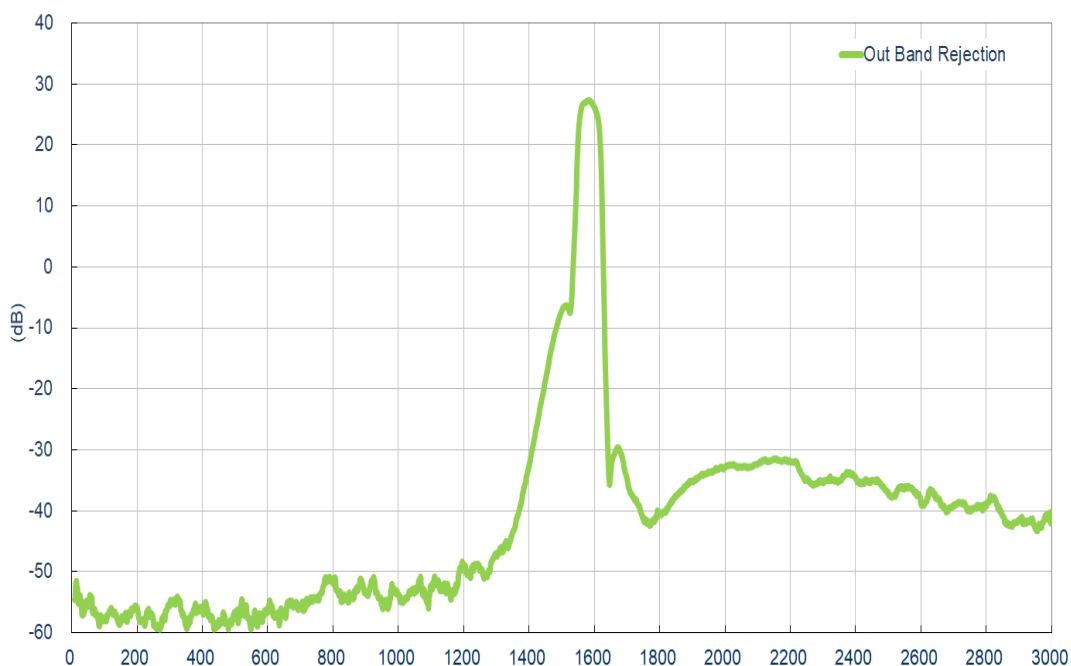


6.9 Noise Figure @ 3.0V

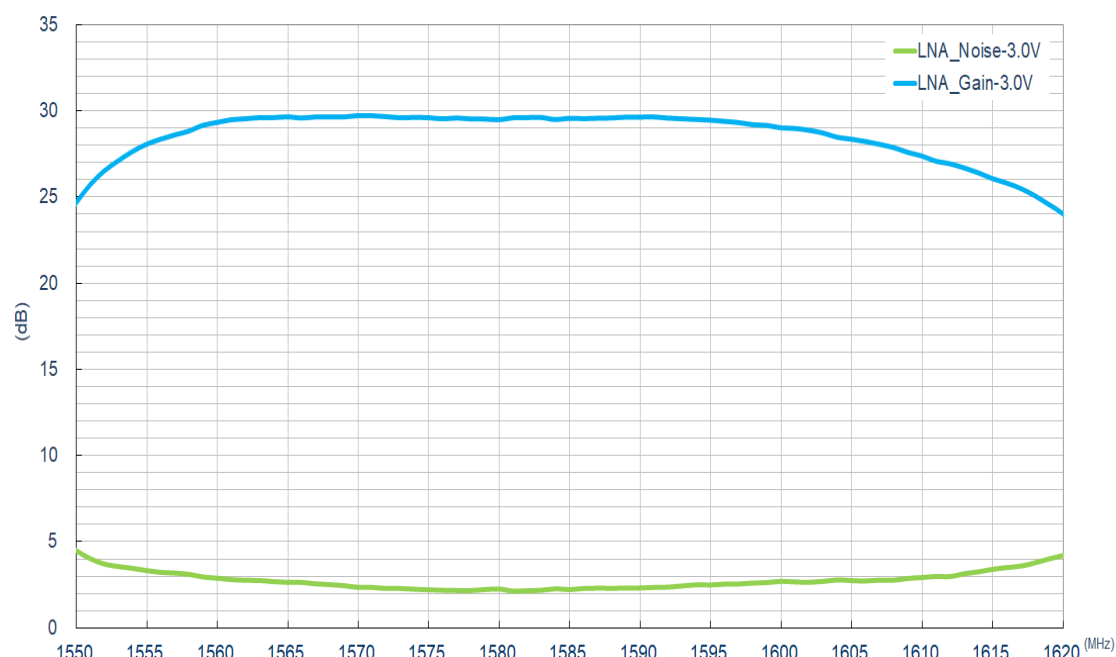


6.10 4G-5G - Return Loss

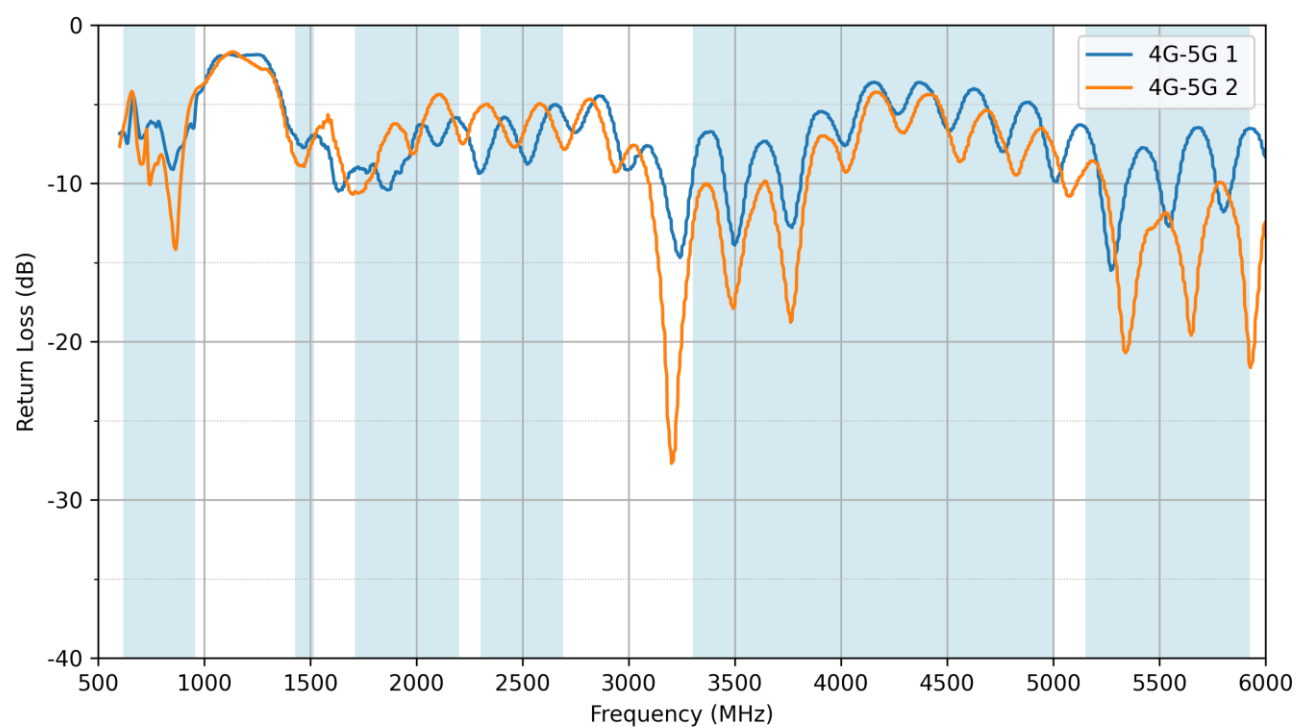


6.11 4G-5G - VSWR

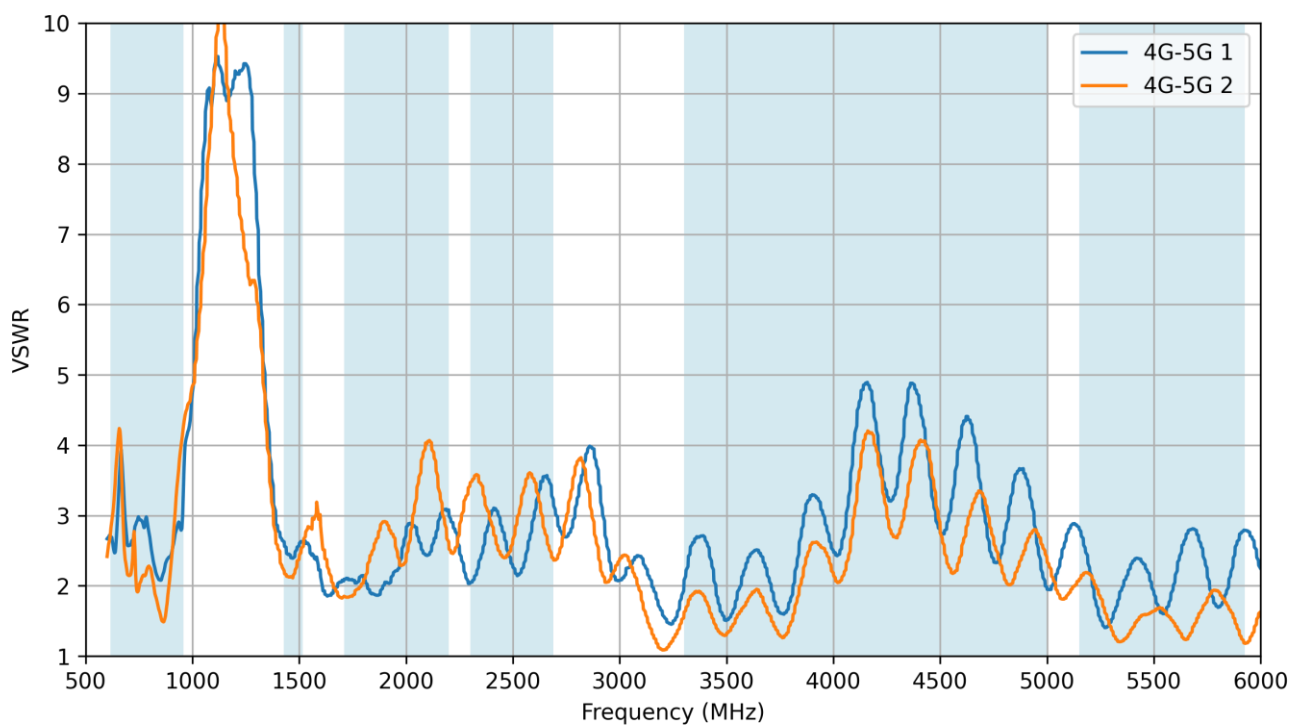


6.12 4G-5G - Isolation

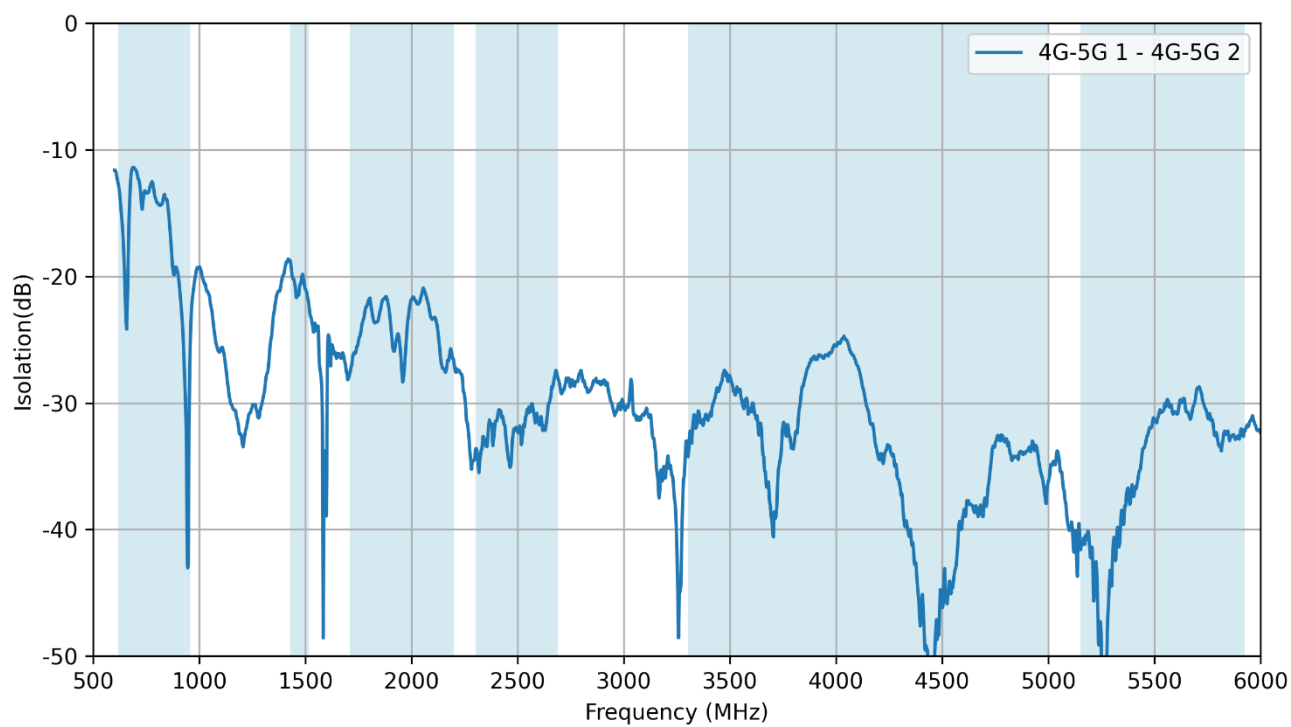


6.13 4G-5G - Efficiency

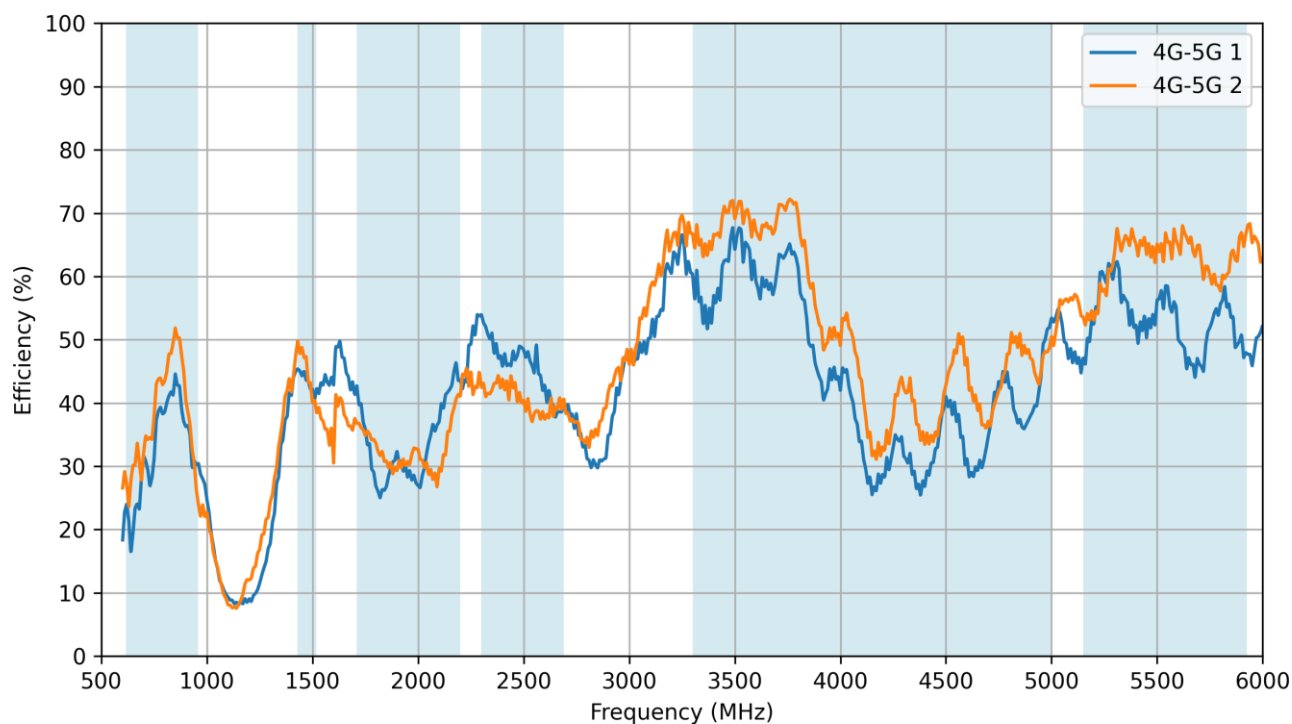


6.14 4G-5G - Average Gain

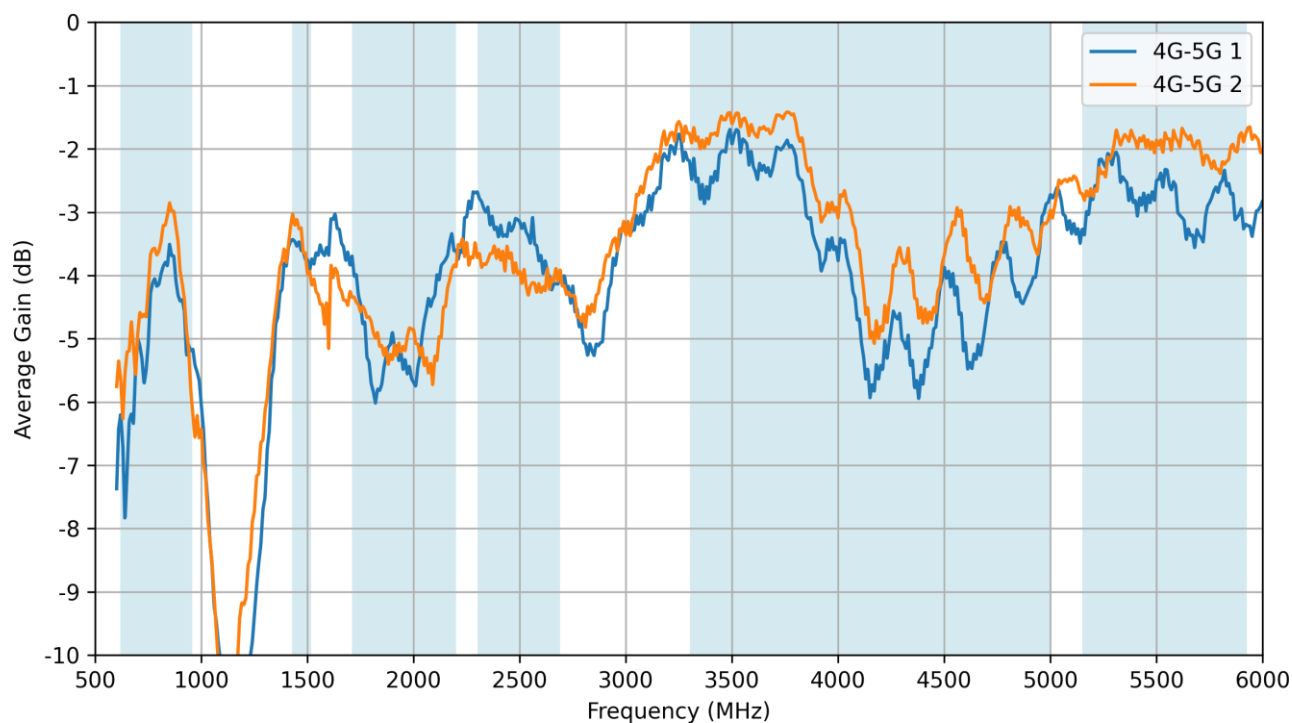


6.15 4G-5G - Peak Gain

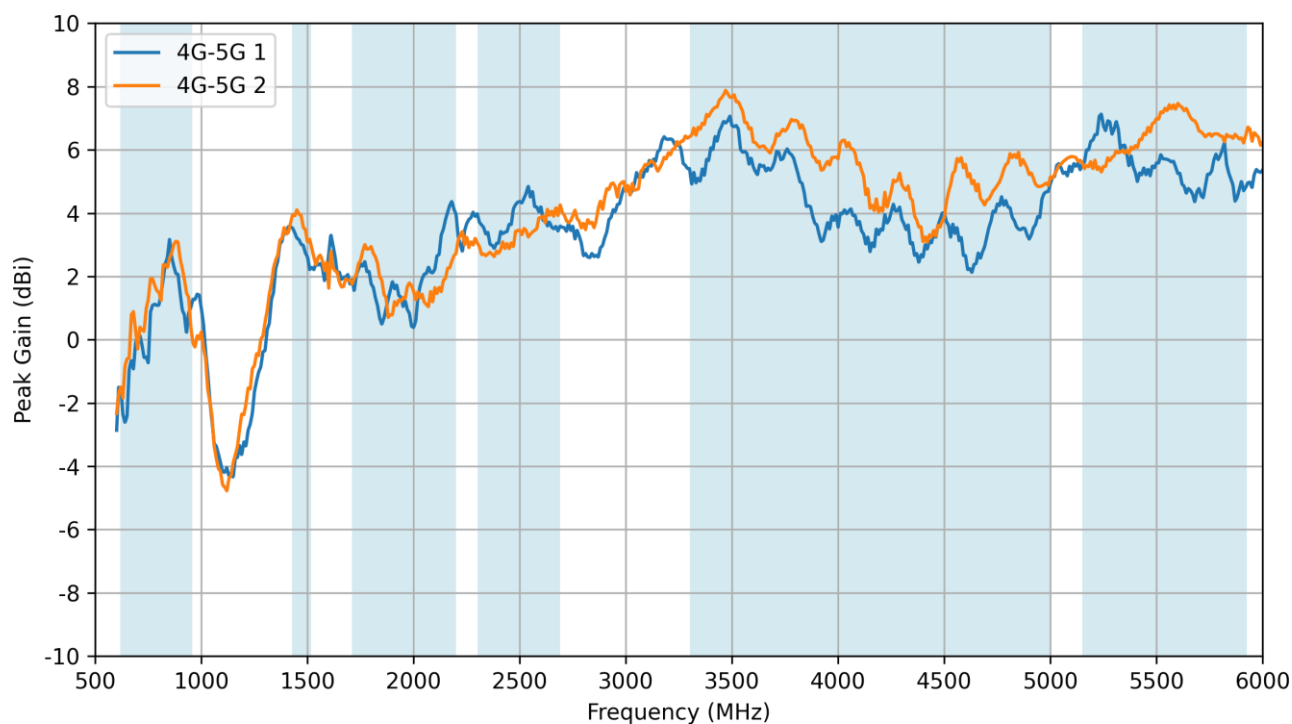


6.16 Wi-Fi - Return Loss

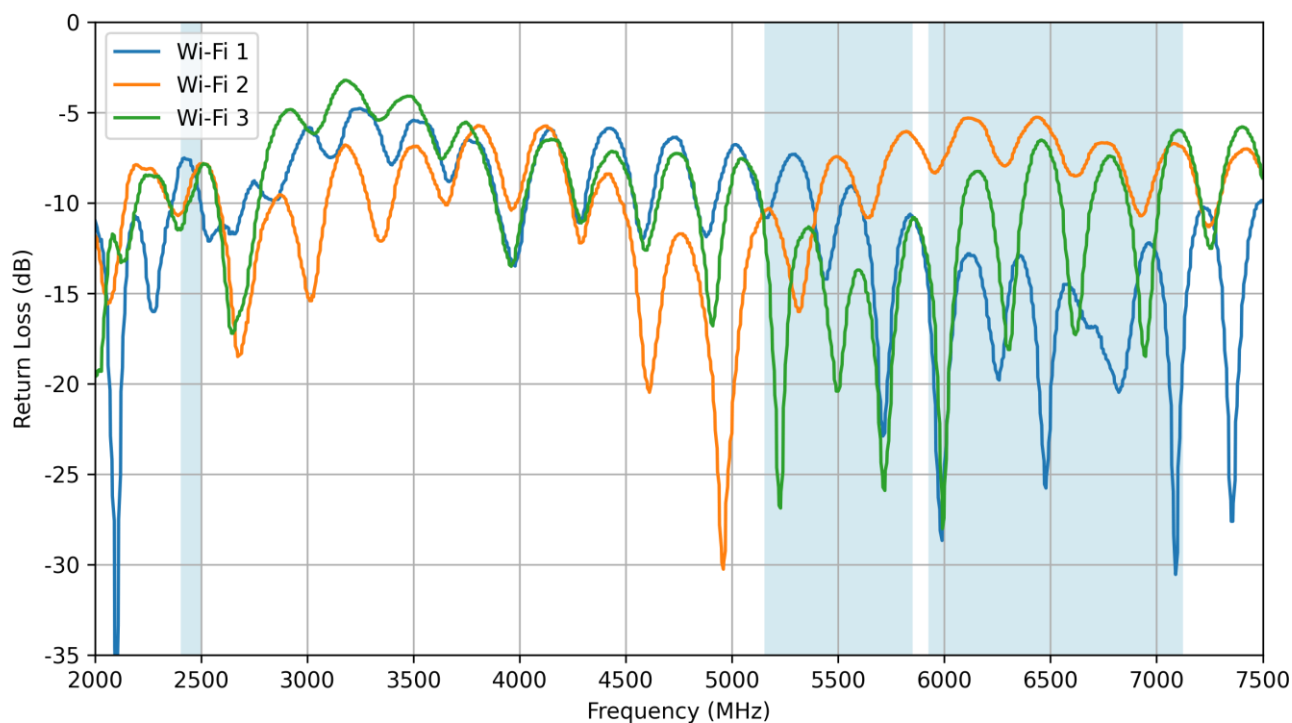


6.17 Wi-Fi - VSWR

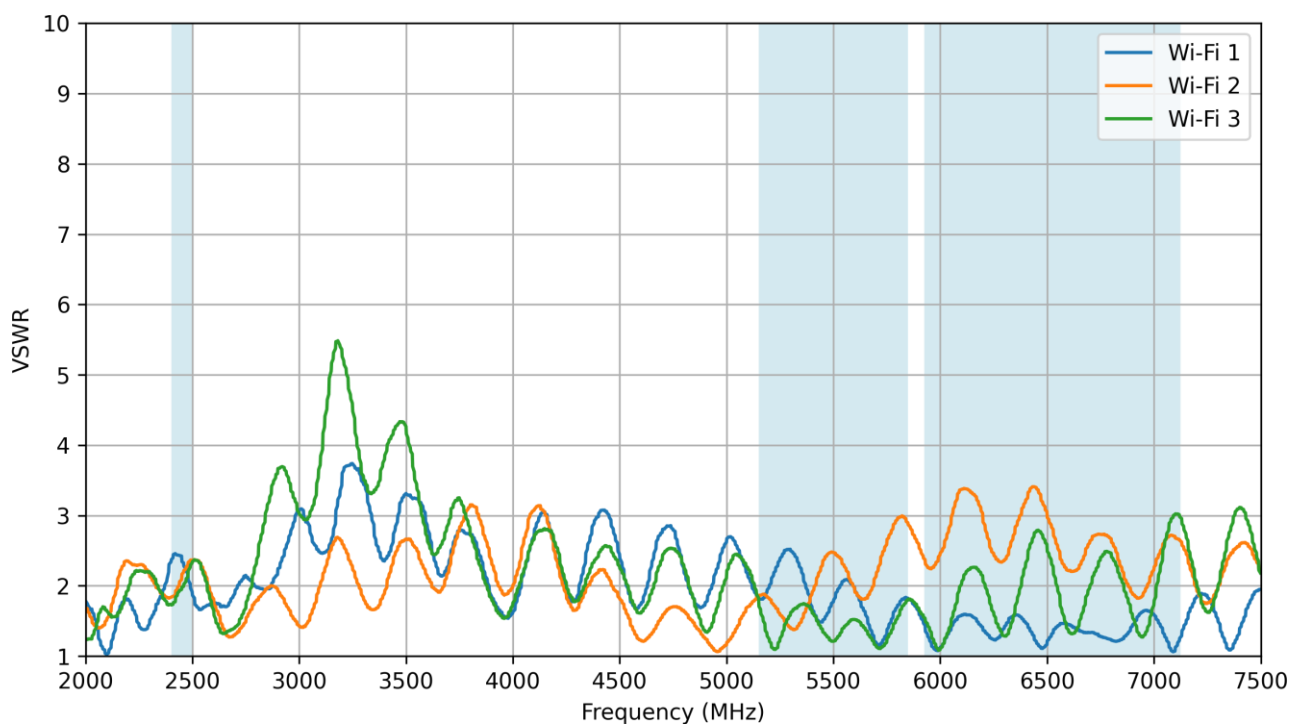


6.18 Wi-Fi - Isolation

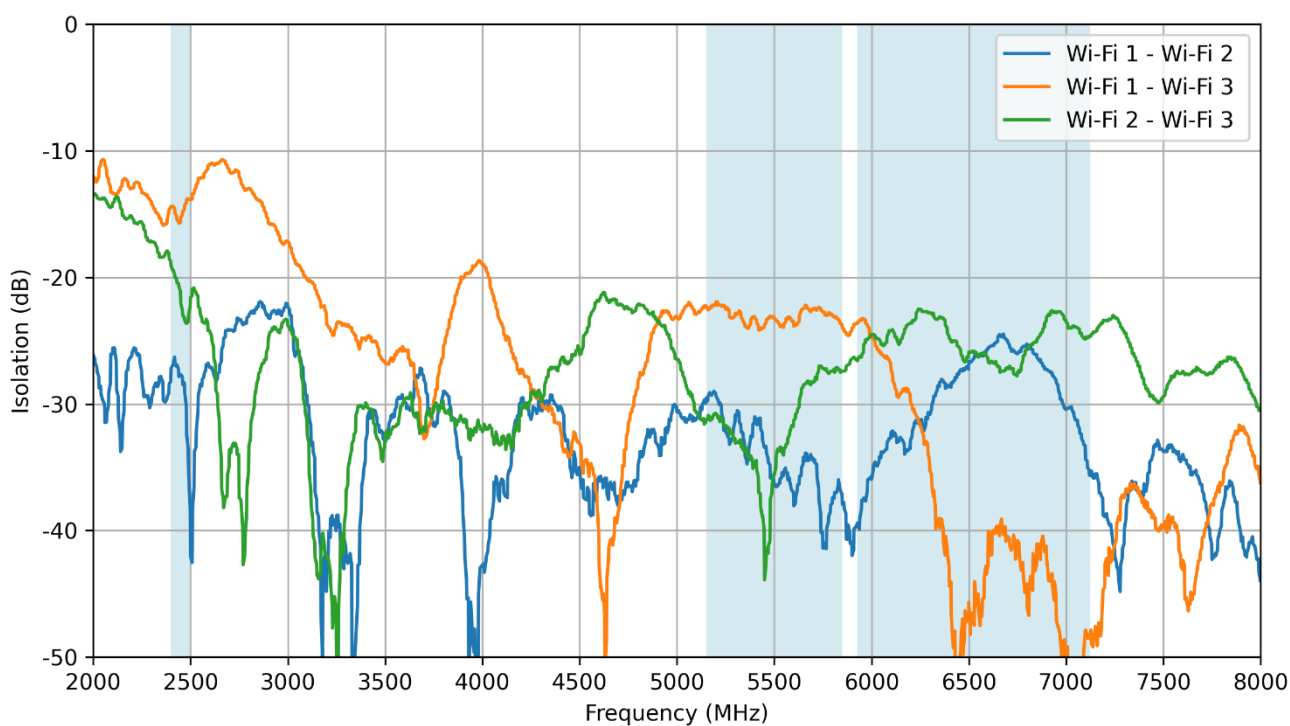


6.19 Wi-Fi - Efficiency

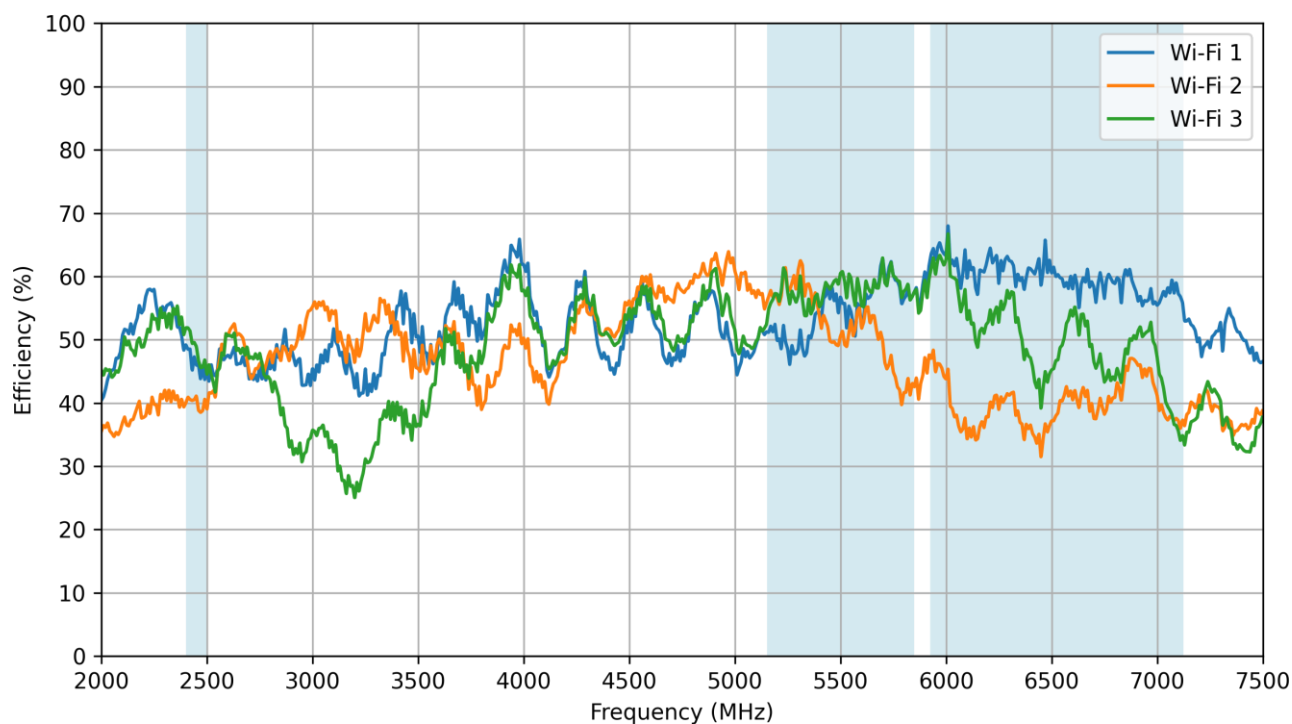


6.20 Wi-Fi - Average Gain

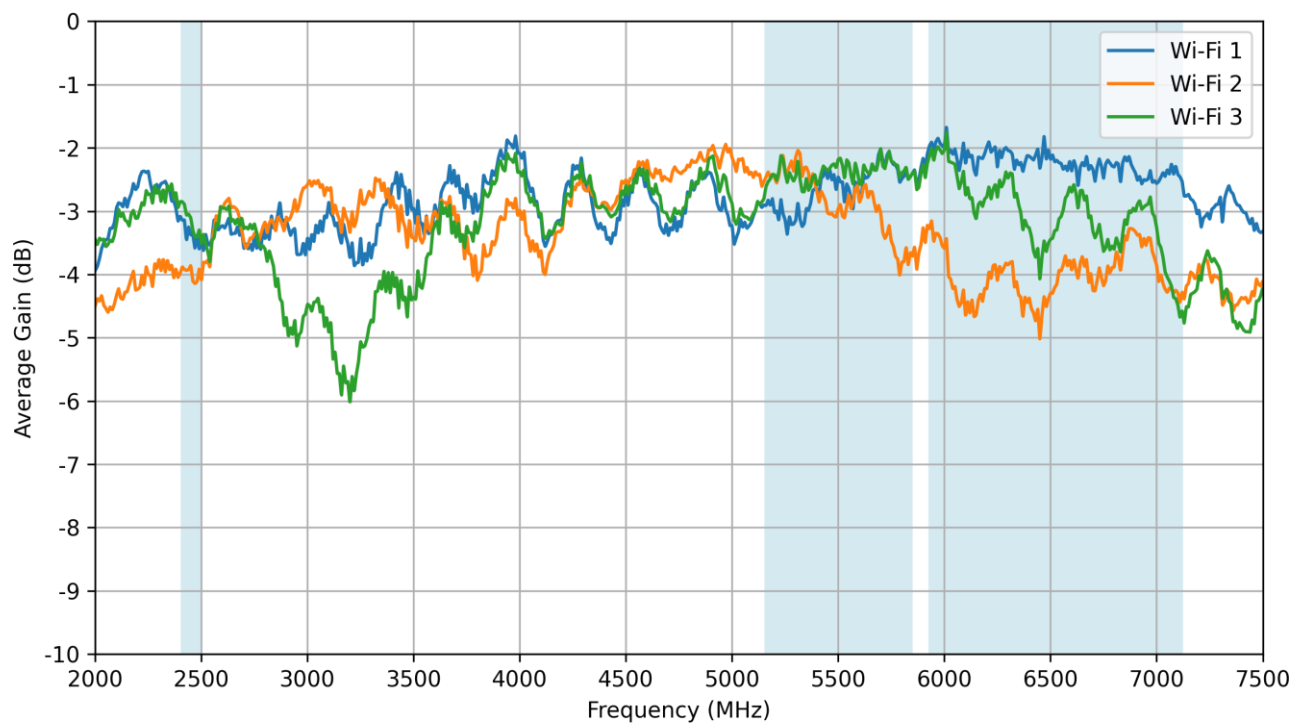


6.21 Wi-Fi - Peak Gain

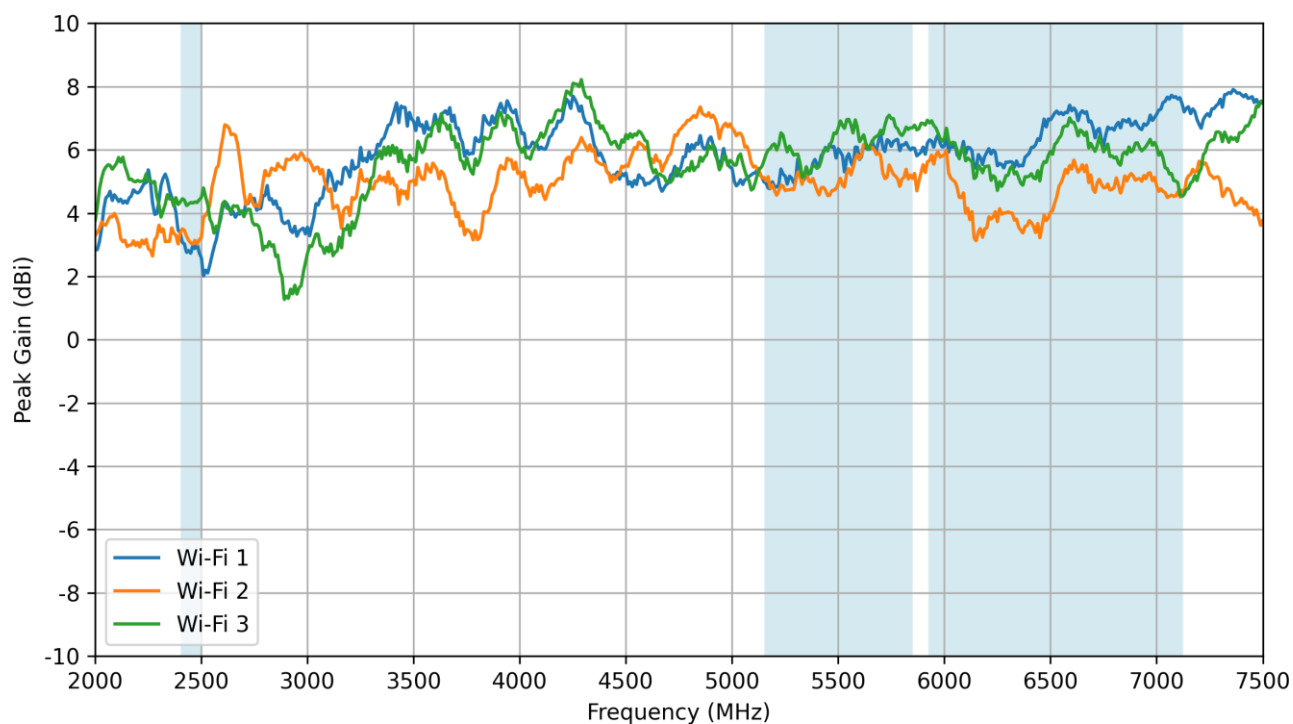

6.22 Isolation 4G-5G1 - Wi-Fi 1-3


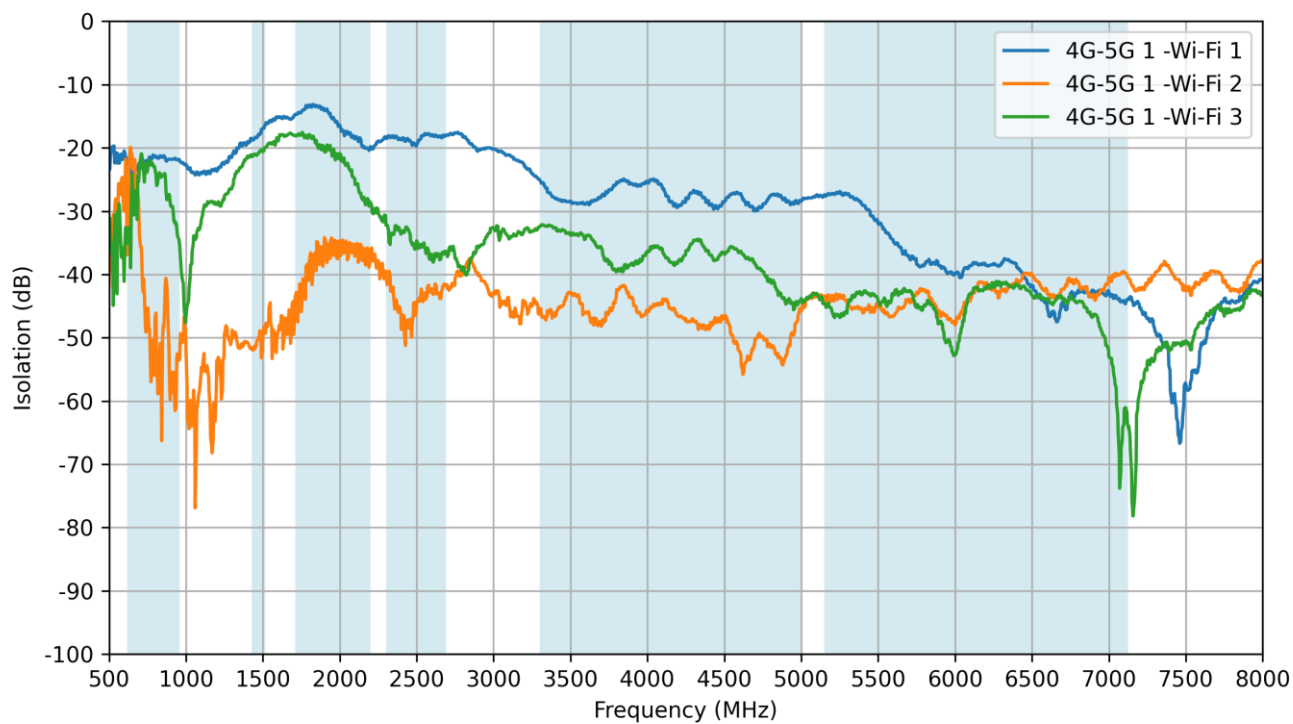


6.23 Isolation 4G-5G2 - Wi-Fi 1-3

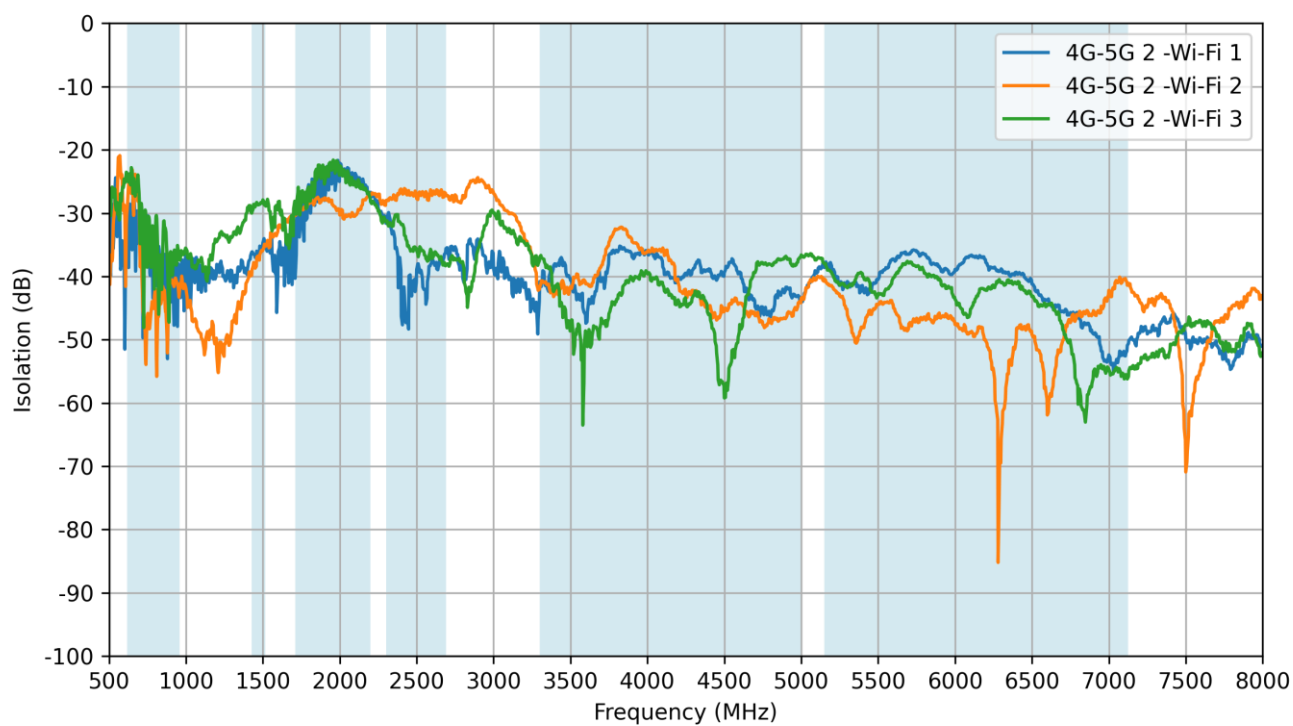


7. Radiation Patterns

7.1 Test Setup

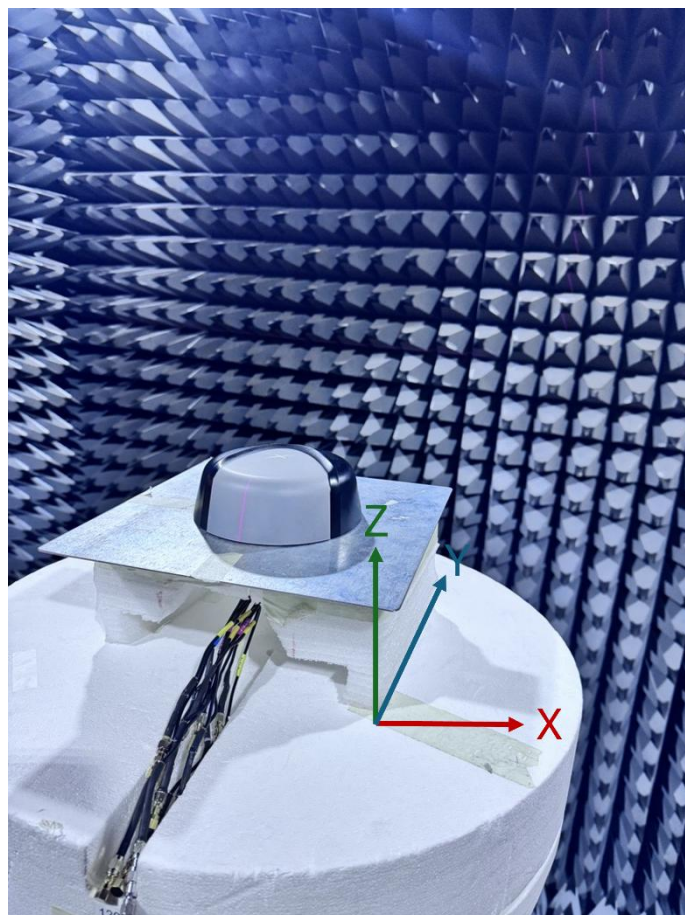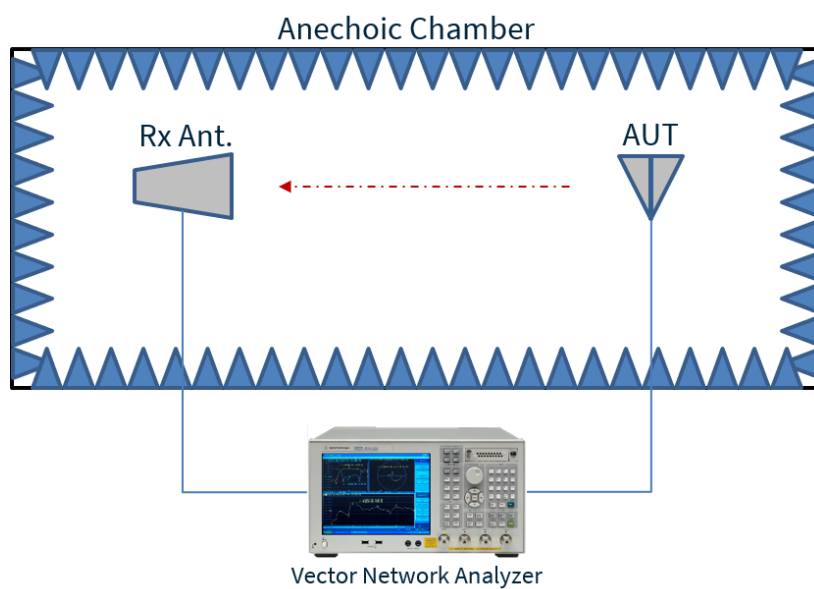


Chamber Test Set-up


7.2 GNSS Patterns at 1575 MHz

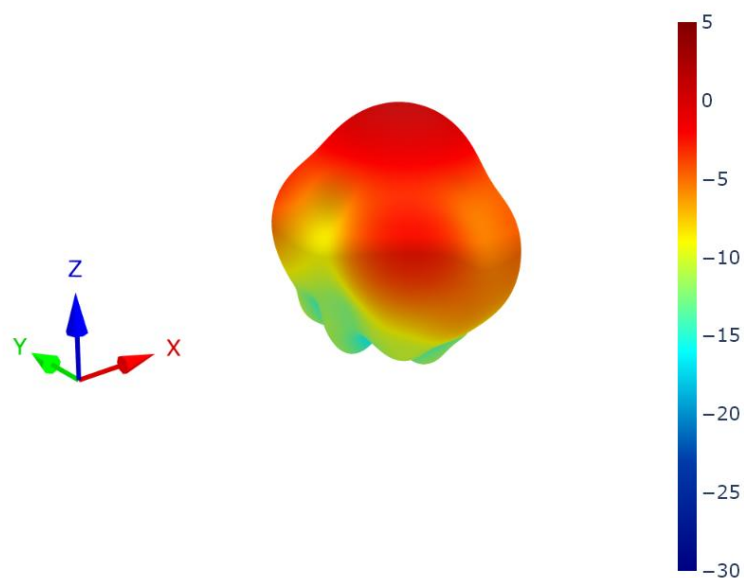


XZ Plane

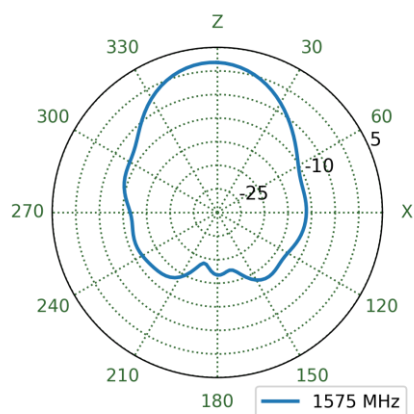



YZ Plane

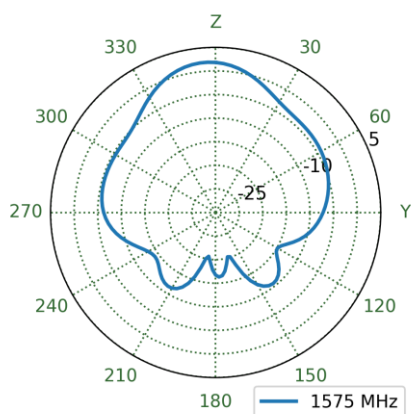


XY Plane

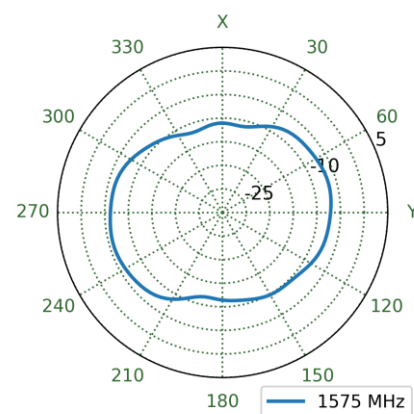


7.3 GNSS Patterns at 1562 MHz

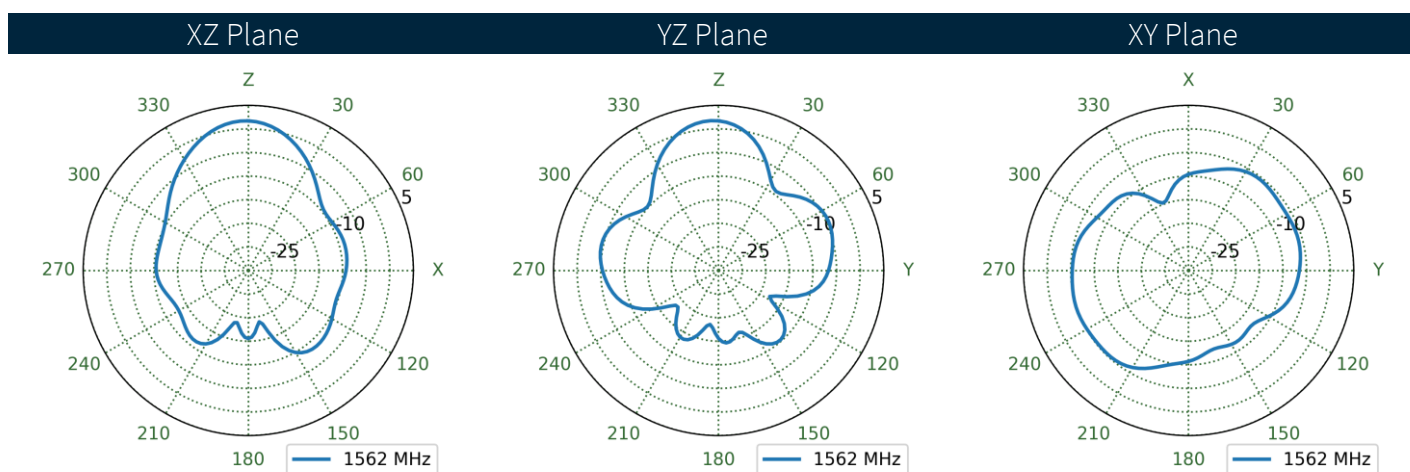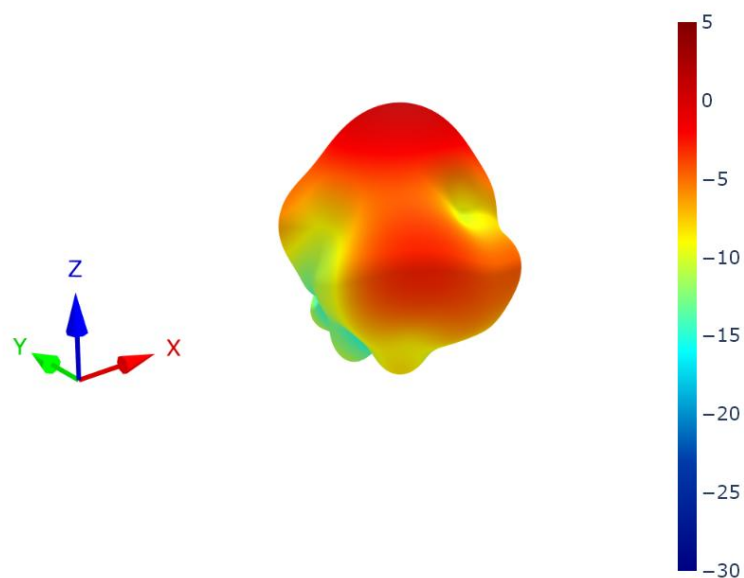


7.4 GNSS Patterns at 1603 MHz

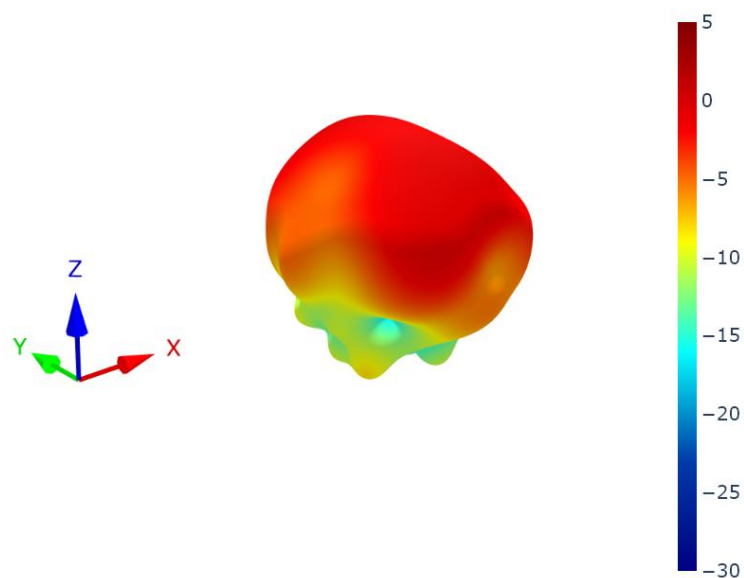


XZ Plane

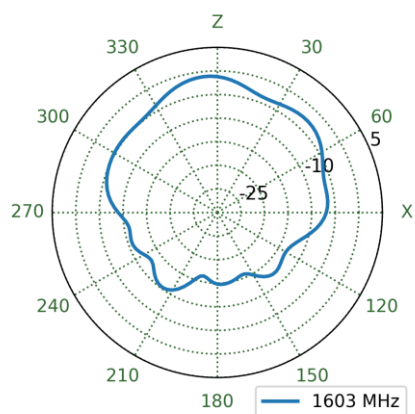


YZ Plane

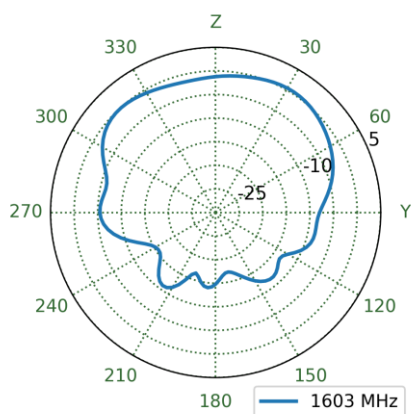


XY Plane

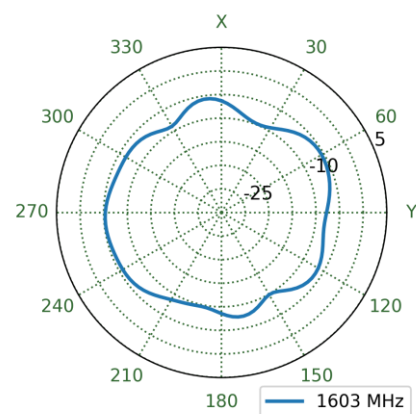


7.5 4G-5G 1 Patterns at 660 MHz

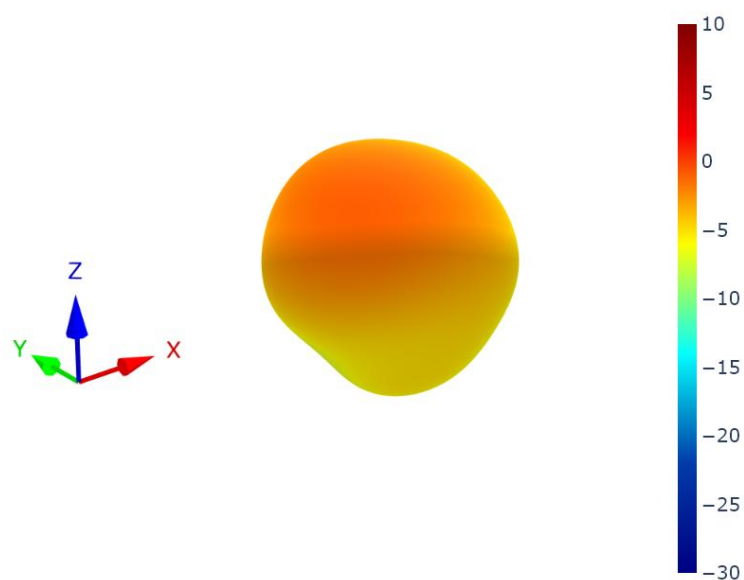


XZ Plane

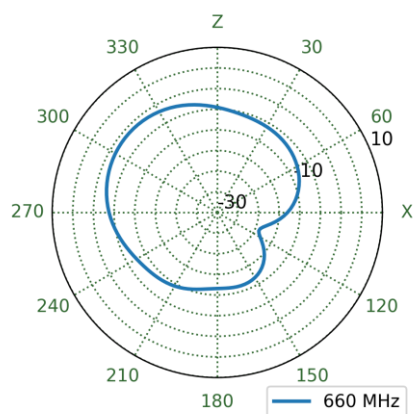


YZ Plane

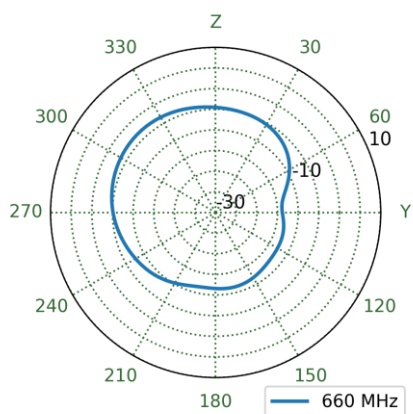


XY Plane

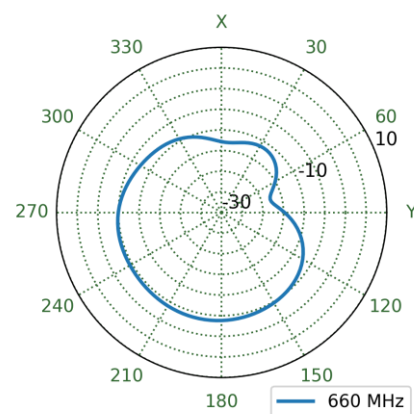


7.6 4G-5G 2 Patterns at 660 MHz

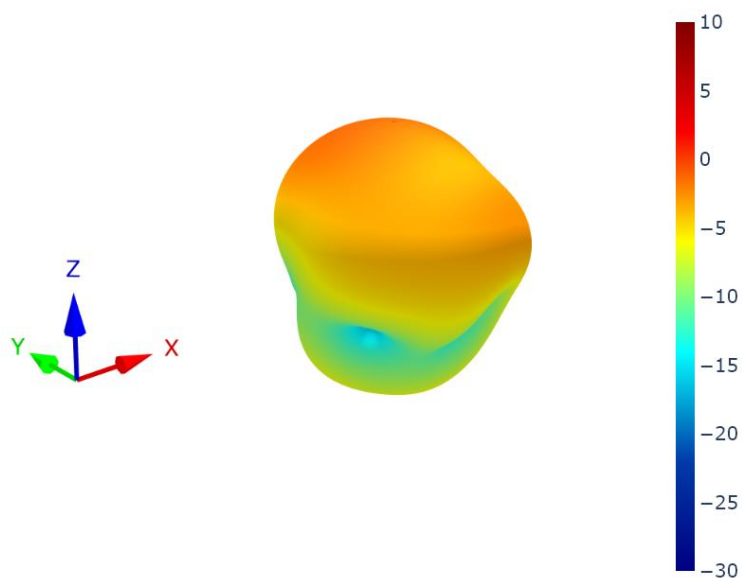


XZ Plane

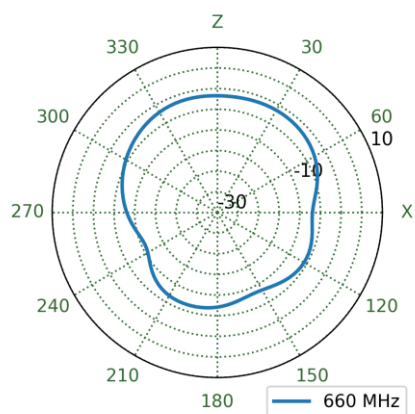


YZ Plane

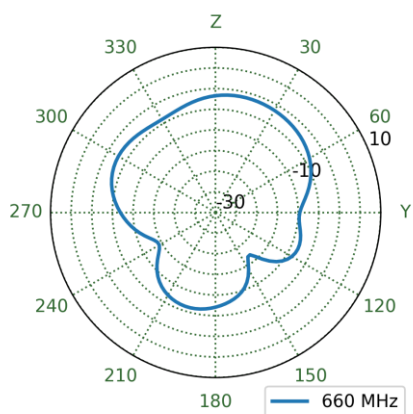


XY Plane

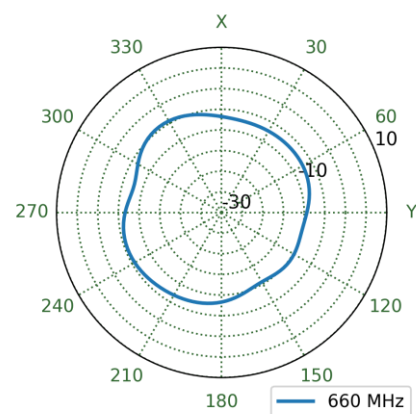


7.7 4G-5G 1 Patterns at 750 MHz

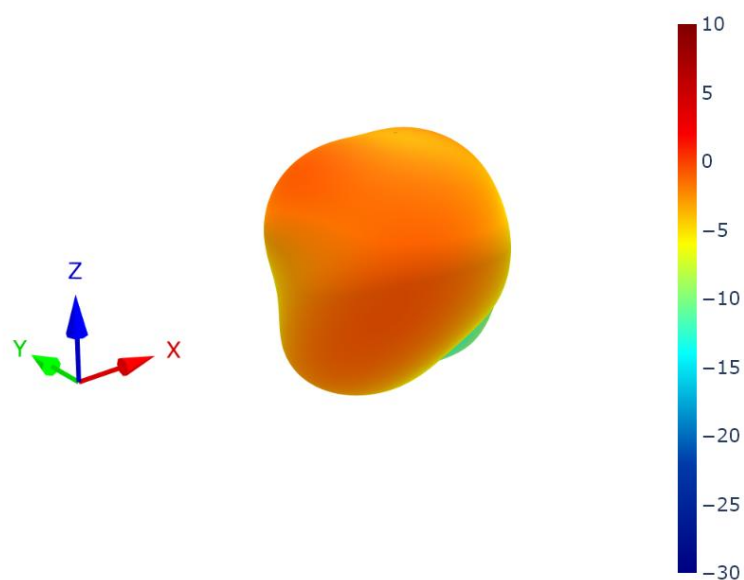


XZ Plane

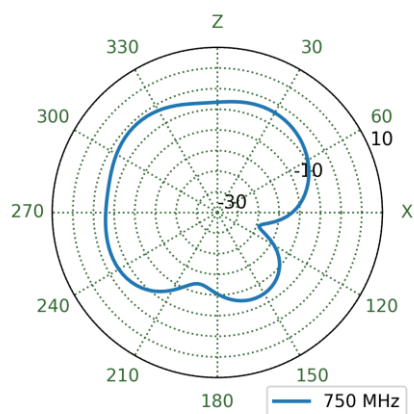


YZ Plane

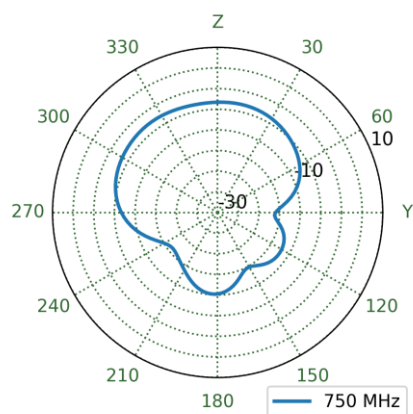


XY Plane

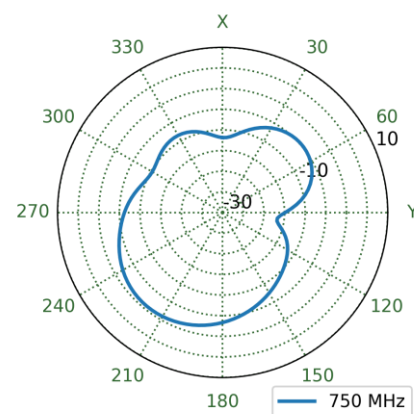


7.8 4G-5G 2 Patterns at 750 MHz

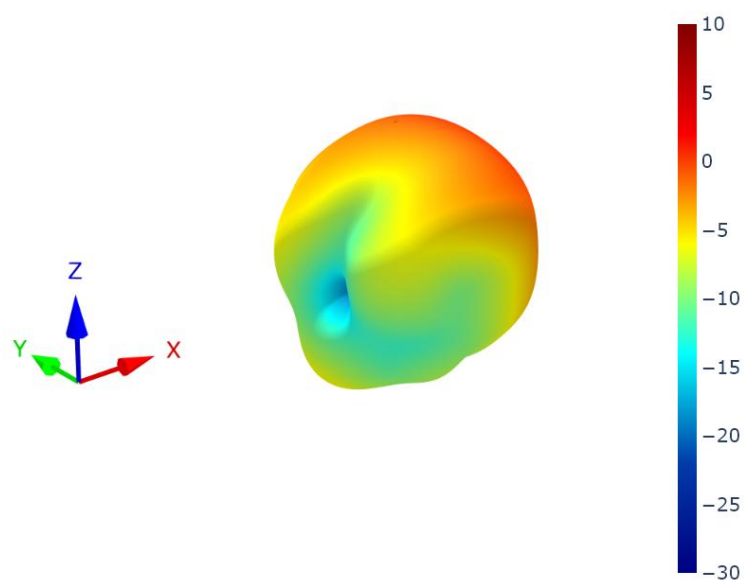


XZ Plane

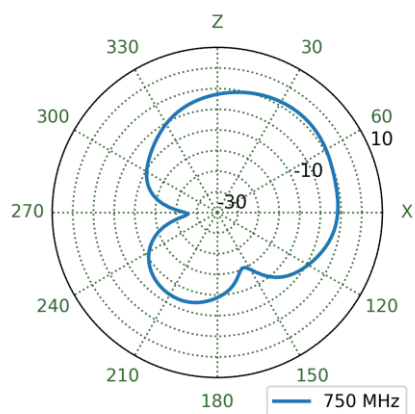


YZ Plane

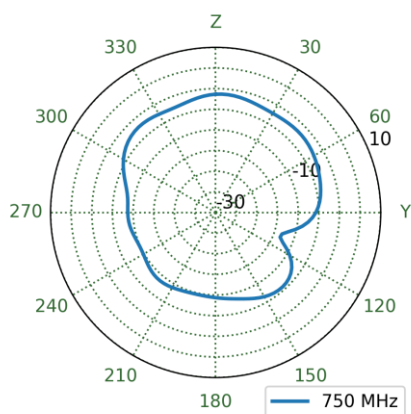


XY Plane

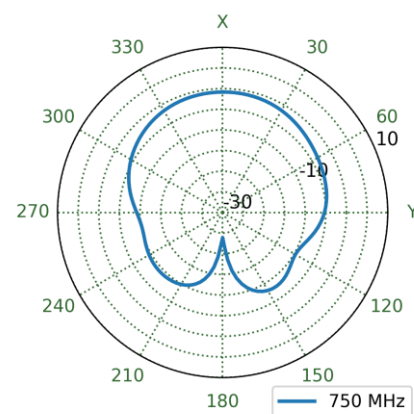


7.9 4G-5G 1 Patterns at 880 MHz

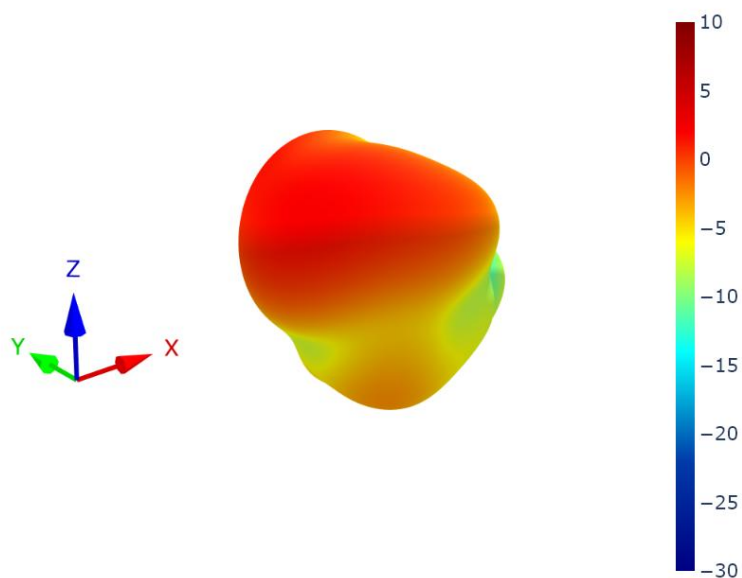


XZ Plane

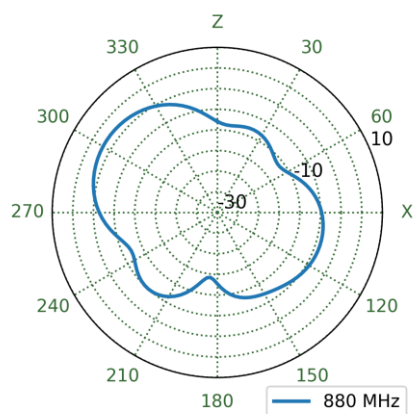


YZ Plane

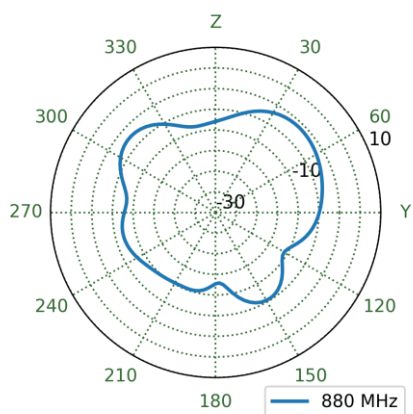


XY Plane

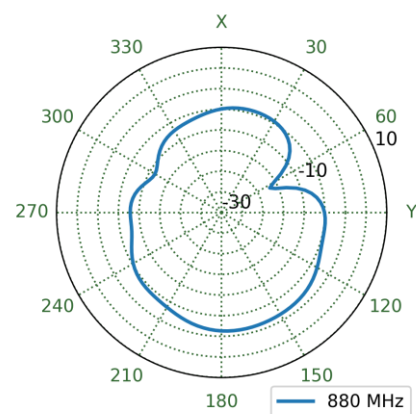


7.10 4G-5G 2 Patterns at 880 MHz

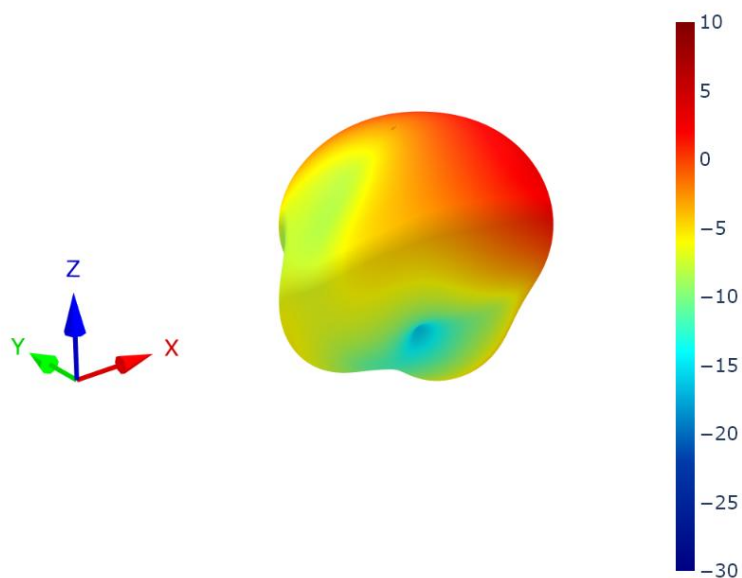


XZ Plane

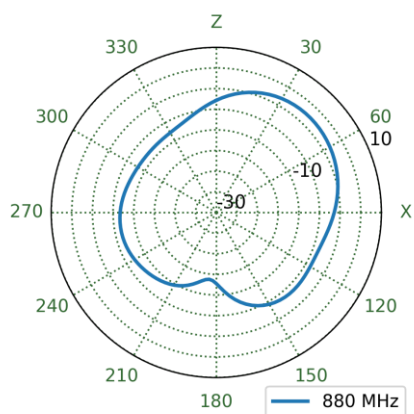


YZ Plane

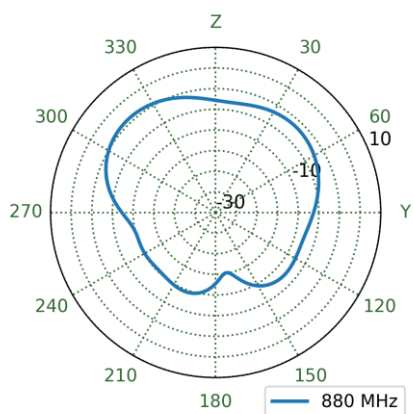


XY Plane

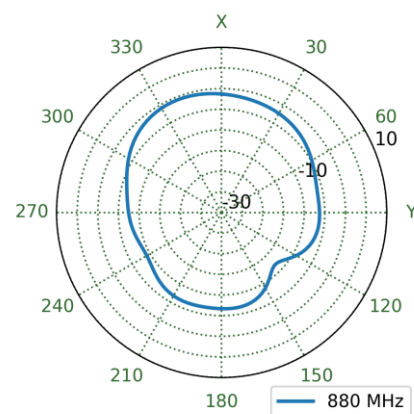


7.11 4G-5G 1 Patterns at 1450 MHz

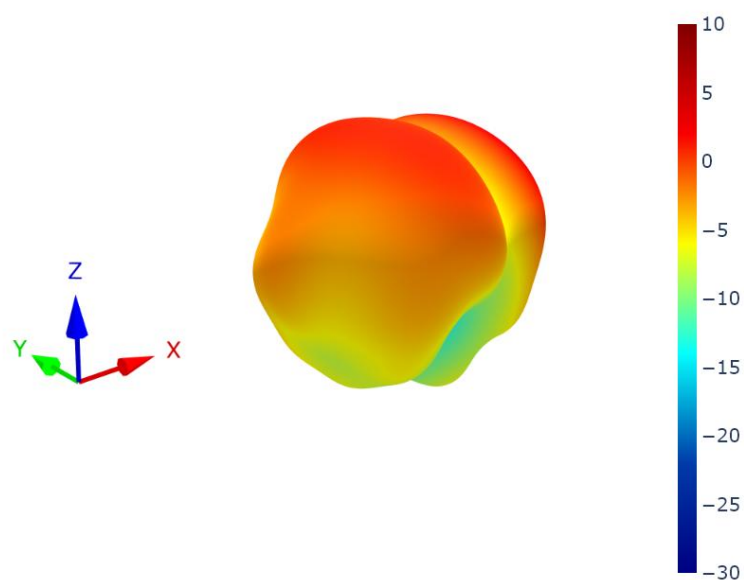


XZ Plane

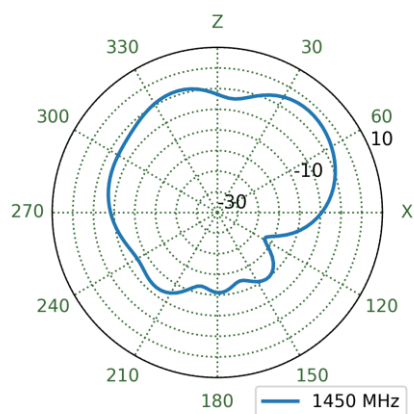


YZ Plane

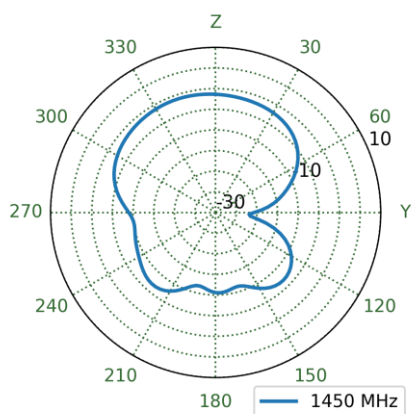


XY Plane

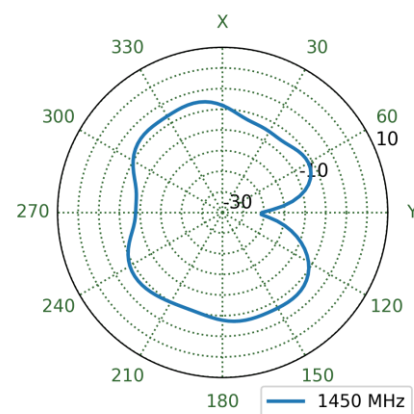


7.12 4G-5G 2 Patterns at 1450 MHz

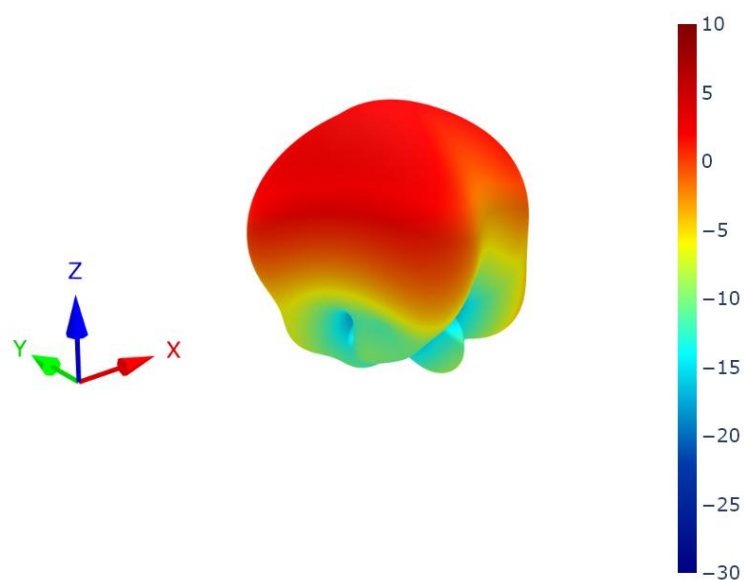


XZ Plane

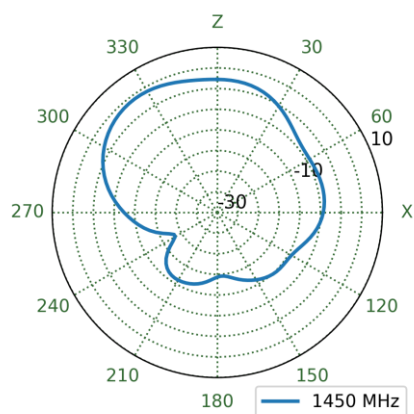


YZ Plane

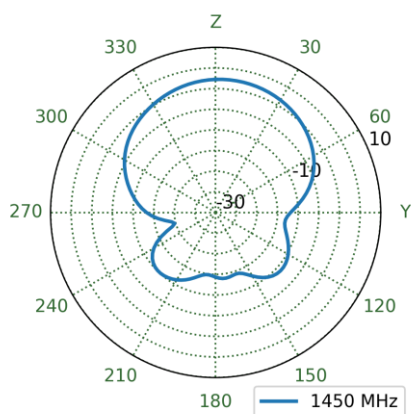


XY Plane

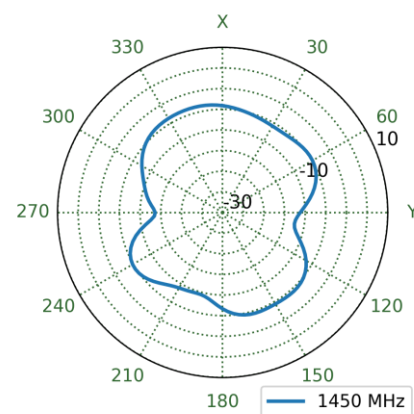


7.13 4G-5G 1 Patterns at 1810 MHz

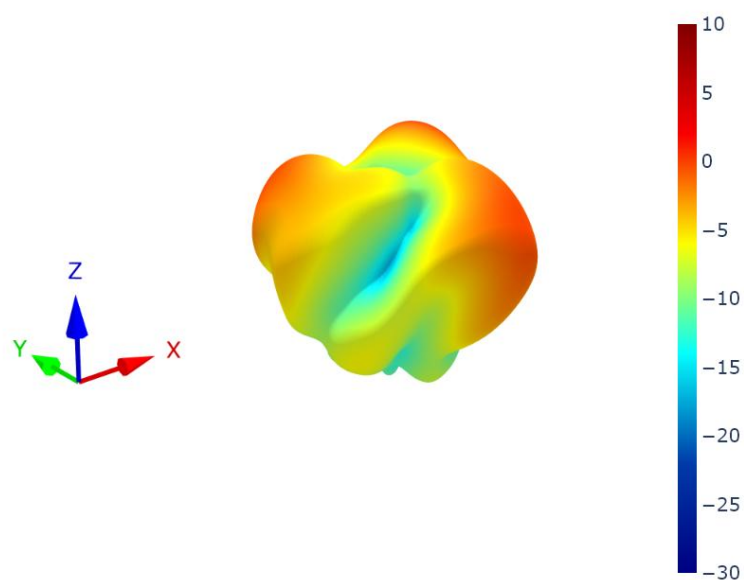


XZ Plane

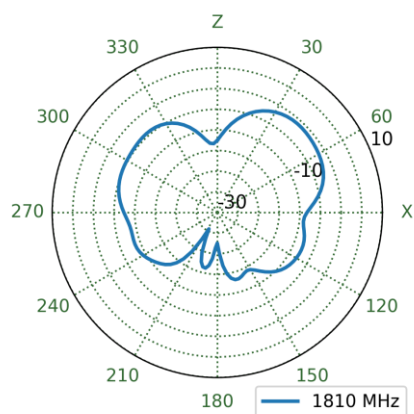


YZ Plane

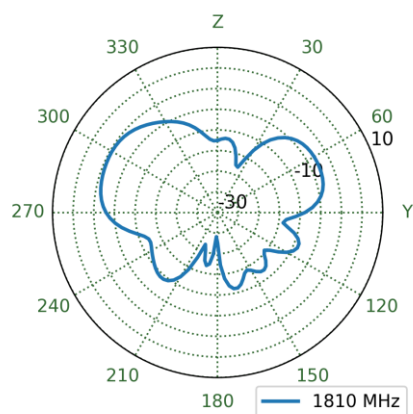


XY Plane

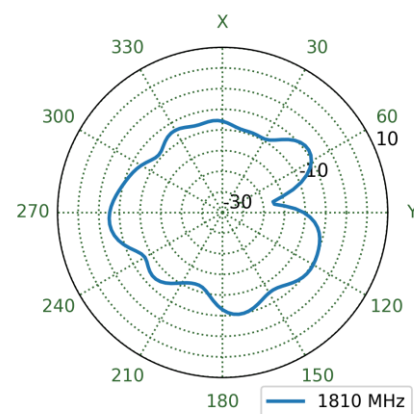


7.14 4G-5G 2 Patterns at 1810 MHz

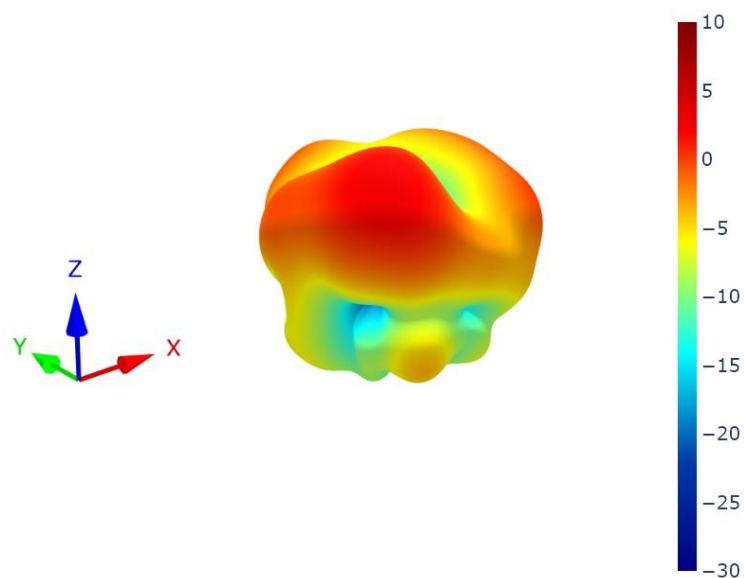


XZ Plane

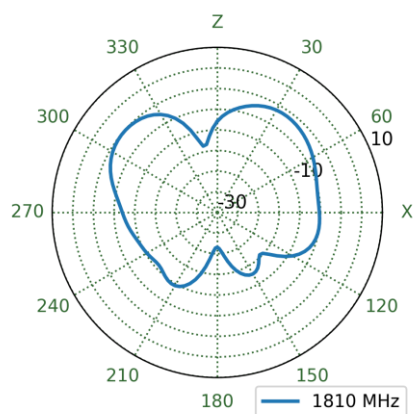


YZ Plane

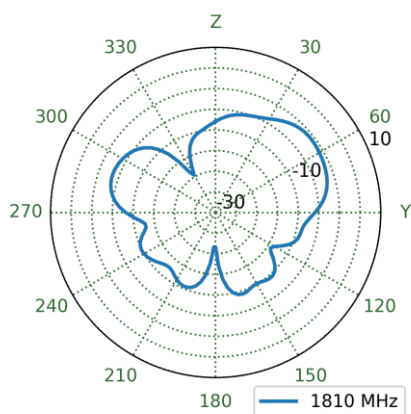


XY Plane

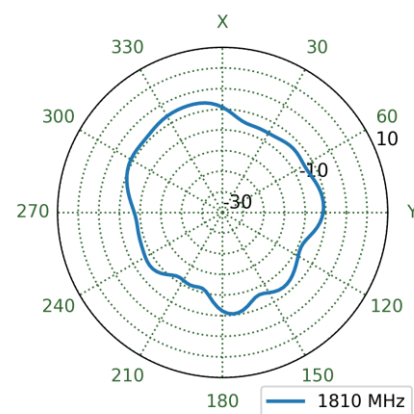


7.15 4G-5G 1 Patterns at 1920 MHz

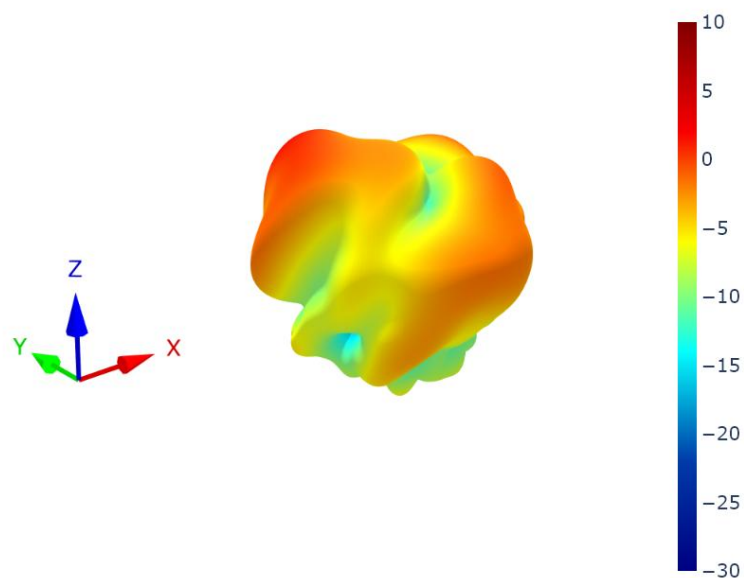


XZ Plane

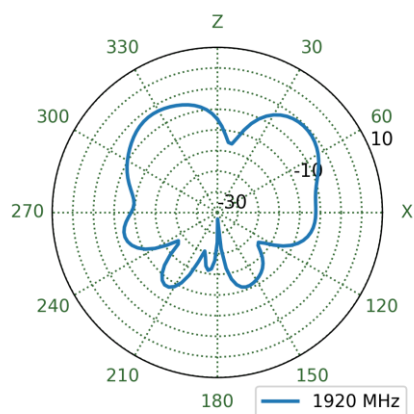


YZ Plane

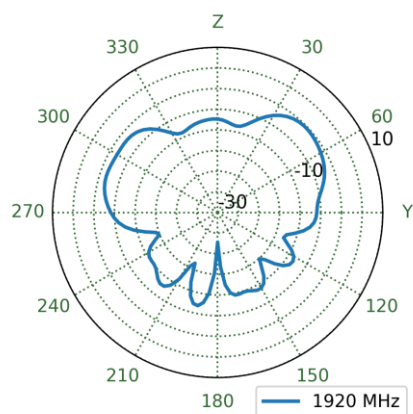


XY Plane

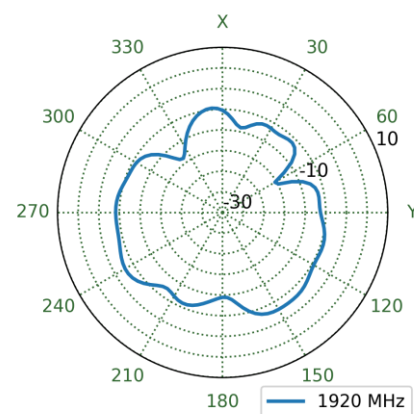


7.16 4G-5G 2 Patterns at 1920 MHz

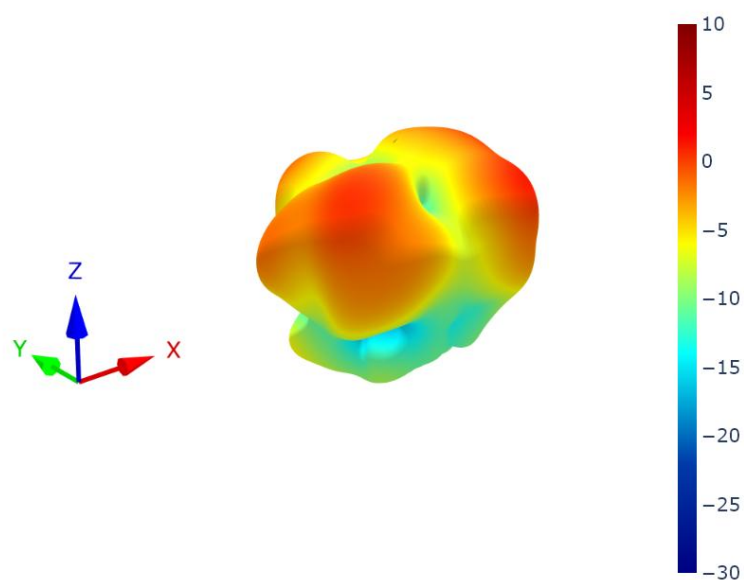


XZ Plane

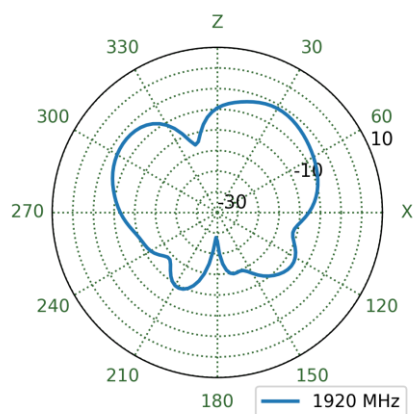


YZ Plane

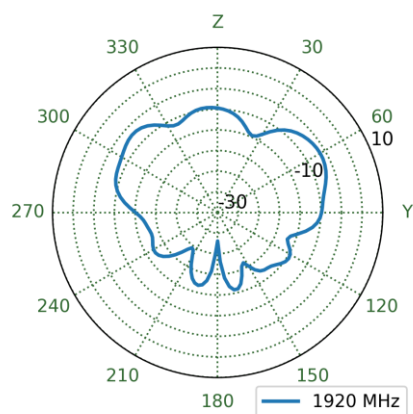


XY Plane

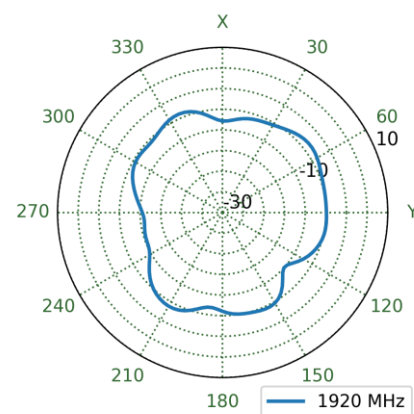


7.17 4G-5G 1 Patterns at 2010 MHz

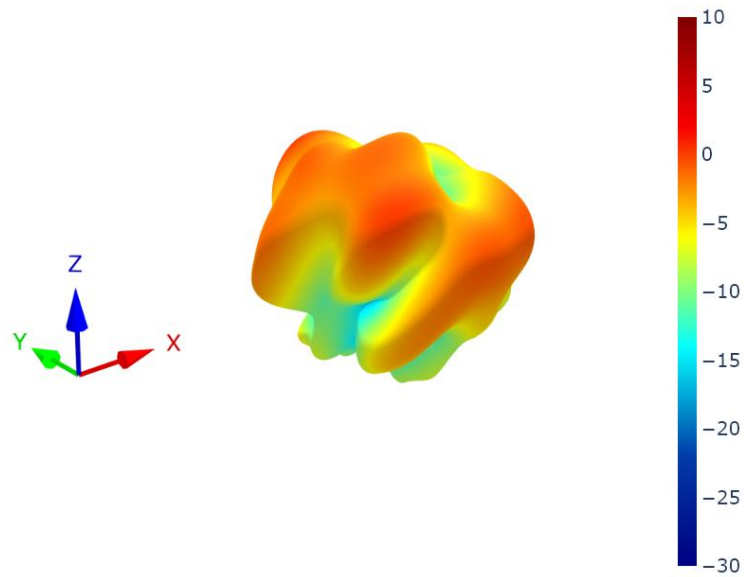


XZ Plane

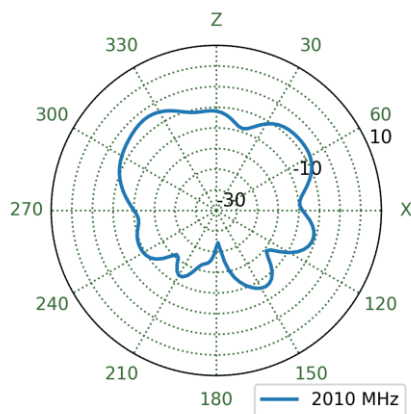


YZ Plane

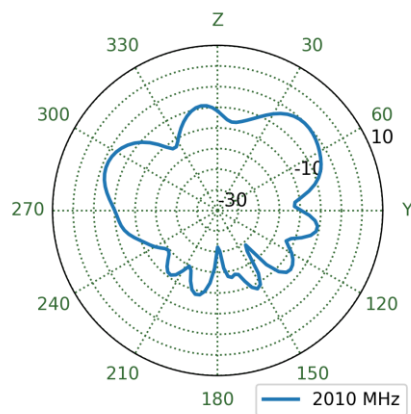


XY Plane

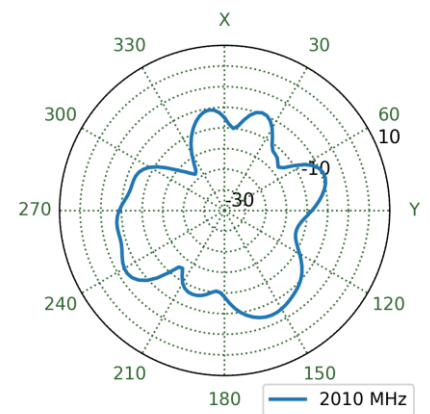


7.18 4G-5G 2 Patterns at 2010 MHz

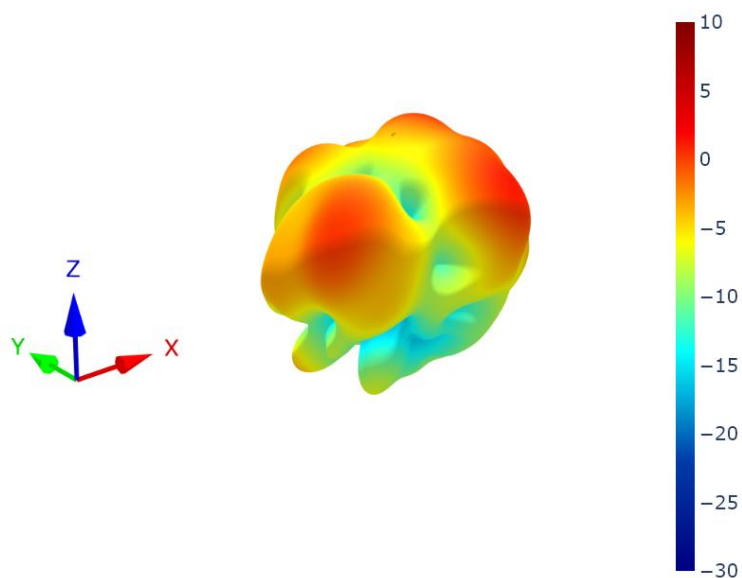


XZ Plane

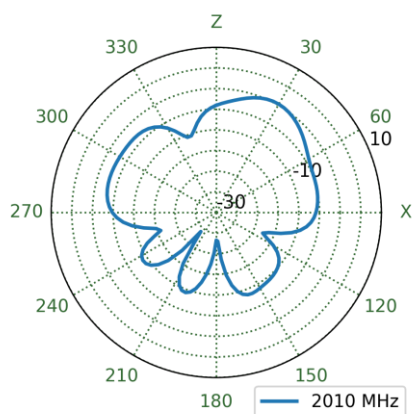


YZ Plane

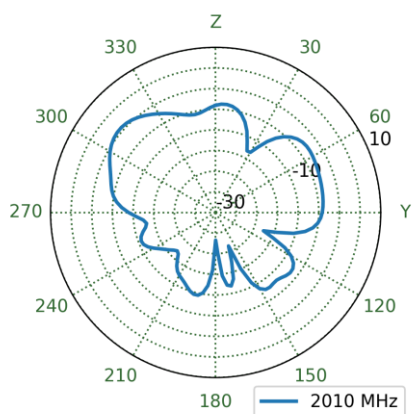


XY Plane

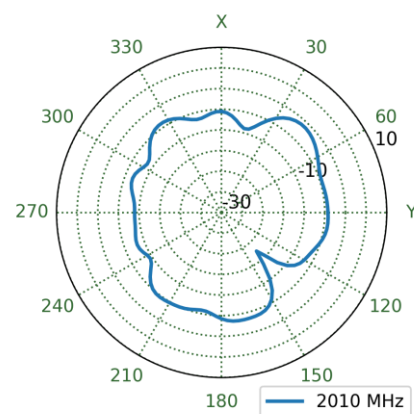


7.19 4G-5G 1 Patterns at 2500 MHz

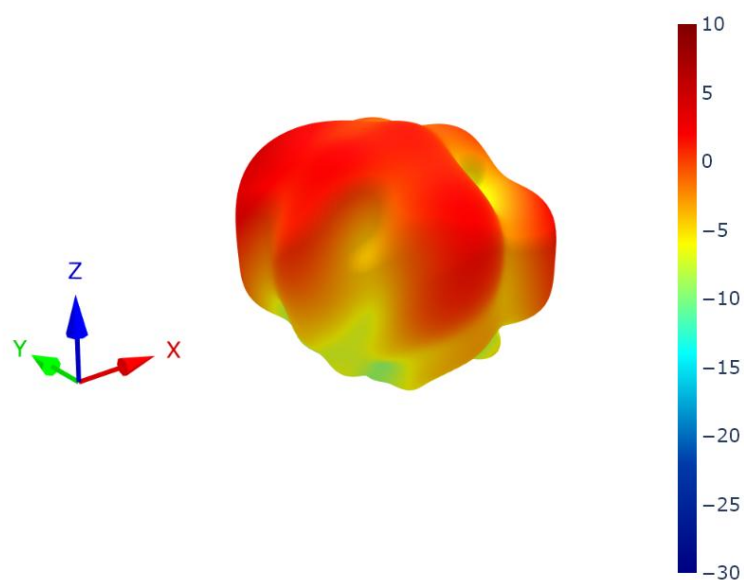


XZ Plane

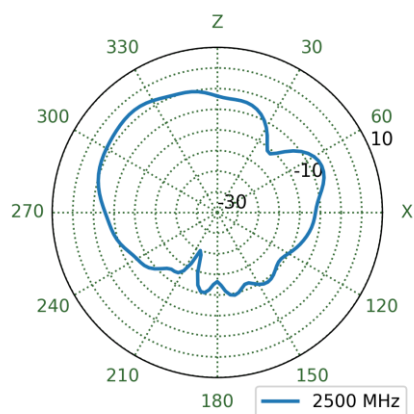


YZ Plane

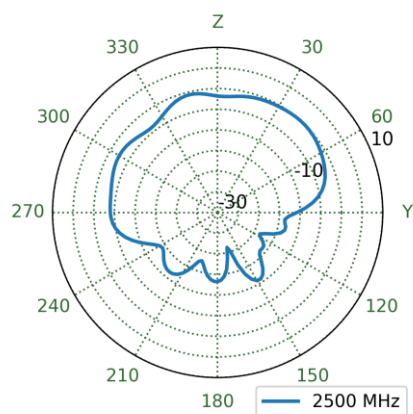


XY Plane

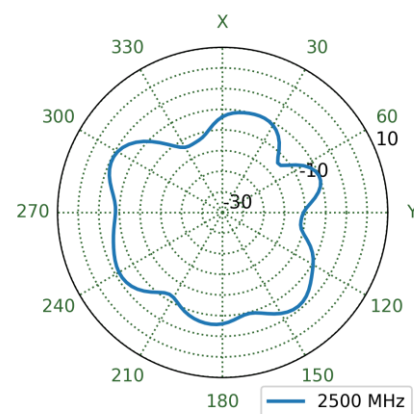


7.20 4G-5G 2 Patterns at 2500 MHz

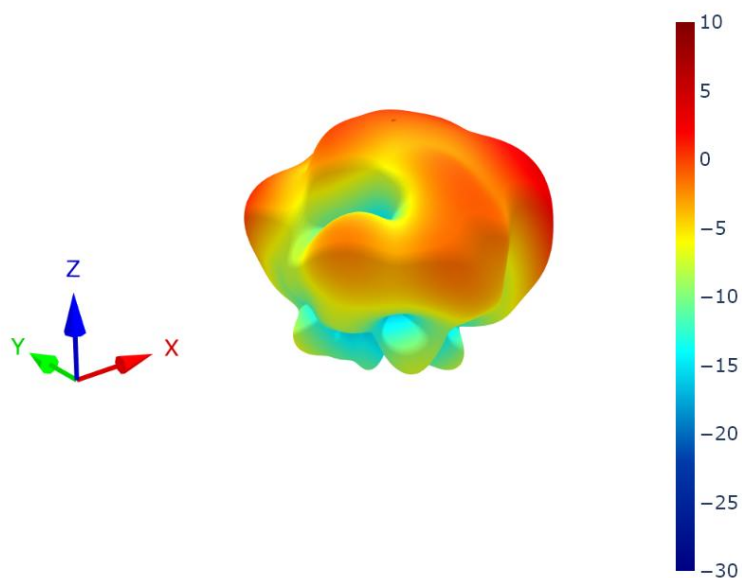


XZ Plane

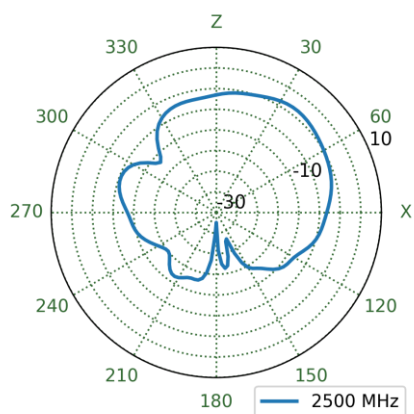


YZ Plane

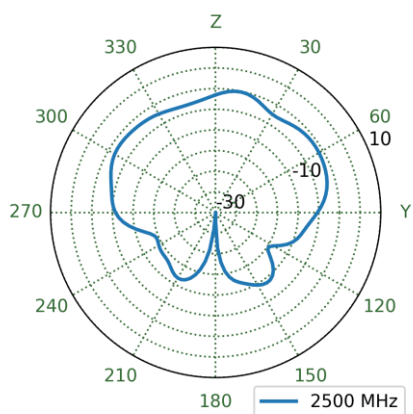


XY Plane

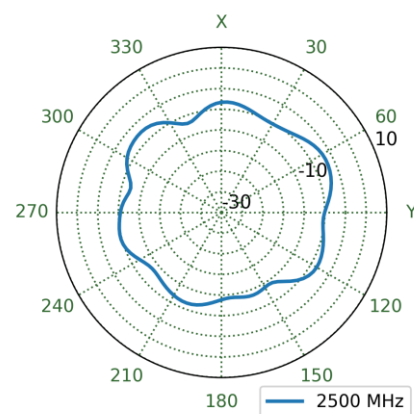


7.21 4G-5G 1 Patterns at 3400 MHz

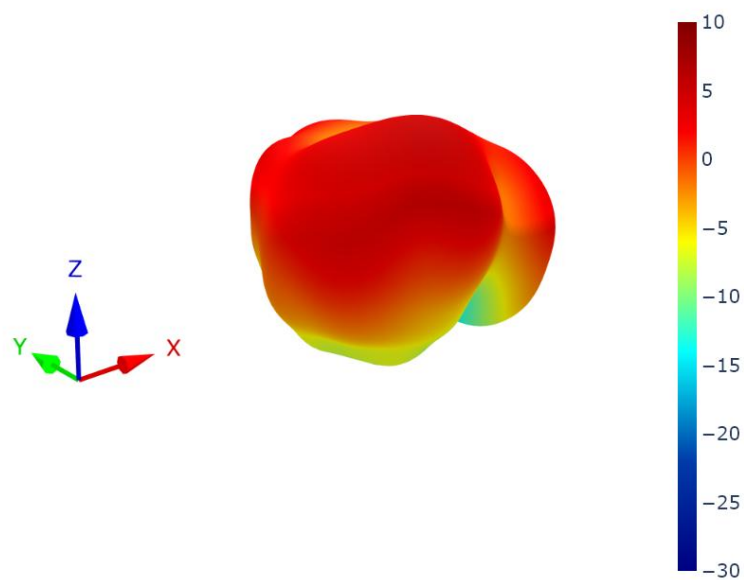


XZ Plane

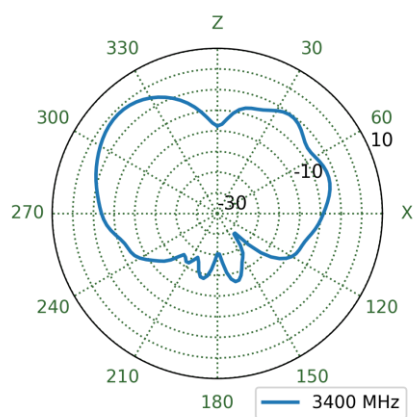


YZ Plane

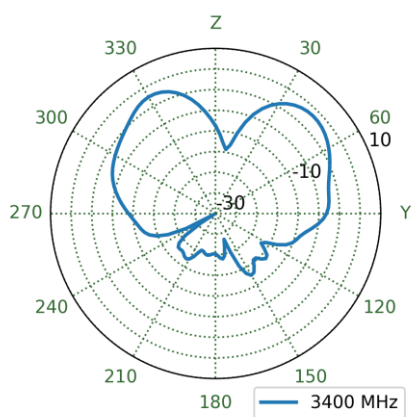


XY Plane

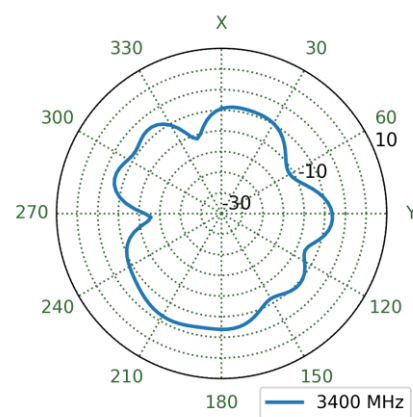


7.22 4G-5G 2 Patterns at 3400 MHz

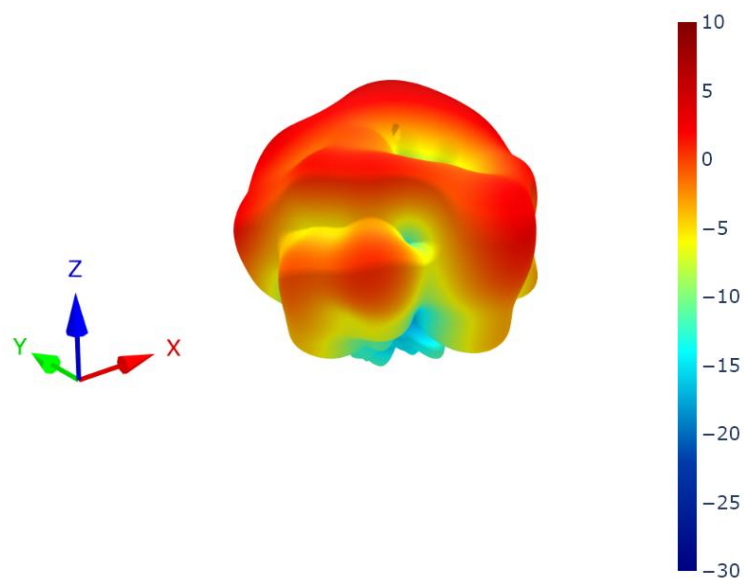


XZ Plane

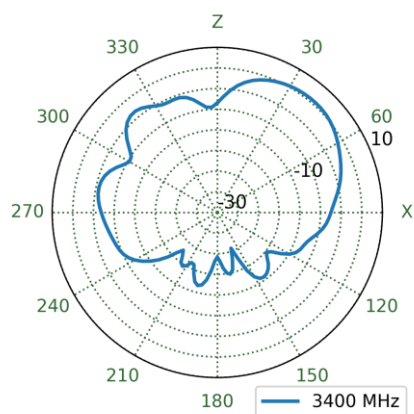


YZ Plane

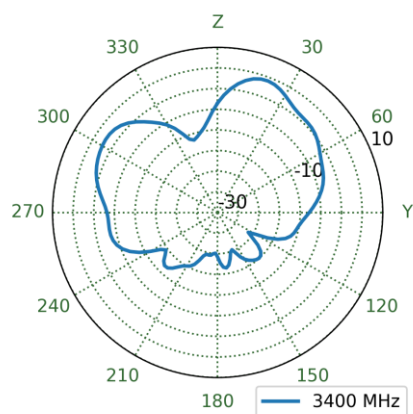


XY Plane

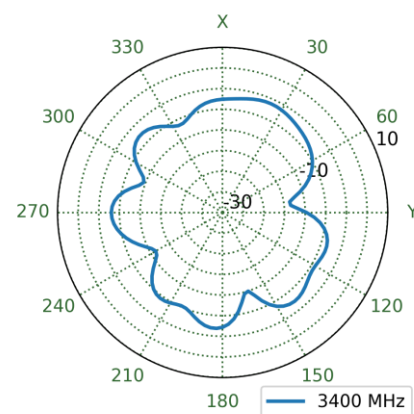


7.23 4G-5G 1 Patterns at 4150 MHz

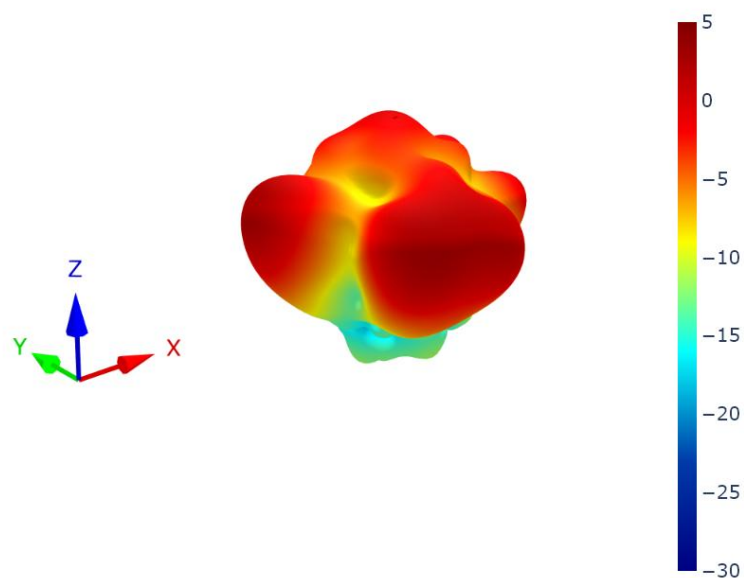


XZ Plane

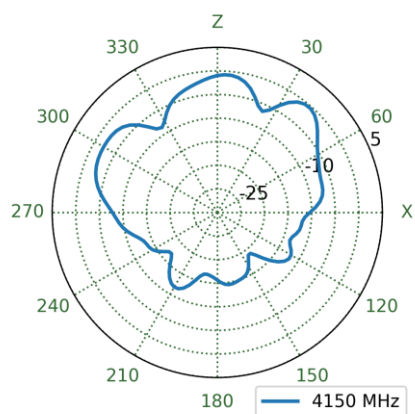


YZ Plane

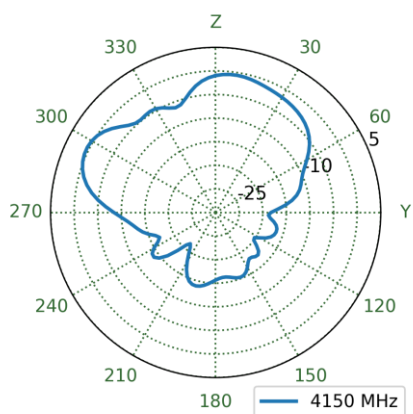


XY Plane

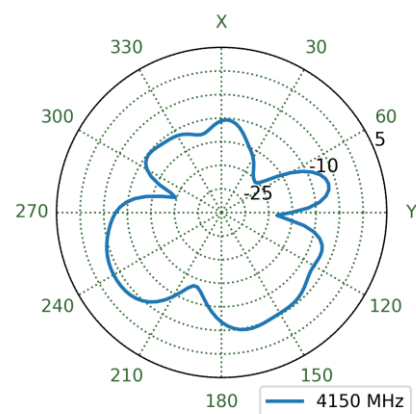


7.24 4G-5G 2 Patterns at 4150 MHz

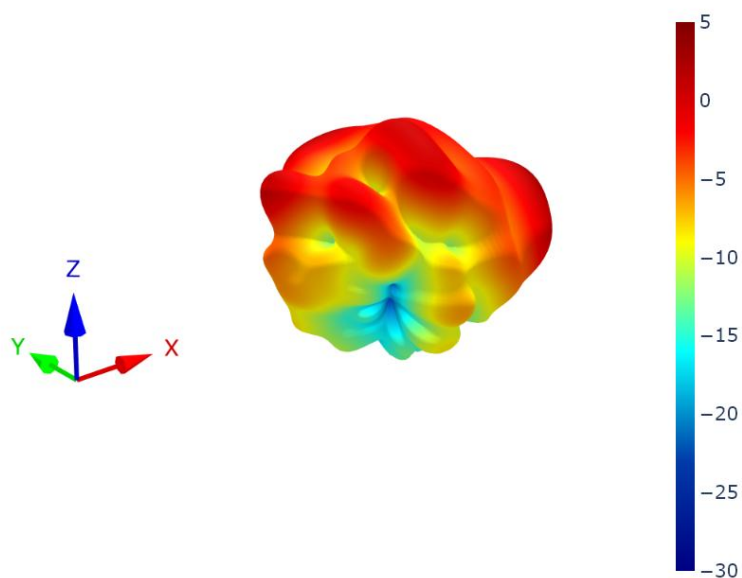


XZ Plane

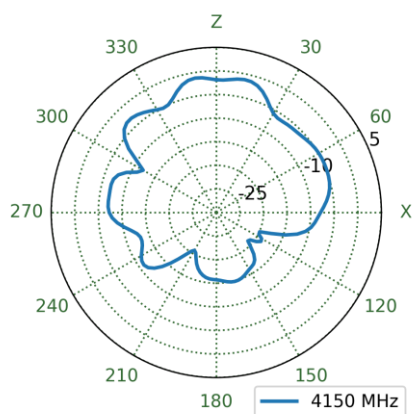


YZ Plane

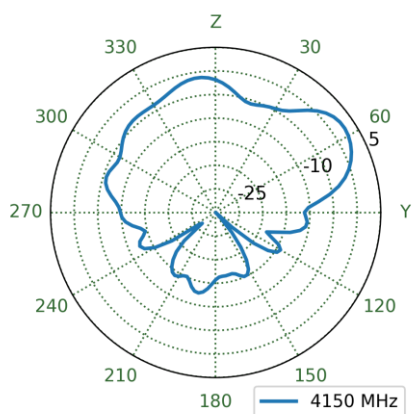


XY Plane

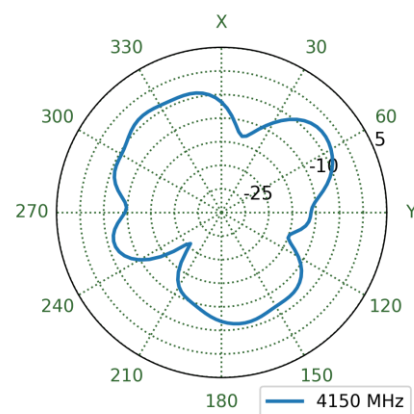


7.25 4G-5G 1 Patterns at 5550 MHz

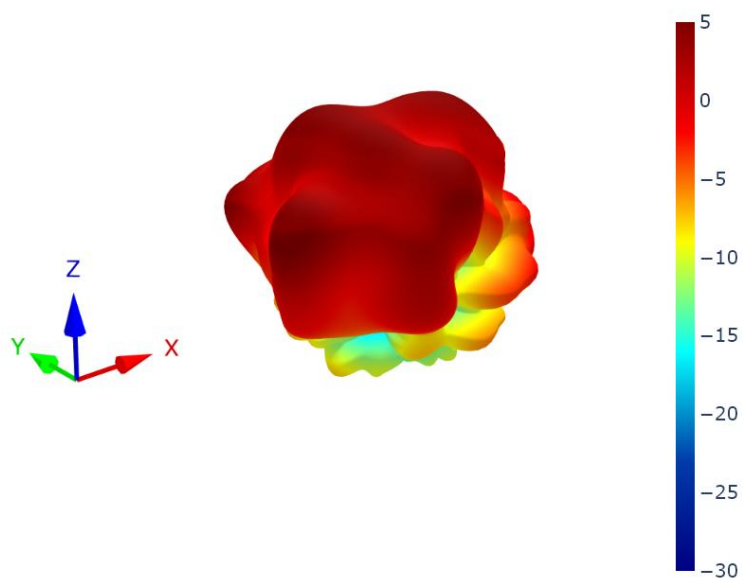


XZ Plane

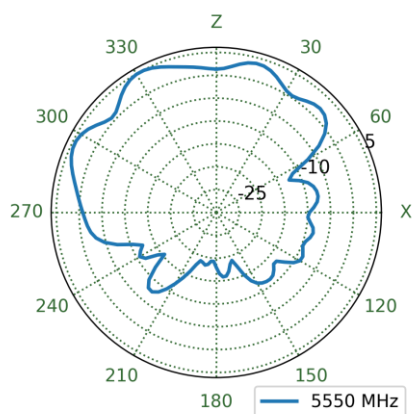


YZ Plane

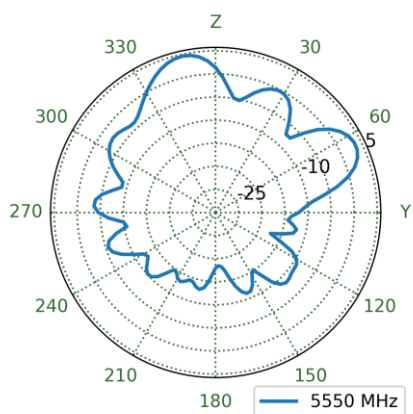


XY Plane

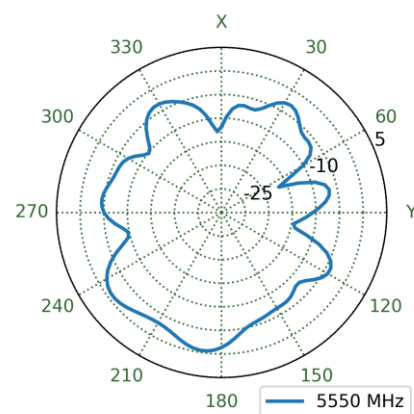


7.26 4G-5G 2 Patterns at 5550 MHz

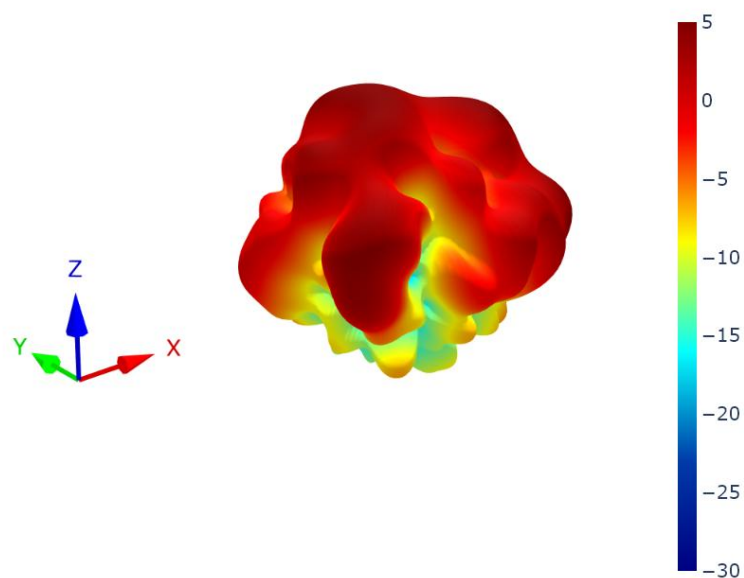


XZ Plane

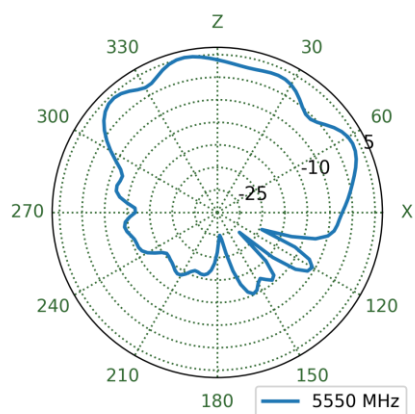


YZ Plane

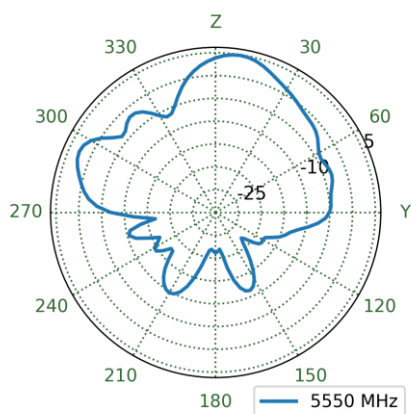


XY Plane

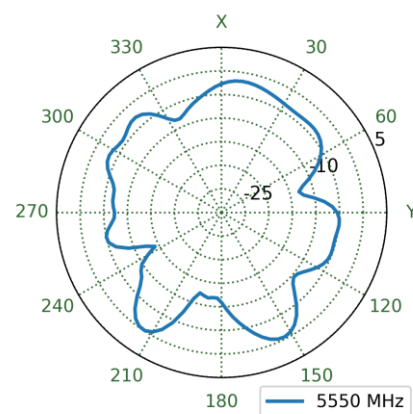


7.27 Wi-Fi 1 Patterns at 2450 MHz

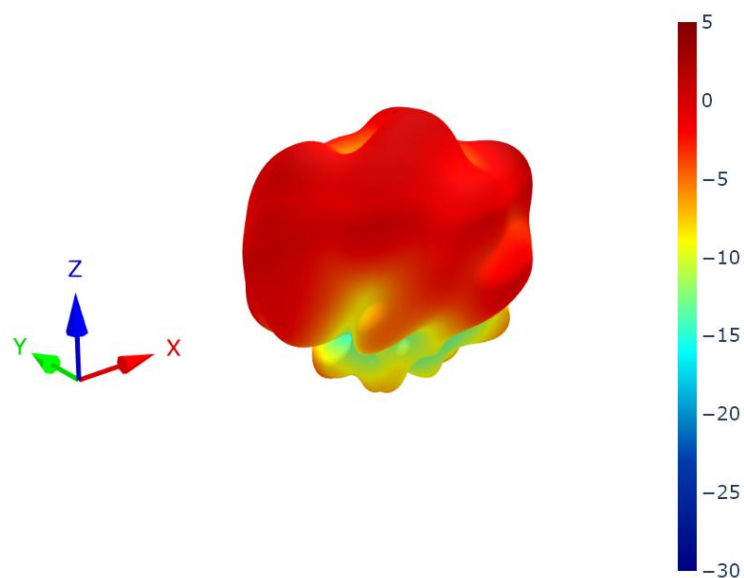


XZ Plane

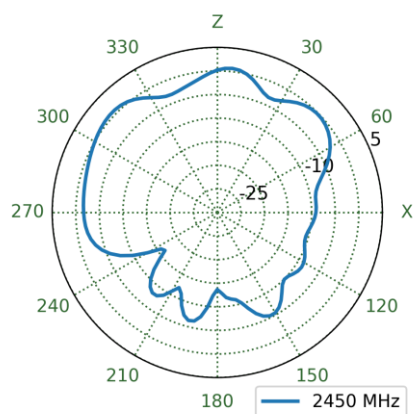


YZ Plane

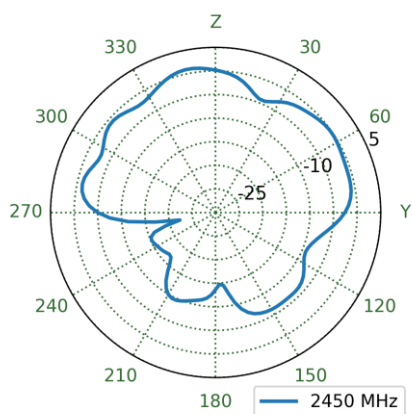


XY Plane

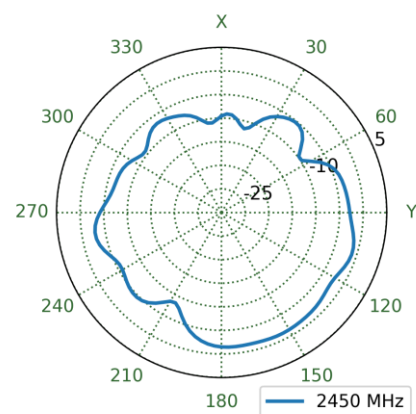


7.28 Wi-Fi 2 Patterns at 2450 MHz

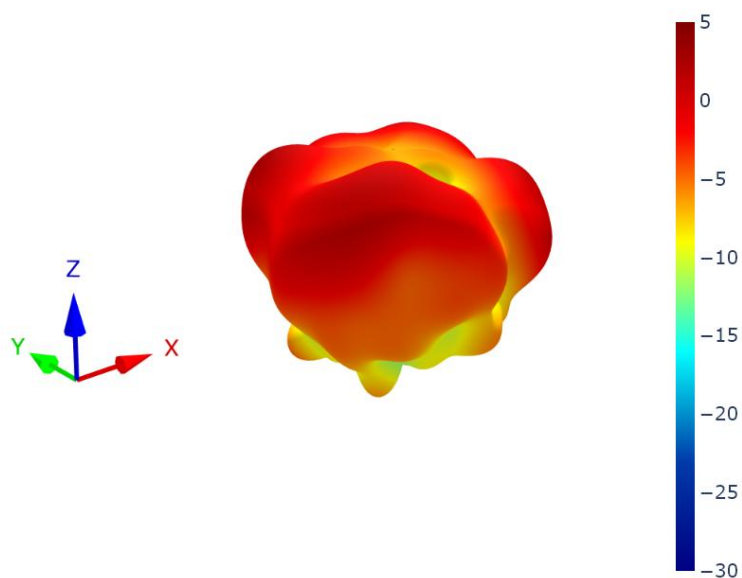


XZ Plane

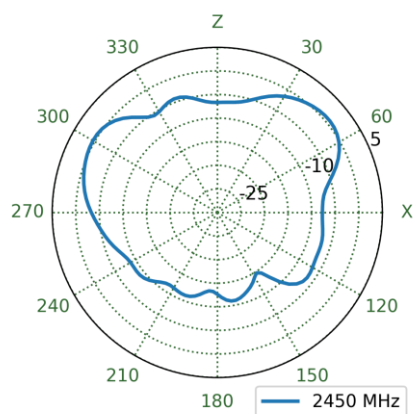


YZ Plane

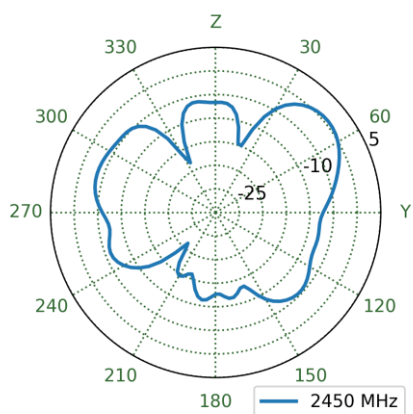


XY Plane

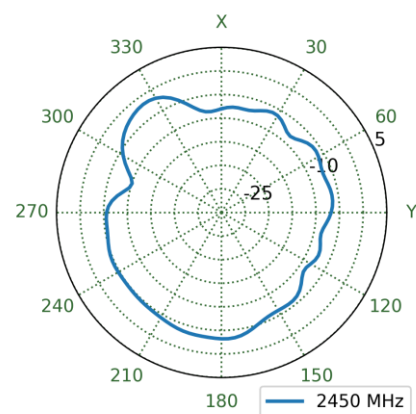


7.29 Wi-Fi 3 Patterns at 2450 MHz

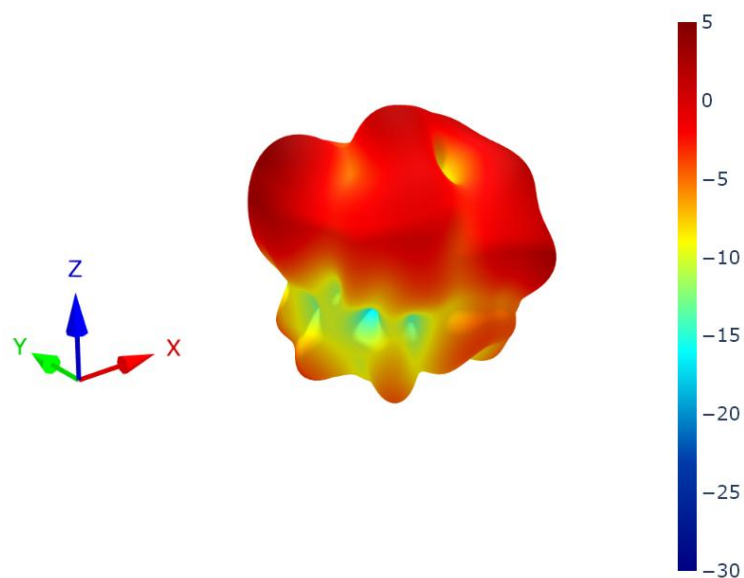


XZ Plane

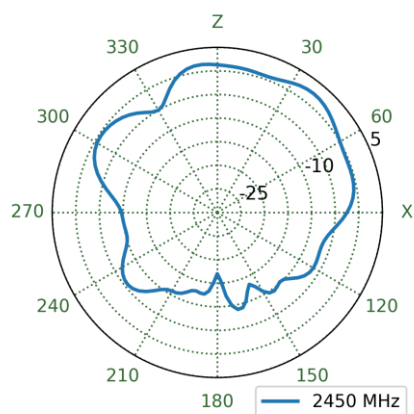


YZ Plane

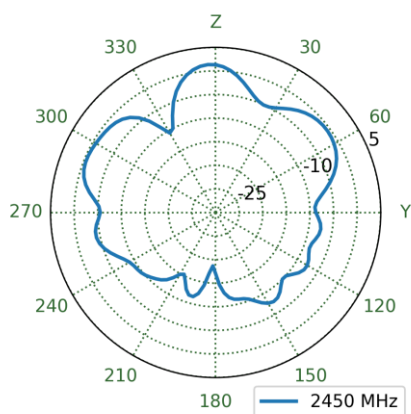


XY Plane

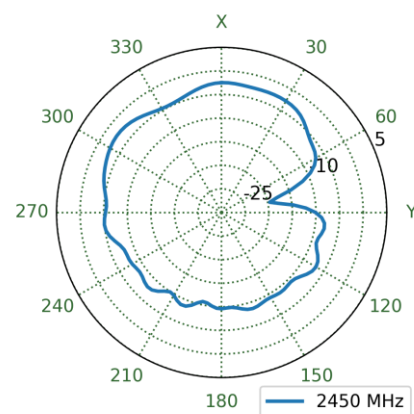


7.30 Wi-Fi 1 Patterns at 5500 MHz

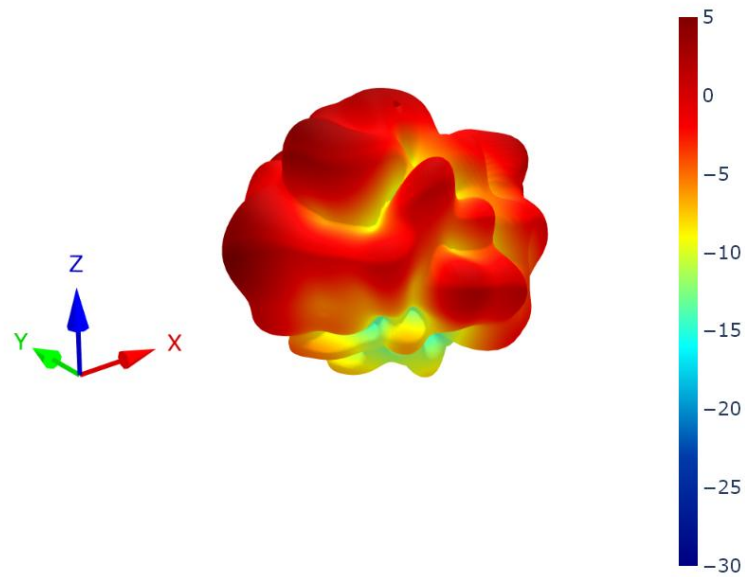


XZ Plane

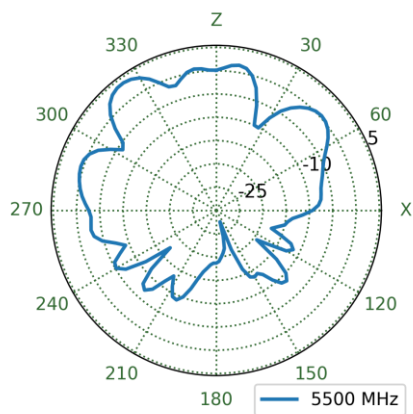


YZ Plane

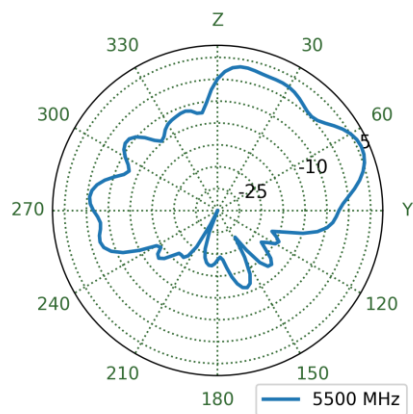


XY Plane

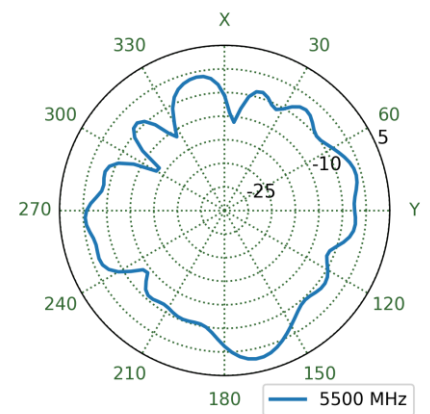


7.31 Wi-Fi 2 Patterns at 5500 MHz

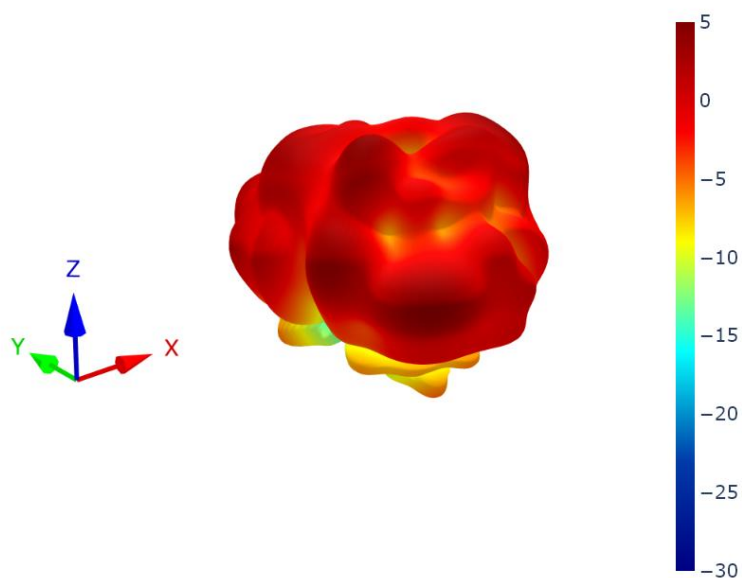


XZ Plane

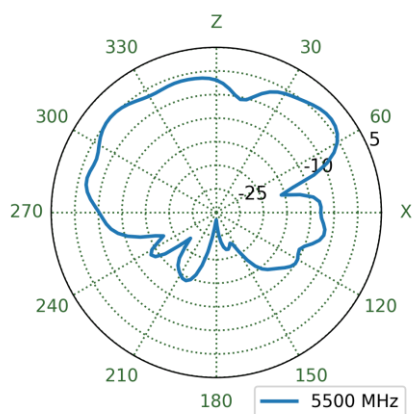


YZ Plane

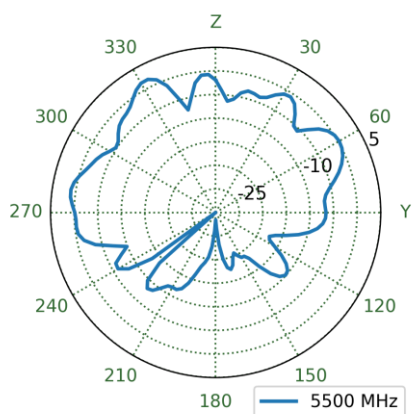


XY Plane

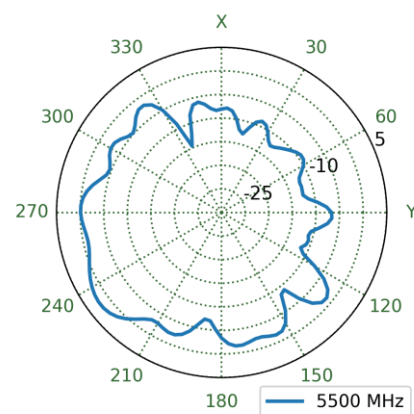


7.32 Wi-Fi 3 Patterns at 5500 MHz

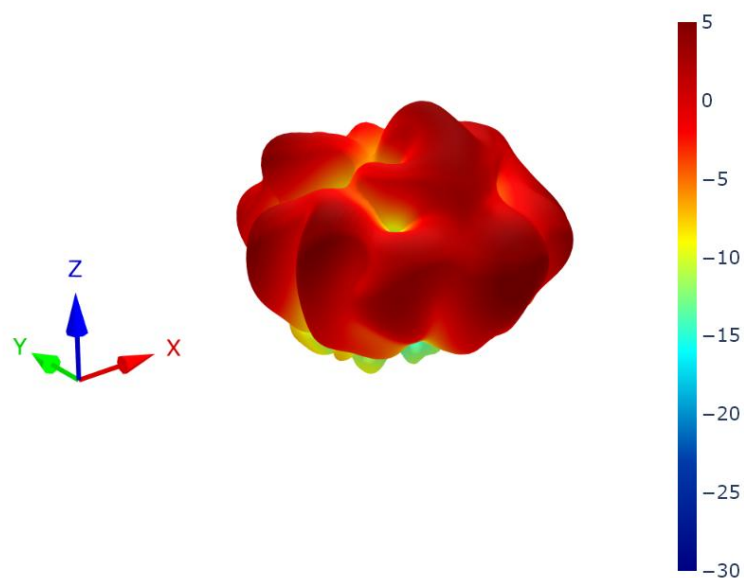


XZ Plane

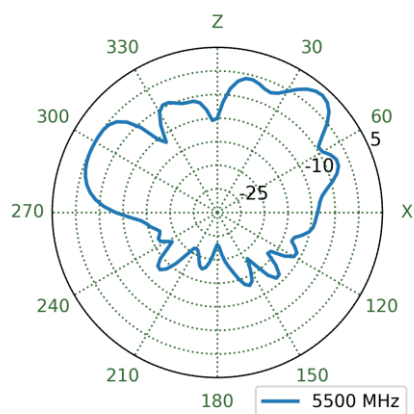


YZ Plane

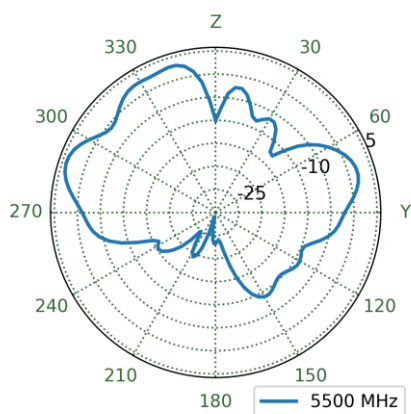


XY Plane

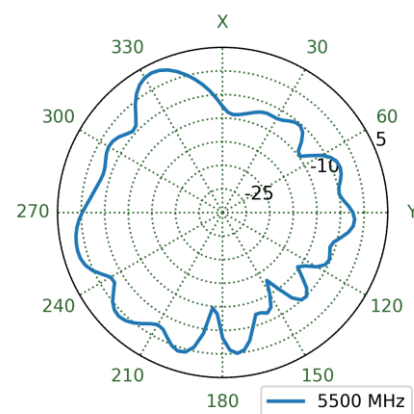


7.33 Wi-Fi 1 Patterns at 6525 MHz

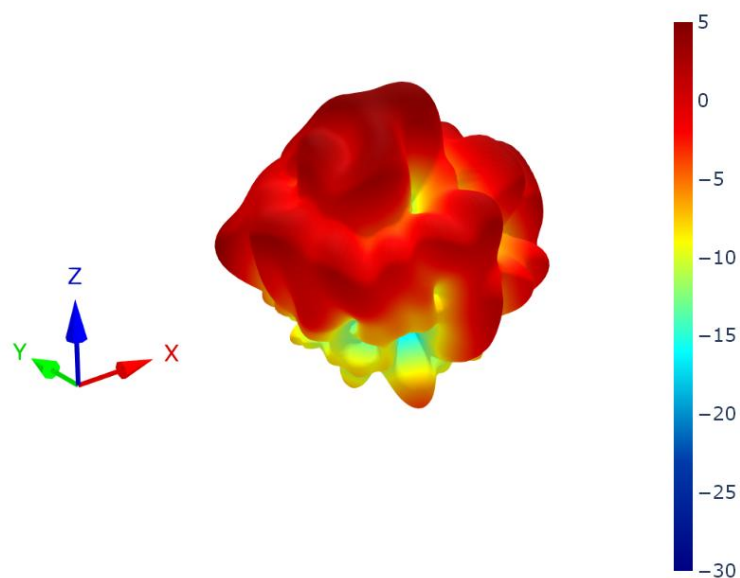


XZ Plane

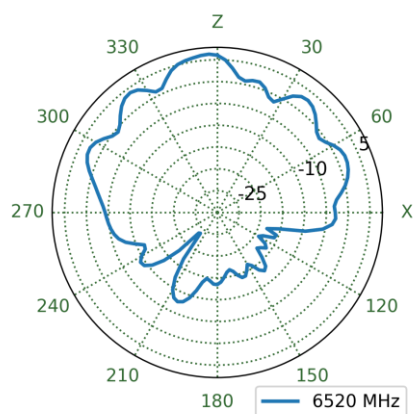


YZ Plane

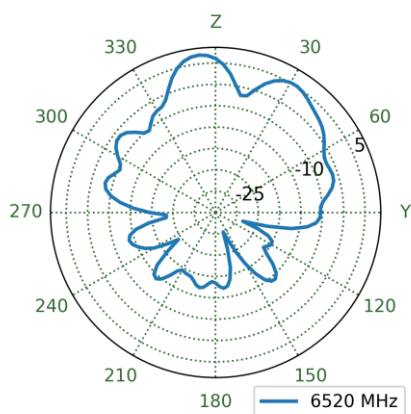


XY Plane

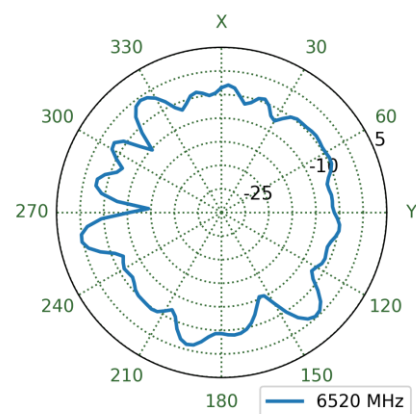


7.34 Wi-Fi 2 Patterns at 6525 MHz

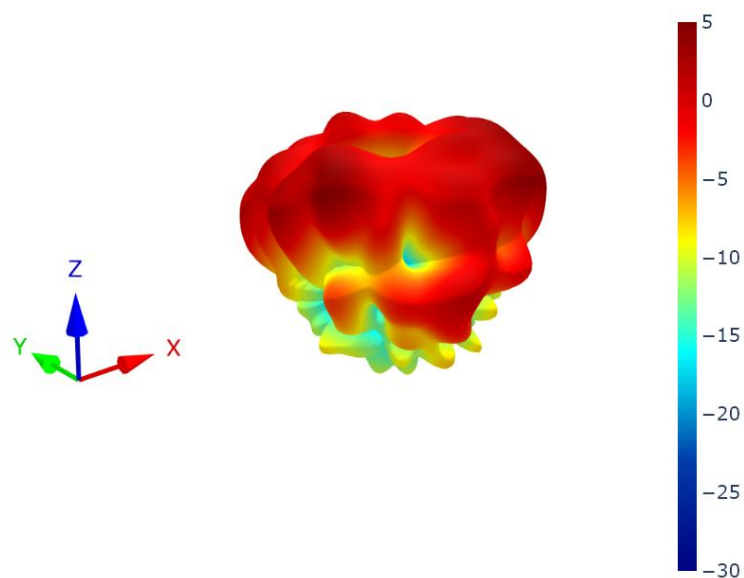


XZ Plane

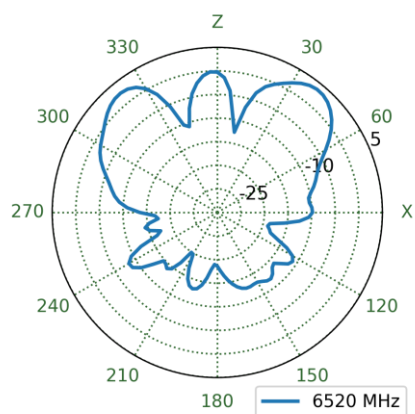


YZ Plane

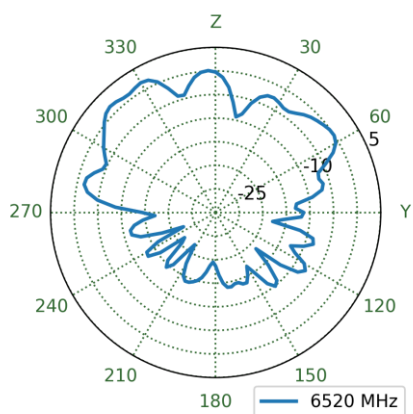


XY Plane

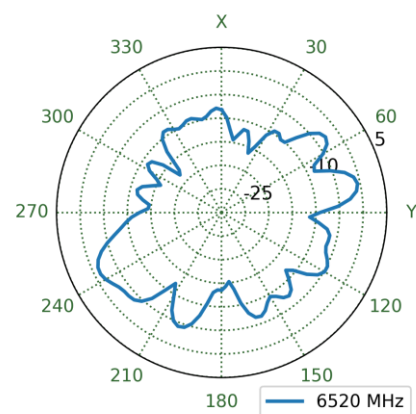


7.35 Wi-Fi 3 Patterns at 6525 MHz

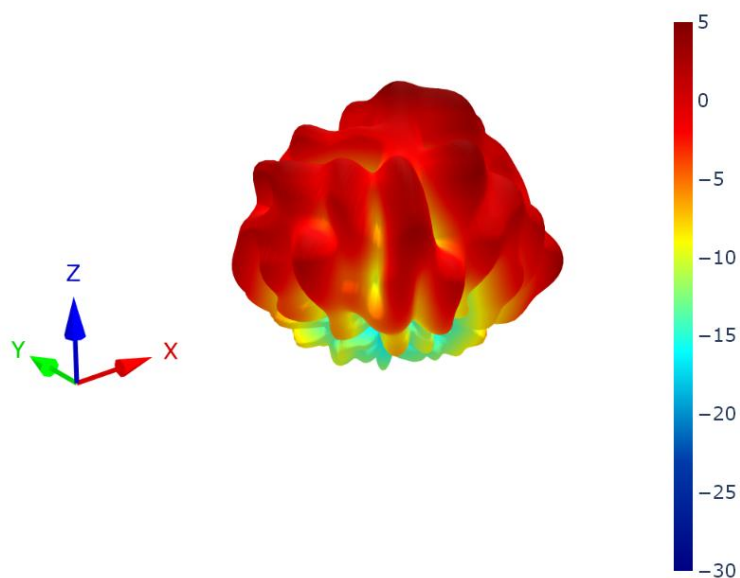


XZ Plane

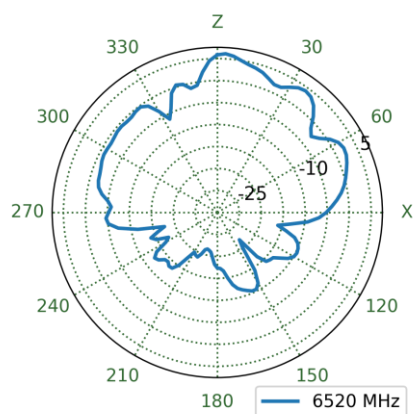

YZ Plane

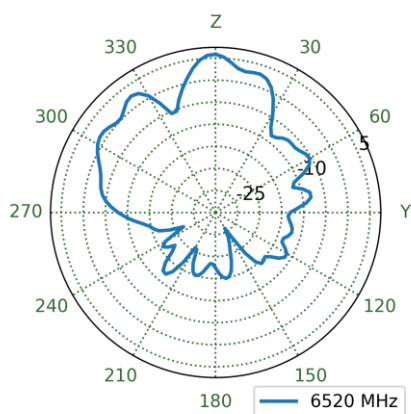

XY Plane

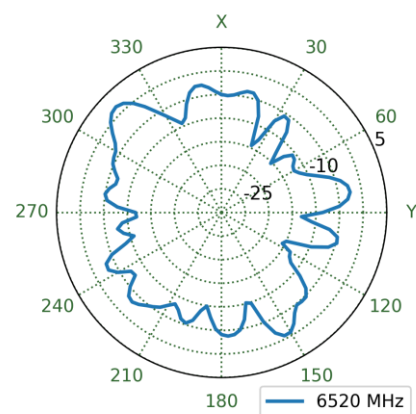

Changelog for the datasheet

SPE-20-8-001 - MA1506.AK.001

Revision: F (Current Version)

Date:	2025-05-09
Changes:	Full datasheet update
Changes Made by:	Gary West

Previous Revisions

Revision: E

Date:	2025-02-05
Changes:	Updated Installation Guidelines
Changes Made by:	Cesar Sousa

Revision: D

Date:	2024-07-22
Changes:	Updated drawing
Changes Made by:	Conor McGrath

Revision: C

Date:	2023-07-05
Changes:	Updated Mechanical Specifications
Changes Made by:	Cesar Sousa

Revision: B

Date:	2020-05-15
Changes:	Updated Wi-Fi Peak Gain Data
Changes Made by:	Jack Conroy

Revision: A (Original First Release)

Date:	2020-01-06
Notes:	Initial Release
Author:	Jack Conroy



www.taoglas.com

