



# TAOGLAS®



# Datasheet

## Synergy 9 in 1 Antenna

**Part No:**  
MA1509.AK.001

### Description:

- 1\*Active GNSS with RG-174LL & SMA(M)
- 5\*5G/4G MIMO with RG-174LL & SMA(M)
- 3\*Wi-Fi MIMO with RG-174LL & RP-SMA(M)

### Features:

- 4 x 5G/4G(600MHz-6GHz) MIMO Antenna
- 1 x 5G/4G(1.7-6GHz) Antenna
- 3 x Wi-Fi 2.4GHz/5GHz MIMO Antenna
- 1 x GPS/GLONASS/BeiDou Antenna Front End GNSS SAW Filter
- IP67 Rated Waterproof Enclosure
- High Efficiency/Peak Gain Outdoor Antenna
- Cable: 300mm RG-174LL with 4700mm TGC-200
- Connectors: SMA(M) / RP-SMA(M)
- RoHS & REACH Compliant

1. Introduction	3
2. Specifications	4
3. Active Antenna Characteristics	10
4. Antenna Characteristics	16
5. Radiation Patterns	24
6. Mechanical Drawing	81
7. Installation Guidelines	82
8. Packaging	84
Changelog	85

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



# 1. Introduction



The Taoglas Synergy MA1509.AK.001 is a 9-in-1 next-generation permanent mount antenna for vehicle roof applications. It has a fully IP67 rated waterproof robust PC enclosure and base. The 9 antennas inside support 5G/4G, GPS/GLONASS/BeiDou, Wi-Fi (2.4GHz/5GHz). This outstanding patent-pending antenna delivers powerful MIMO antenna technology for 5G/4G, Wi-Fi 2.4/5.8GHz 802.11n and the emerging 802.11ac, and an optimized GPS/GLONASS/BeiDou patch antenna for location. The 5G/4G antennas also include backward compatibility to work at most worldwide 2G and 3G bands.

#### Typical Applications:

- Next Generation OEM Automotive Connectivity
- Multimedia, Navigation and Telematics Systems
- V2V, V2X and Fleet Management Applications
- Real-time HD Video Streaming
- First Net Responder Routers


The MA1509 is ideal for applications that require highly sophisticated antennas for real-time streaming applications that demand high-speed video uplink and downlink into the cabin of the vehicle. These challenges are resolved by the highly efficient, high gain MIMO antennas, with high isolation, all of which is necessary to achieve the required signal to noise ratio and throughput.

The MA1509 can also be customized for your particular wireless application and frequency band, subject to NRE and MOQ. There are 8x 300mm RG-174 low loss cables, terminating in SMA(M) connectors for 5G/4G MIMO 5X5 and RP SMA(M) for Wi-Fi MIMO 3X3. There is a 300mm RG-174 cable for GNSS terminating in an SMA(M) connector.

All cable lengths and connector types are customizable. The Synergy MA1509 can be supplied with low loss TGC-200 cable extensions for longer cable runs. Contact your regional Taoglas customer services team for details and support.

## 2. Specifications

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	□	□		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	■	□	□		
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	□	□	□	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	■	□	□	□
L-Band	L-Band 1542 MHz				
	■				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	■	□	□	□	
IRNSS (Regional)	L5 1176.45 MHz				
	□				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	□	■	□	□

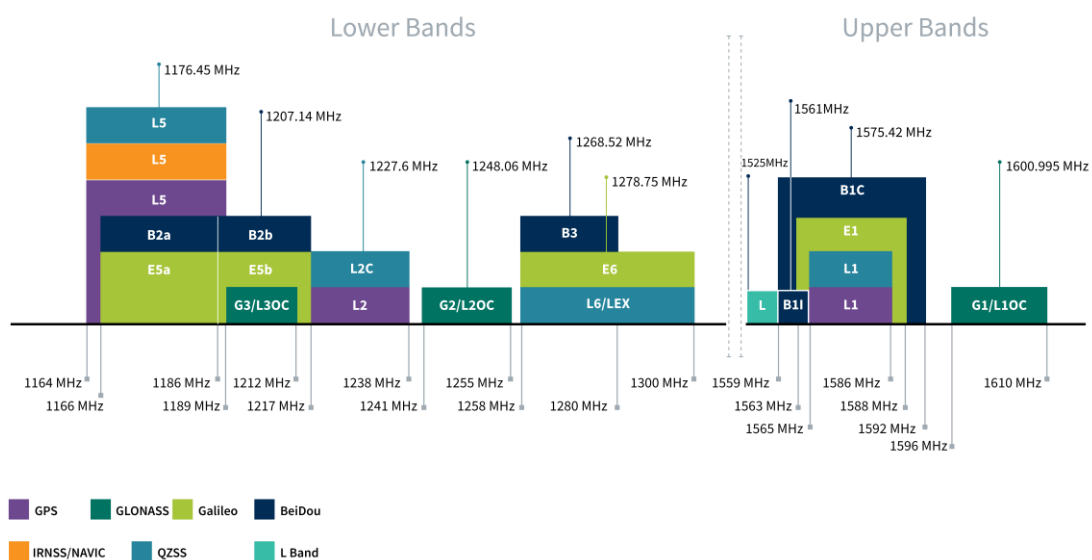

GNSS Electrical			
Frequency (MHz)	1561	1575.42	1602
VSWR (max.)	2.5	2.5	2.5
Passive Antenna Efficiency (%) (Without cable loss)	40.02	48.39	44.29
Passive Antenna Gain at Zenith (dBic) (Without cable loss)	3.75	4.44	4.54
Axial Ratio (dB)	20	11	15
Polarization	RHCP		
Impedance	50Ω		
Cable	RG-174		
Connector	SMA(M)		

LNA and Filter Electrical Properties			
Frequency (MHz)	1561	1575.42	1602
VSWR (max.)	2.0:1	2.0:1	2.0:1
Gain@1.8V (dBic)	28.8 dB	28.8 dB	28 dB
Gain@3.0V (dBic)	29 dB	29 dB	28.3 dB
Gain@5.5V (dBic)	29.6 dB	29.4 dB	28.7 dB
Noise@1.8V (dB)	2.8 dB	2.3 dB	2.8 dB
Noise@3.0V (dB)	2.8 dB	2.2 dB	2.8 dB
Noise@5.5V (dB)	2.9 dB	2.3 dB	2.8 dB
Power consumption@1.8V (mA)	8.7 mA		
Power consumption@3.0V (mA)	9.0 mA		
Power consumption@5.5V (mA)	11 mA		

Total Specification (Through Antenna, SAW Filter and LNA)			
Frequency (MHz)	1561	1575.42	1602
Gain@3V (dBic)	31.7 ± 3	32.4 ± 3	32.4 ± 3
Output Impedance	50Ω		

5G/4G Antenna											
Frequency (MHz)		5G NR Band 71	LTE700	GSM 850/900	5G NR Band	DCS	PCS	UMTS1	LTE2600	5G NR Band 77, 78, 79	LTE5200/Wi-Fi 5800
		617 ~698	698 ~824	824 ~960	1427 ~1518	1710 ~1880	1850 ~1990	1920 ~2170	2300 ~2690	3300 ~3800	5150 ~5925
Efficiency (%)											
MIMO 1	5m	21.5	22.7	40.5	33.8	37.2	26.1	23.7	29.5	37.0	33.8
MIMO 2	5m	18.5	23.2	38.6	34.2	35.9	25.6	23.4	28.4	37.1	32.8
MIMO 3	5m	18.3	24.2	26.9	35.4	37.9	32.3	29.9	37.1	23.4	30.7
MIMO 4	5m	20.1	23.6	25.8	36.7	37.0	32.9	30.9	36.4	22.3	33.1
MIMO 5	5m	1.8	1.4	4.3	9.1	34.4	27.4	31.6	36.4	31.4	29.4
Average Gain (dB)											
MIMO 1	5m	-6.67	-6.45	-3.92	-4.71	-4.30	-5.83	-6.26	-5.30	-4.32	-4.71
MIMO 2	5m	-7.32	-6.35	-4.13	-4.66	-4.45	-5.92	-6.31	-5.46	-4.30	-4.84
MIMO 3	5m	-7.37	-6.16	-5.70	-4.51	-4.22	-4.91	-5.24	-4.31	-6.31	-5.13
MIMO 4	5m	-6.96	-6.26	-5.88	-4.36	-4.31	-4.83	-5.10	-4.39	-6.51	-4.81
MIMO 5	5m	-17.49	-18.55	-13.65	-10.39	-4.63	-5.63	-5.00	-4.39	-5.03	-5.32
Peak Gain (dBi)											
MIMO 1	5m	-1.92	-0.37	2.96	2.22	2.72	0.23	0.03	2.24	4.28	3.33
MIMO 2	5m	-2.48	-0.56	2.44	2.08	3.07	0.38	0.03	2.28	4.26	3.20
MIMO 3	5m	-2.19	-1.41	0.47	2.04	3.29	1.64	1.69	3.19	1.61	2.87
MIMO 4	5m	-2.14	-1.54	0.05	2.13	2.97	1.62	1.25	3.40	1.03	3.57
MIMO 5	5m	-11.80	-12.86	-8.10	-2.93	2.90	1.90	2.00	1.94	4.97	3.88
Impedance	50 Ω										
Polarization	Linear										
Radiation Pattern	Omni										
Max. input power	10W										

Wi-Fi MIMO				
Frequency (MHz)		2400~2500		5150~5850
<b>Efficiency (%)</b>				
MIMO 1	5m		33.16	42.72
MIMO 2	5m		47.59	47.92
MIMO 3	5m		35.95	35.76
<b>Average Gain (dB)</b>				
MIMO 1	5m		-4.79	-3.69
MIMO 2	5m		-3.22	-3.19
MIMO 3	5m		-4.44	-4.47
<b>Peak Gain (dBi)</b>				
MIMO 1	5m	Free Space	-0.63	-1.89
		30*30cm Ground Plane	2.16	0.73
MIMO 2	5m	Free Space	-0.50	-1.89
		30*30cm Ground Plane	1.24	1.65
MIMO 3	5m	Free Space	-0.63	-2.30
		30*30cm Ground Plane	1.65	-0.07
<b>Impedance</b>		50 Ω		
<b>Polarization</b>		Linear		
<b>Radiation Pattern</b>		Omni		
<b>Max. input power</b>		10W		

<b>Mechanical</b>	
<b>Height</b>	57.47mm
<b>Planner Dimension</b>	Ø160mm
<b>Casing</b>	PC
<b>Cable</b>	0.3m RG-174LL with 4.7m TGC-200 for 5G/4G – Fully Customizable 0.3m RG-174LL with 4.7m TGC-200 for Wi-Fi – Fully Customizable 0.3m RG174LL with 4.7m TGC-200 for GNSS – Fully Customizable
<b>Connector</b>	5G/4G_SMA-Plug – Fully Customizable Wi-Fi_RP-SMA-Plug – Fully Customizable GNSS_SMA-Plug – Fully Customizable
<b>Thread Diameter</b>	M22
<b>Waterproof</b>	IP67
<b>Sealant</b>	Rubber Stopper and O-Ring
<b>Weight</b>	2.7Kg
<b>Environmental</b>	
<b>Ingress Protection</b>	IP67
<b>Temperature Range</b>	-40°C to 85°C
<b>Humidity</b>	Non-condensing 65°C 95% RH
<b>Cable Pull</b>	RG-174 4 Kg




5G/4G Bands			
Band Number	5GNR / FR1 / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA		
	Uplink	Downlink	Covered
1	UL: 1920 to 1980	DL: 2110 to 2170	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓
5	UL: 824 to 849	DL: 869 to 894	✓
7	UL: 2500 to 2570	DL: 2620 to 2690	✓
8	UL: 880 to 915	DL: 925 to 960	✓
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✓
12	UL: 699 to 716	DL: 729 to 746	✓
13	UL: 777 to 787	DL: 746 to 756	✓
14	UL: 788 to 798	DL: 758 to 768	✓
17	UL: 704 to 716	DL: 734 to 746	✓
18	UL: 815 to 830	DL: 860 to 875	✓
19	UL: 830 to 845	DL: 875 to 890	✓
20	UL: 832 to 862	DL: 791 to 821	✓
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✓
22	UL: 3410 to 3490	DL: 3510 to 3590	✓
23	UL: 2000 to 2020	DL: 2180 to 2200	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559	✓
25	UL: 1850 to 1915	DL: 1930 to 1995	✓
26	UL: 814 to 849	DL: 859 to 894	✓
27	UL: 807 to 824	DL: 852 to 869	✓
28	UL: 703 to 748	DL: 758 to 803	✓
29	UL: -	DL: 717 to 728	✓
30	UL: 2305 to 2315	DL: 2350 to 2360	✓
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5	✗
32	UL: -	DL: 1452 - 1496	✓
35		1850 to 1910	✓
38		2570 to 2620	✓
39		1880 to 1920	✓
40		2300 to 2400	✓
41		2496 to 2690	✓
42		3400 to 3600	✓
43		3600 to 3800	✓
48		3550 to 3700	✓
66	UL: 1710-1780	DL: 2110-2200	✓
71		617 to 698	✓
74/75/76		1427 to 1518	✓
78		3300 to 3800	✓
79		4400 to 5000	✓


\* Covered Bands represent greater than 20% efficiency

### 3. Active Antenna Characteristics


#### 3.1 Block Diagram (Active antenna)

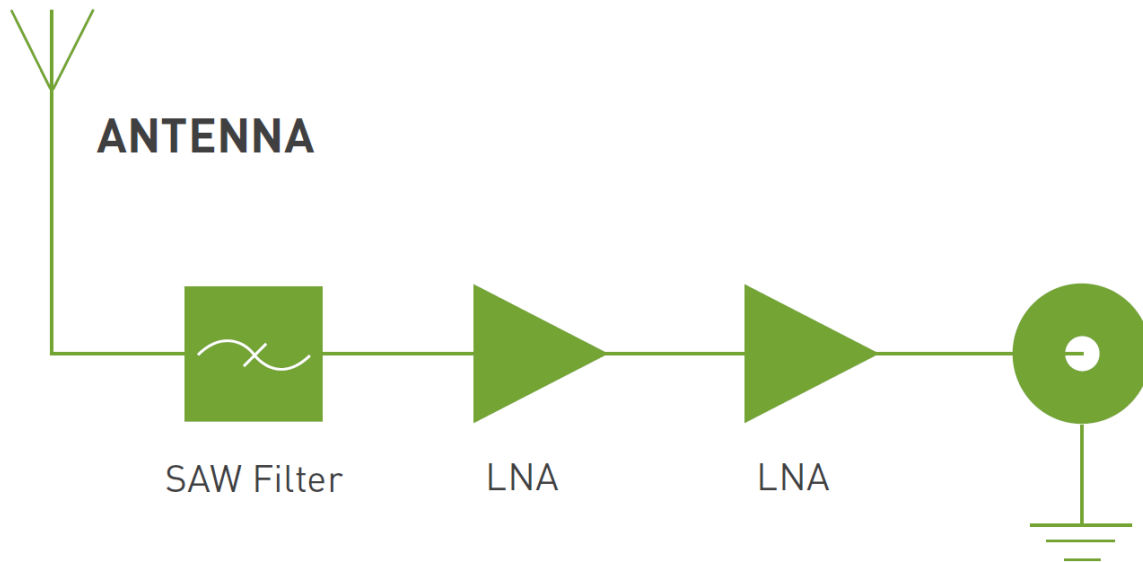


#### 3.2 Passive Antenna Return Loss

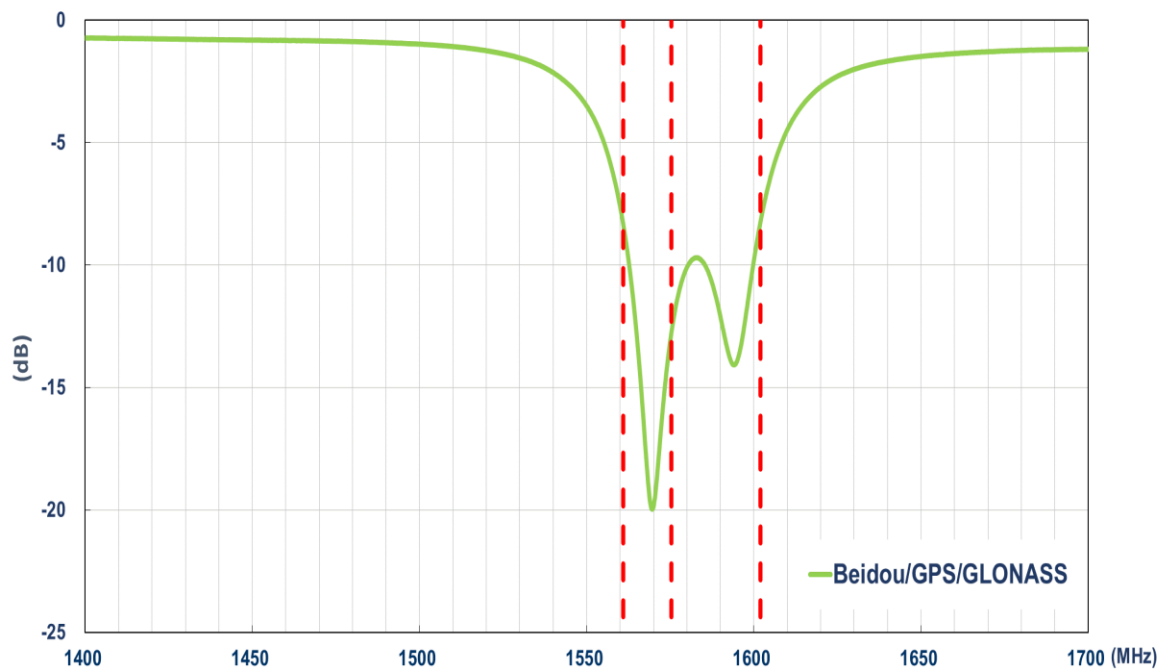


### 3.3 Passive Antenna Efficiency

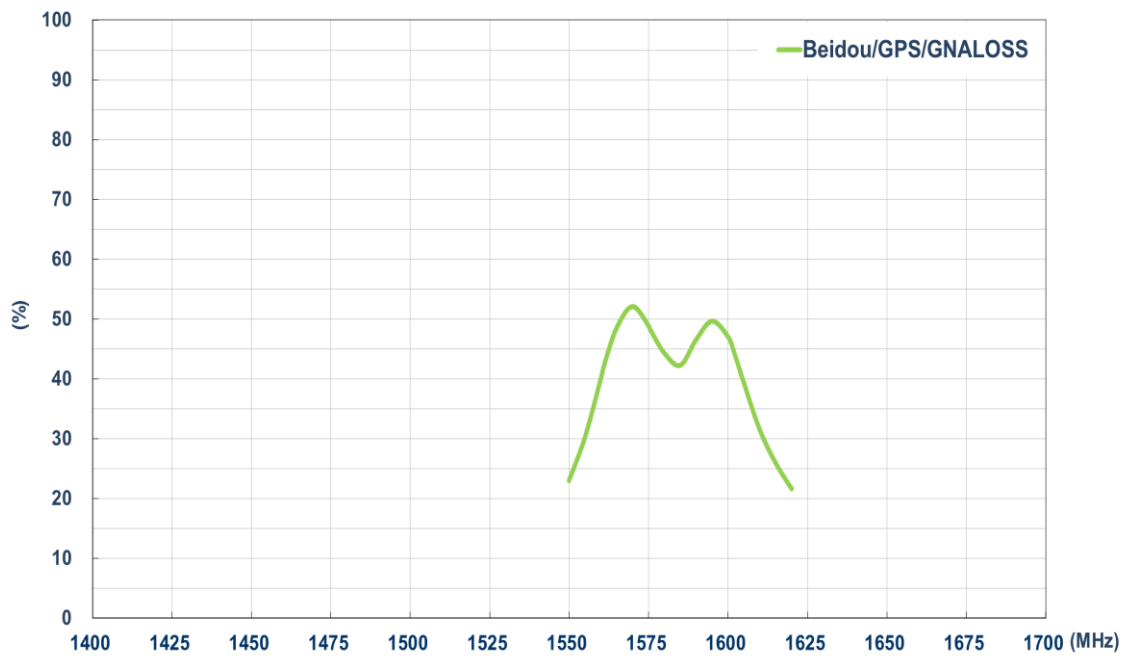

### 3.4 Passive Antenna Average Gain

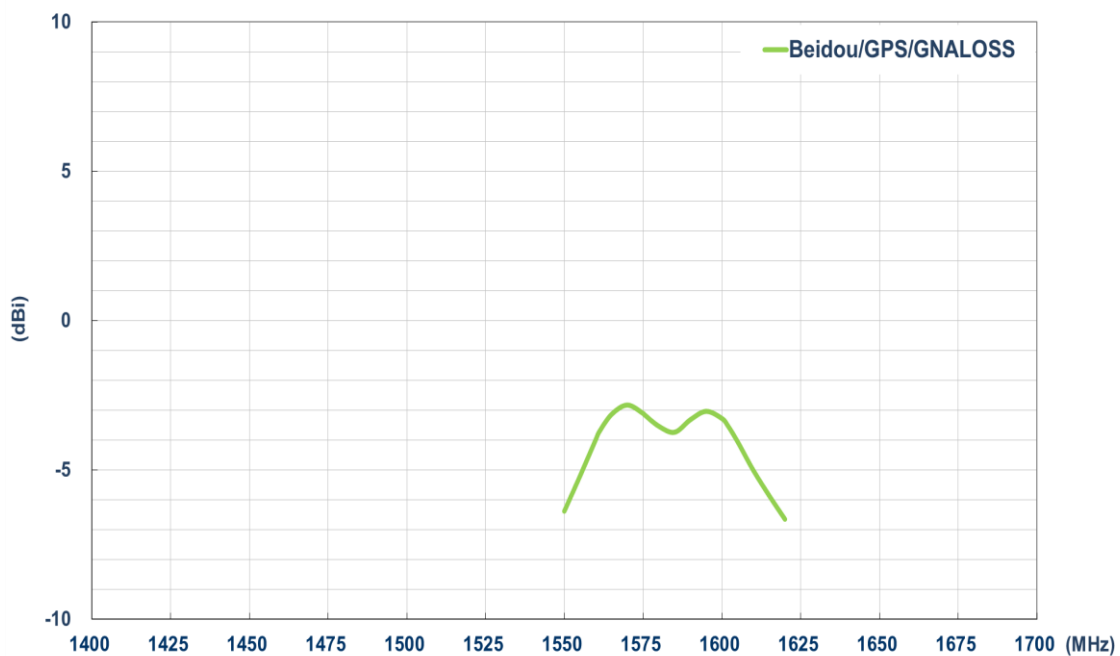


### 3.5 Passive Antenna Peak Gain

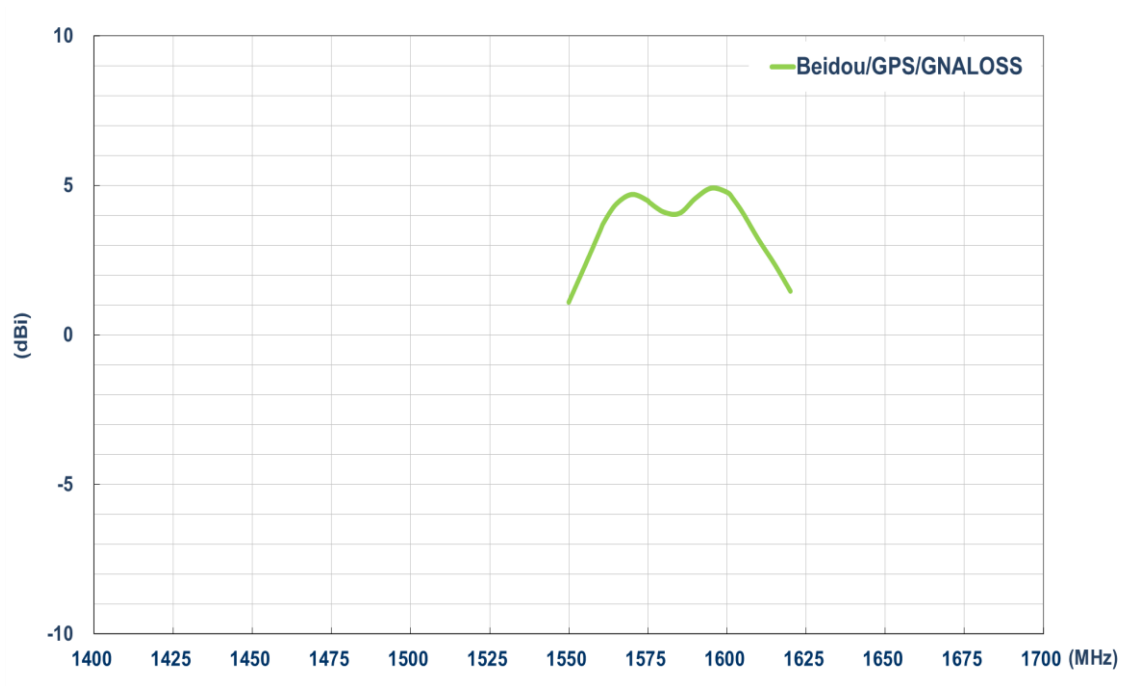


### 3.6 Passive Antenna Axial Ratio (Zenith is at 0°)

XZ-plane

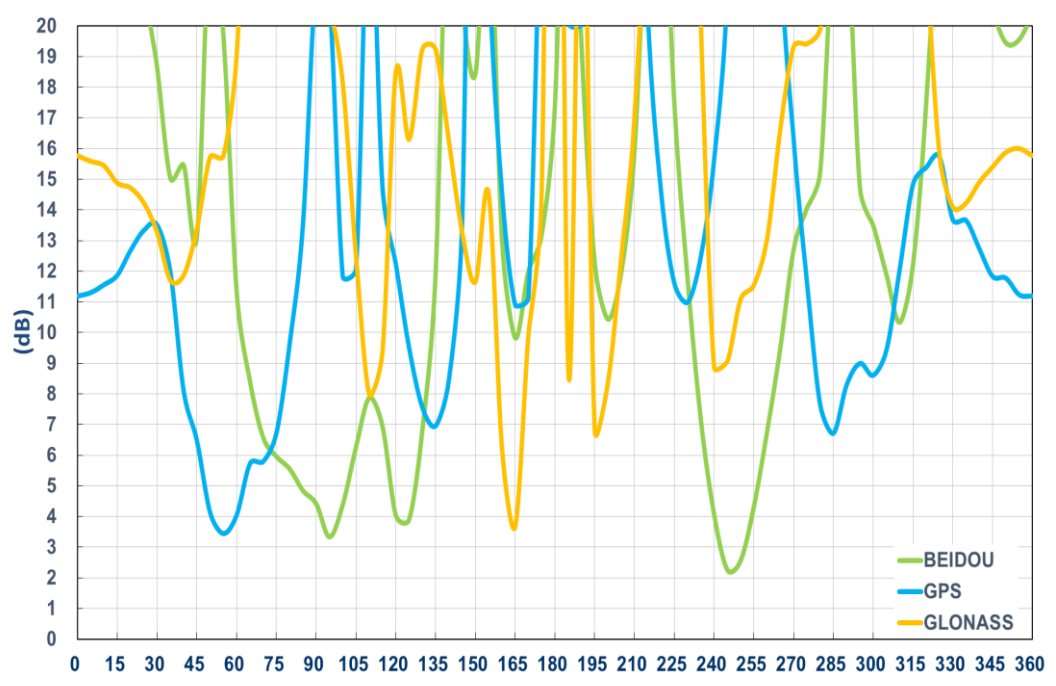


YZ-plane

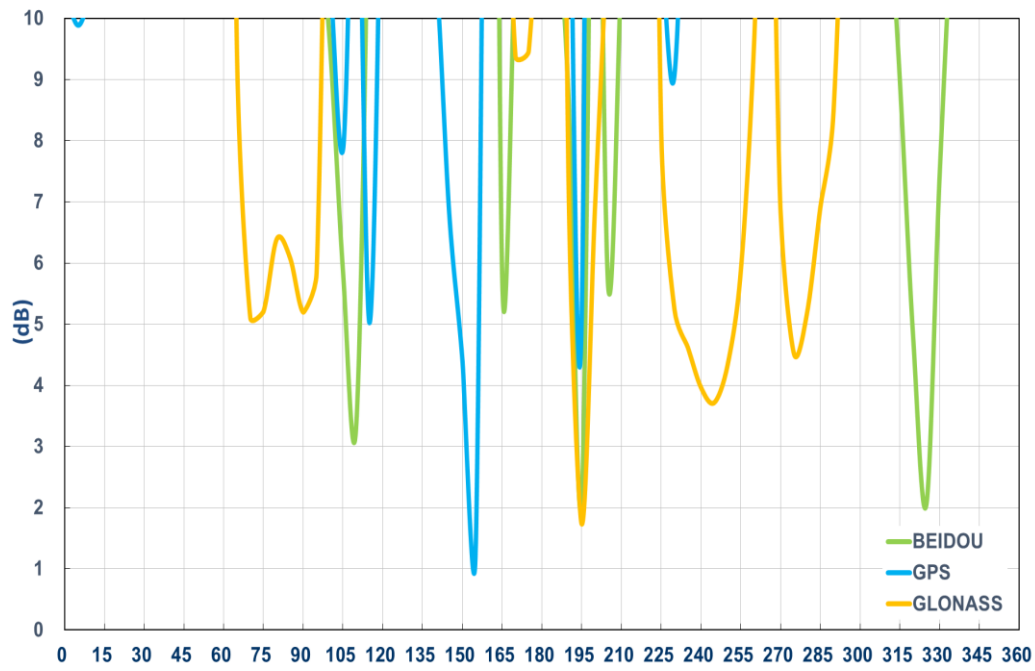


### 3.7 Active measurements

#### LNA Gain @ 3.0V


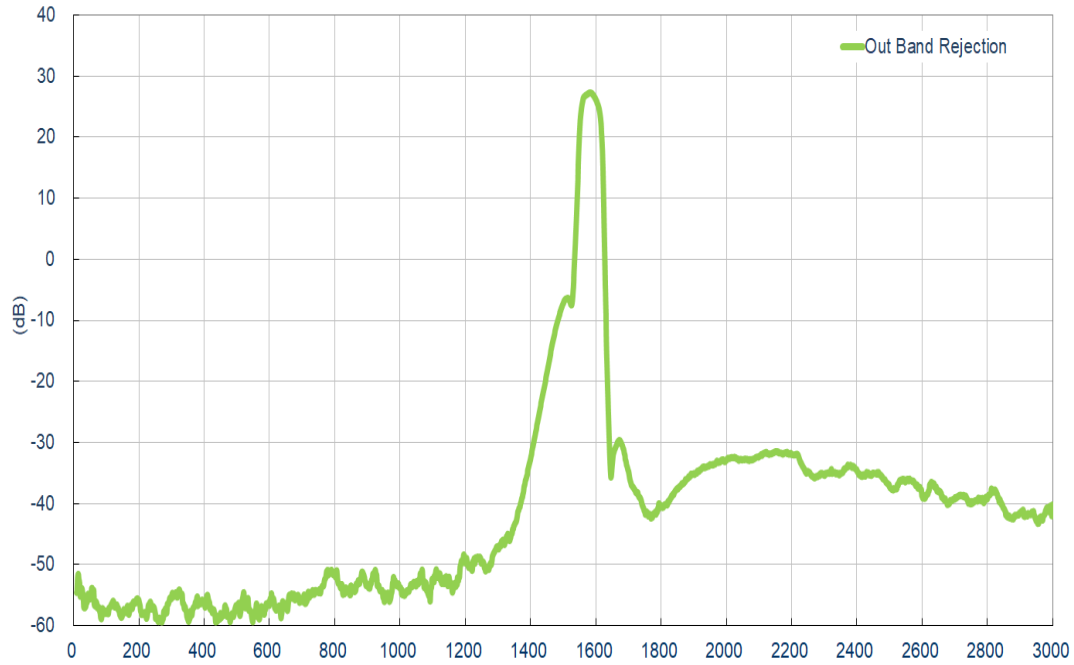


#### Noise Figure @ 3.0V

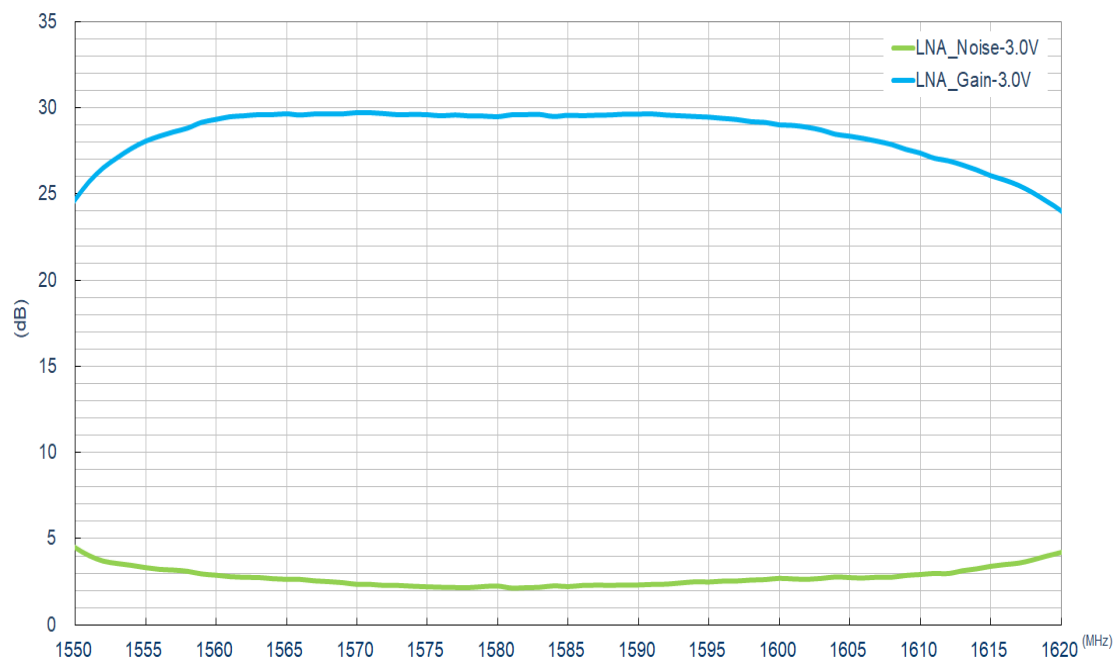

### 3.8 Passive Antenna Radiation Patterns


1575.42MHz

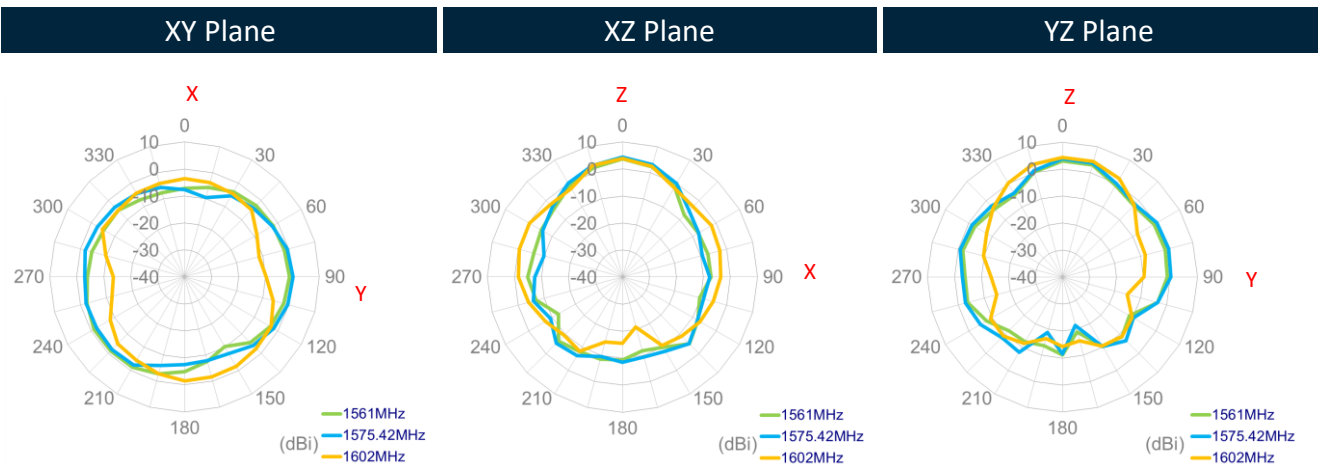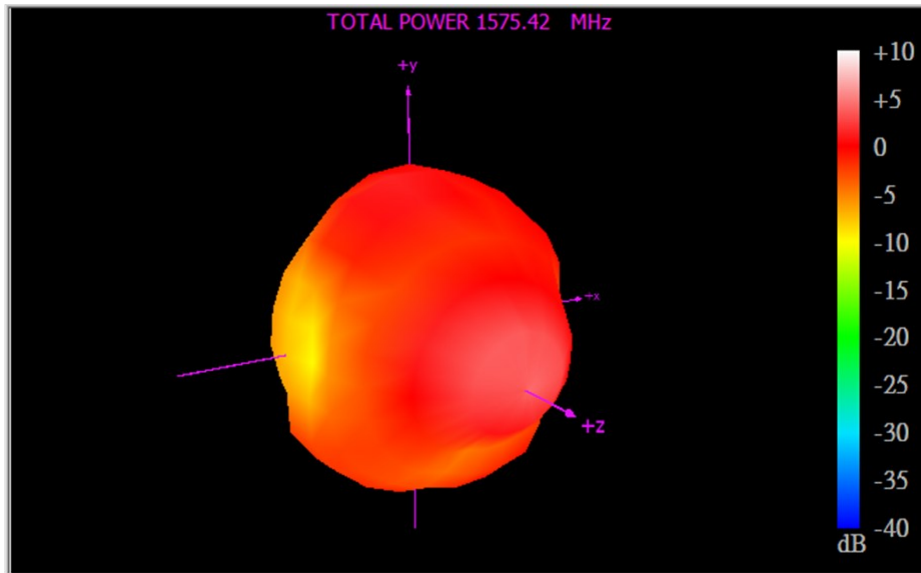


## 4. Antenna Characteristics

### 4.1 Return Loss

#### 5G/4G MIMO

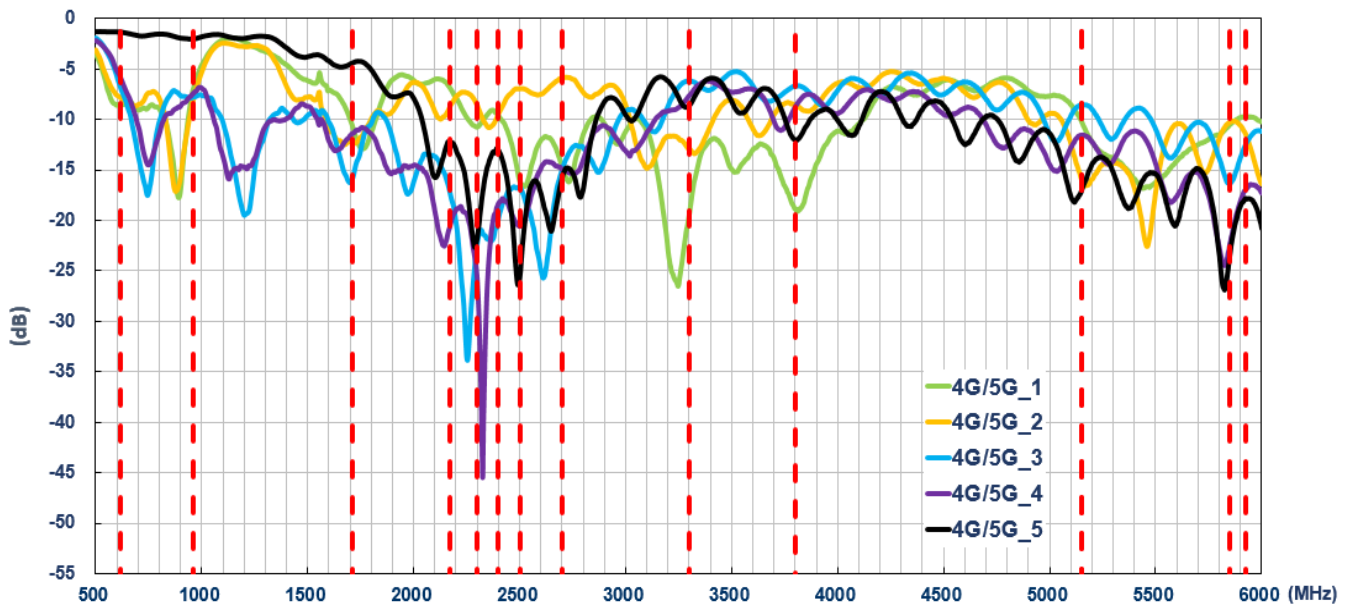


#### Wi-Fi MIMO

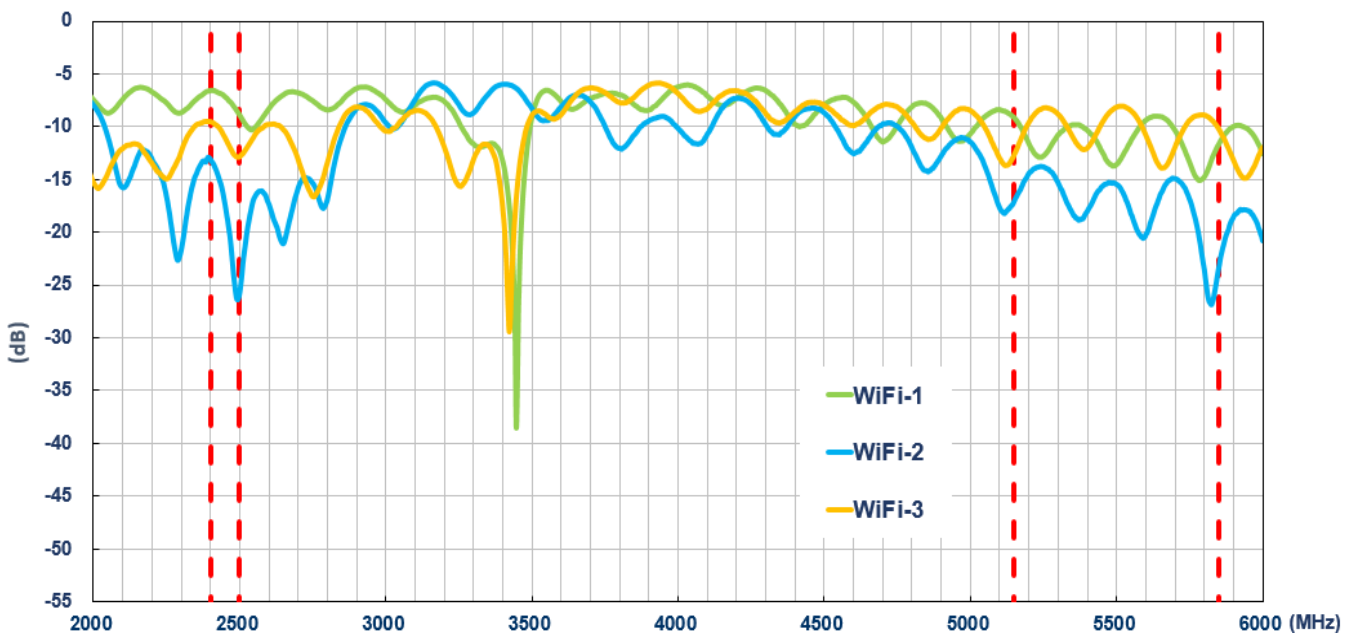




## 4.2 Isolation


### 5G/4G 1

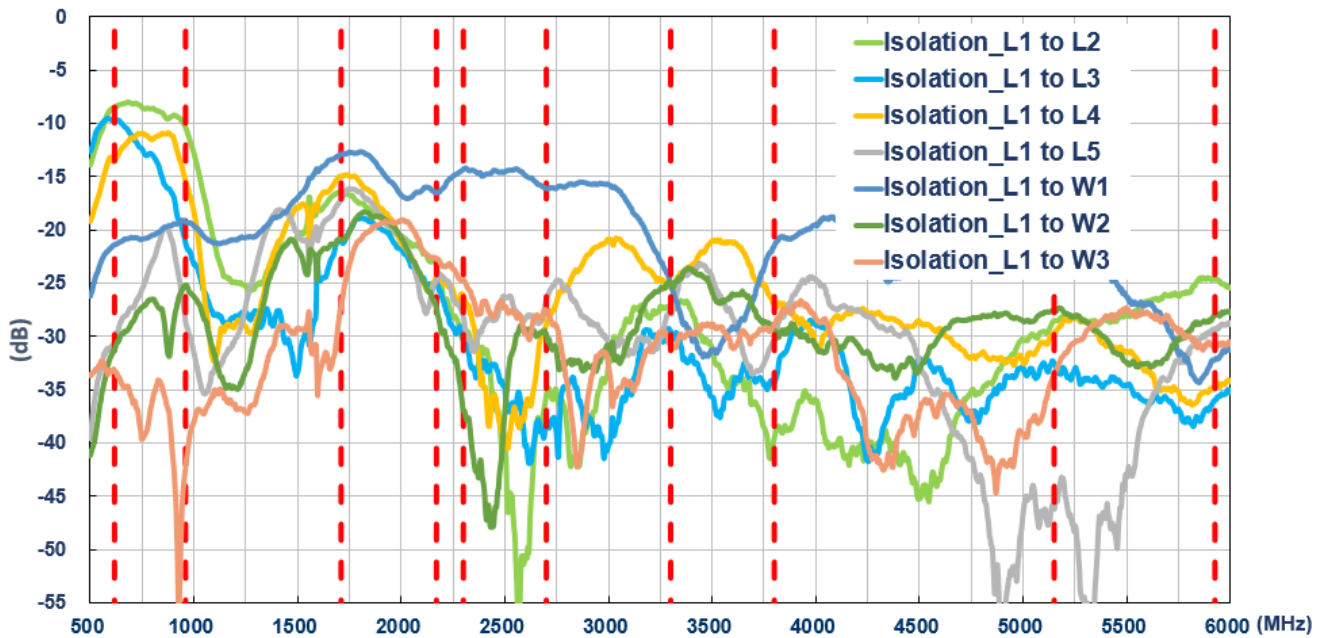


### 5G/4G 2

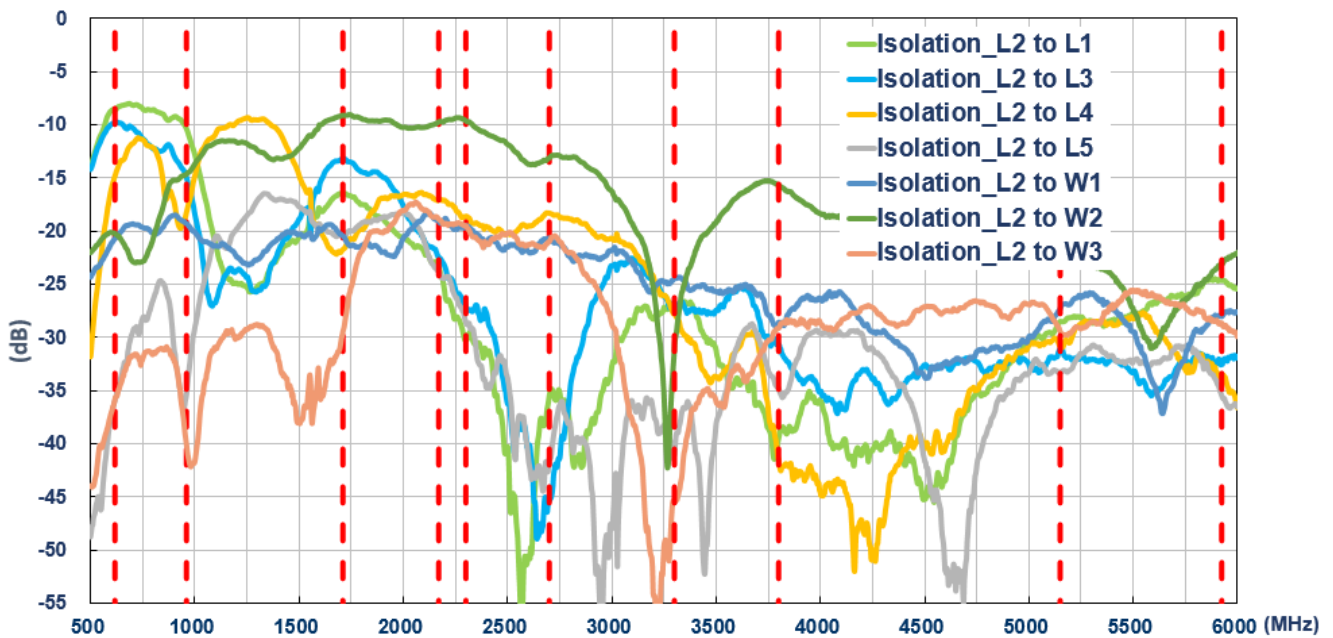


### 5G/4G 3

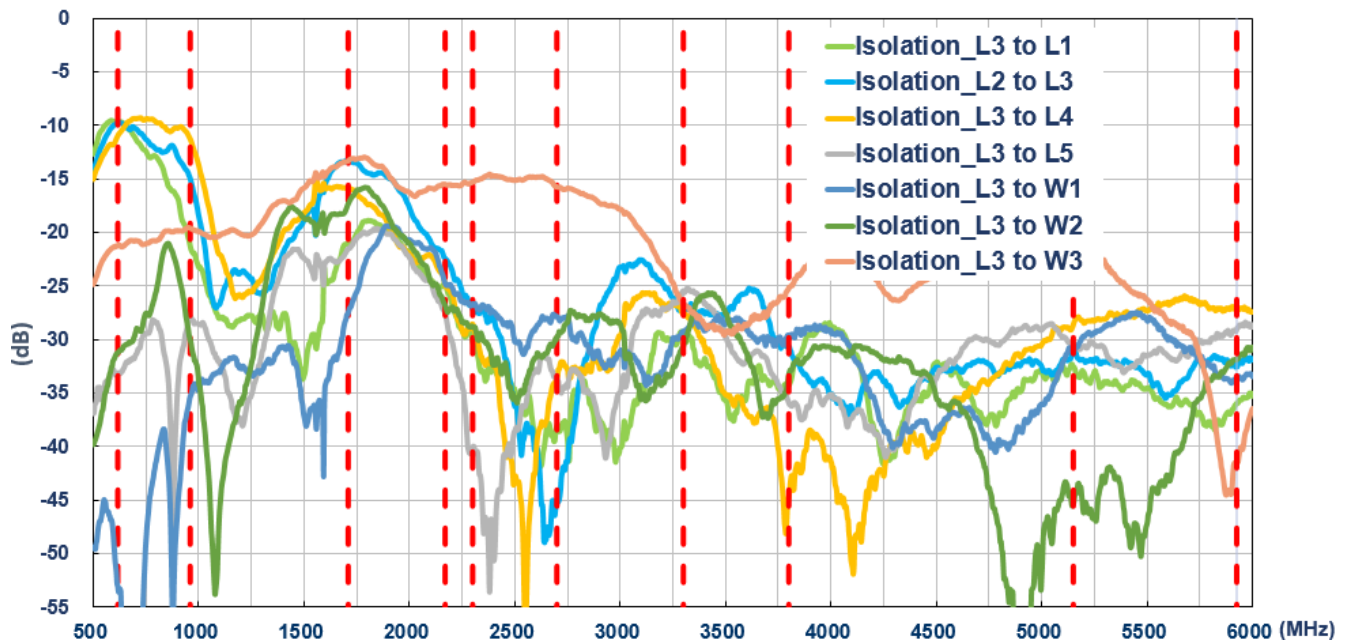


### 5G/4G 4

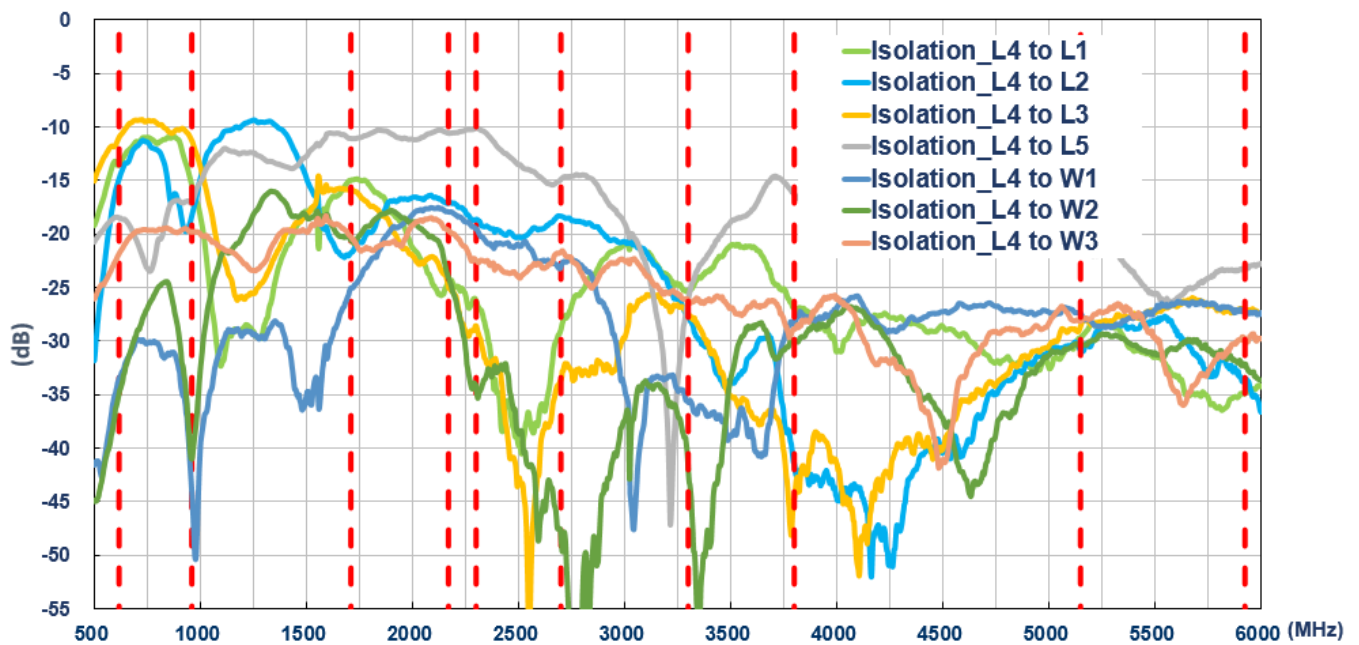


## 5G/4G 5

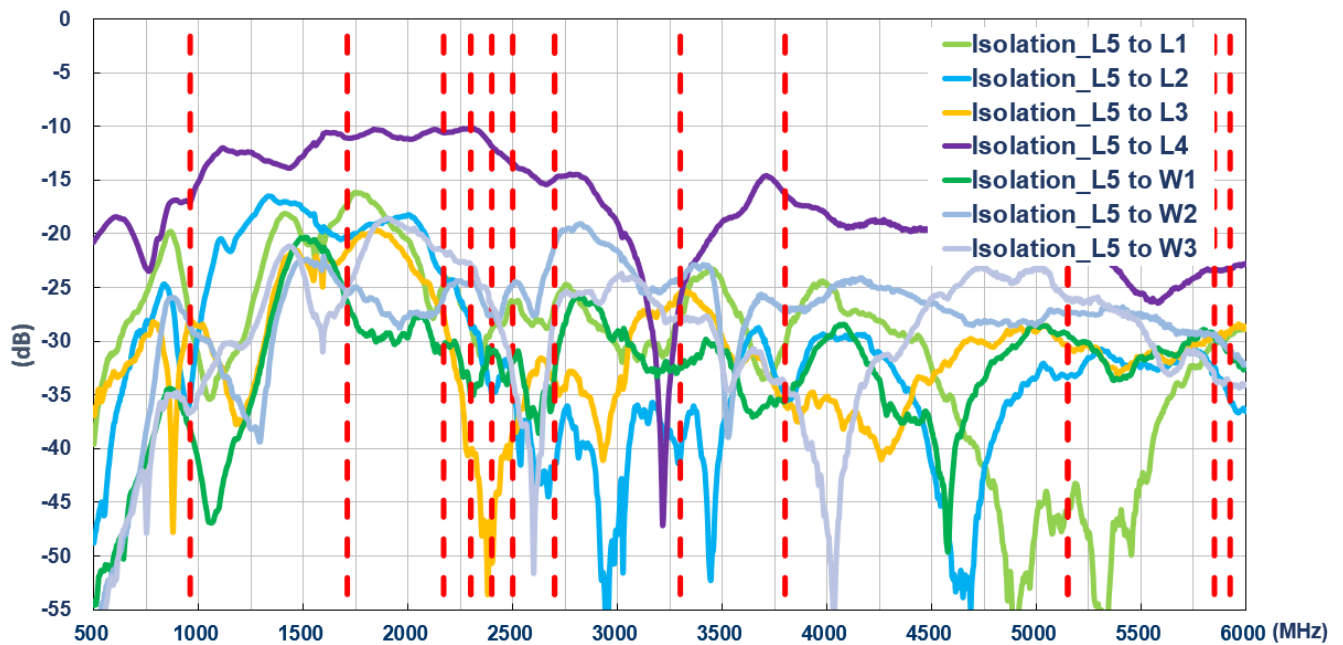


## Wi-Fi 1

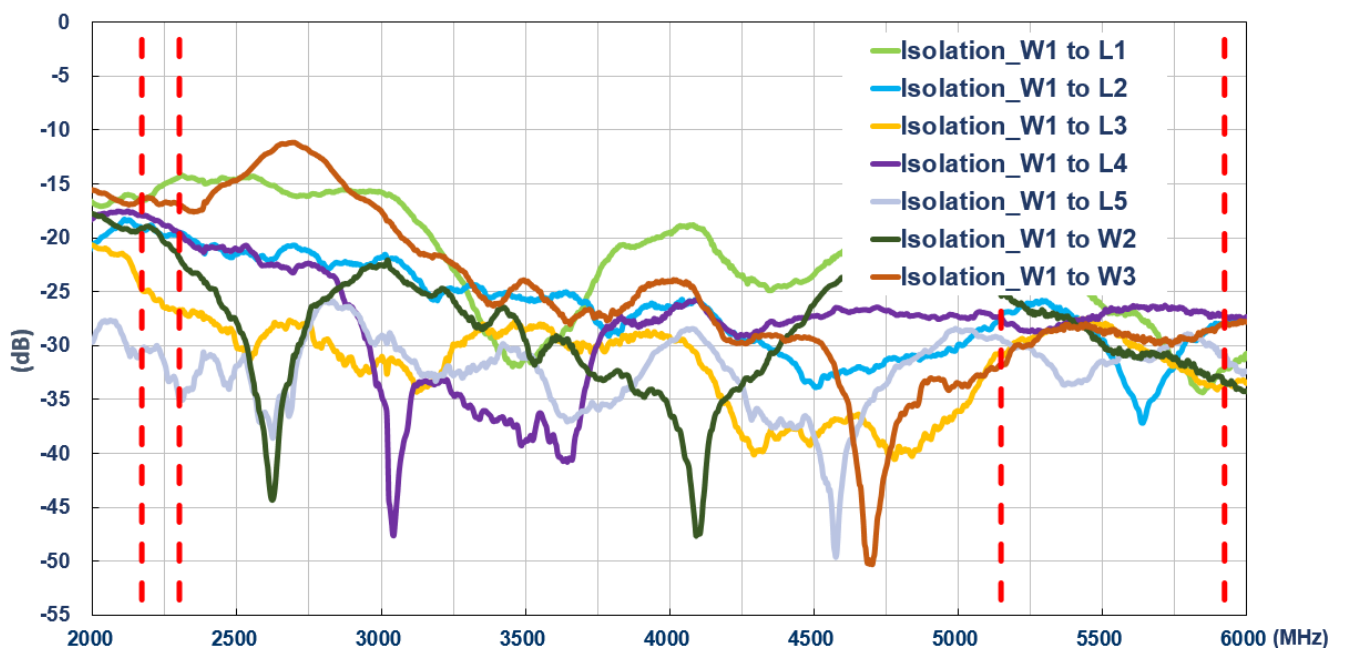

## Wi-Fi 2

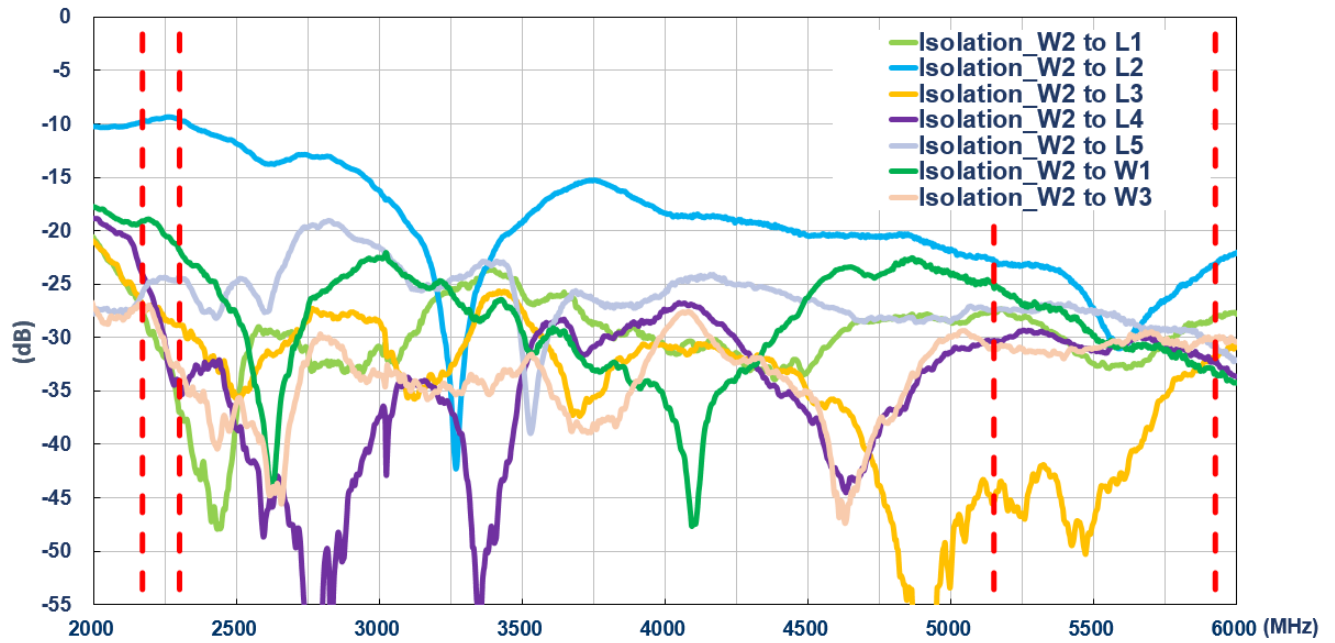


## Wi-Fi 3

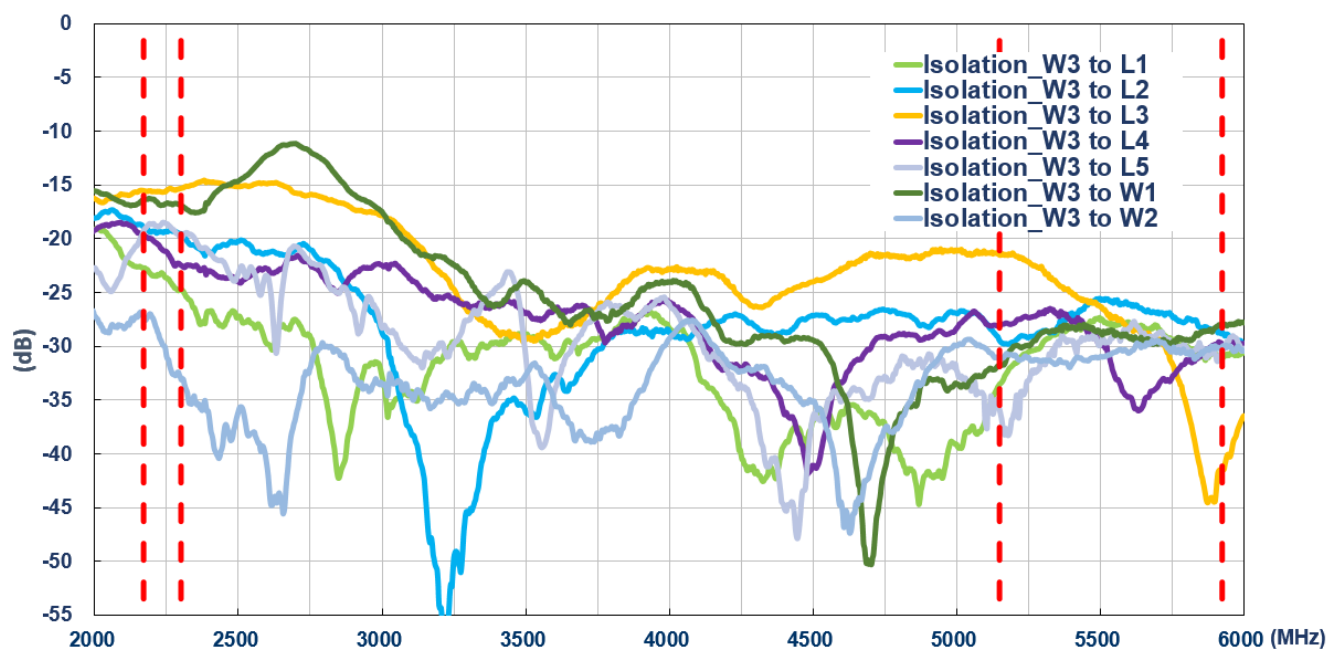


### 4.3 Efficiency

#### 5G/4G MIMO

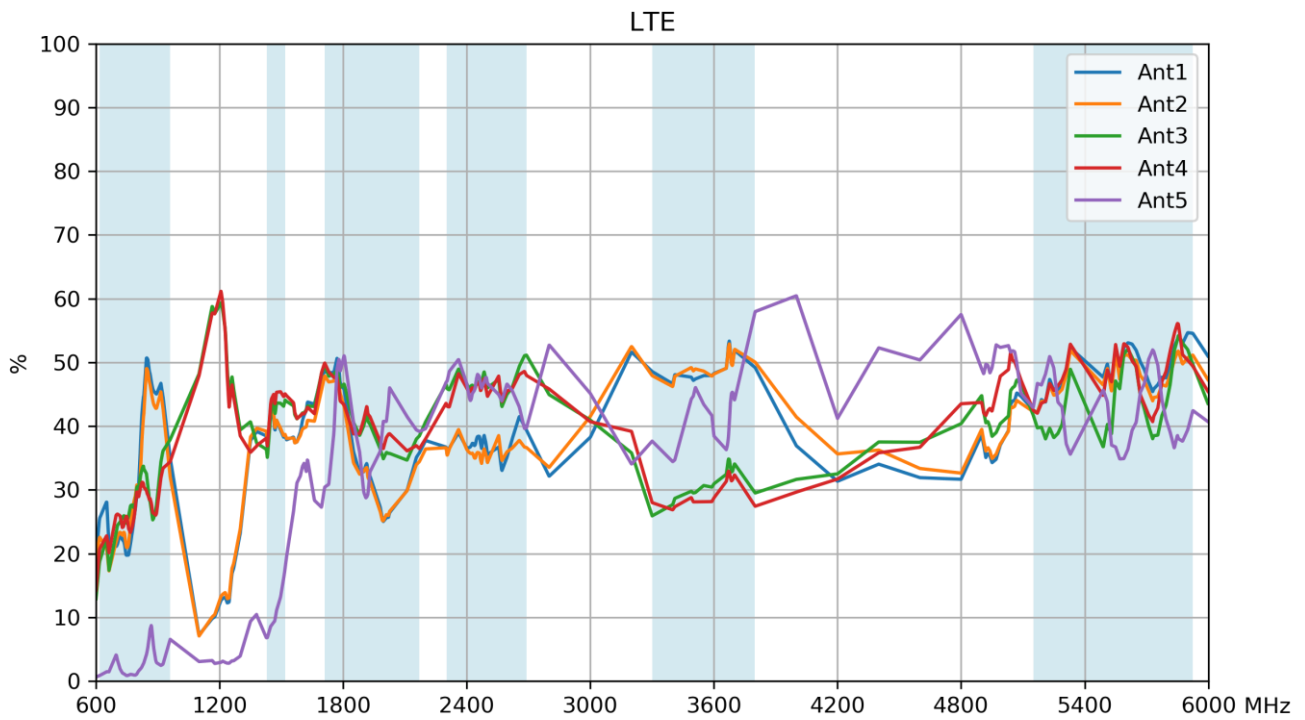


#### Wi-Fi MIMO

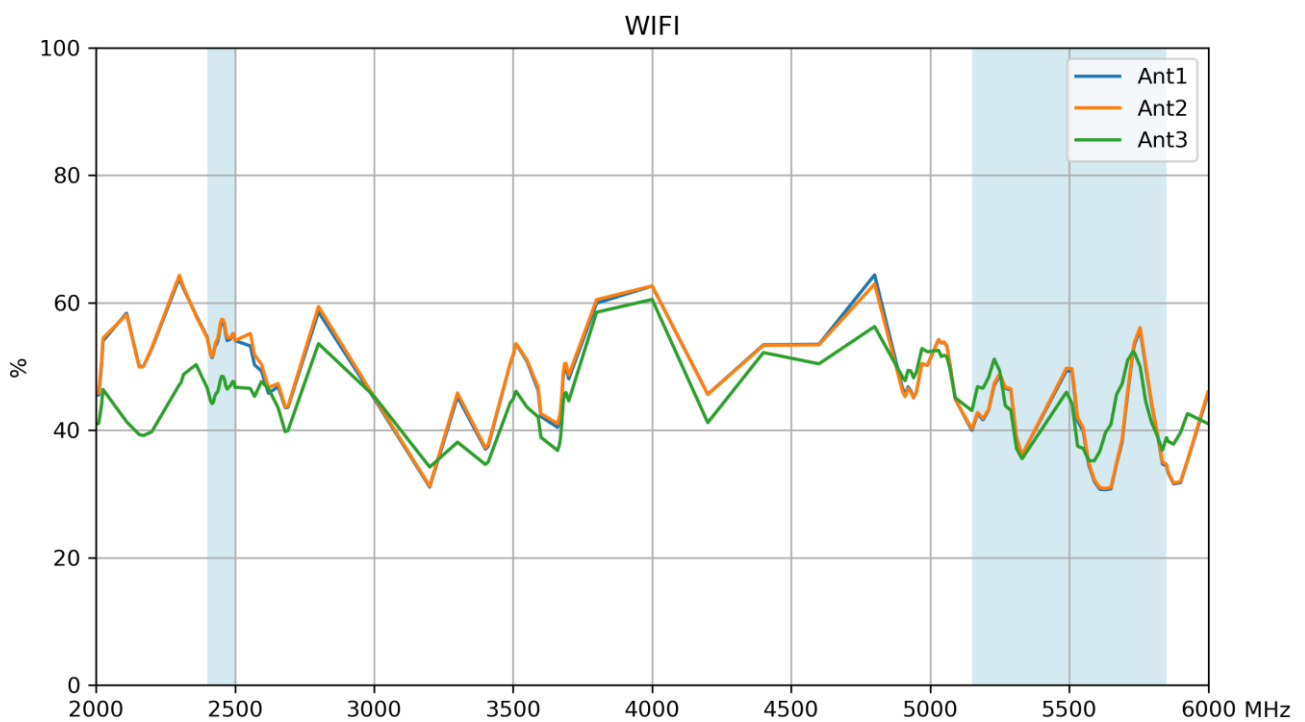


## 4.4 Average Gain

### 5G/4G MIMO

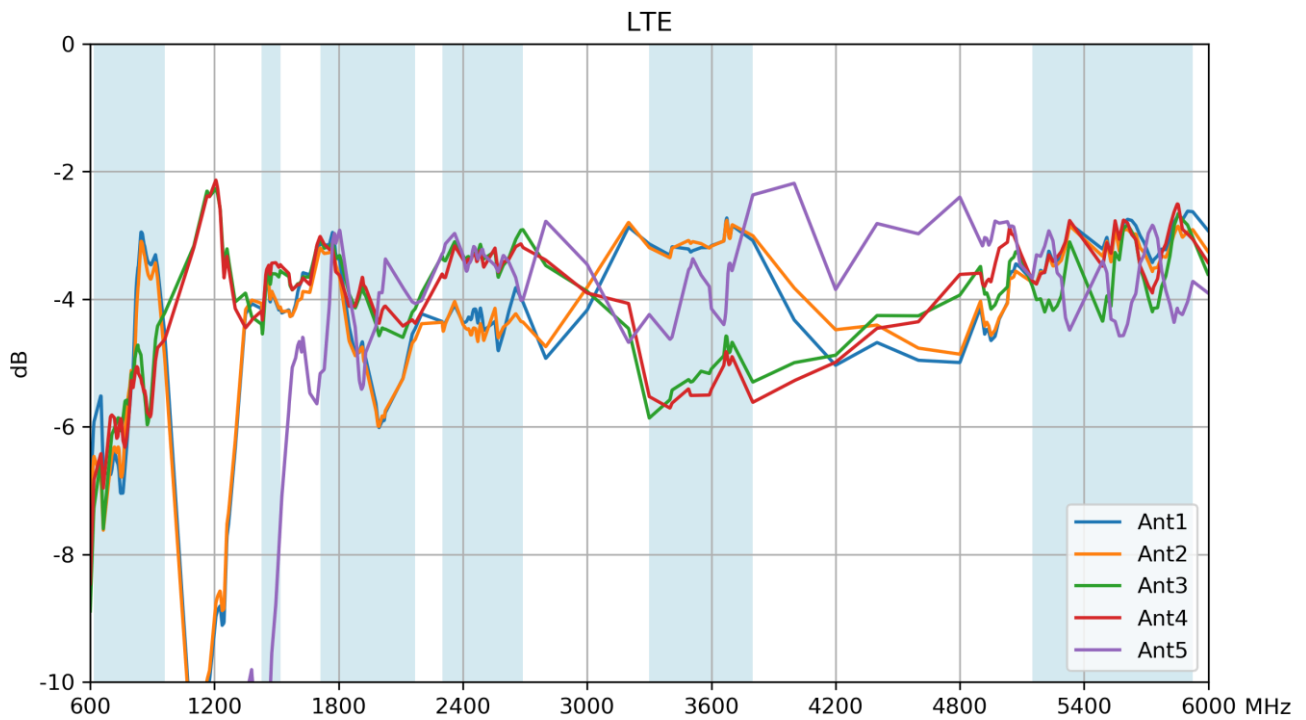


### Wi-Fi MIMO

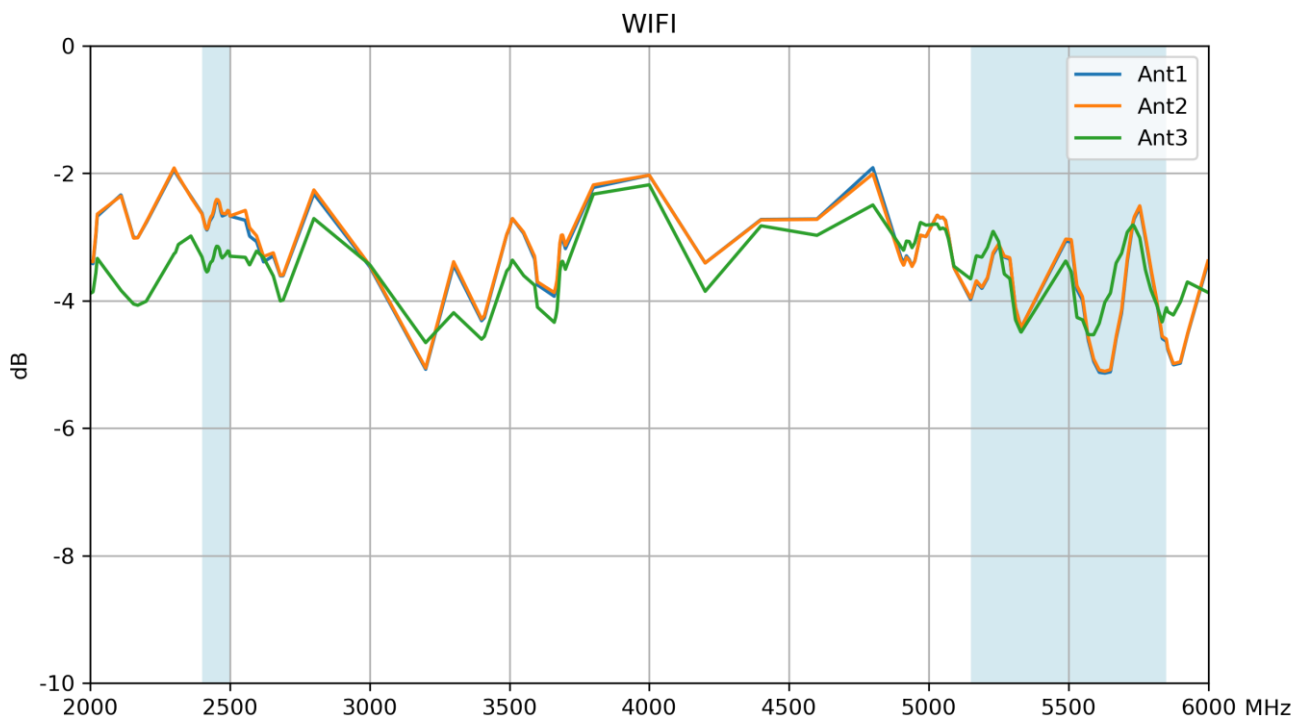


## 4.5 Peak Gain

### 5G/4G MIMO

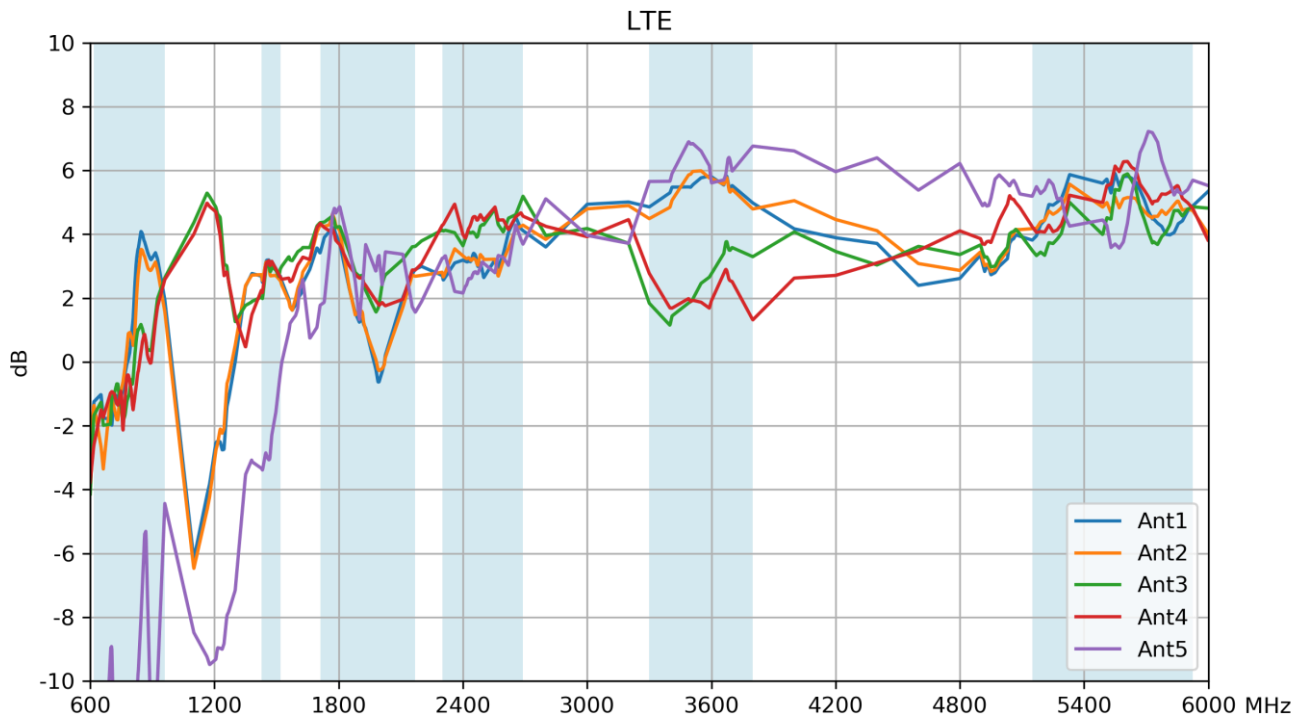


### Wi-Fi MIMO

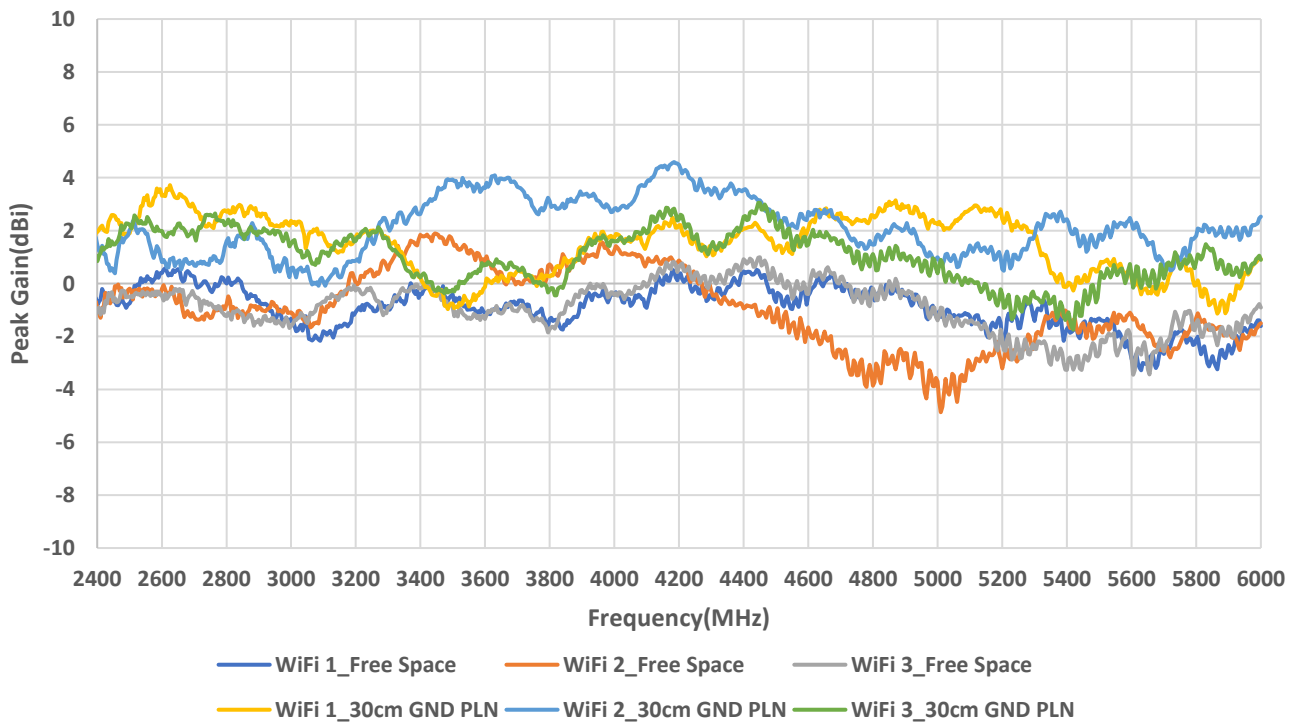

## 5. Radiation Patterns

### 5.1 Test Setup


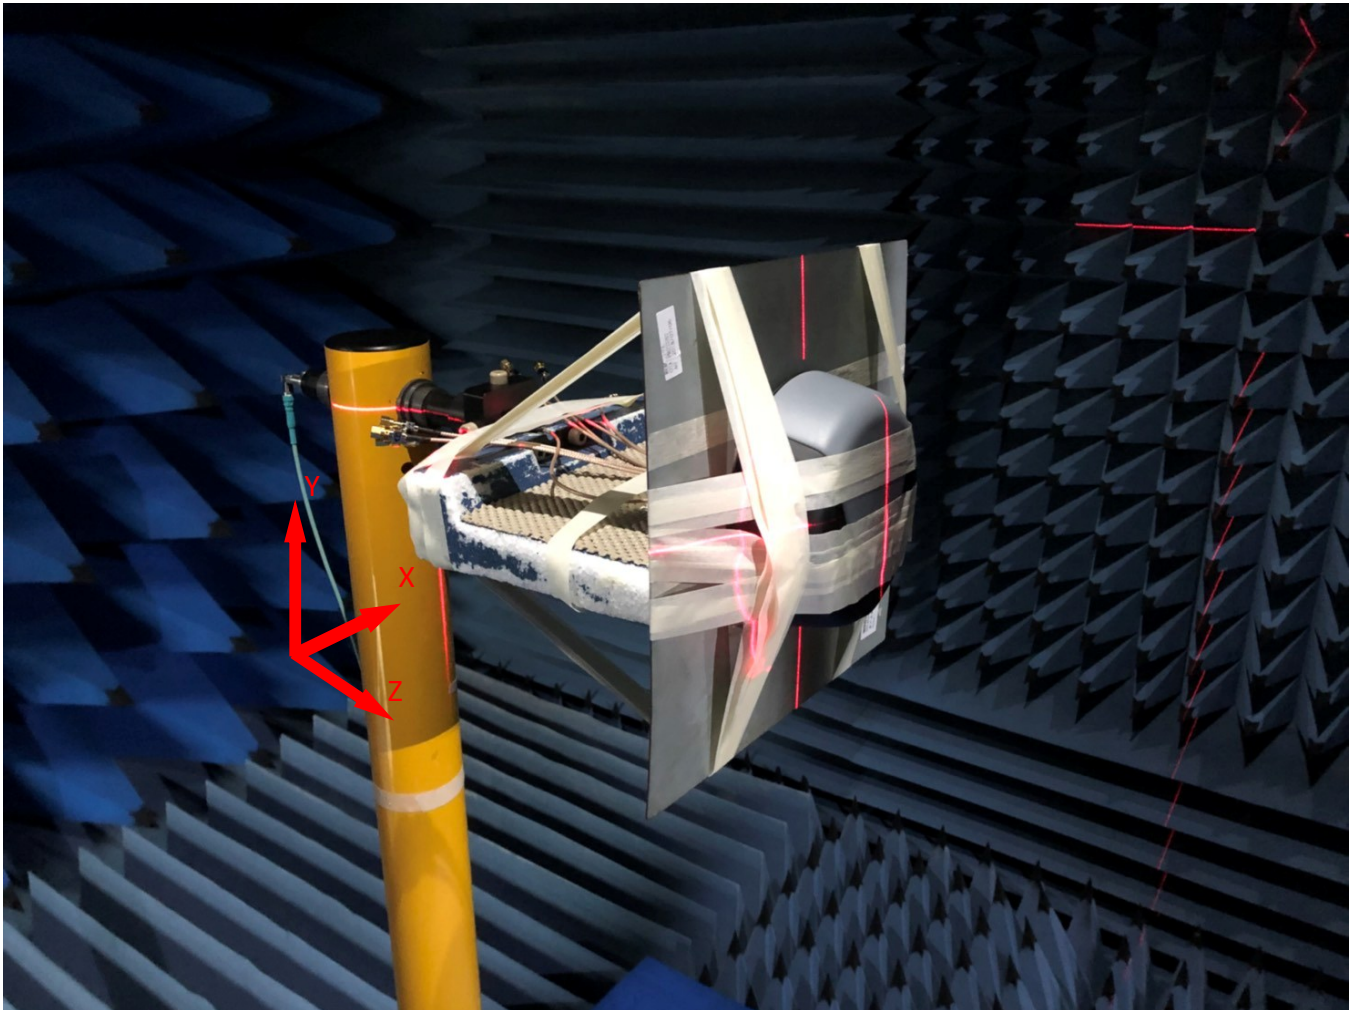


On 30x30cm Ground Plane




5.2 5G/4G MIMO 1 Radiation Pattern




652MHz

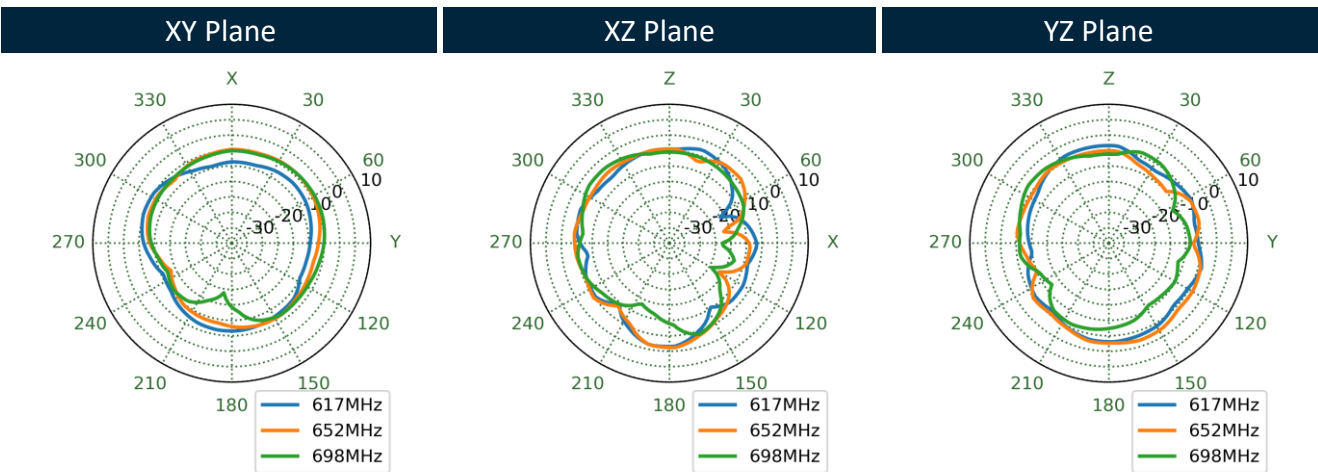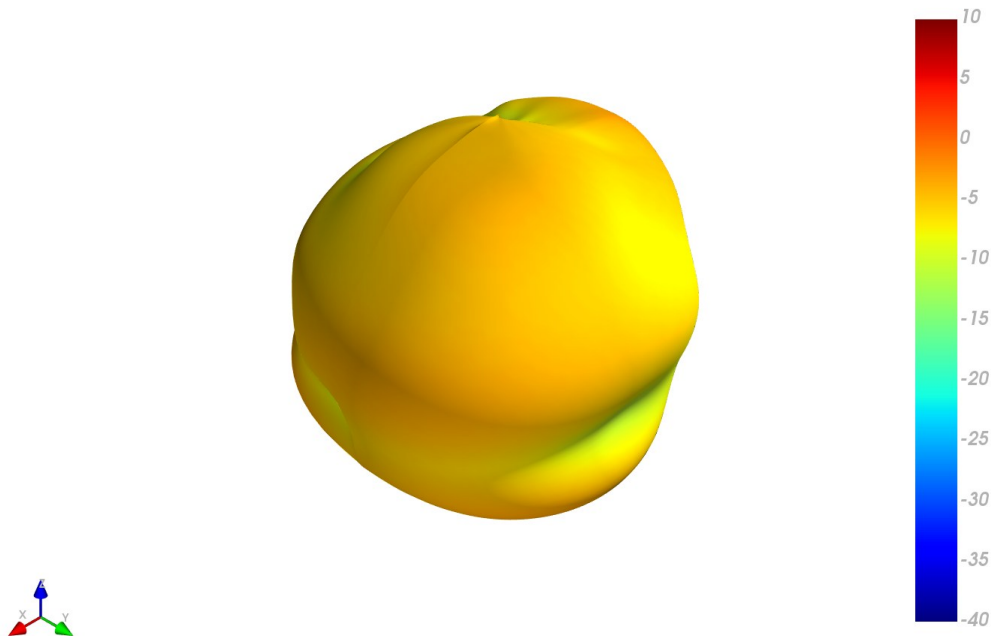



751MHz

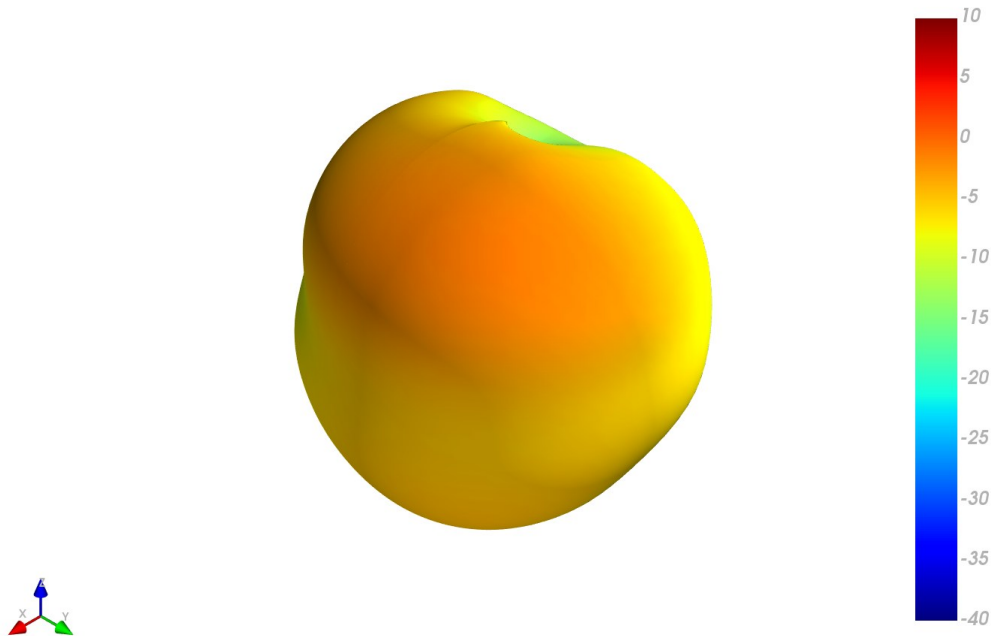



XY Plane      XZ Plane      YZ Plane

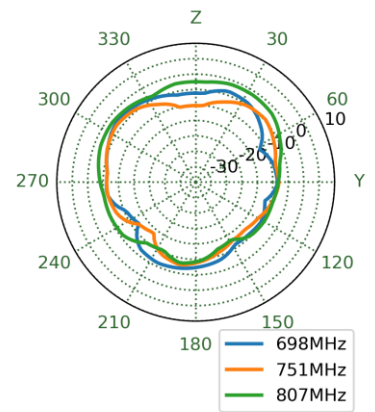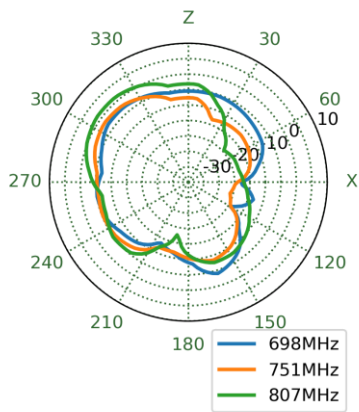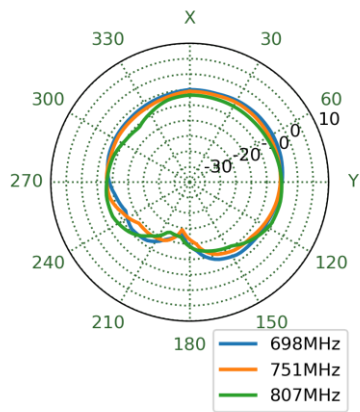


890MHz

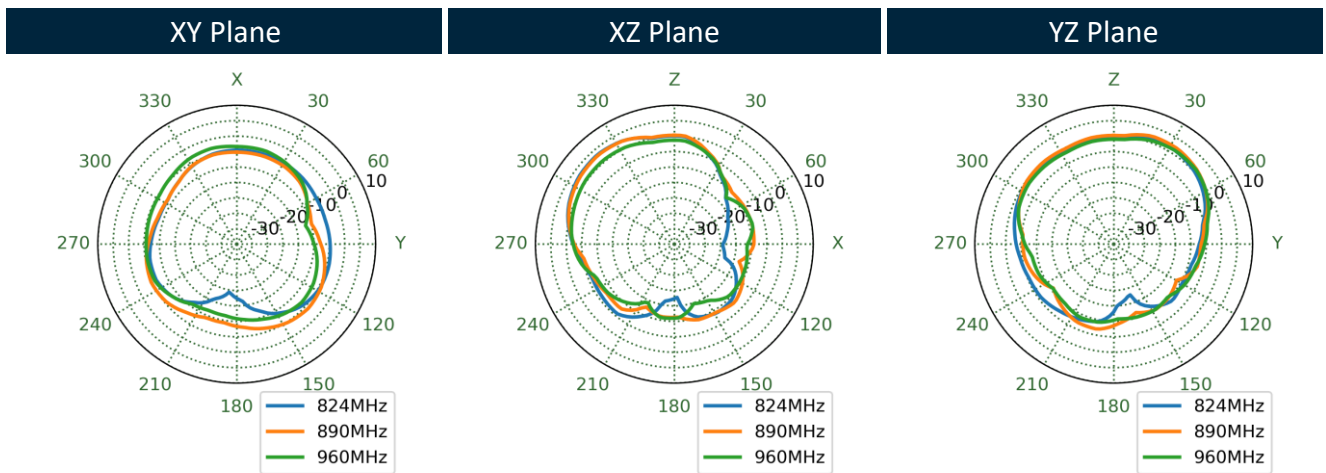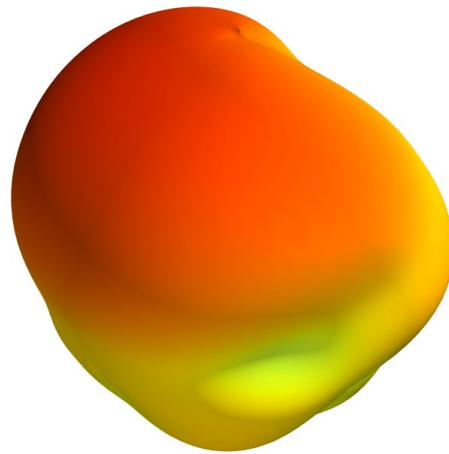




1470MHz

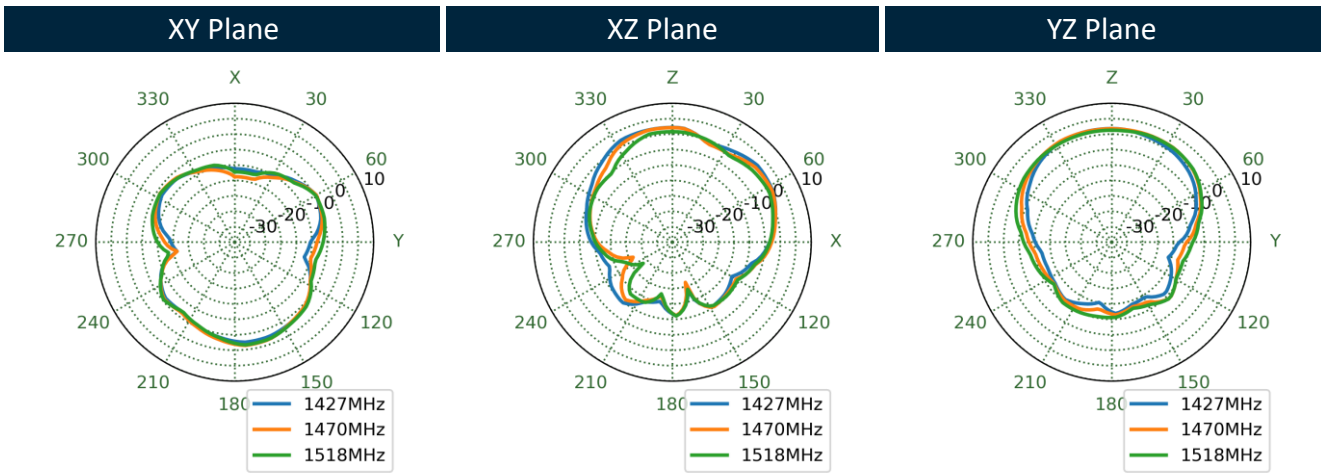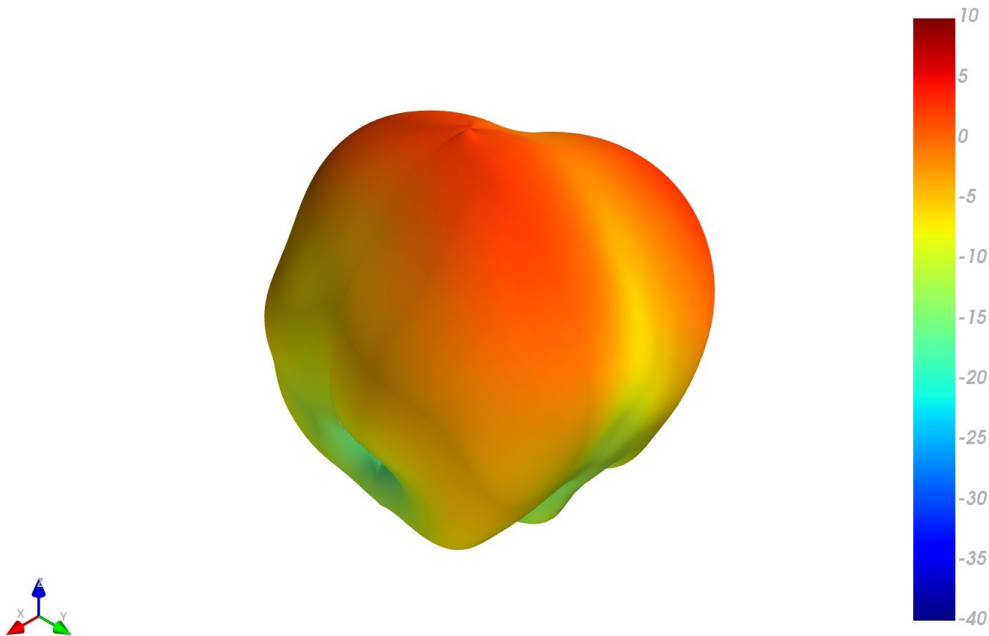



1805MHz

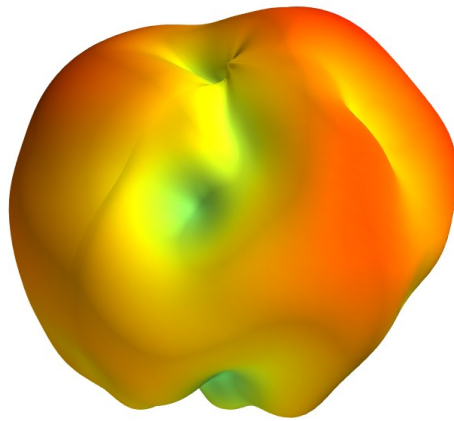



XY Plane      XZ Plane      YZ Plane

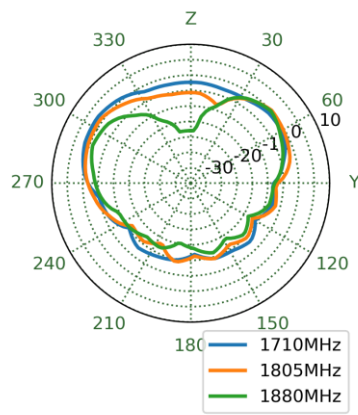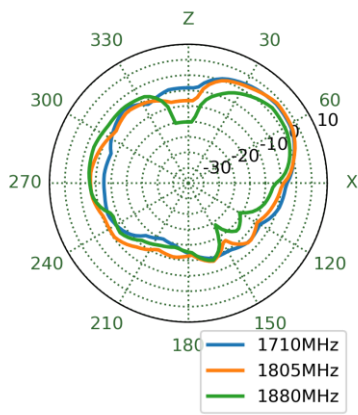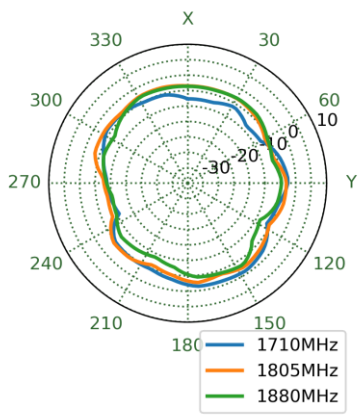



1920MHz

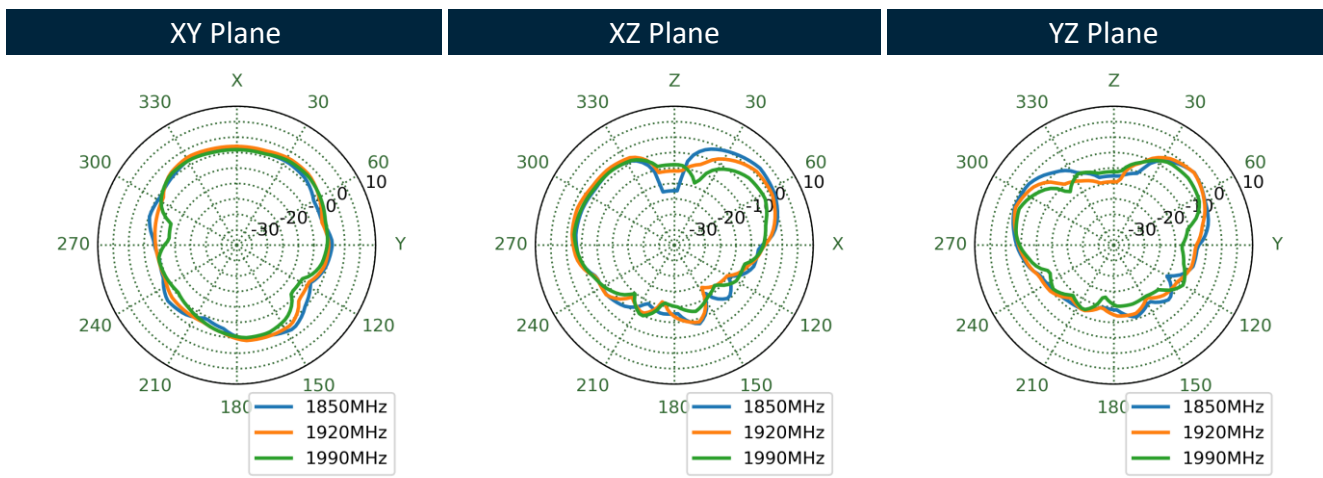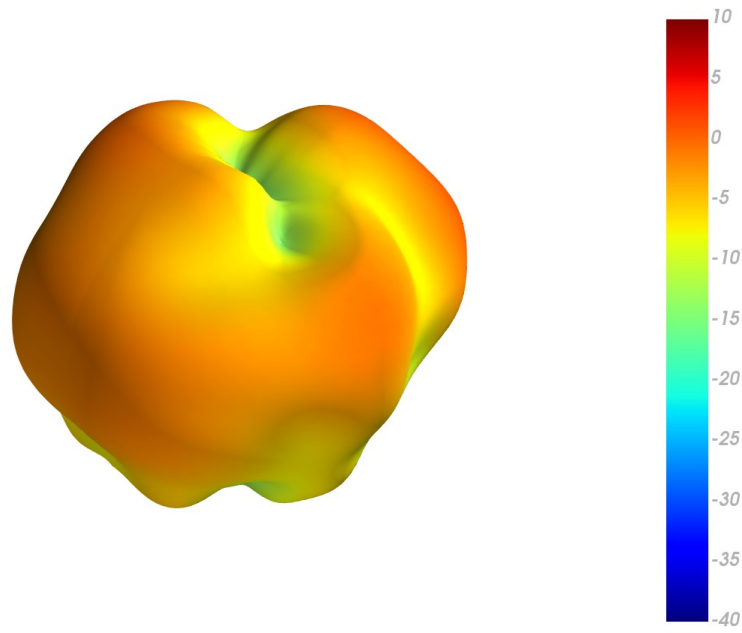

1990MHz

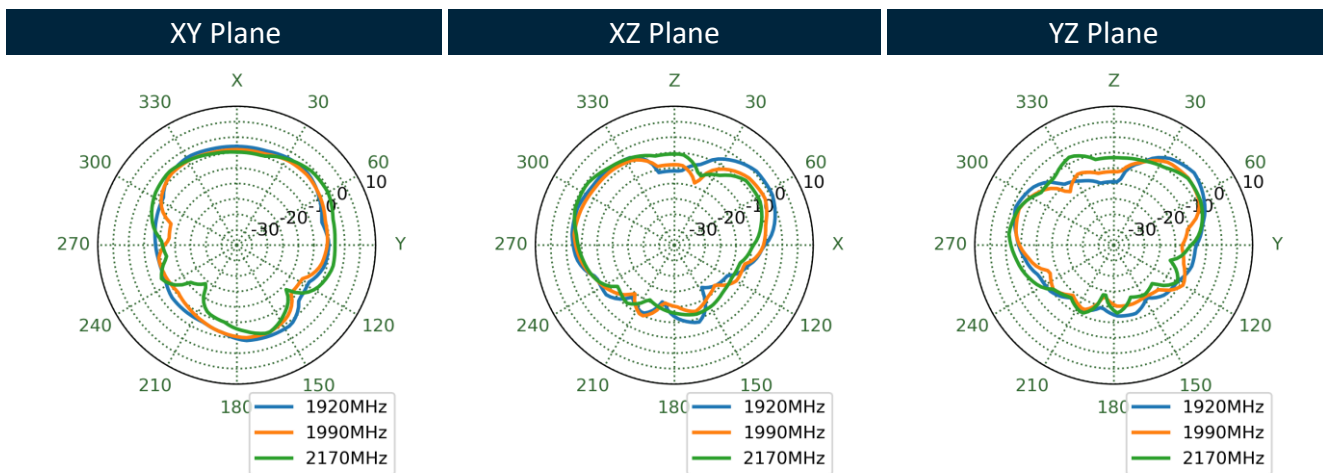
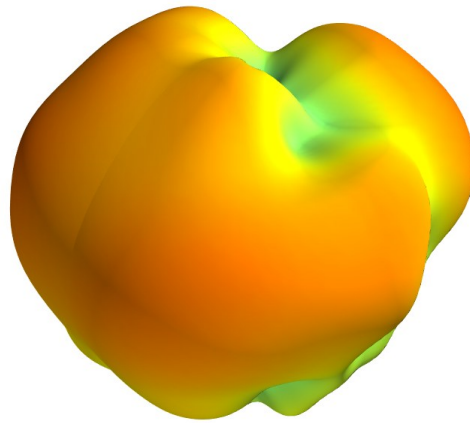


2595MHz

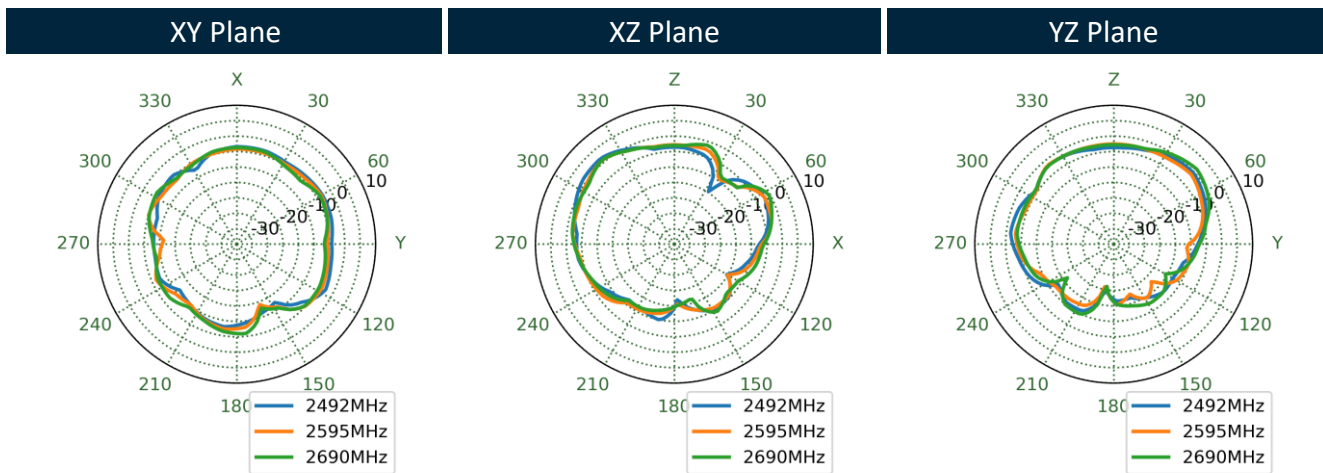
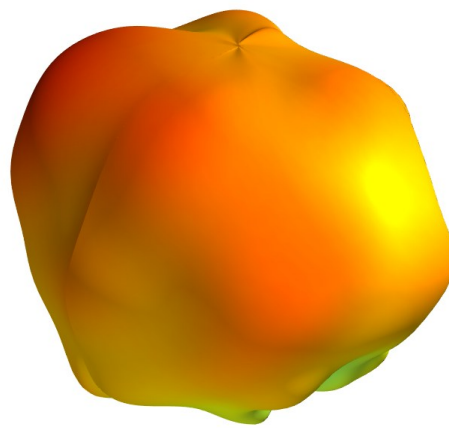




3550MHz

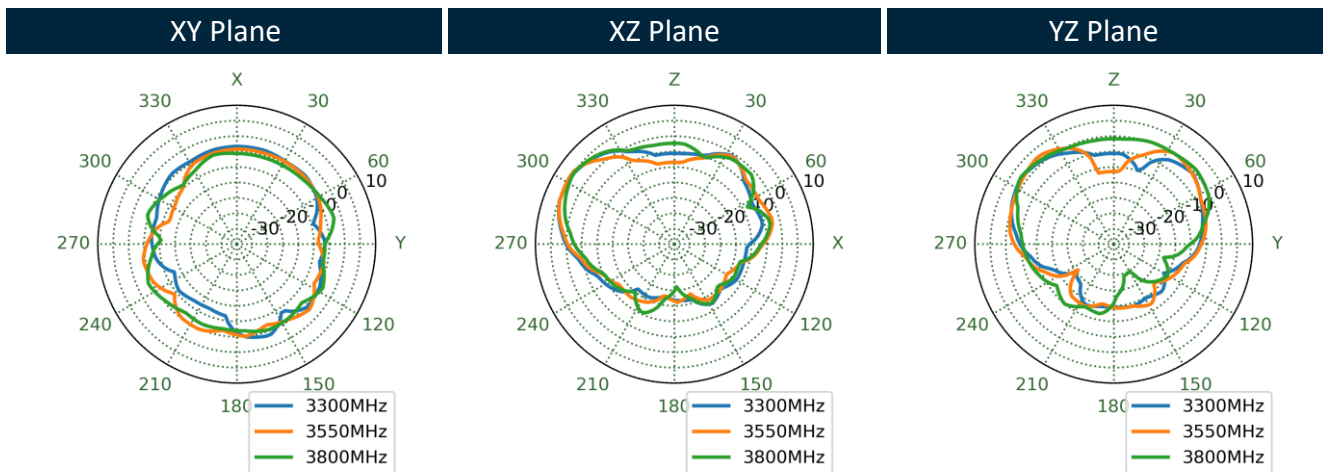
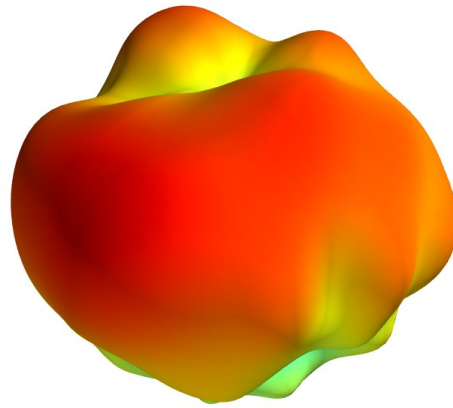


5530MHz

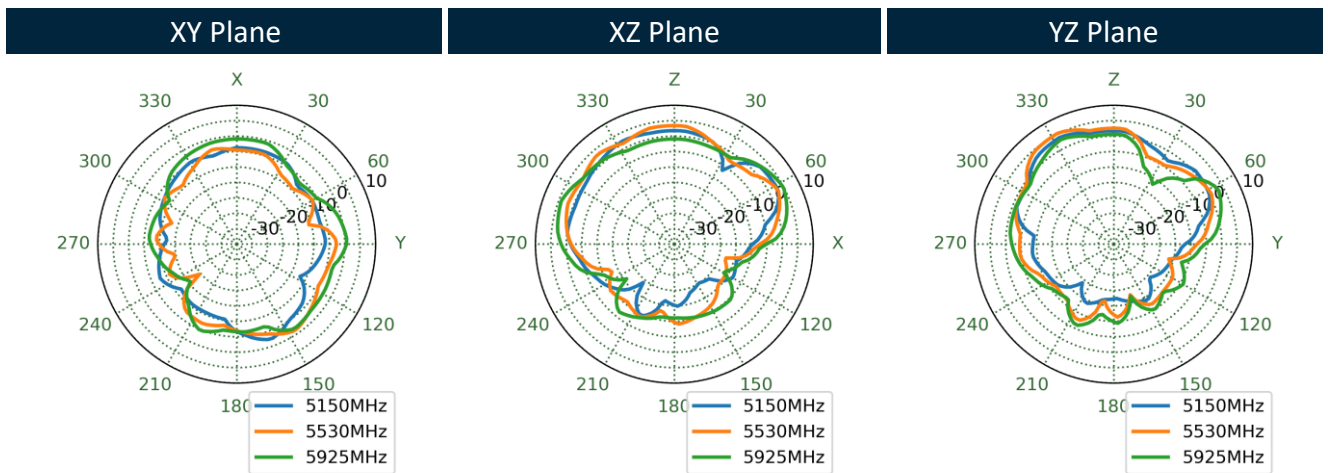
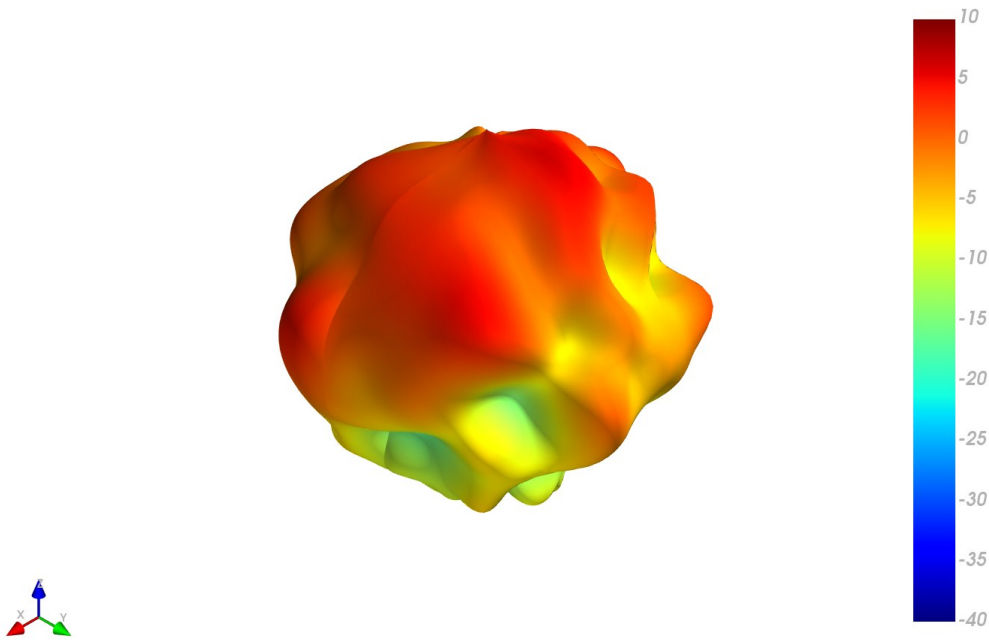


5.3 5G/4G MIMO 2 Radiation Pattern



652MHz

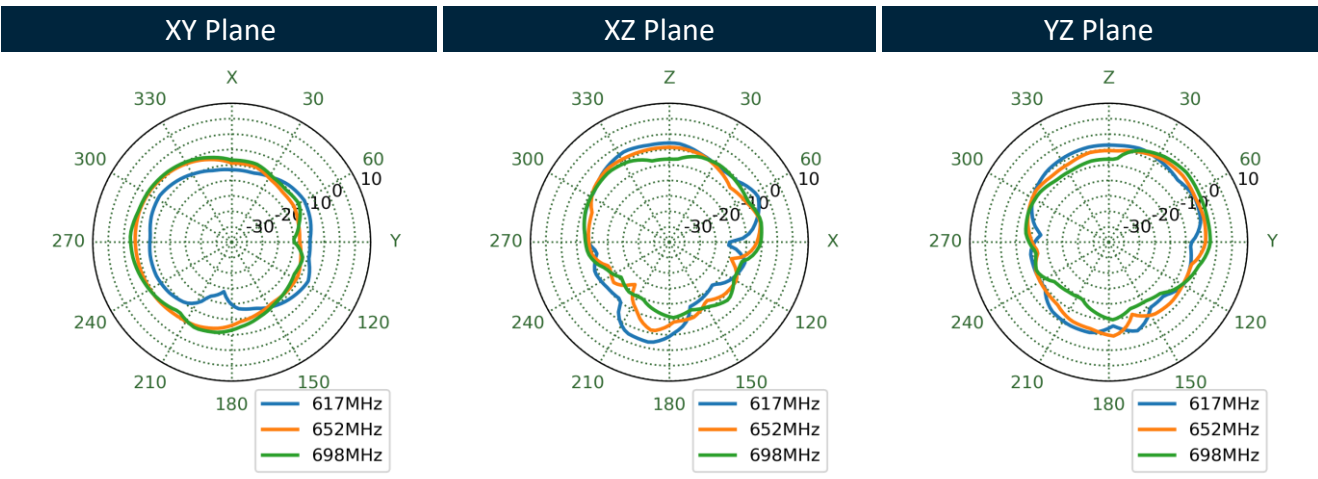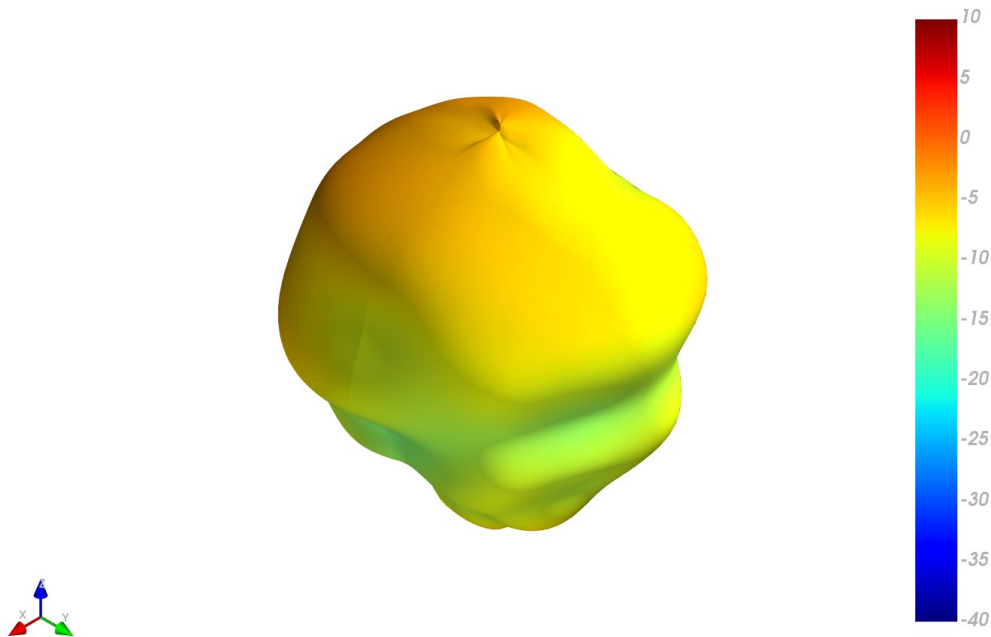



751MHz

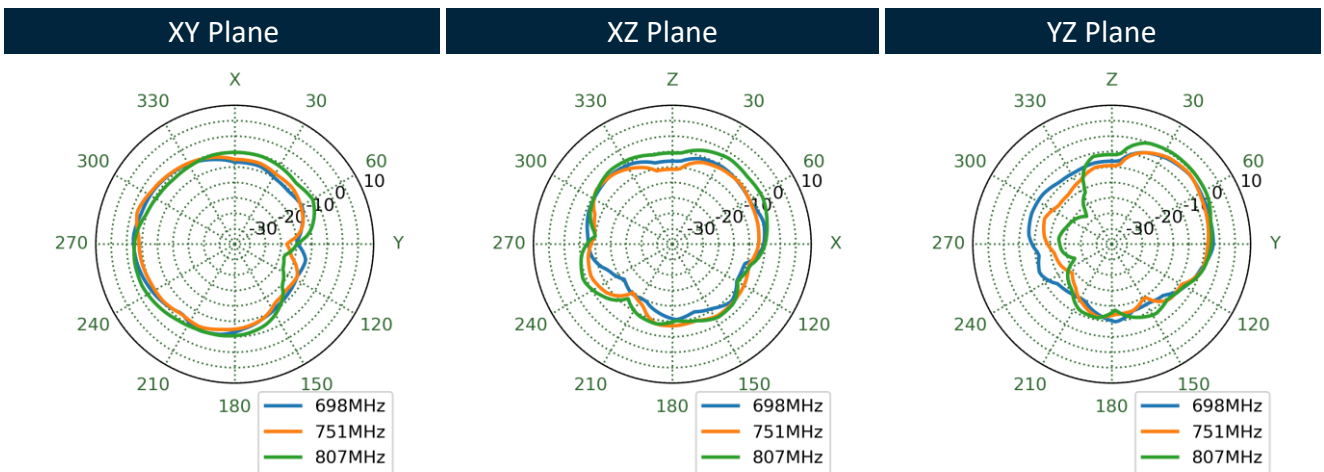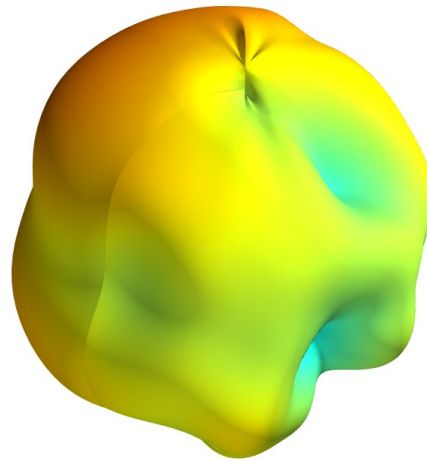



890MHz

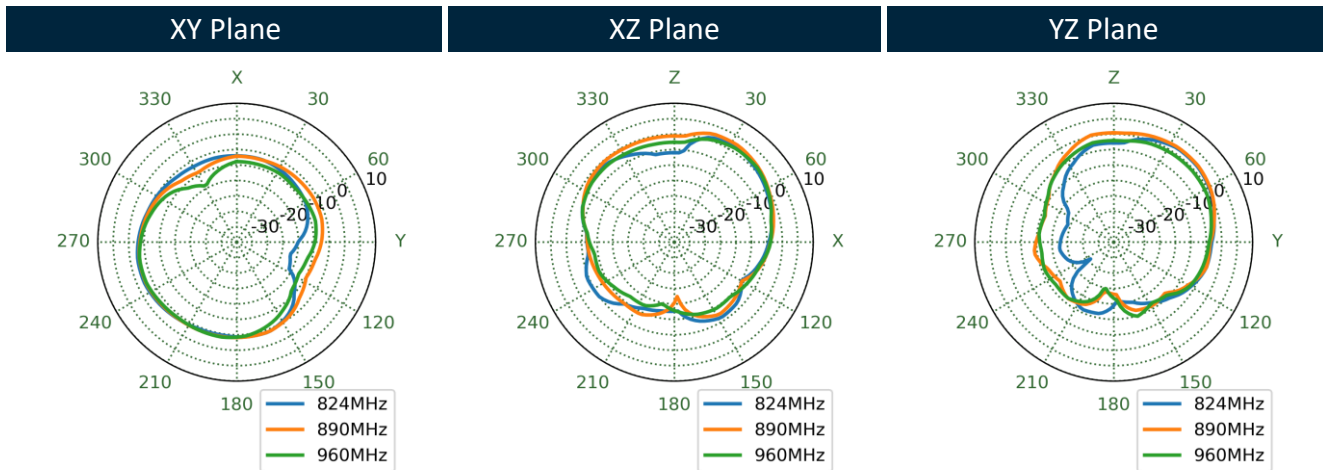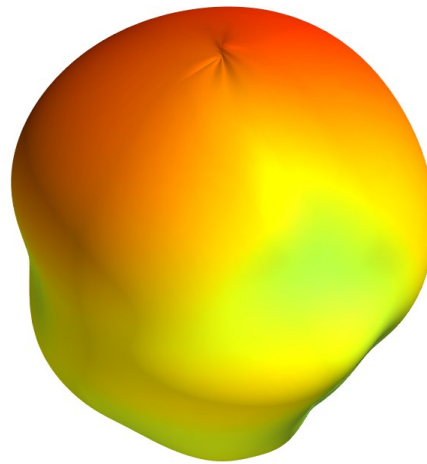



1470MHz

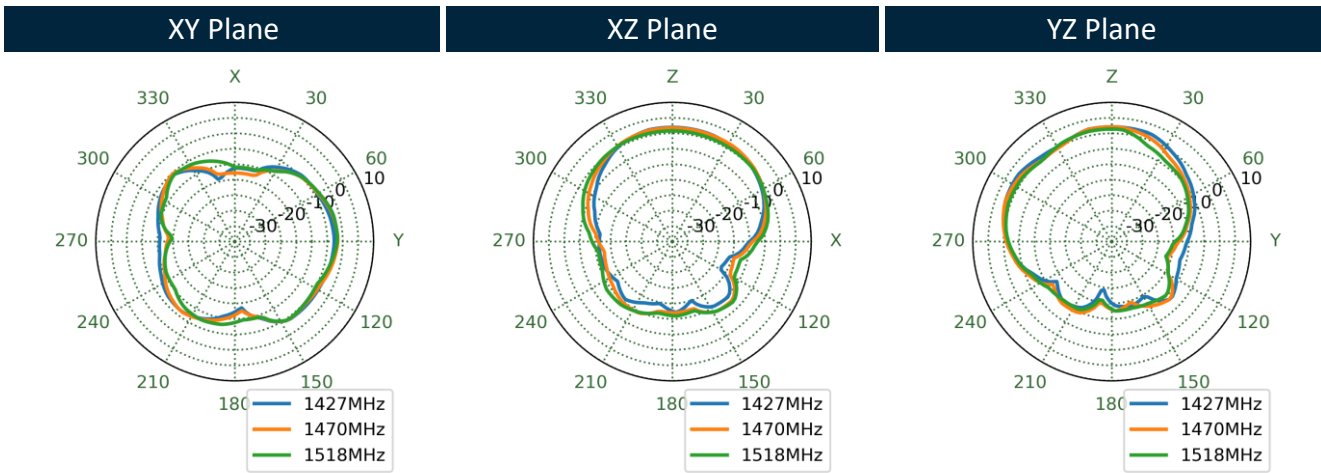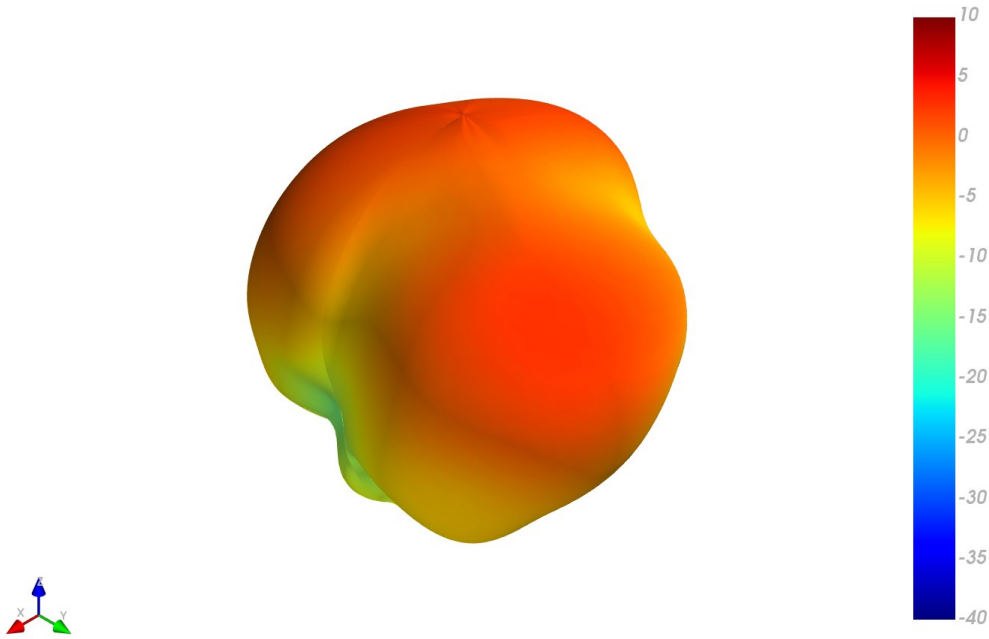

1805MHz

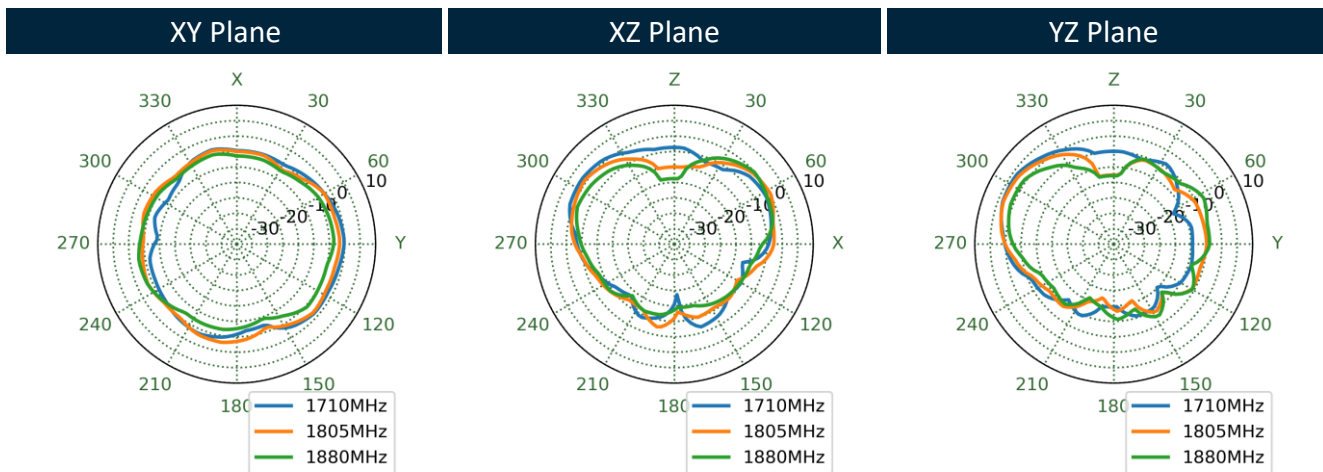
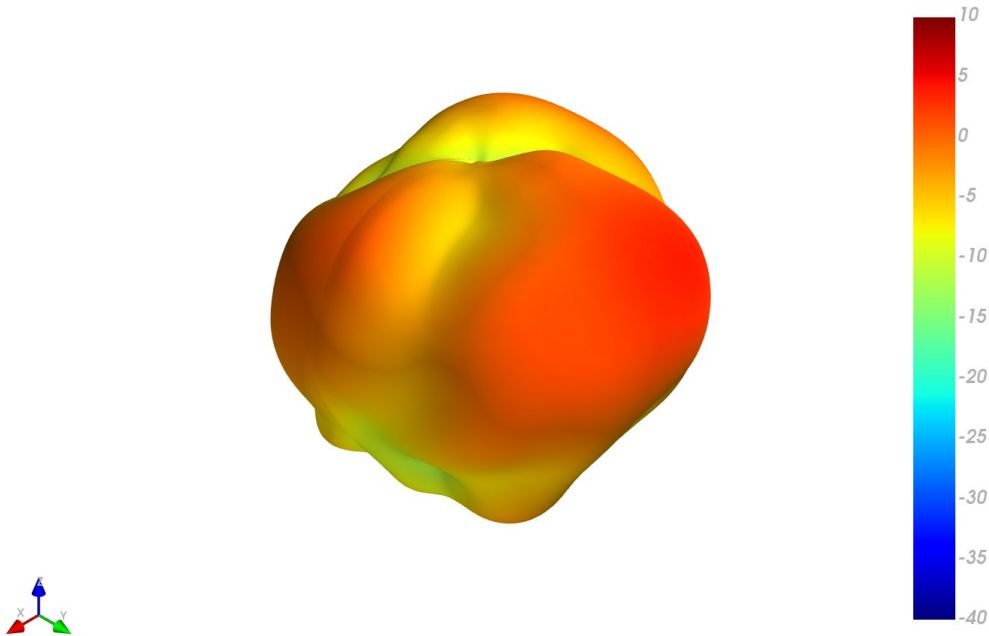


1920MHz

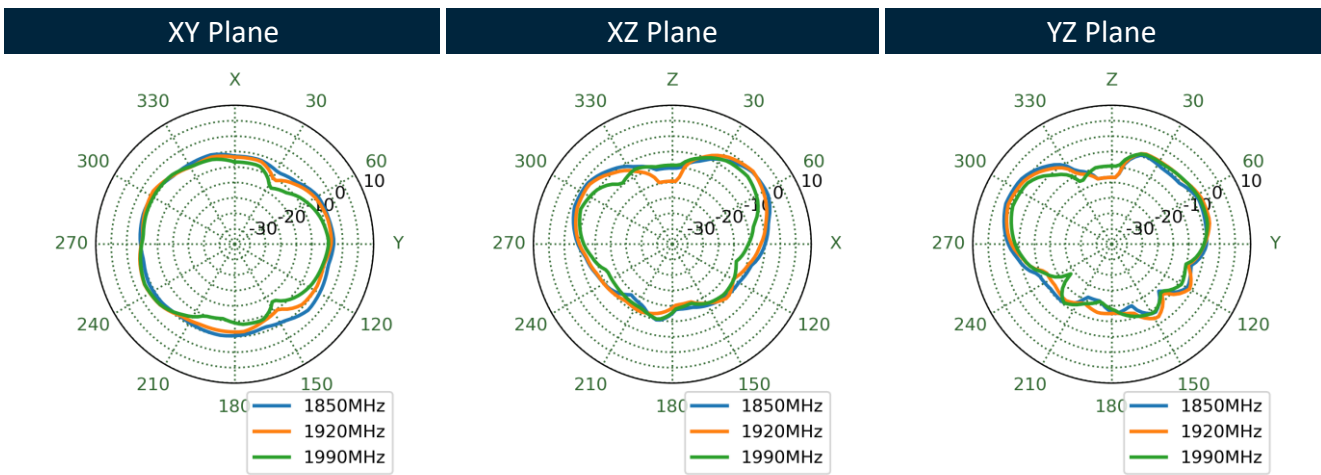
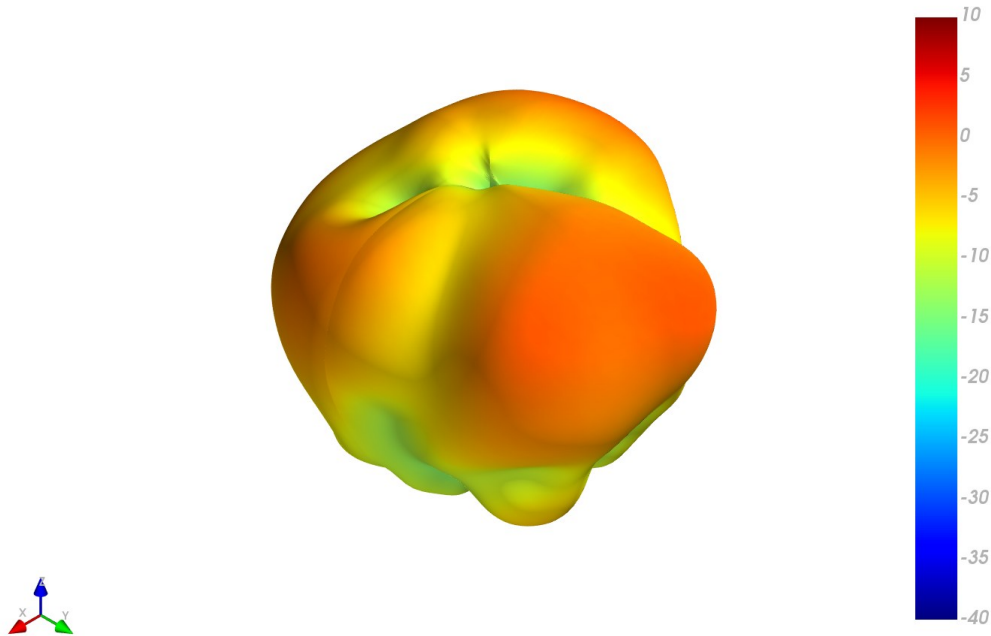






1990MHz

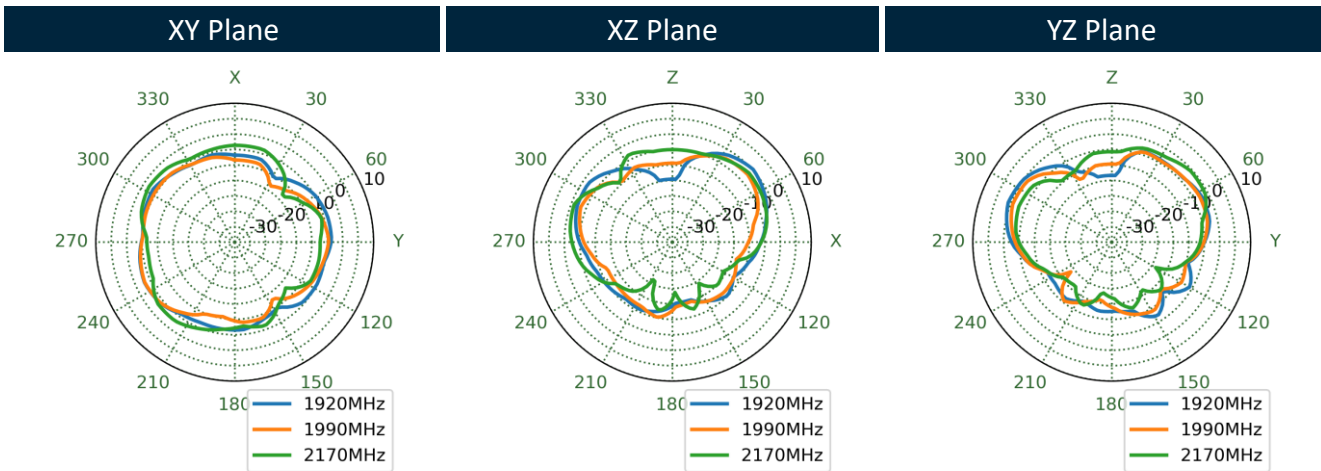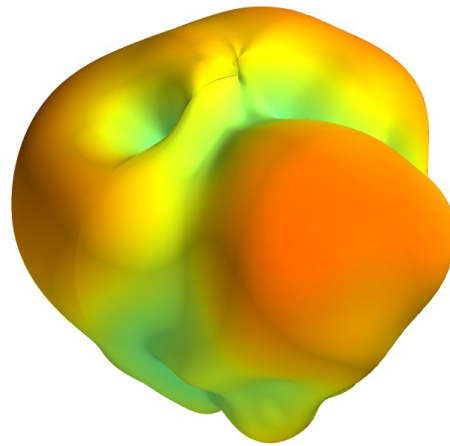



2595MHz

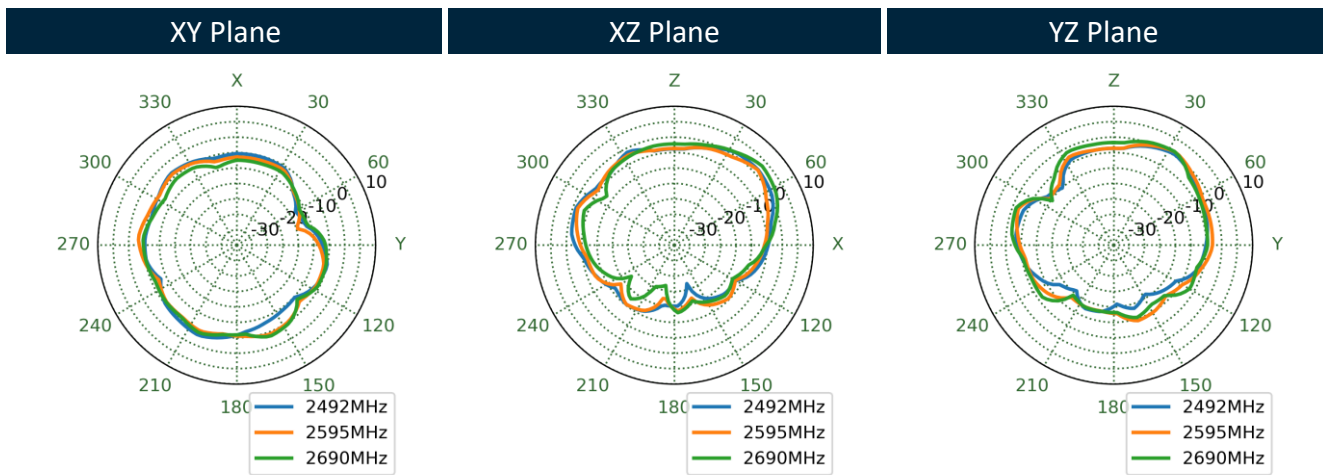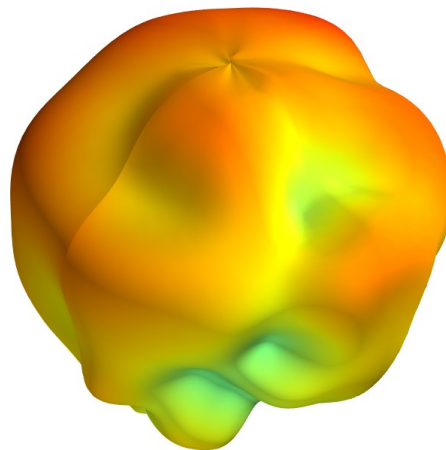

3550MHz

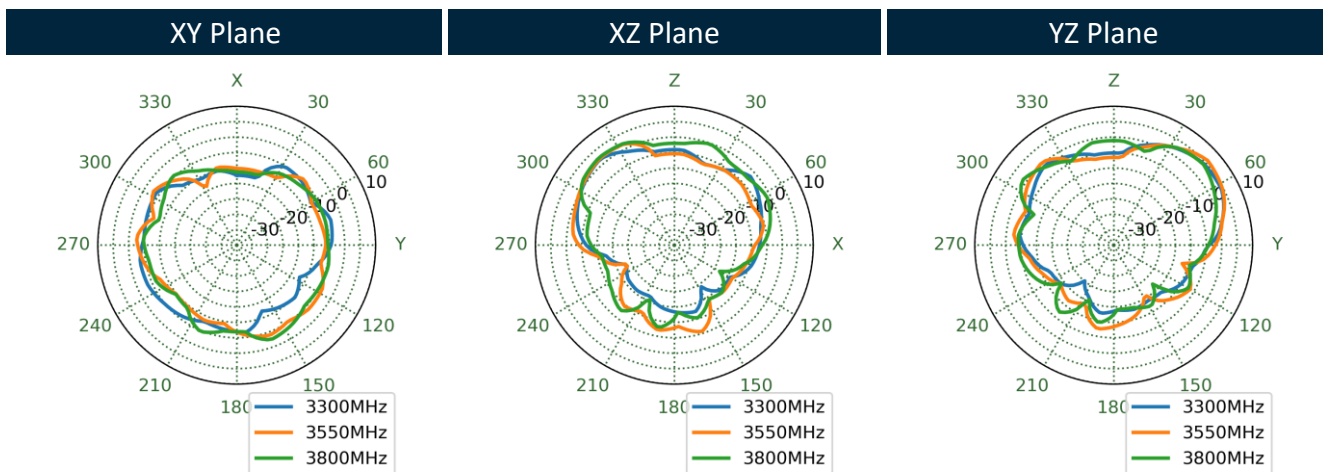
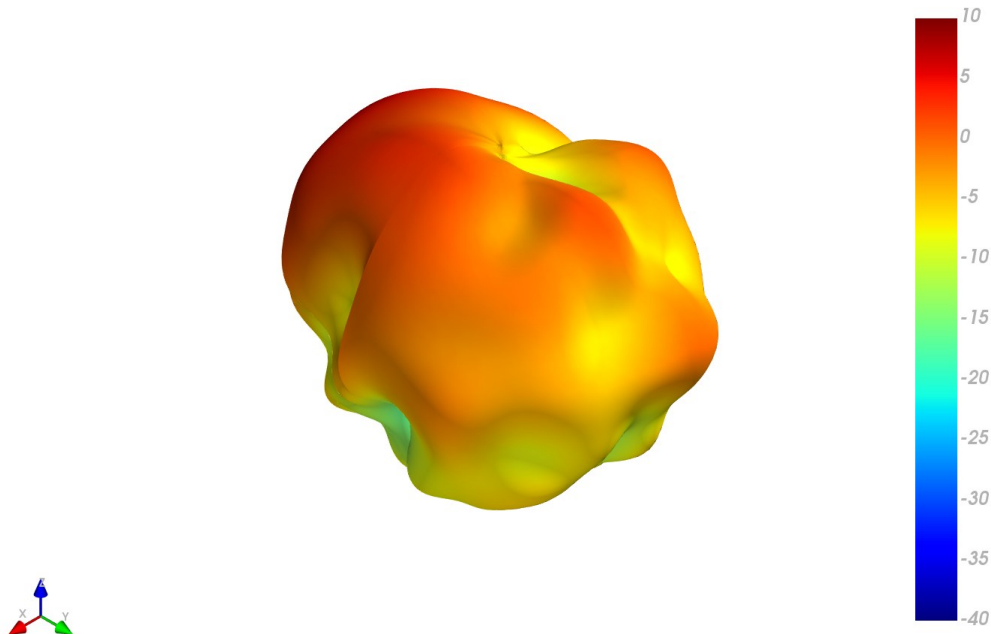


5530MHz

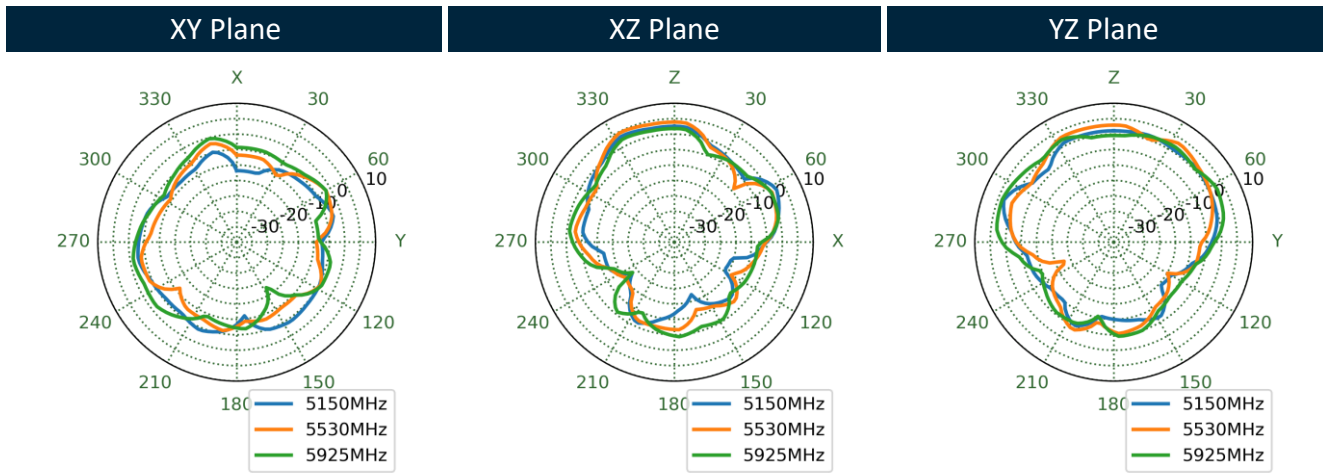
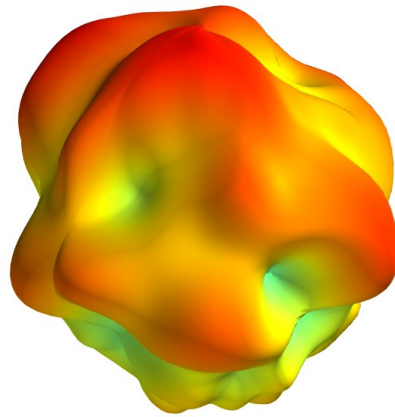


5.4 5G/4G MIMO 3 Radiation Pattern



652MHz

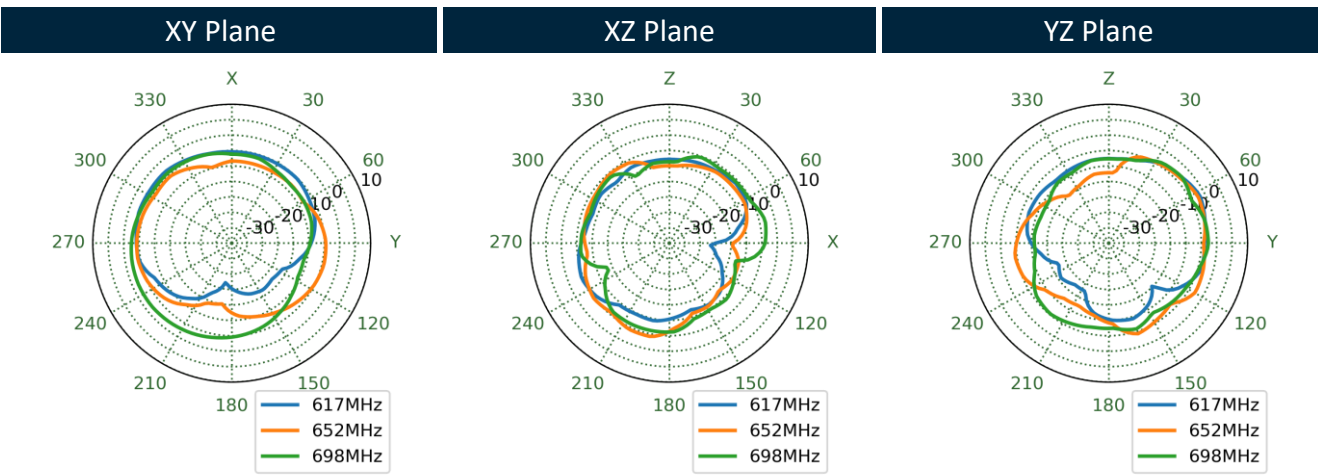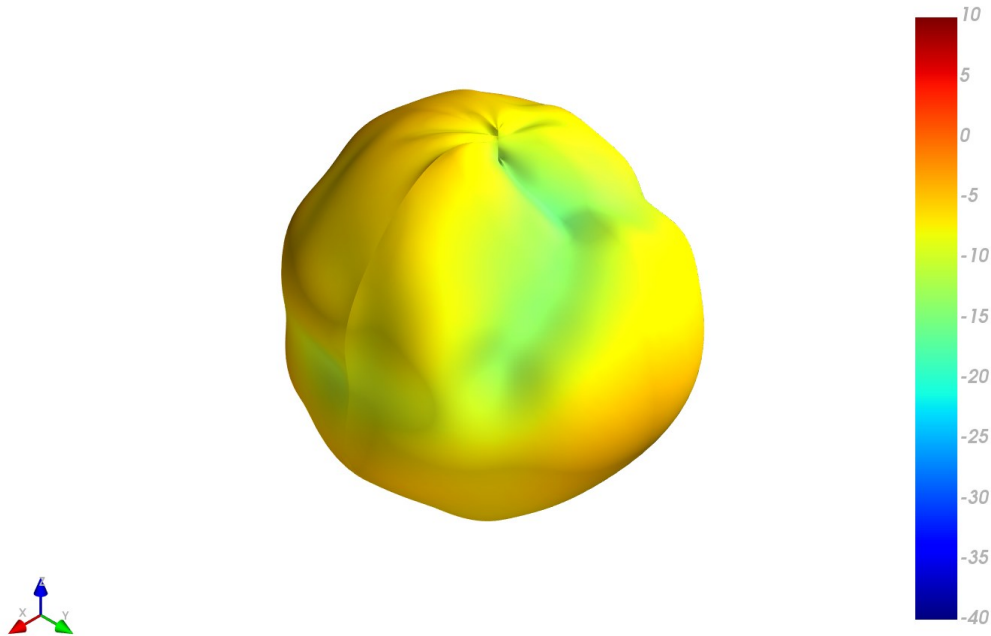



751MHz

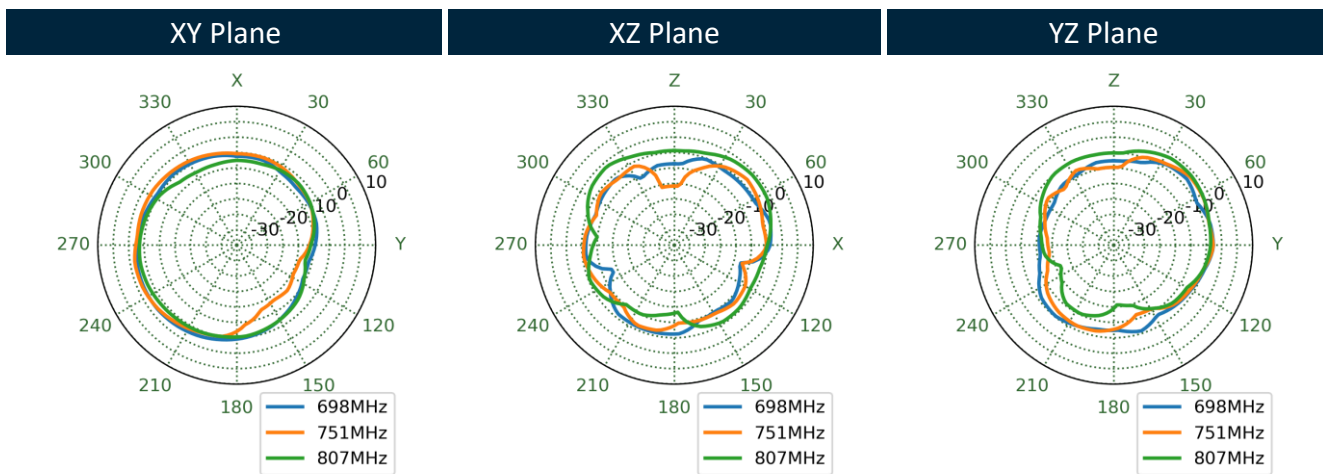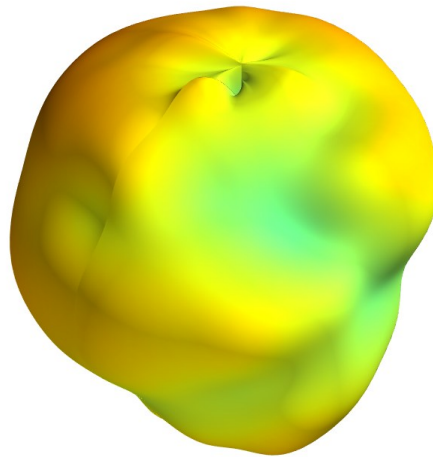

890MHz

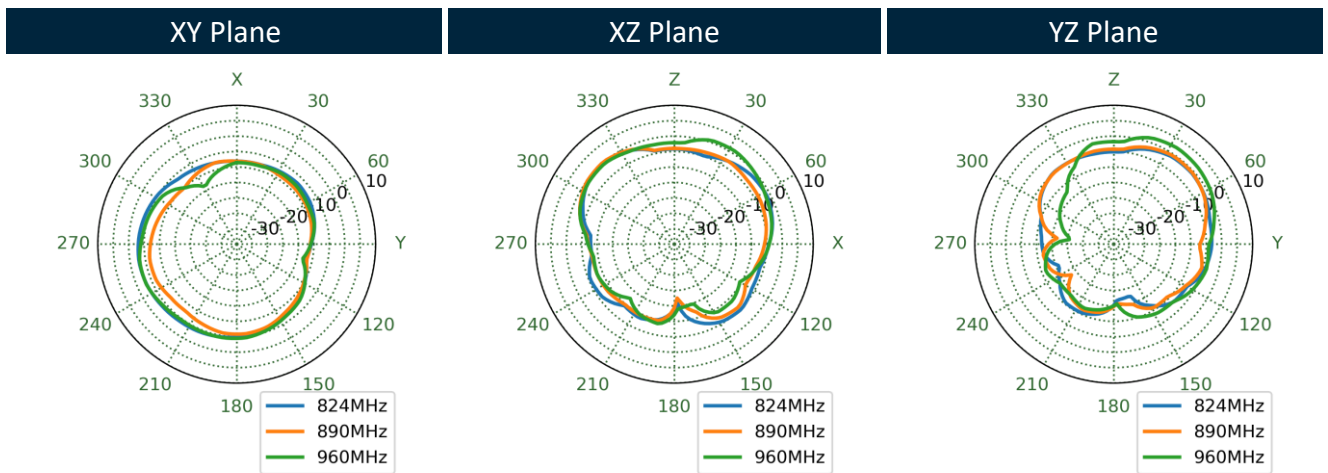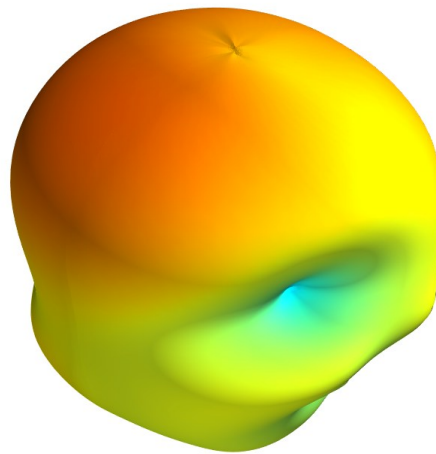


1470MHz


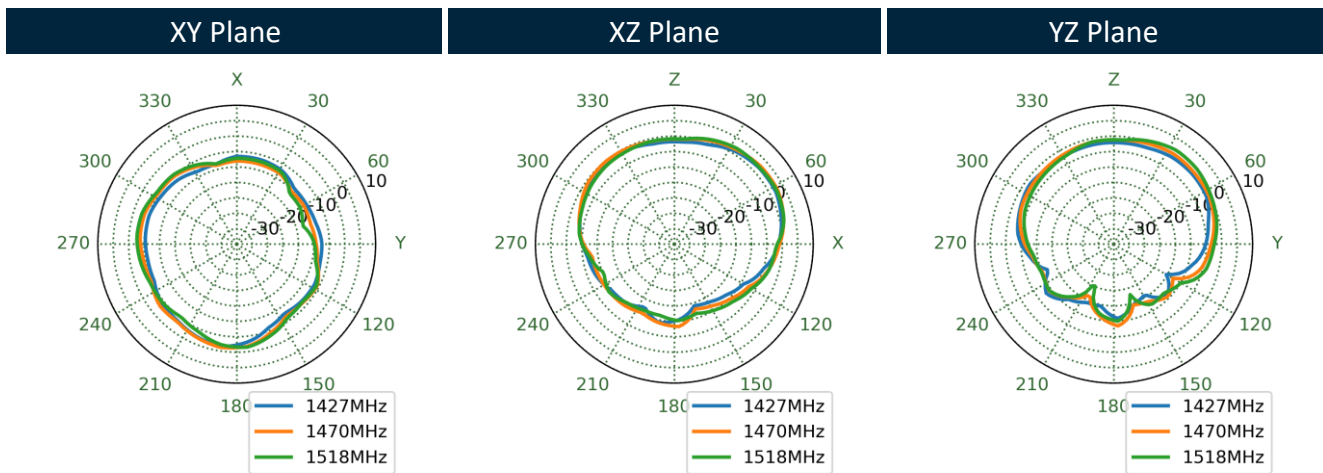
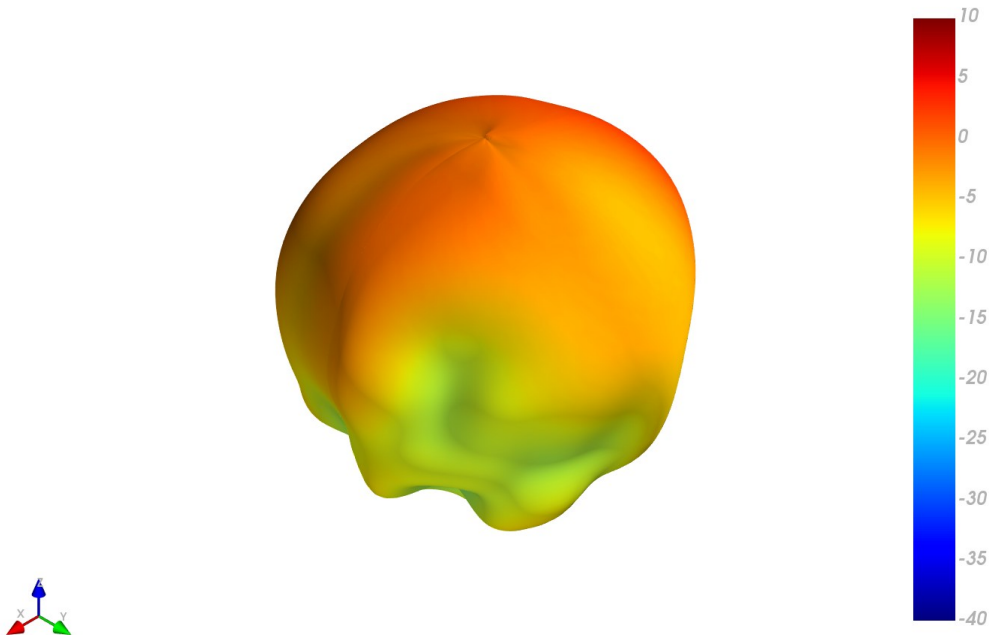






1805MHz

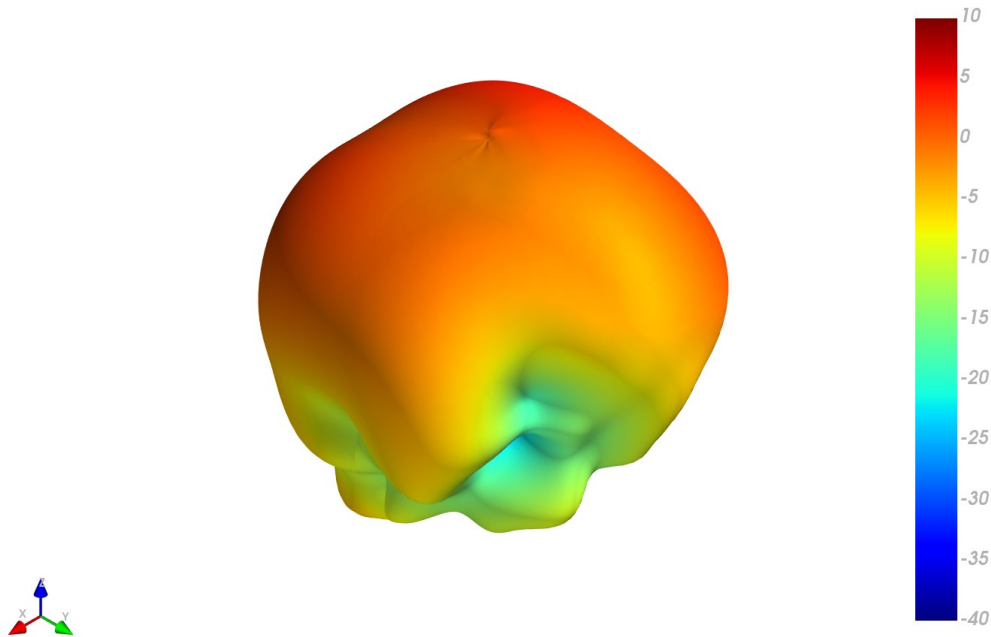



XY Plane      XZ Plane      YZ Plane

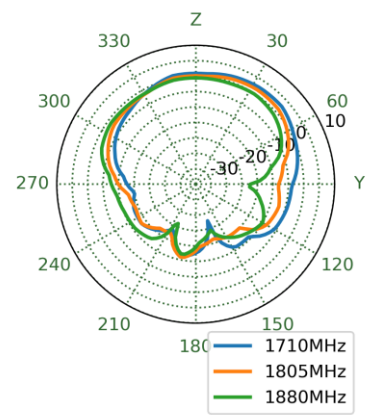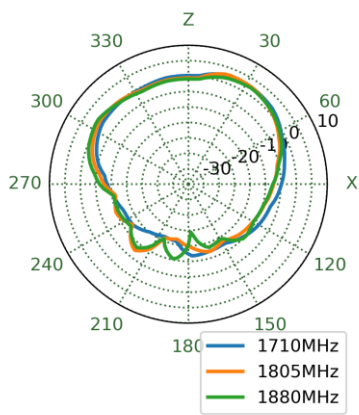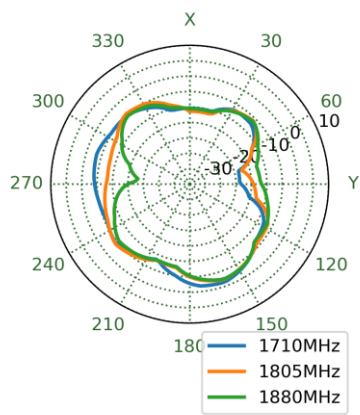



1920MHz

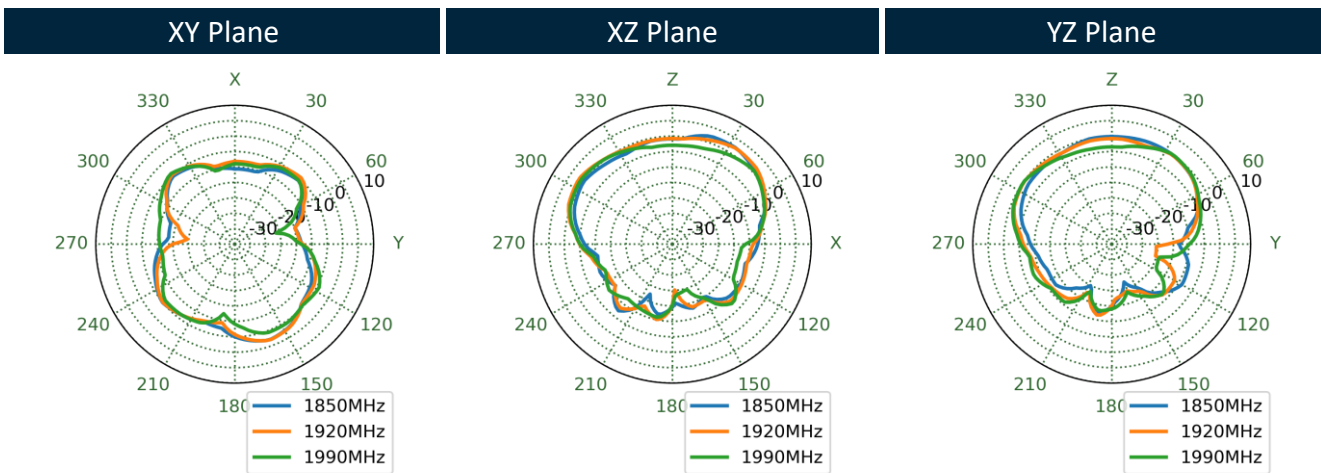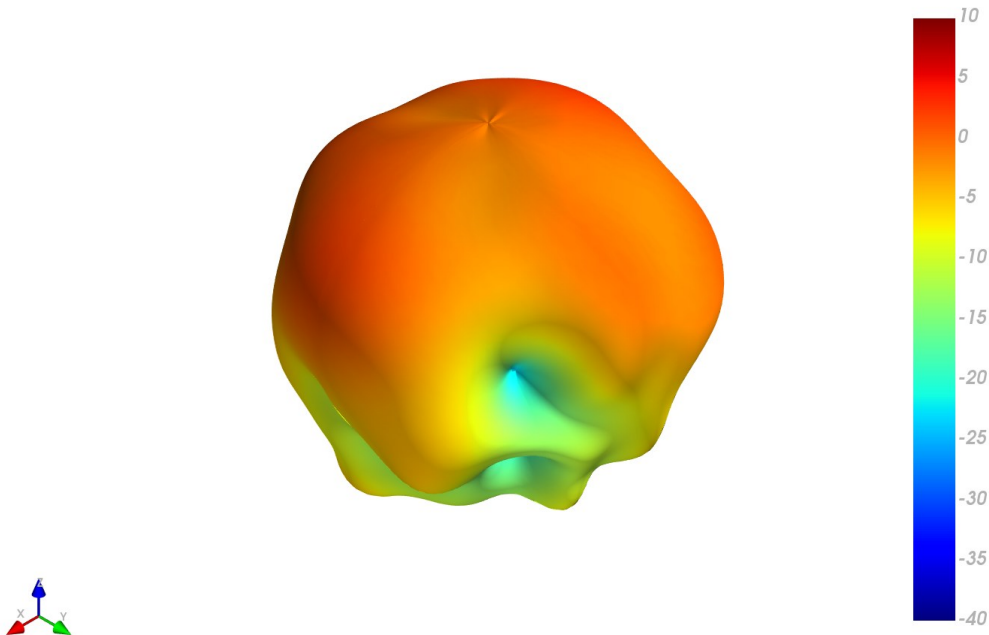



1990MHz

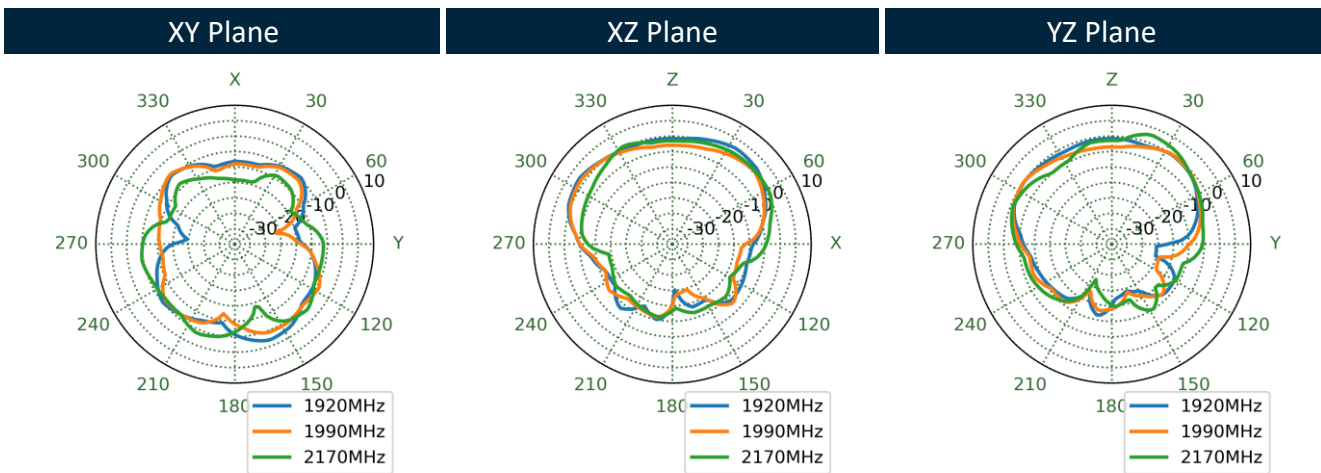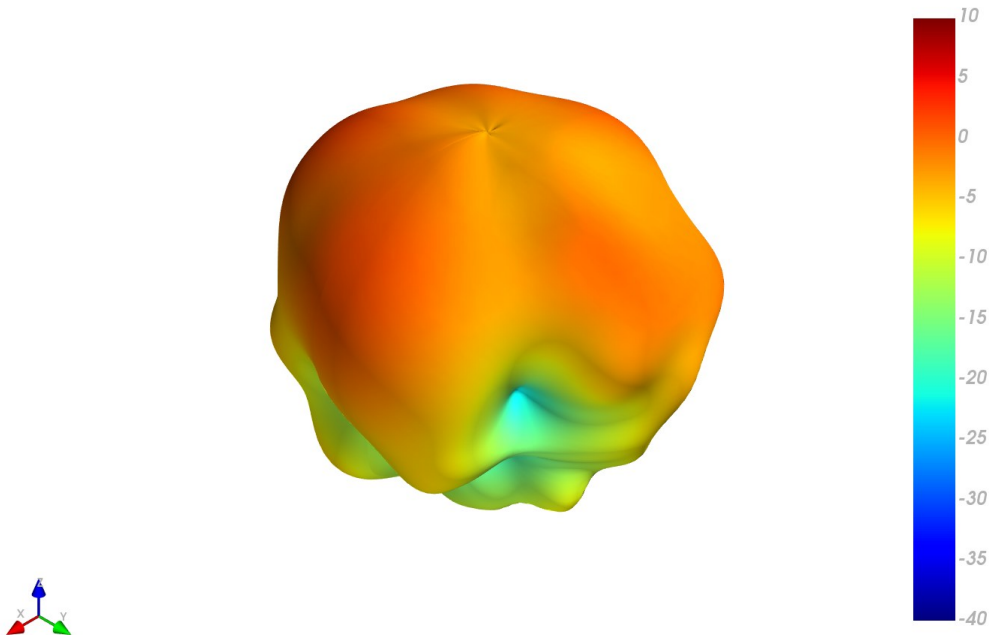


2595MHz

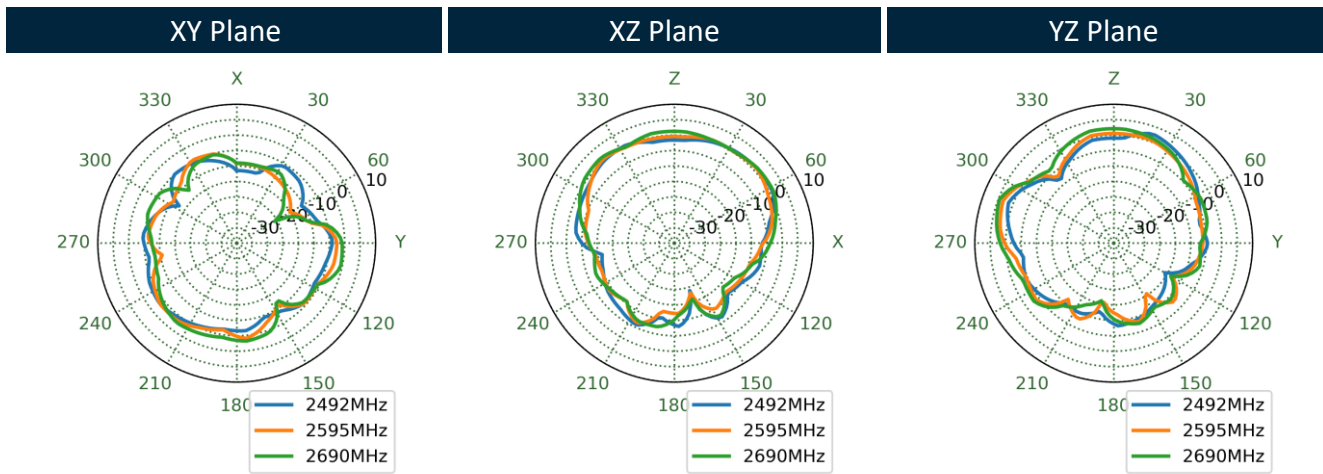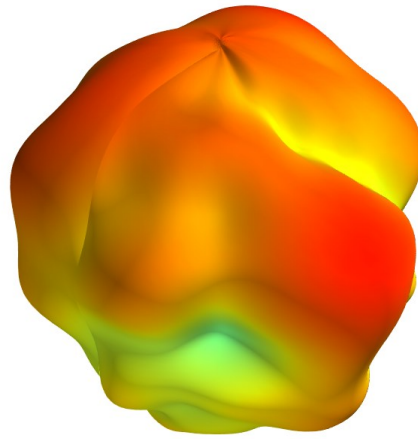




3550MHz

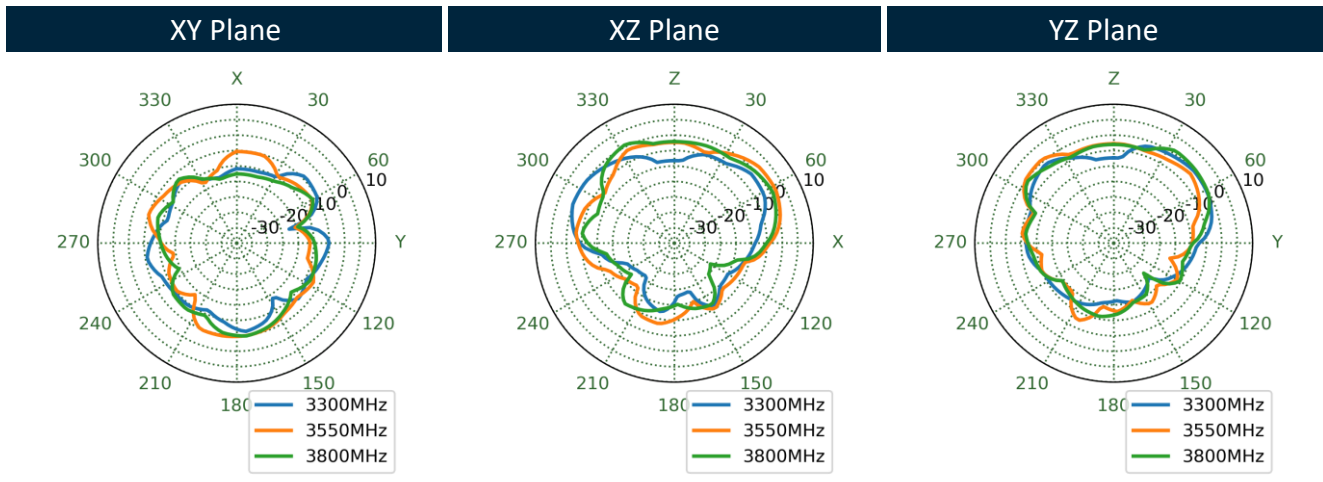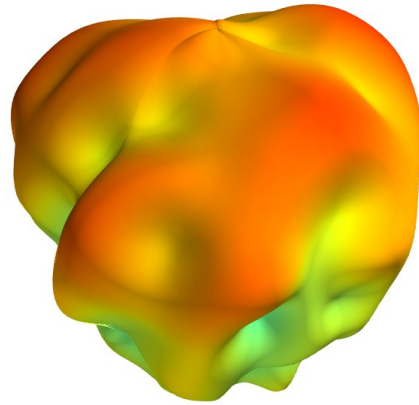

5530MHz


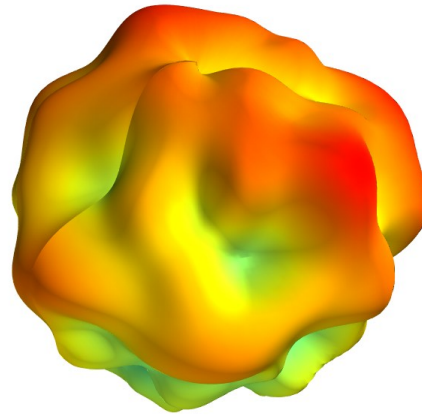


XY Plane      XZ Plane      YZ Plane

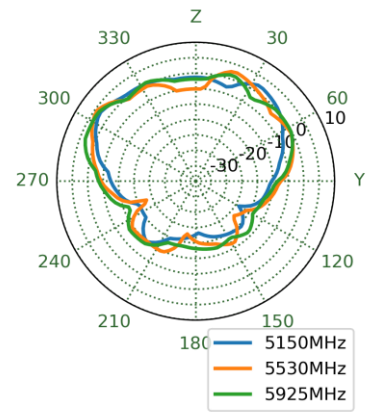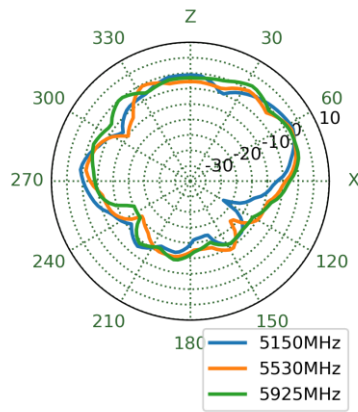
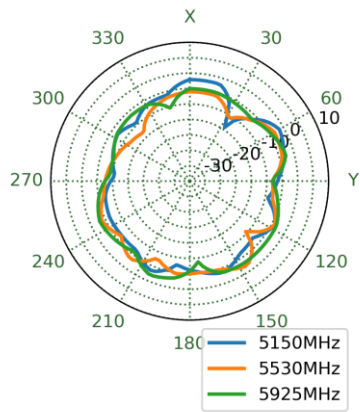


5.5 5G/4G MIMO 4 Radiation Pattern

652MHz

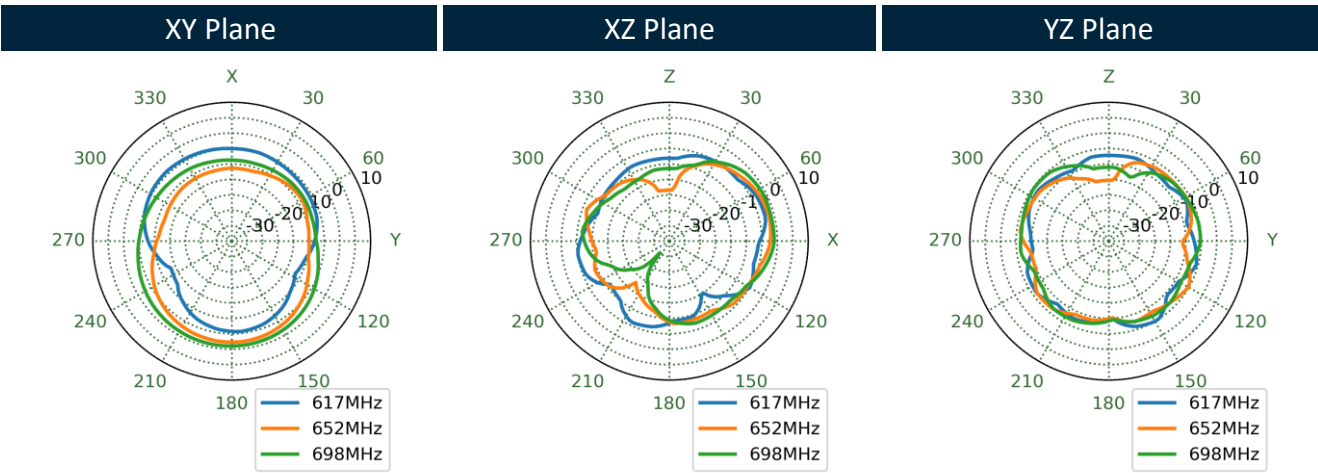
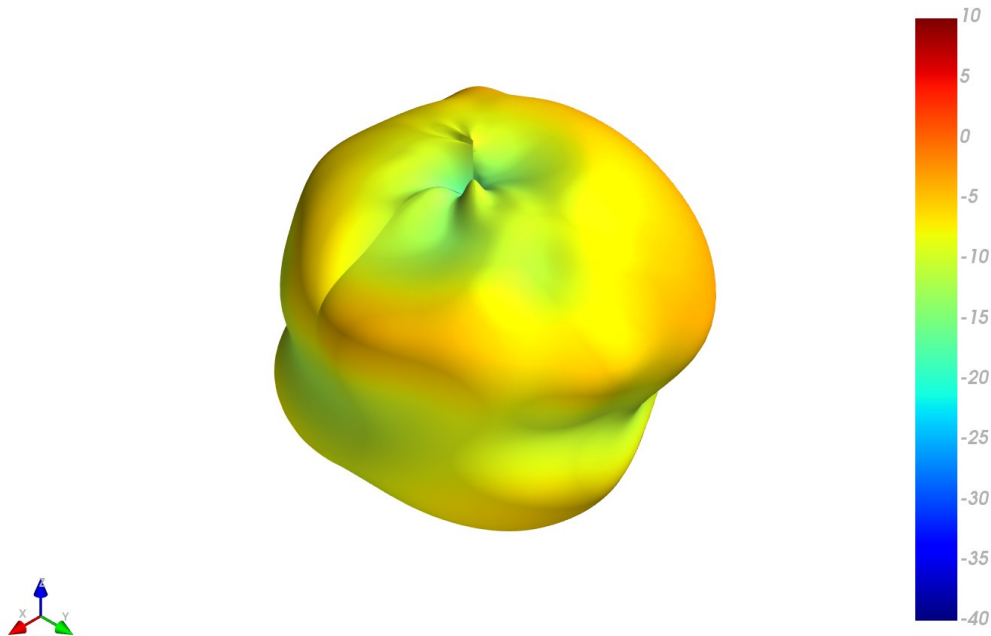


751MHz

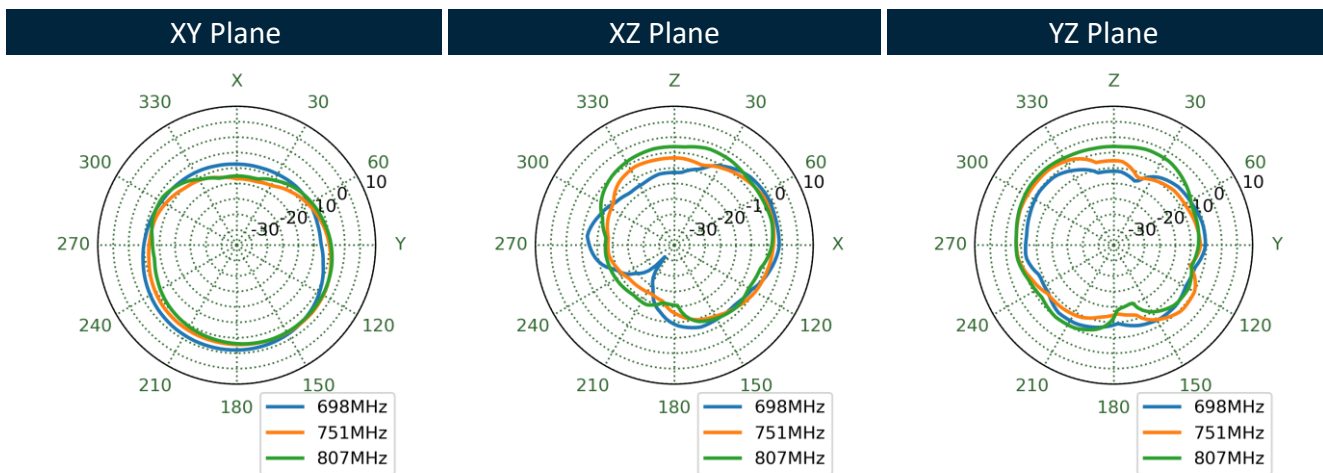
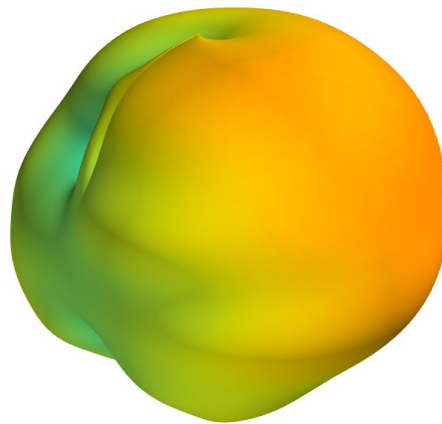






890MHz

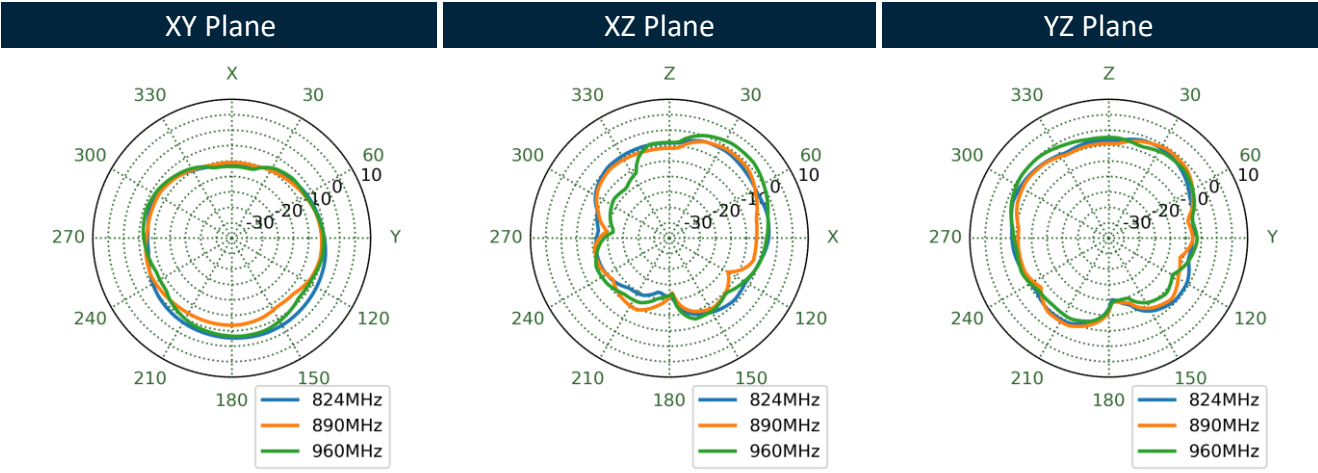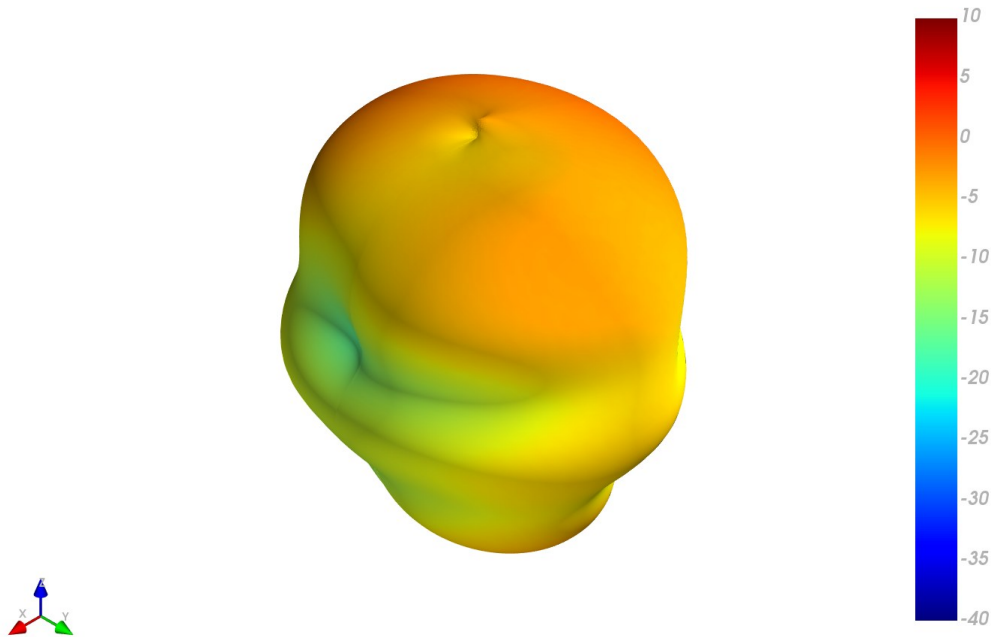



1470MHz

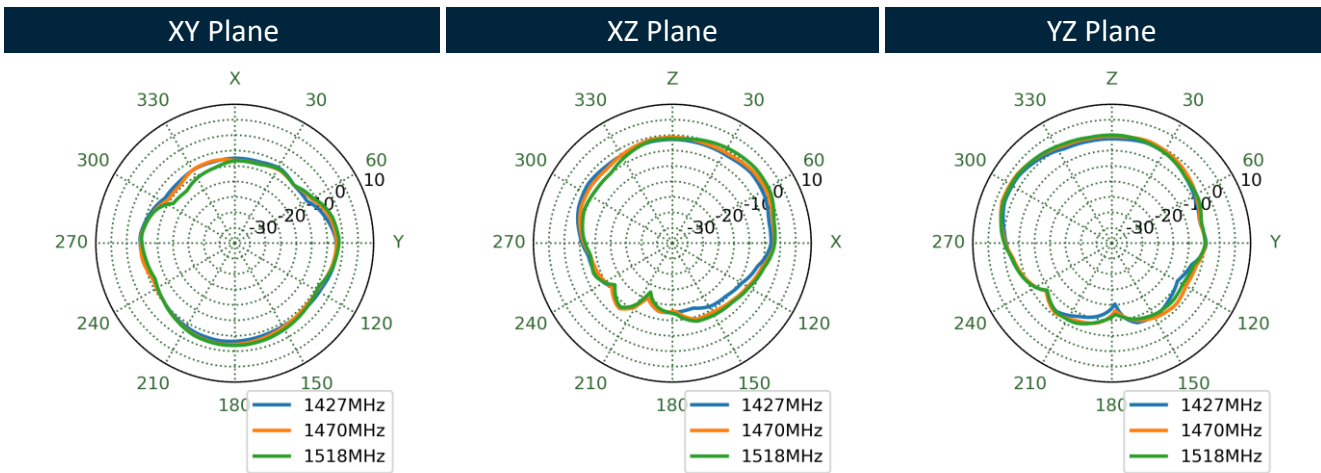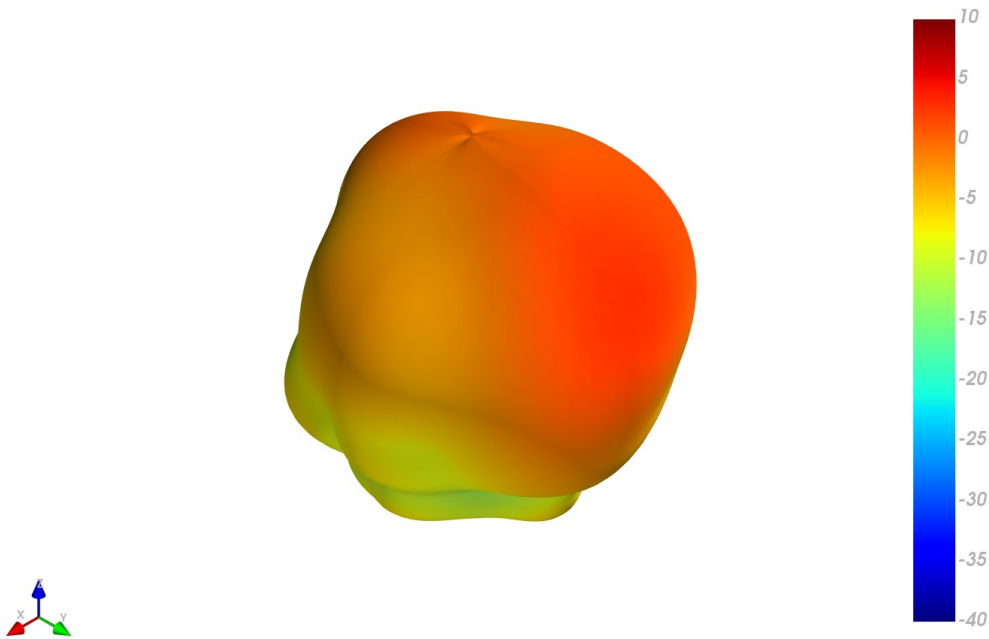



1805MHz

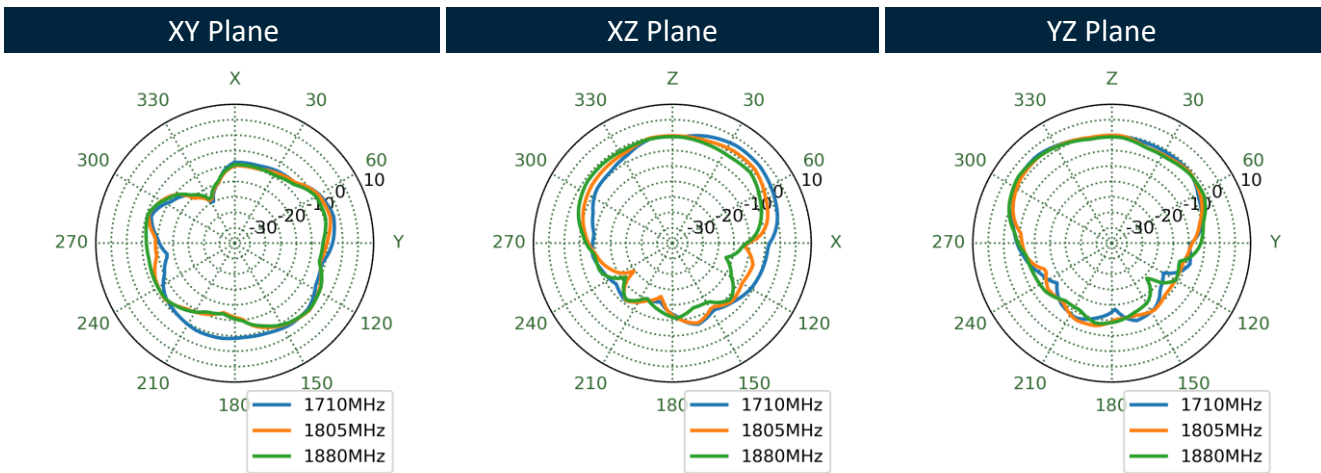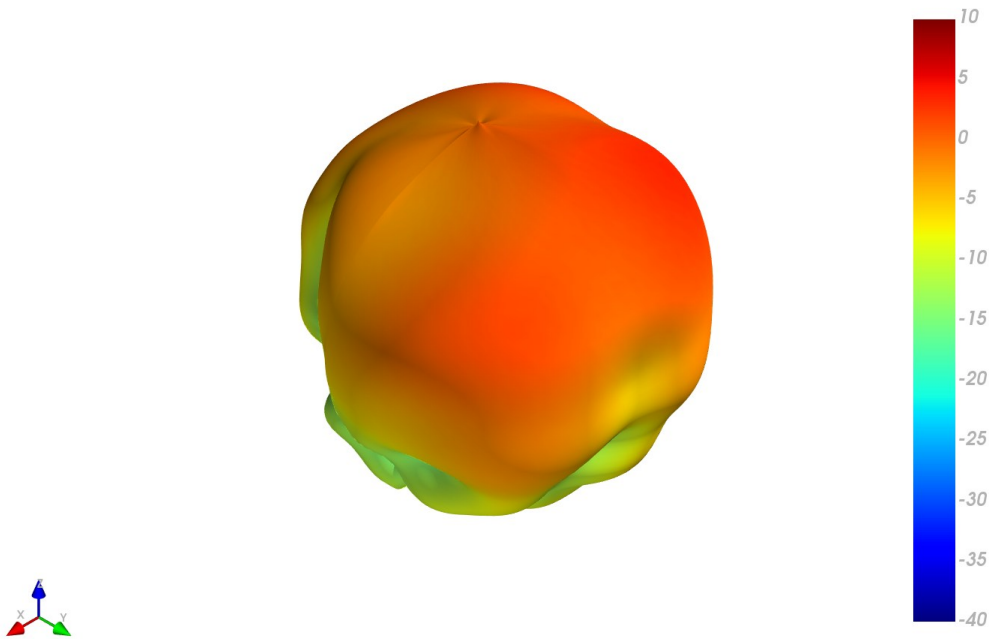



1920MHz

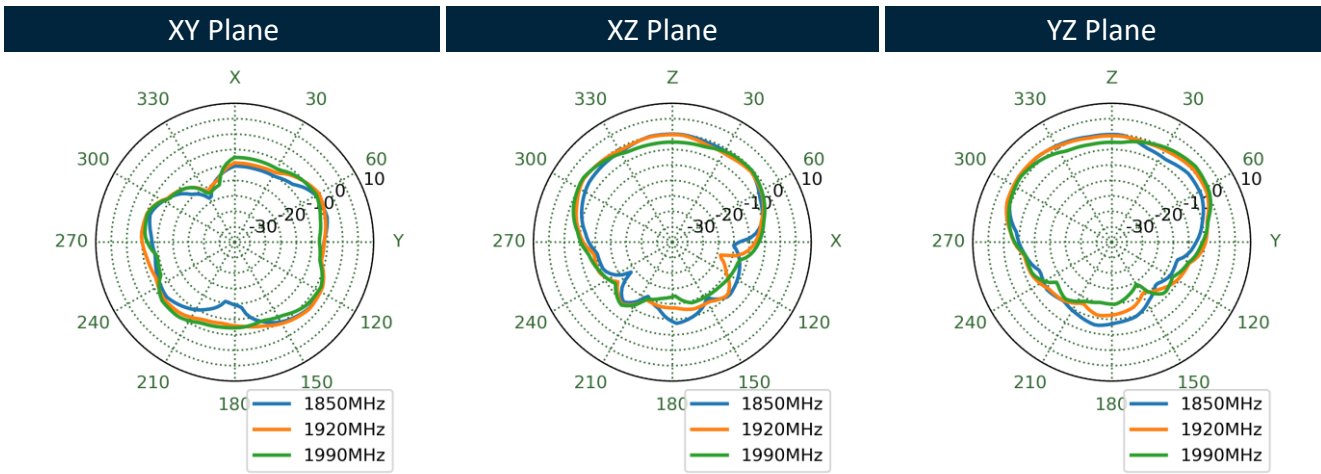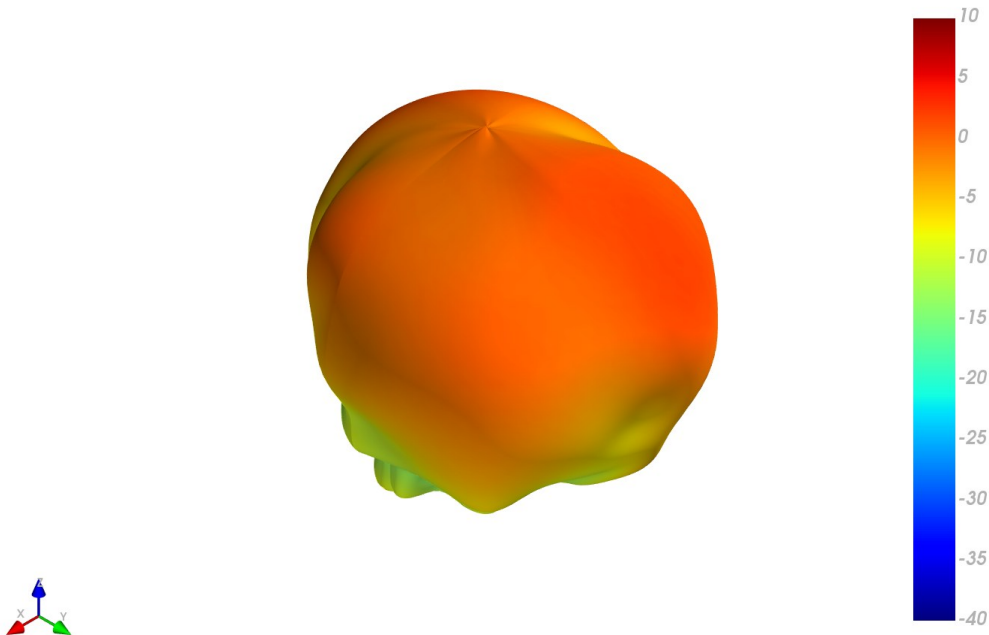


1990MHz

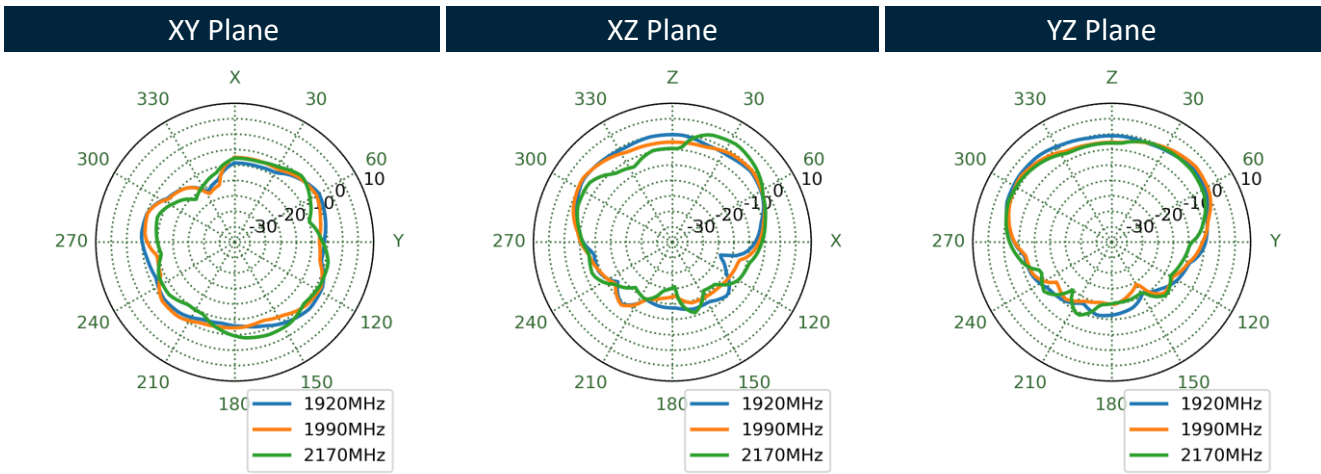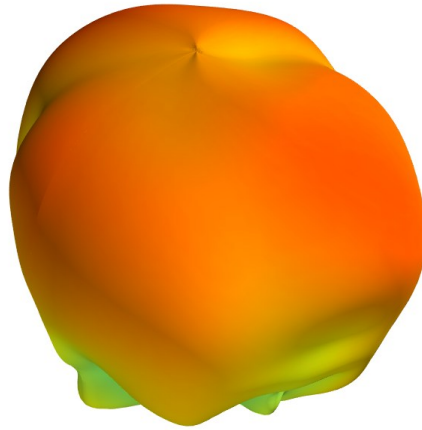




2595MHz

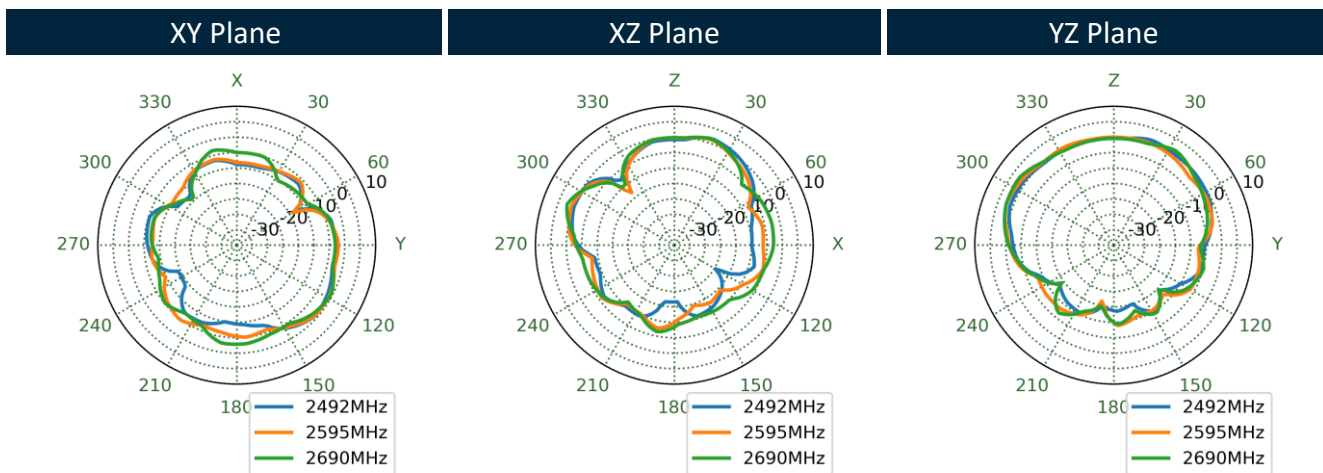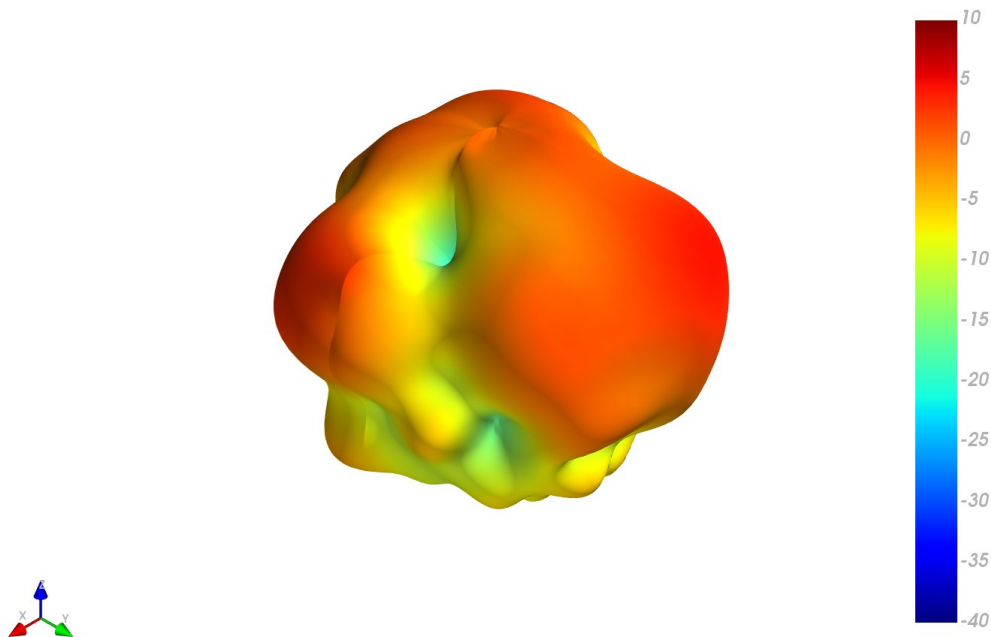



3550MHz

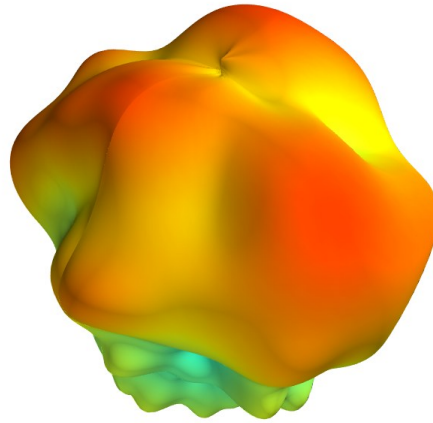

XY Plane      XZ Plane      YZ Plane

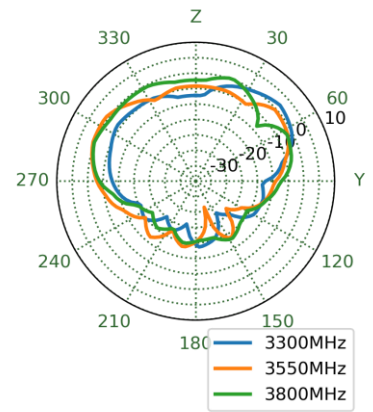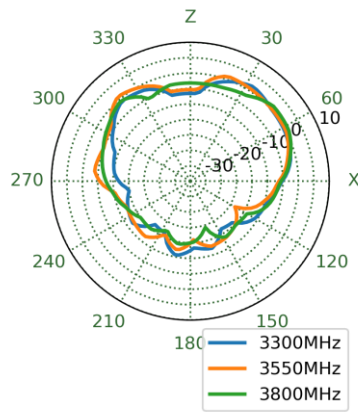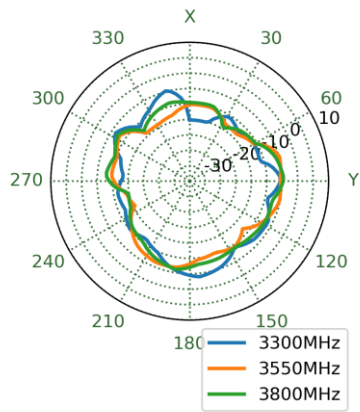



5530MHz

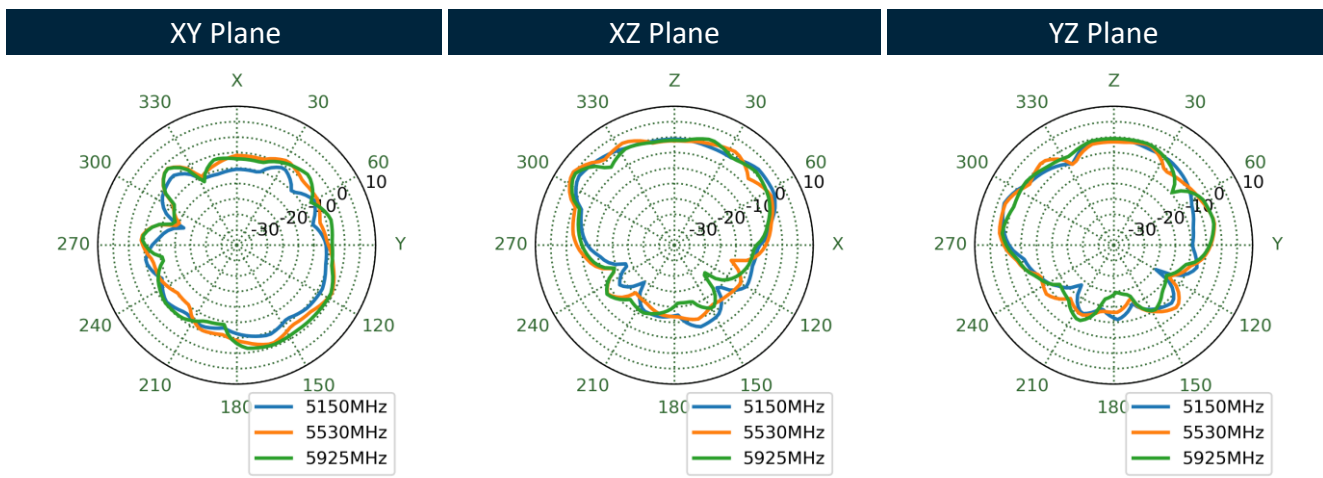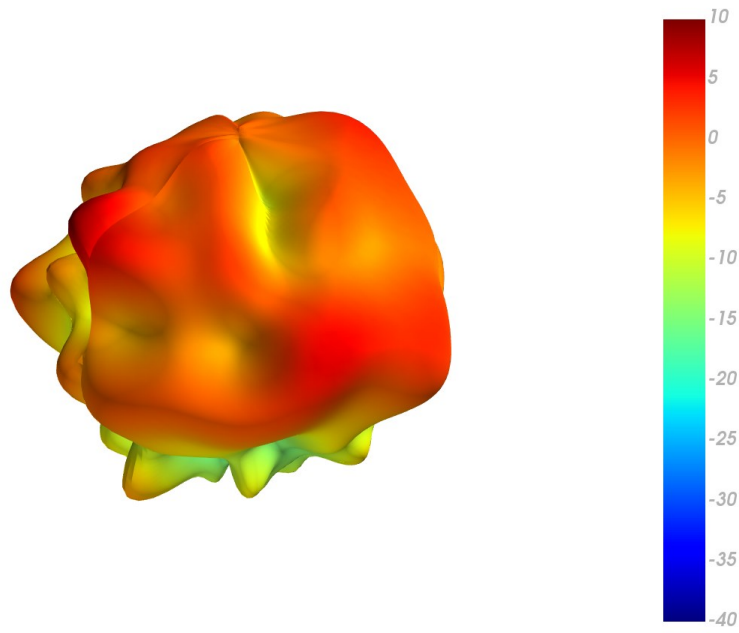





5.6 5G/4G MIMO 5 Radiation Pattern



652MHz

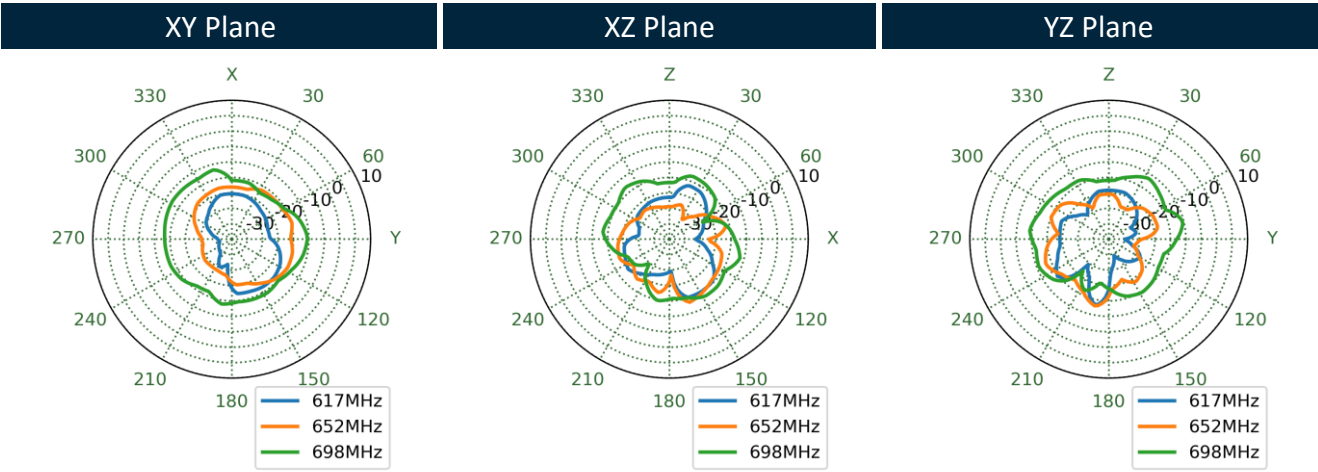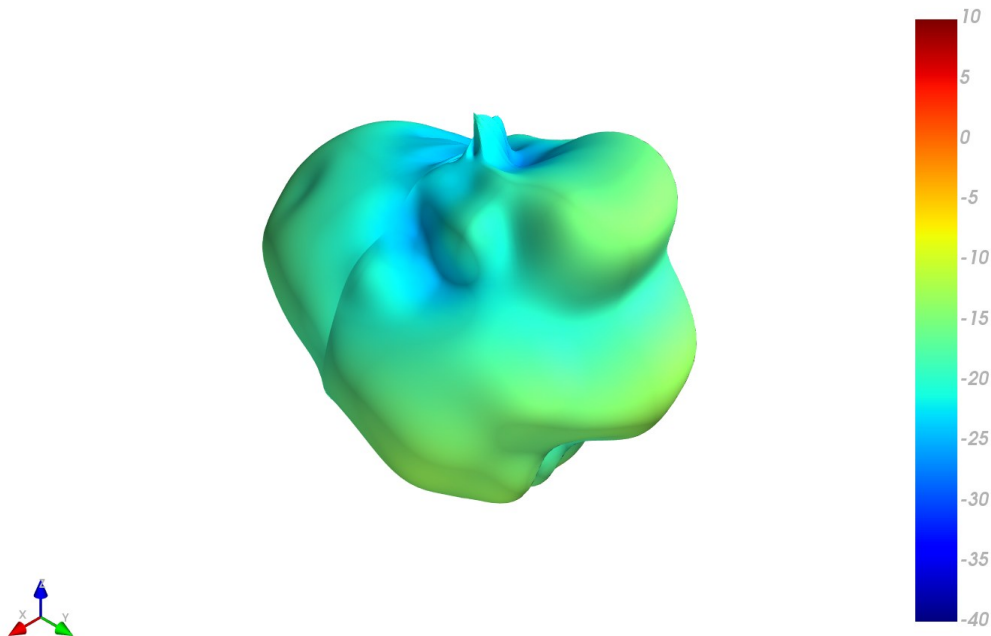



751MHz

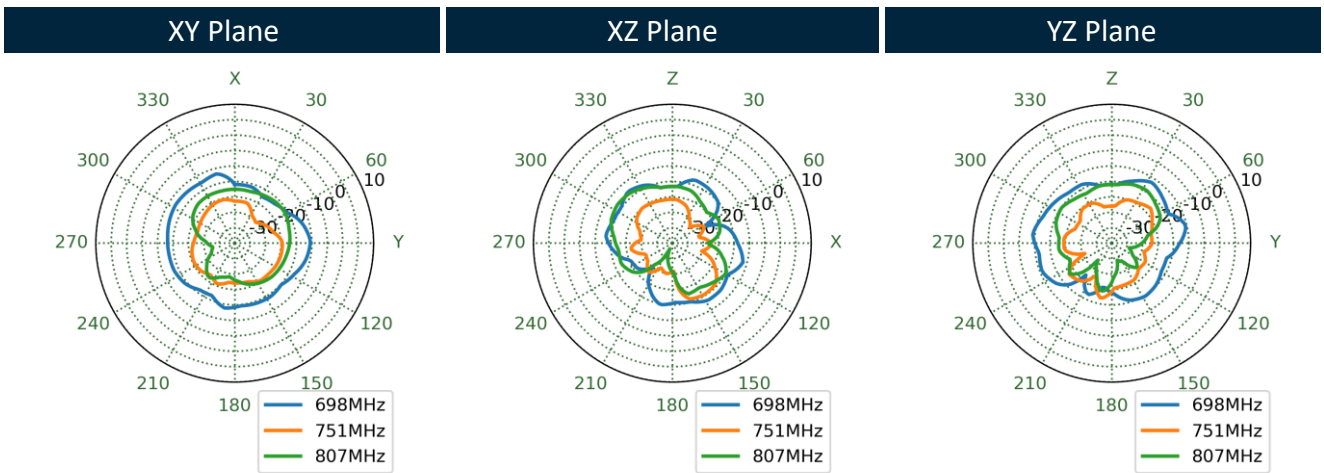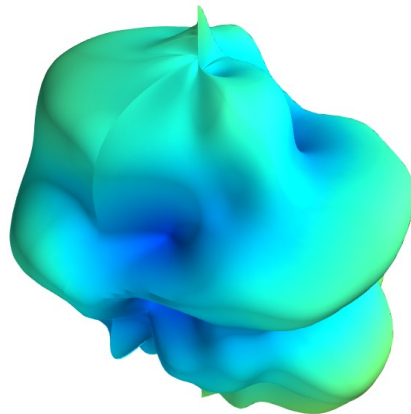



890MHz

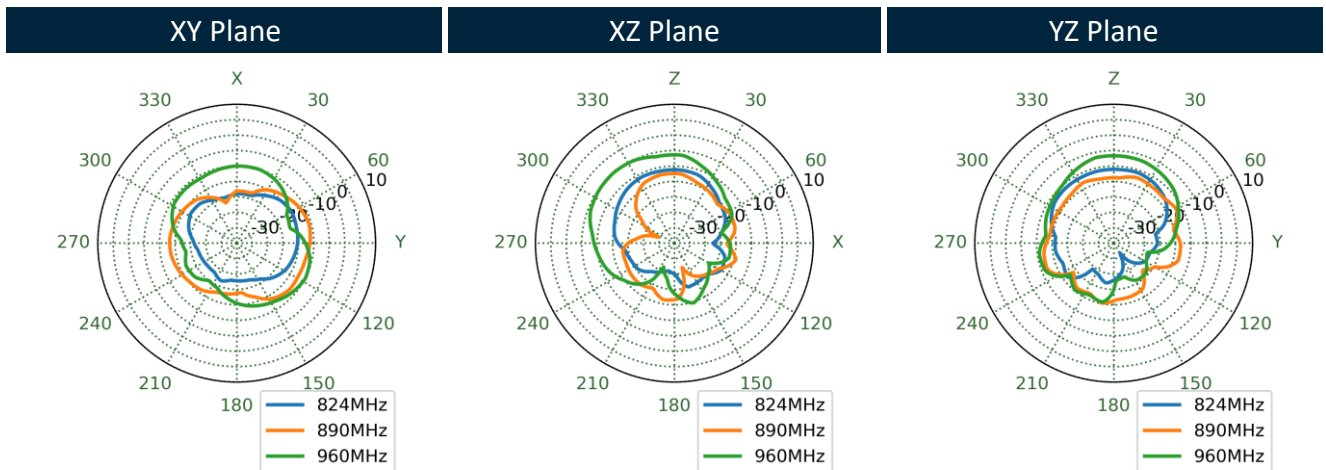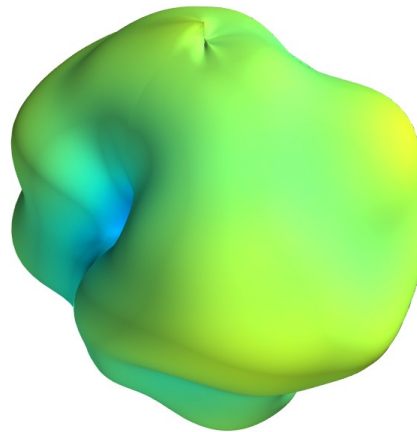



1470MHz

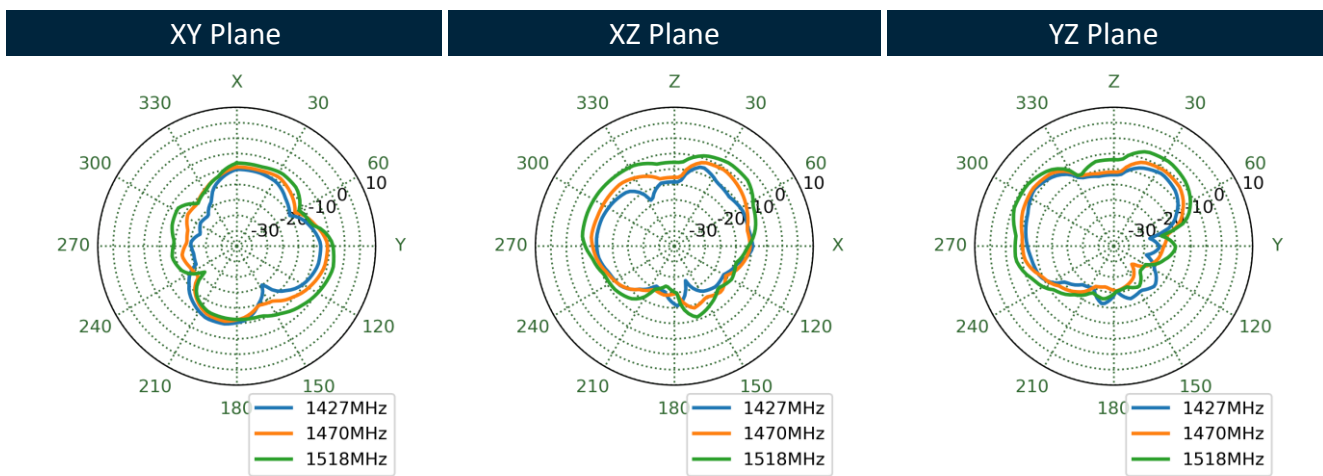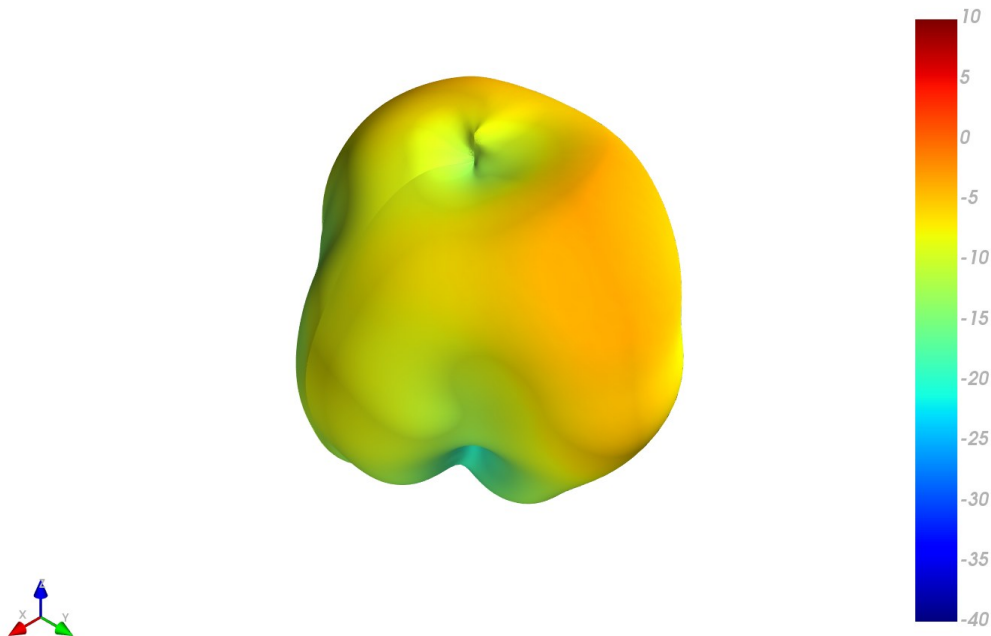



1805MHz

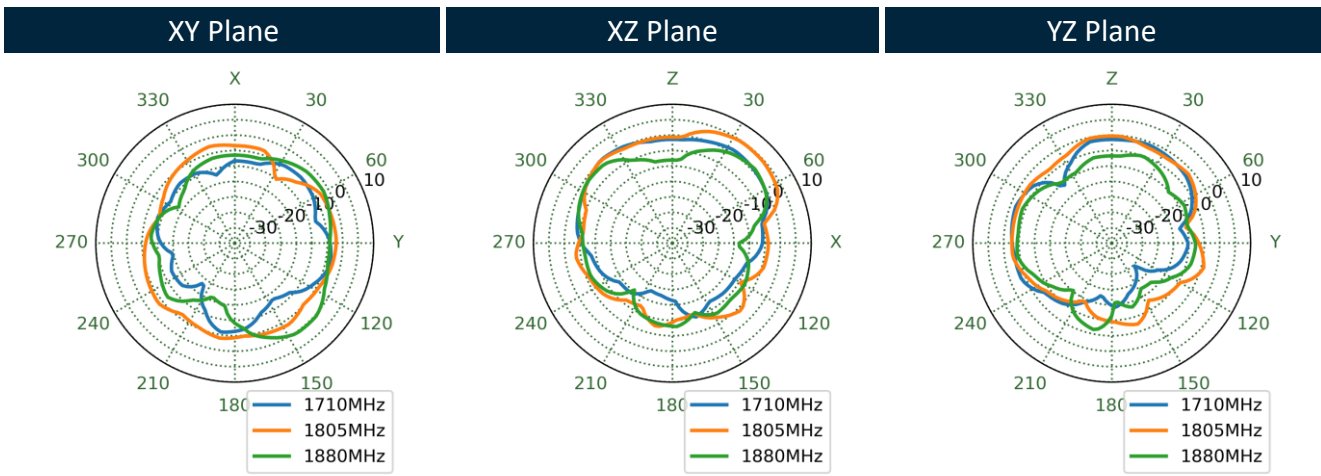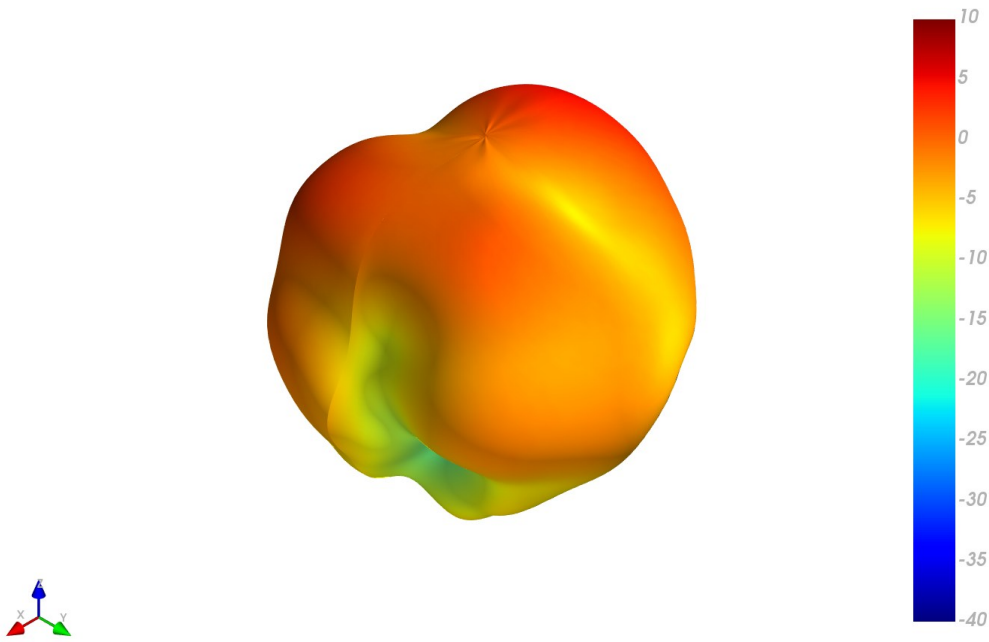



1920MHz

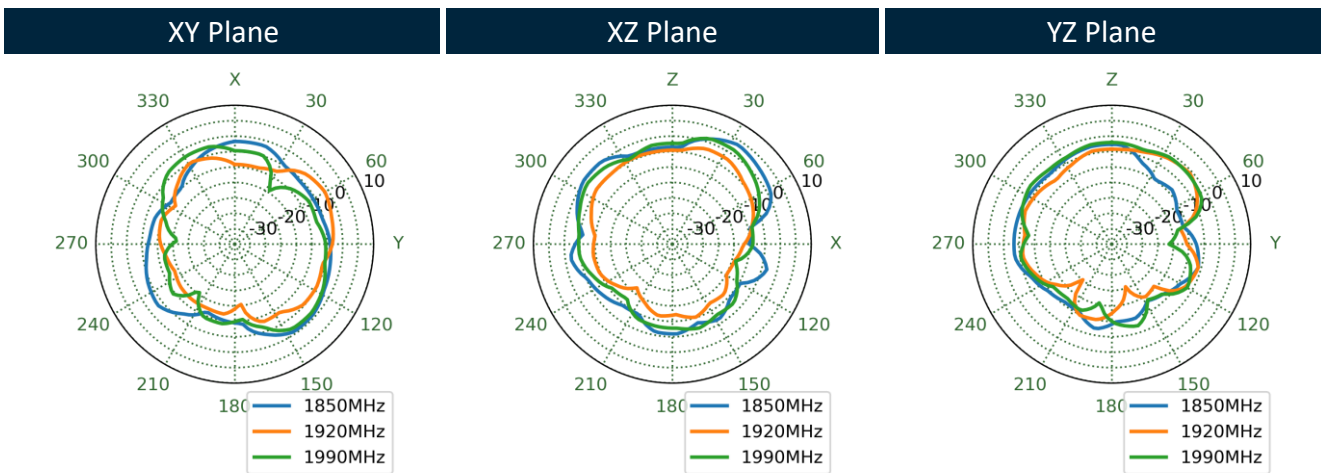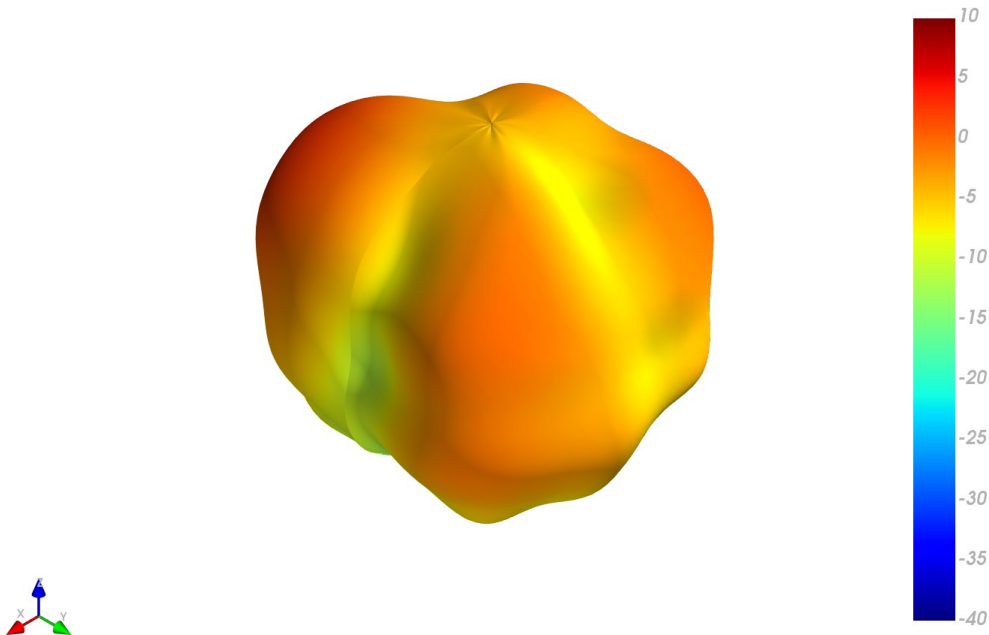

1990MHz

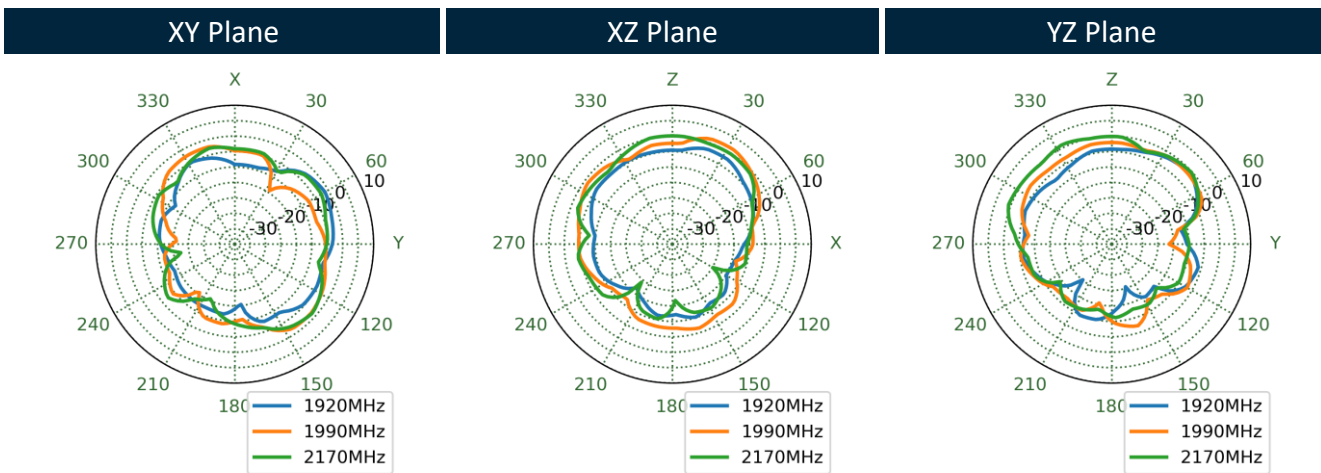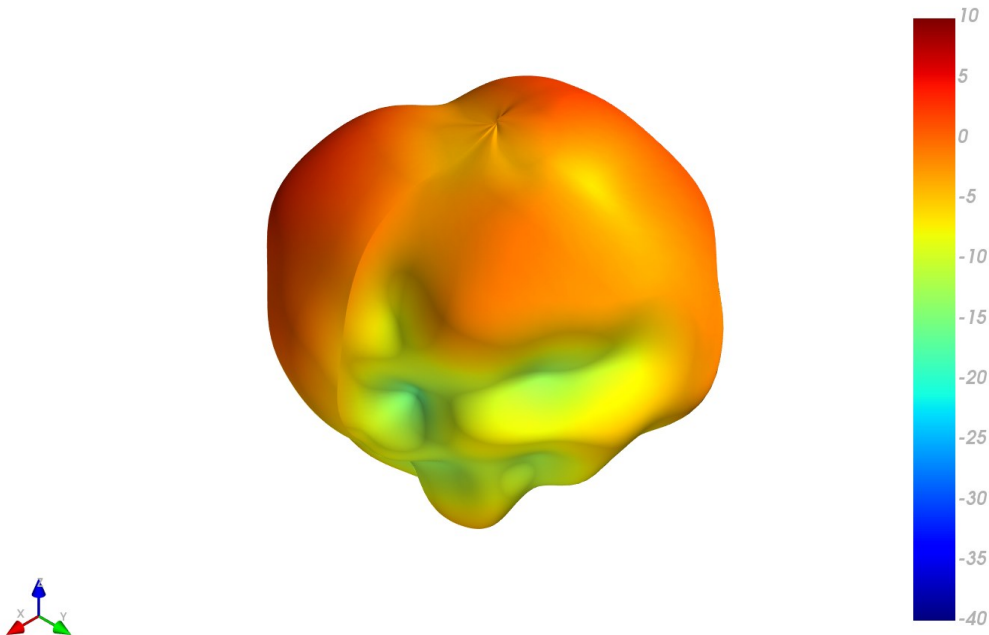


2595MHz


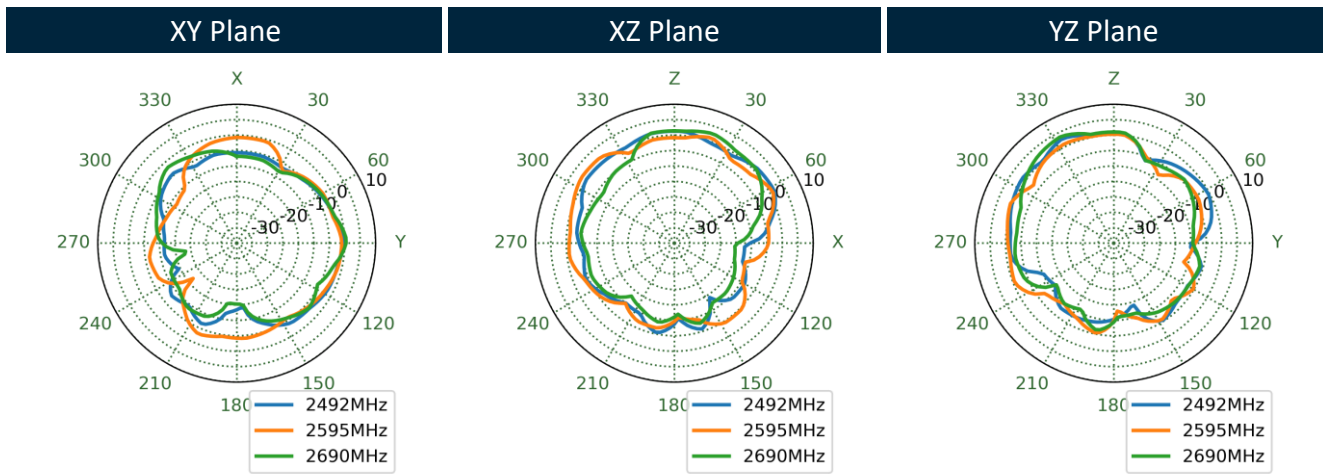
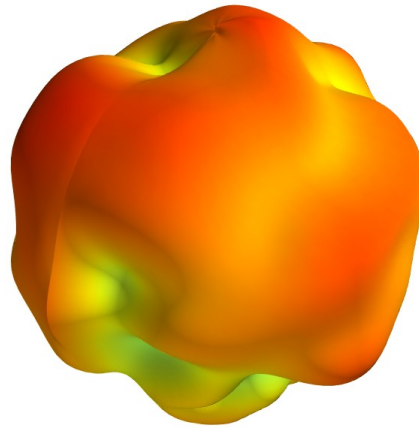






3550MHz

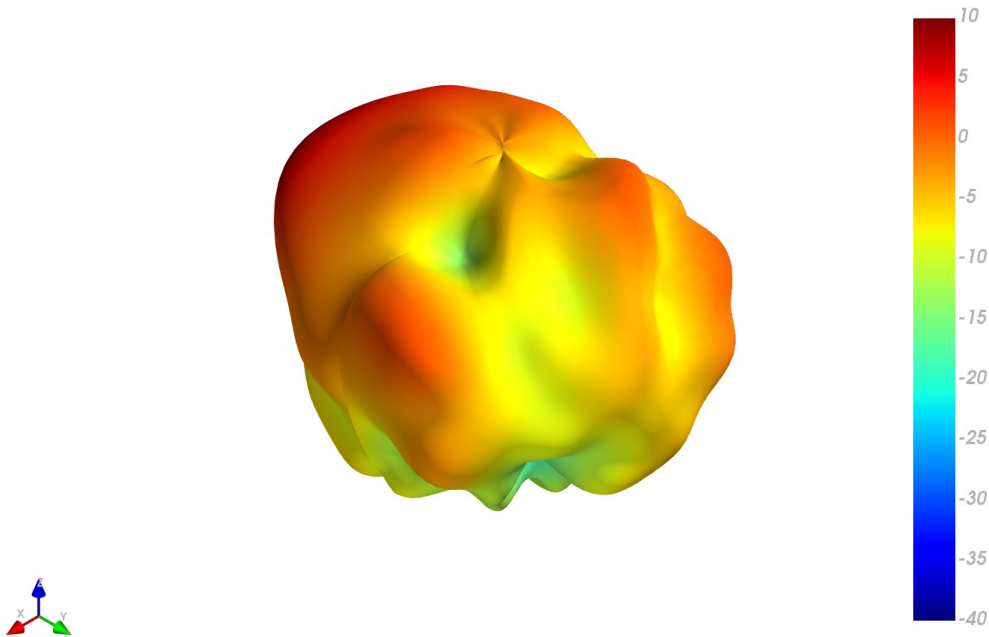

XY Plane XZ Plane YZ Plane

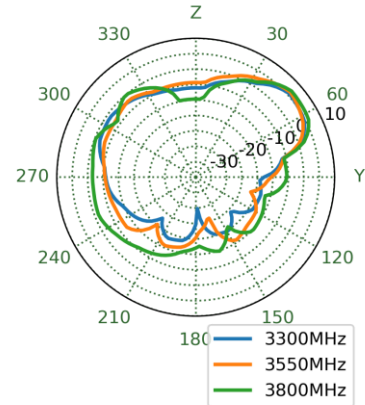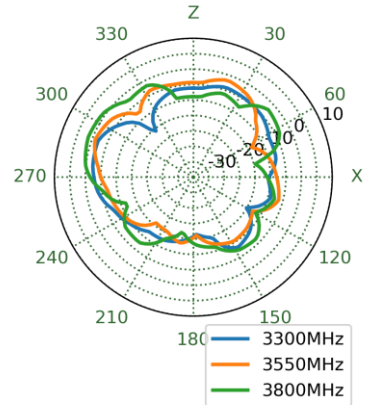
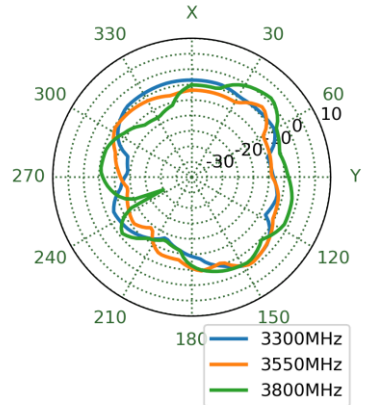


5530MHz

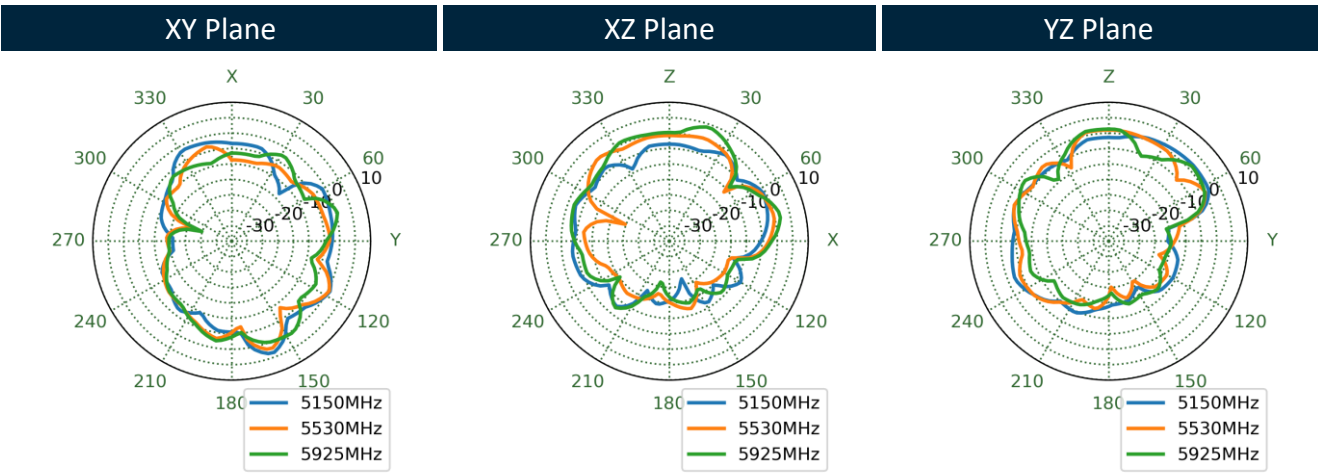
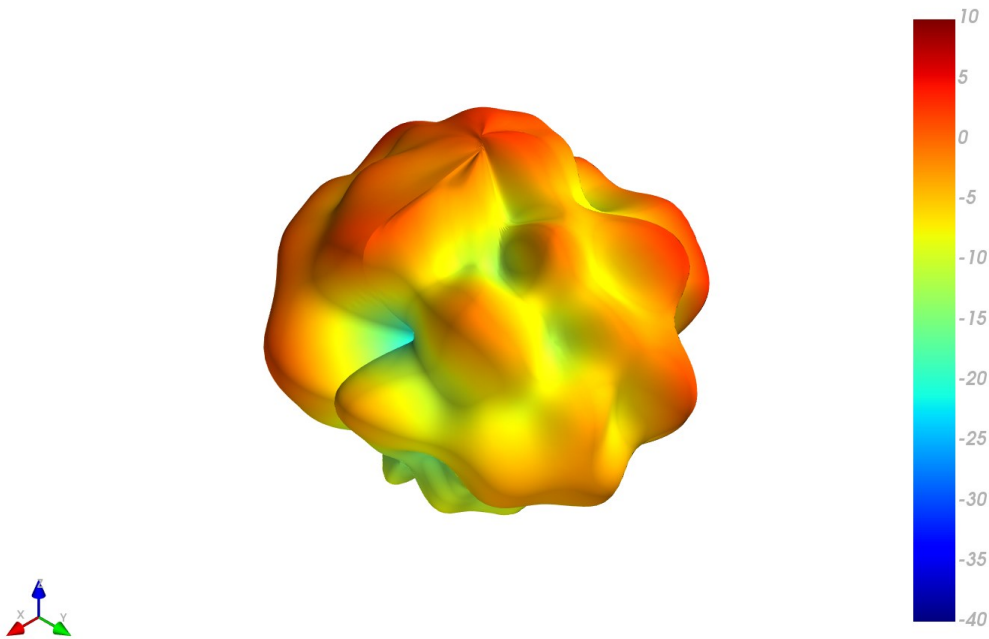


## 5.7 Wi-Fi MIMO 1 Radiation Pattern

2450MHz

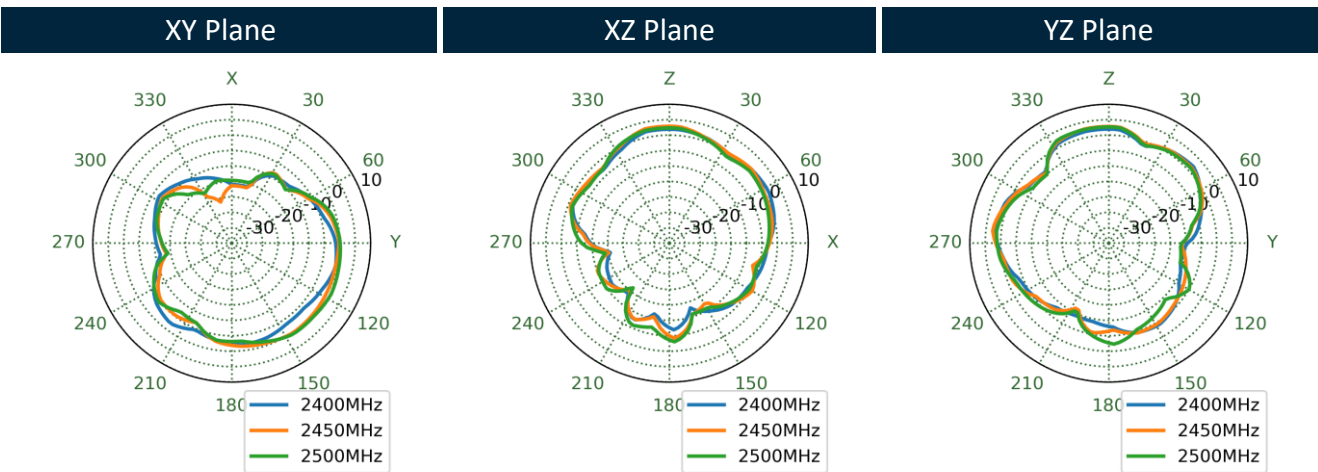
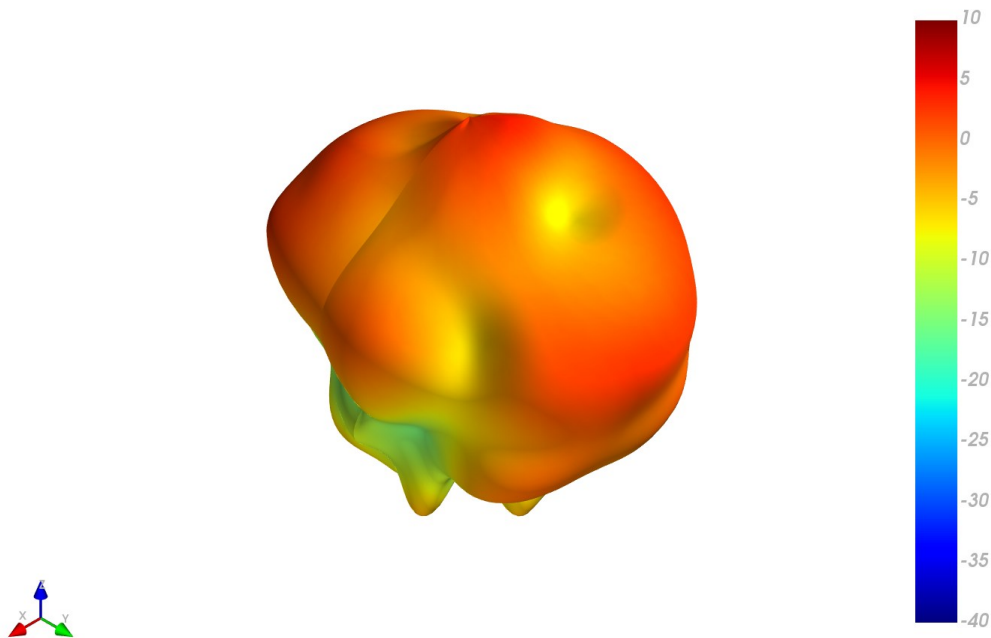


5550MHz

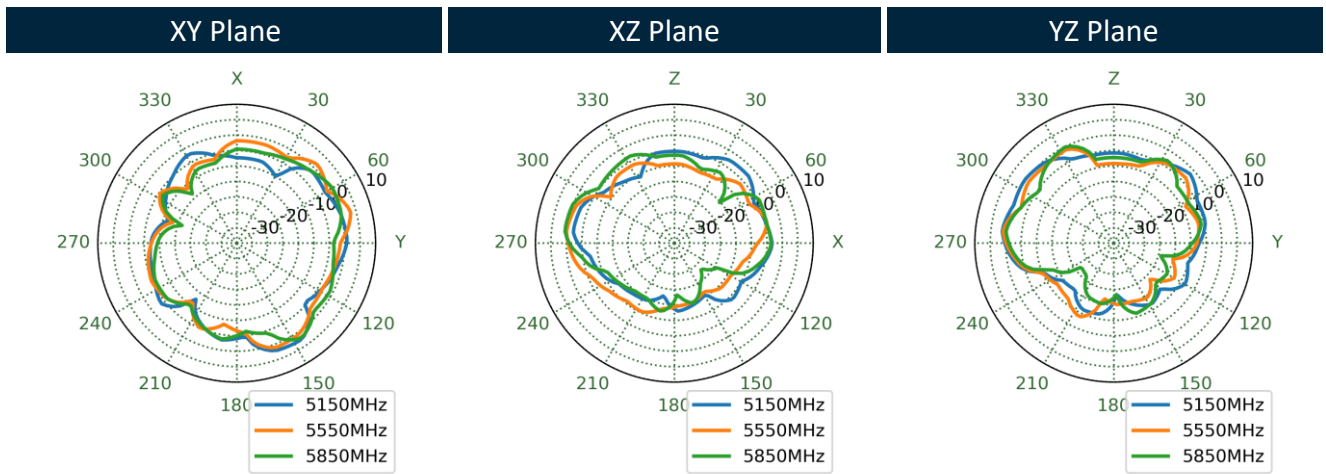
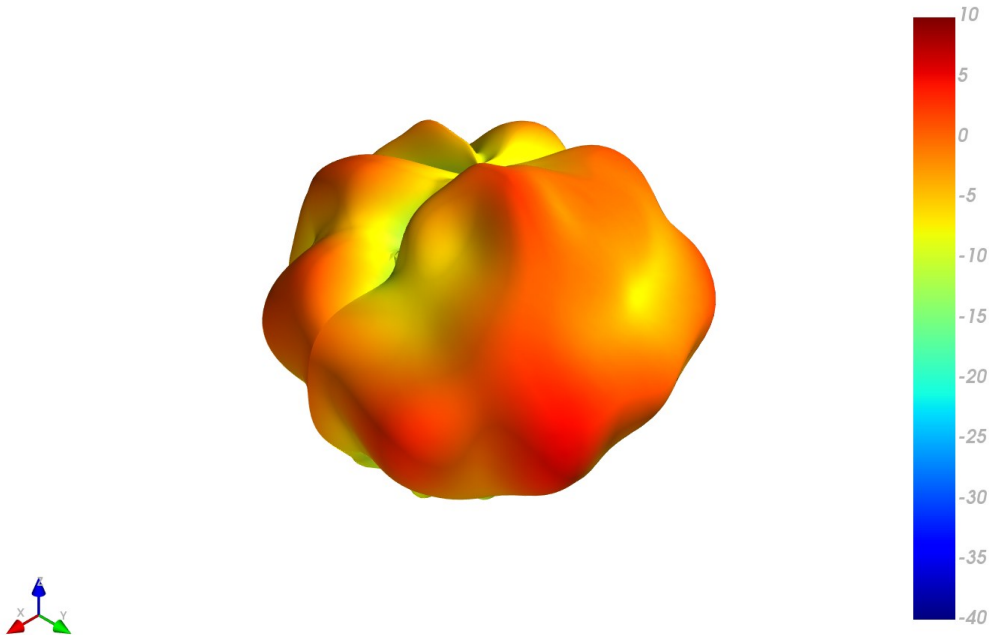


5.8 Wi-Fi MIMO 2 Radiation Pattern

2450MHz

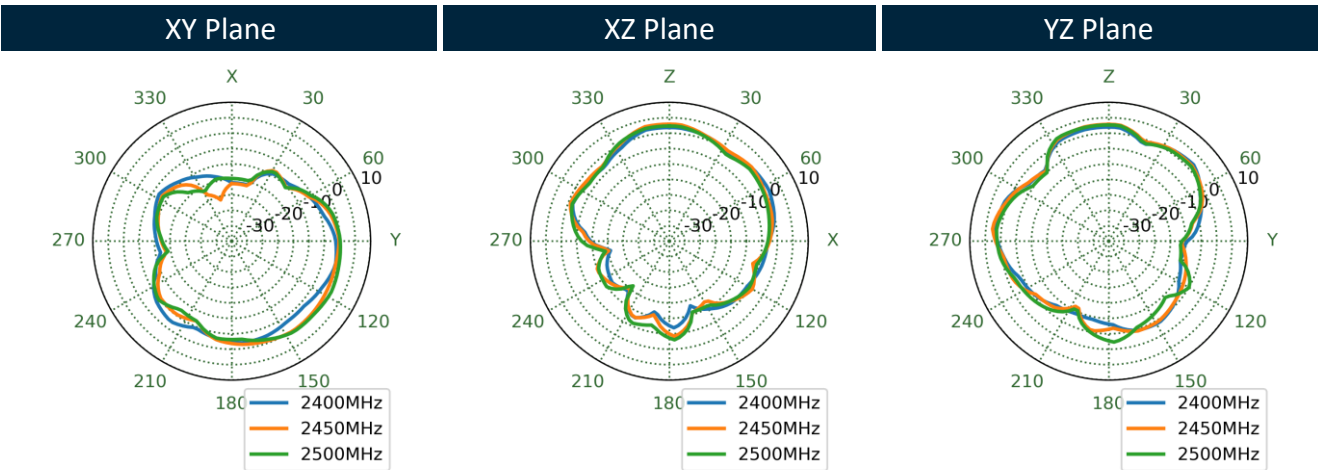
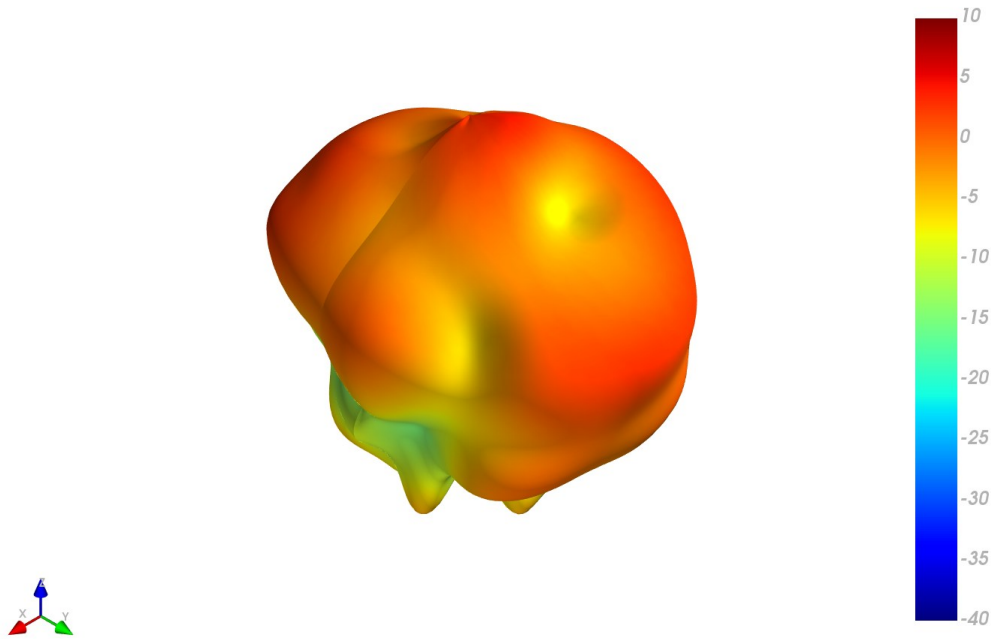


5550MHz

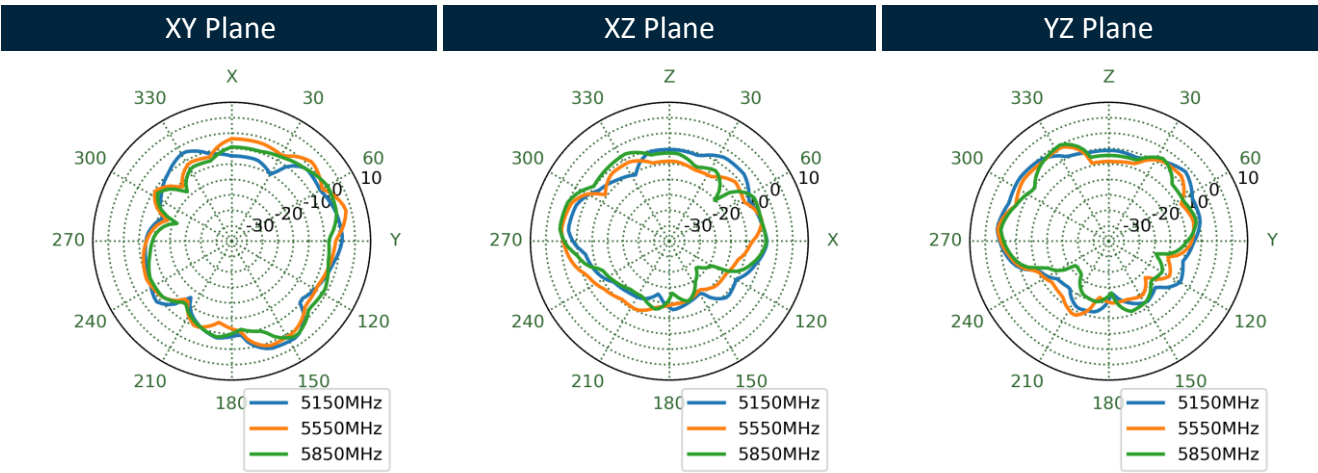
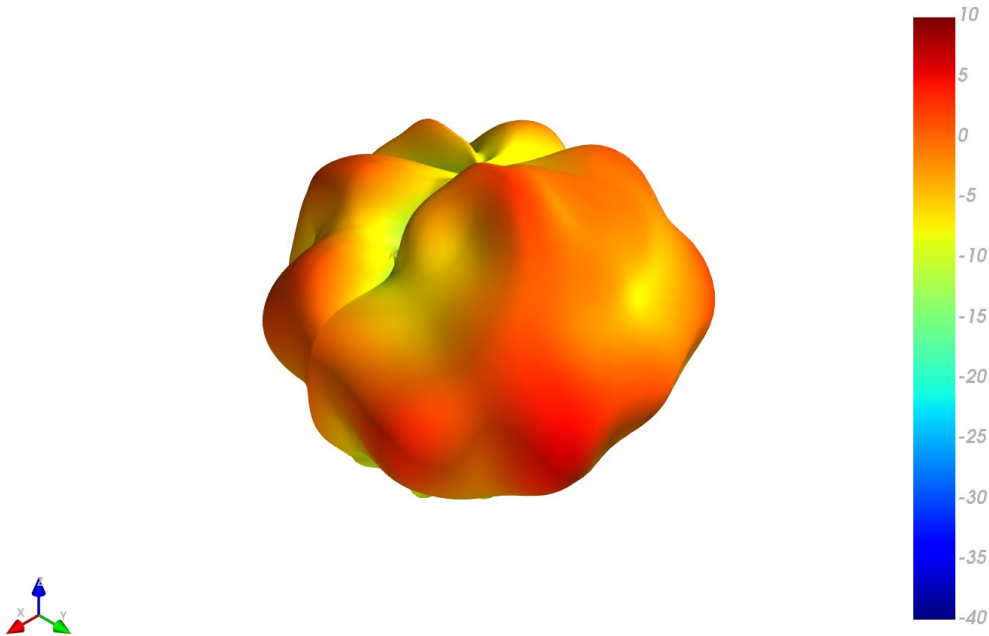


5.9 Wi-Fi MIMO 3 Radiation Pattern

2450MHz

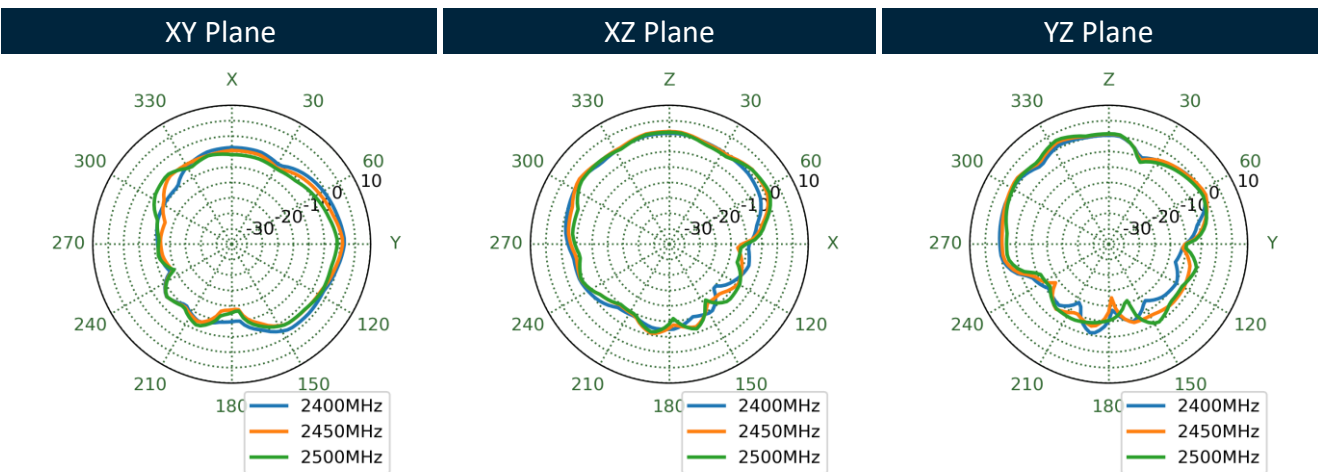
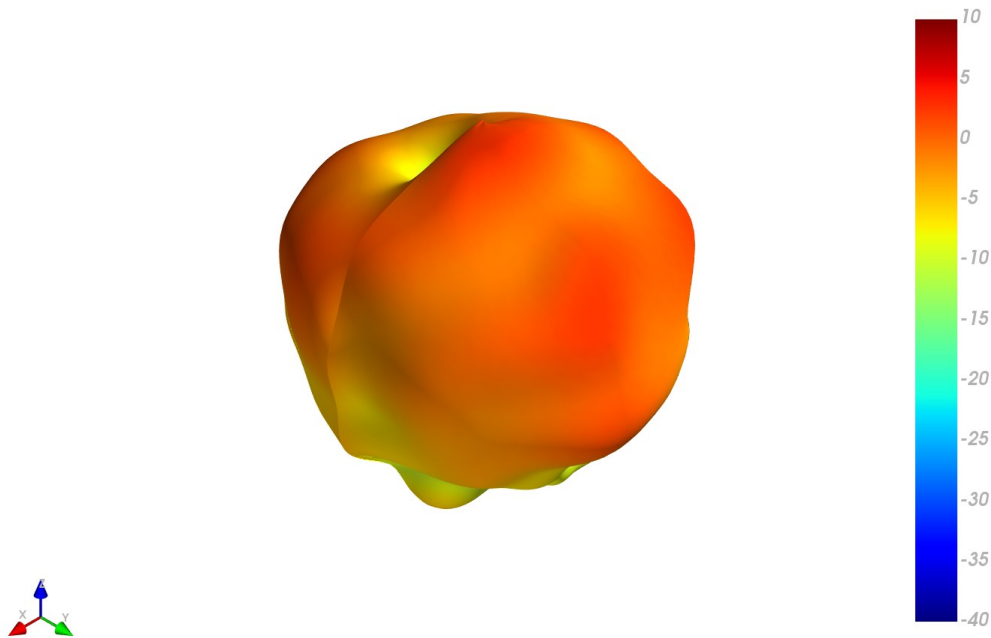


5550MHz

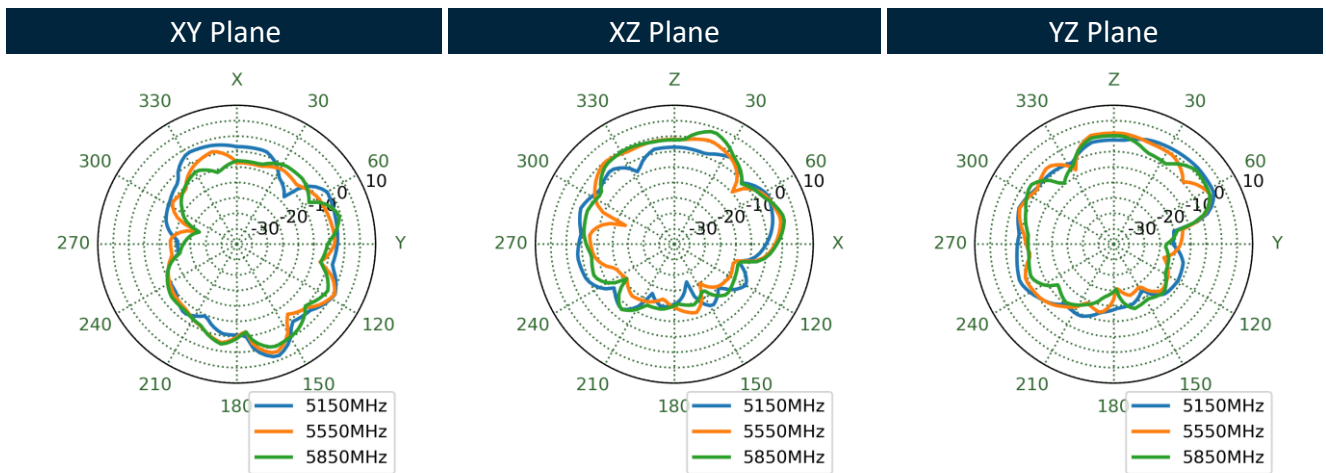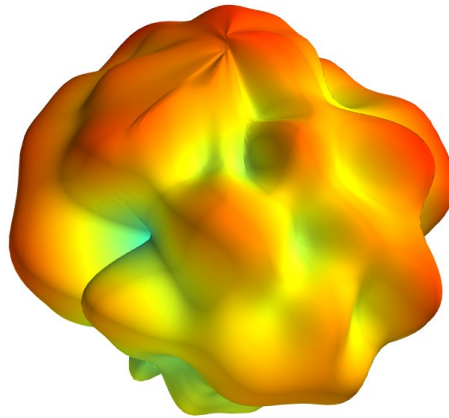




## 6. Mechanical Drawing (Units: mm)

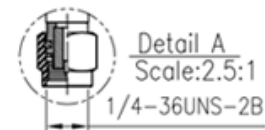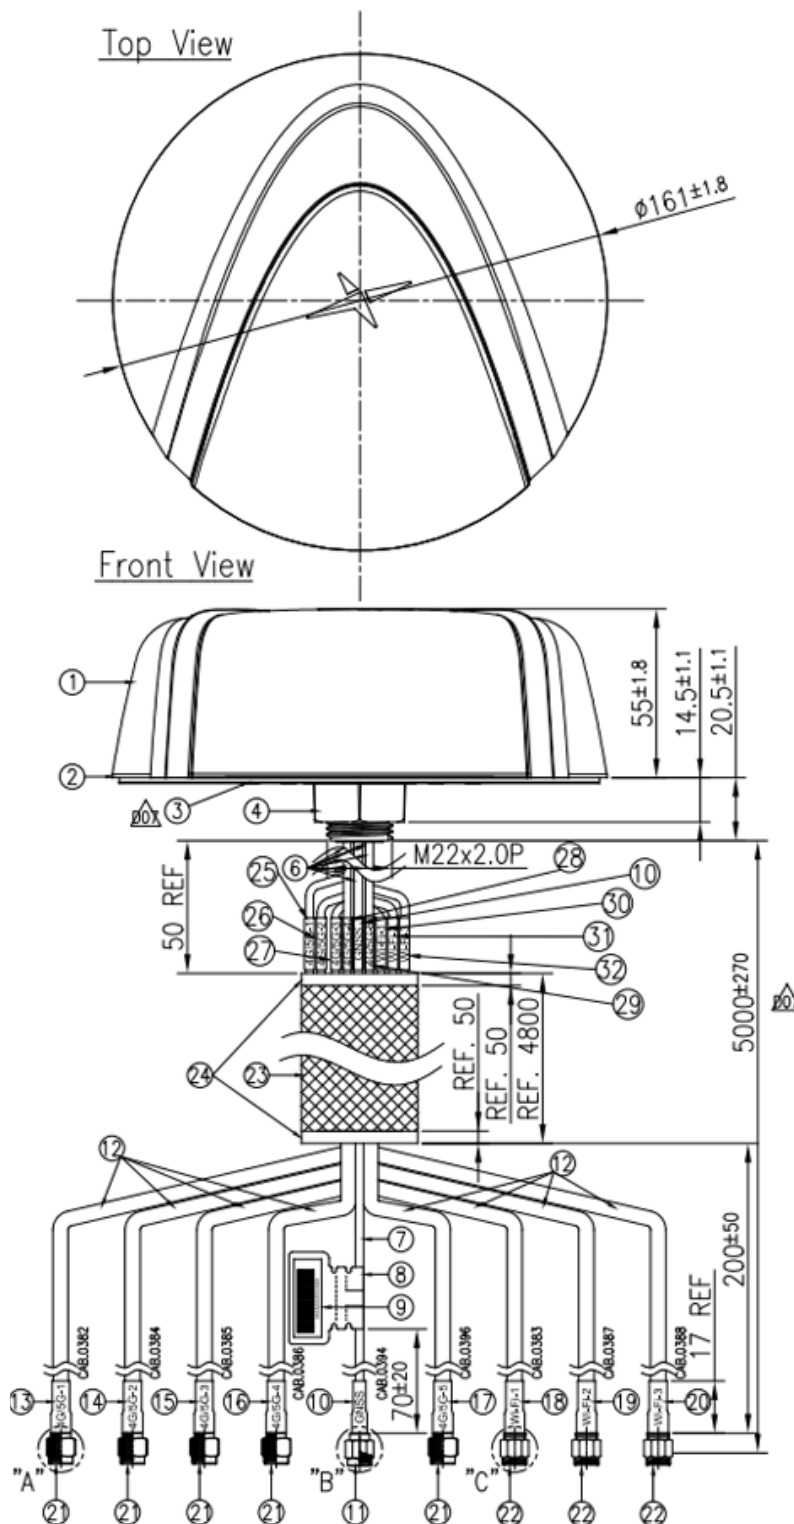

Bottom Thread View

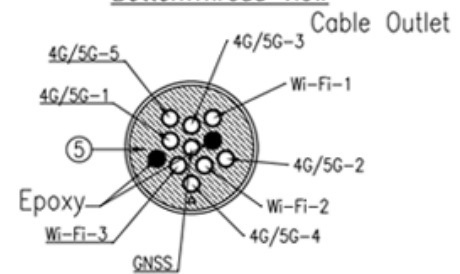

	Name	P/N	Material	Finish	QTY
1	Top Plastic Shell	000118G08000A	PC	Black / Grey	1
2	Bottom Plastic	000118G10000A	PC	Black	1
3	Double Sided Adhesive	001022J06000A	EK30H-3W 9448	Black Foam/White Liner	1
4	Nut_M22	000418H02000A	Nylon	Black	1
5	Rubber	000718H01000A	Silicone Rubber	Black	1
6	RG174 Coaxial Cable (M1508A101)	301315C00000A	PVC	Black	9
7	RG174 Coaxial Cable (CAB.0394)	301315C00000A	PVC	Black	1
8	Empty Label	001015G00000A	PEPA	White	1
9	Barcode Label	001015G01000A	PET	White	1
10	Heat Shrink Tube (GNSS)	001316C00000A	PE	Blue Tube/White Text	2
11	SMA(W)ST	200216D000098A	Brass	Au Plated	1
12	TGC-200 Coaxial Cable	306718E00000A	PE	Black	8
13	Heat Shrink Tube (4G/5G-1)	001319G05000A	PE	Red Tube/White Text	1
14	Heat Shrink Tube (4G/5G-2)	001319G06000A	PE	Red Tube/White Text	1
15	Heat Shrink Tube (4G/5G-3)	001319G07000A	PE	Red Tube/White Text	1
16	Heat Shrink Tube (4G/5G-4)	001319G08000A	PE	Red Tube/White Text	1
17	Heat Shrink Tube (4G/5G-5)	001319G09000A	PE	Red Tube/White Text	1
18	Heat Shrink Tube (Wi-Fi-1)	001316L06000A	PE	Yellow Tube/Black Text	1
19	Heat Shrink Tube (Wi-Fi-2)	001316L07000A	PE	Yellow Tube/Black Text	1
20	Heat Shrink Tube (Wi-Fi-3)	001316L09000A	PE	Yellow Tube/Black Text	1
21	SMA(W)ST	200216D020098A	Brass	Au Plated	5
22	SMA(W)ST_RP	200216D030098A	Brass	Au Plated	3
23	Centenary Braid	001313J000049A	BSPET	Black	1
24	Heat Shrink Tube	001319G08000A	PE With Glue	Black	2
25	Heat Shrink Tube (4G/5G-1)	001319G00000A	PE	Red Tube/White Text	1
26	Heat Shrink Tube (4G/5G-2)	001319G01000A	PE	Red Tube/White Text	1
27	Heat Shrink Tube (4G/5G-3)	001319G02000A	PE	Red Tube/White Text	1
28	Heat Shrink Tube (4G/5G-4)	001319G03000A	PE	Red Tube/White Text	1
29	Heat Shrink Tube (4G/5G-5)	001319G04000A	PE	Red Tube/White Text	1
30	Heat Shrink Tube (Wi-Fi-1)	001316C06000A	PE	Yellow Tube/Black Text	1
31	Heat Shrink Tube (Wi-Fi-2)	001316C07000A	PE	Yellow Tube/Black Text	1
32	Heat Shrink Tube (Wi-Fi-3)	001316C09000A	PE	Yellow Tube/Black Text	1

## 7. Installation Guidelines

### A Introduction

The Taoglas Synergy is an external permanent mount combination antenna that can be provided with combinations of 5G/4G, active GNSS with front end saw and dual-band Wi-Fi. The Synergy is available with two versions of the enclosure, one designed specifically for the Ford Interceptor, both supplied with 3M adhesive, along with an M22 threaded boss for surface attachment. The Synergy is ideal for vehicle panels of up to 6mm(0.23") thick with a threaded boss length of 20.5mm(0.81"). The Synergy is IP67 rated and includes an O-Ring to seal from any water ingress.



#### Electrical Safety

The Synergy contains an active GPS/GNSS antenna.  
Rated voltage: 3-5VDC Rated current: 20mA maximum

**The supply to this device must be provided with overcurrent protection of 1A maximum.**

**Power consumption@1.8V (mA) 8.7 mA**

**Power consumption@3.0V (mA) 9.0 mA**

**Power consumption@5.5V (mA) 11 mA**

### B Mounting & Location

For prime performance, the Synergy is recommended to be fitted on a conductive metal panel. When fitting on a non-metallic panel, a conductive metal ground plane of suitable size should be fitted underneath the mounting panel to achieve a better level of performance. Optimum ground plane size is 300mm x 300mm(11.8" x 11.8"). When mounting on a vehicle roof panel ensure to mount on a flat surface, and measure for central position. Care should be taken to mount the Synergy antenna as far as possible from other roof-mounted features such as the aircon unit, light bar etc.




#### Sealing

In order to ensure that the installation is properly sealed against the mounting surface care must be taken regarding curvature of the mounting panel. It is highly recommended to install the antenna on a clean, flat and level surface. After installation the compression of the rubber boot against the mounting panel should be checked and a small bead of neutral cure silicone sealant can be applied around the periphery of the mounting boot if required.

### C Surface Preparation

When preparing to drill the hole, mask the area around the hole position to protect the surface. Drill a pilot hole and increase the hole size to  $\varnothing 24\text{mm}$  ( $\frac{7}{8}$ "). Ensure the drill bit does not contact the headliner. Deburr and clean the area around the hole carefully removing all waste.

Remove paint and primer from under panel surface to ensure adequate contact with washer and nut. Apply petroleum jelly or paint around cut edge of the hole to prevent corrosion

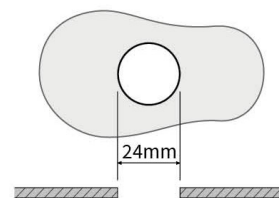

## D Adhesive Patch

On the underside of the antenna there is a 3M adhesive patch. Peel away the 3M adhesive protection and feed the cables through the hole. Position the antenna over the hole and press down onto the panel with pressure. This adhesion will ensure it will be securely mounted and will also allow for extremely minimal curvature on the roof of a vehicle.



## E Securing the Mount

A split nut is used to easily fit onto the thread through the cables. The nut is attached from the underside of the panel, it should easily twist onto the thread and then be secured in place with a final tighten with a spanner. After tightening, double check the antenna to make sure that it is properly secured but take care not to over tighten, damaging the threads on the screw.



## F Cable Routing and Connection

The Cables supplied are RG-174 for the GNSS feed and TGC-200 for the other feeds. The heatshrink will denote which cable is which for ease of installation. Connect each individual connector to the correct port of the router, if any cable is unused please fit a 50Ω terminator to the individual connection.



## G Notices



### Caution

To comply with FCC RF Exposure requirements in section 1.1310 of the FCC Rules, antennas used with this device must be installed to provide a separation distance of at least 20 cm from all persons to satisfy RF exposure compliance.



### Warning

**Do not** operate the equipment in an explosive atmosphere.



### European Waste Electronic Equipment Directive 2012/19/EU

Please ensure that your old Waste Electricals and Electronics are recycled do not throw them away into standard waste.



### Hazardous Substances Directive (RoHS) 2011/65/EU / 2015/863/EU

### Radio Equipment Directive (RED) 2014/53/EU


#### Harmonised Standards and References:

**EN 301 489-1 (V2.2.3):** ElectroMagnetic Compatibility (EMC) standard for radio equipment and services;  
Part 1: Common technical requirements; Harmonised Standard for ElectroMagnetic Compatibility


**Waiver:** This document represents information compiled by Taoglas to the best of our current knowledge. This is not intended to be used as a representation or warranty of fitness of the products described for any particular purpose. This document details guidelines for general information purposes only. When planning installations, always seek specialist advice and ensure that the products are always installed by a properly qualified installer in accordance with applicable regional laws and regulations.

All copyrights, trademarks and any other intellectual property rights related are owned by Taoglas Group Holdings Limited.


## 8. Packaging

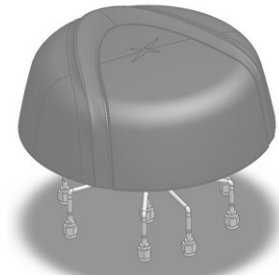

1pc MA1509.AK.001 per PE Bag  
Weight: 2.7Kg

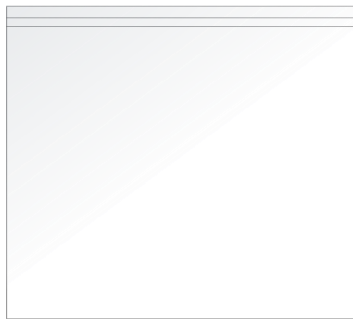

4pcs MA1509.AK.001 per Carton  
Carton Dimensions: 740\*370\*300mm  
Weight: 11.6Kg

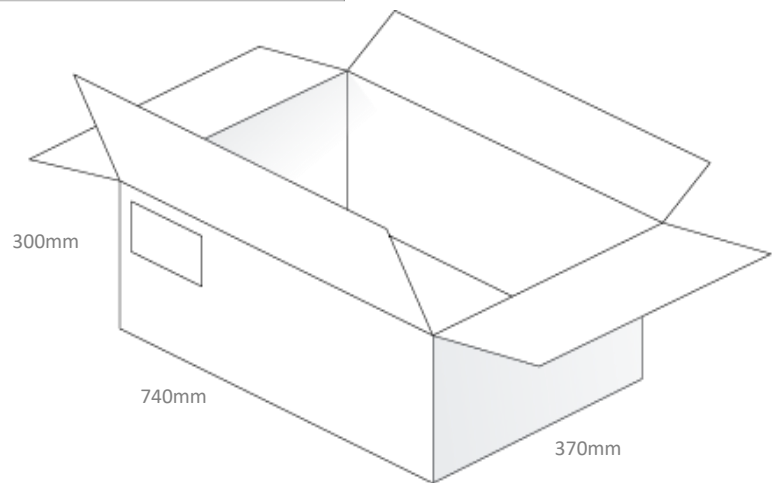

Changelog for the datasheet

**SPE-20-8-004 - MA1509.AK.001**

**Revision: E (Current Version)**

Date:	2025-02-06
Changes:	Added Installation Guidelines
Changes Made by:	Cesar Sousa

**Previous Revisions**

**Revision: D**

Date:	2024-07-23
Changes:	Updated drawing
Changes Made by:	Conor McGrath

**Revision: C**

Date:	2023-07-07
Changes:	Updated Specifications
Changes Made by:	Cesar Sousa

**Revision: B**

Date:	2020-05-15
Changes:	Initial Release
Changes Made by:	Jack Conroy

**Revision: A (Original First Release)**

Date:	2020-01-09
Notes:	Initial Release
Author:	Jack Conroy



**TAOGLAS**®

[www.taoglas.com](http://www.taoglas.com)

