



TAOGLAS®



Datasheet

Raptor Max

Part No:
MAX1015.K.002

Description

15-in-1 Permanent Mount Antenna 5M TGC-200 1*GNSS L1/L5, 8*5G/4G, 6*Wi-Fi With FAKRA C Blue, D Violet, I Beige, Braided Cable Assembly

Features:

- Low-profile, IP67 rated Enclosure
- 8* 5G/4G MIMO 617~6000MHz
- 6* WIFI MIMO 2.4/5.8/7.125GHz
- 1* GNSS L1/L5 Dual-band Antenna
- Cables: 5m Braided Assembly of TGC-200
- Connectors: GNSS: FAKRA Code C, 5G/4G: FAKRA Code D, Wi-Fi: FAKRA Code I
- Dims: 330mm x 75.5mm x 45.2mm
- RoHS & Reach Compliant

1.	Introduction	3
2.	Specification	5
3.	Mechanical Drawing	9
4.	Packaging	10
5.	Installation Guide	11
6.	Characteristics	12
7.	LNA Characteristics	22
8.	Radiation Patterns	27
	Changelog	151

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The Taoglas® Raptor MAX series combination antenna is designed to enhance the connectivity options available to you for your vehicle. With up to 16-in-1 connections available, in combinations of Multiband GNSS, 5G/4G MIMO, Wi-Fi MIMO, and LMR/VHF/UHF/Tetra, this next generation, super low-profile vehicle roof mount antenna eliminates the need for multiple antennas, saving you time and money on installations.

The MAX1015 version combines multiband GNSS (L1/L5), 8 5G/4G antennas, and 6 Wi-Fi antennas. The super low profile, fully IP67 rated waterproof enclosure is manufactured from a robust, IK08 rated, UV protected ABS material, ideal for use in any environment or weather condition. Combining all the antennas for your application into one compact enclosure saves on installation space, reduces costs and allows for multi network support.

Typical application for the Raptor MAX series of products include:

- **Connected Vehicles** – Fleet Management and Asset Tracking
- **Smart Cities** – Public Safety Systems and Infrastructure
- **Industrial IoT** – Monitoring and Asset Tracking
- **Public Safety** – First Responder Vehicles
- **Military and Defense** – Command and Control Systems

The antenna comes with 5m TGC-200 cables as standard, terminating in SMA(M) / RP-SMA(M), with custom configurations available depending on your requirements. Cable extension kits are available and are fully customized to suit your application. Several configurations of the Raptor MAX Series will launch as standard, see below, but other configurations are available upon request, available in both black and white and with or without braided cables. Contact your local Taoglas customer service team for more information.


Raptor Max Series Configurations:

- **MAX1008** 8x 5G/4G
- **MAX1009** 1x GNSS and 8x 5G/4G
- **MAX1012** 1x GNSS, 8x 5G/4G and 3x Wi-Fi
- **MAX1013** 1x GNSS, 8x 5G/4G and 4x Wi-Fi
- **MAX1014** 1x GNSS, 8x 5G/4G and 5x Wi-Fi
- **MAX1015** 1x GNSS, 8x 5G/4G and 6x Wi-Fi
- **MAX1016** 1x GNSS, 8x 5G/4G, 6x Wi-Fi and 1x LMR Whip



2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	□	■		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	□	□	□		
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	■	□	□	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	■	■	□	□
L-Band	L-Band 1542 MHz				
	□				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	■	□	■	□	
IRNSS (Regional)	L5 1176.45 MHz				
	■				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	■	□	□	□

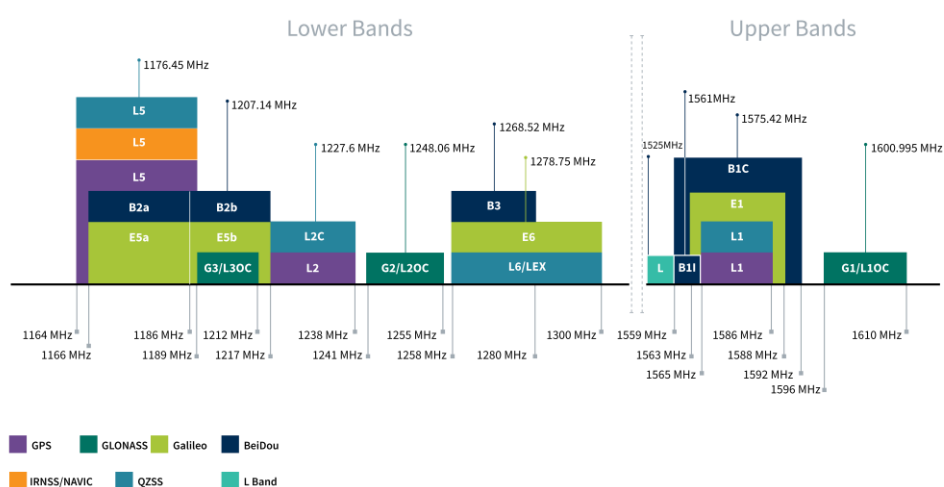

GNSS Bands and Constellations

Passive GNSS Electrical			
Frequency (MHz)	1176.45	1561	1575.42
VSWR (max.)	3:1	3:1	3:1
Passive Antenna Efficiency (%)	37.77	33.44	40.65
Passive Antenna Gain at Zenith (dBi)	1.75	3.59	4.51
Polarization	Linear		
Impedance	50 Ω		
*Results shown obtained with 300mm of RG-174			

LNA and Electrical Properties				
Frequency (MHz)	1176.45	1561	1575.42	1602
Gain(dB)	29.7	28.8	28.1	28.6
Noise Figure (dB)	2.9	2.8	2.9	2.3
Input Voltage (V)	+ 1.8 to 5.5			
Current consumption (mA)	5 $\pm$ 2			
IEC61000-4-2 (ESD protection)	$\pm$ 30 kV air / $\pm$ 20Kv contact discharge			

4G-5G Electrical									
Band	Frequency (MHz)	Antenna MIMO	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
5G NR/4G Band 71	617-698	4G-5G1	27.0	-5.69	2.03	50 Ω	Linear	Omni	10W
		4G-5G2	20.4	-6.91	-1.50				
		4G-5G3	25.6	-5.92	0.17				
		4G-5G4	44.1	-3.56	3.54				
		4G-5G5	24.9	-6.04	2.68				
		4G-5G6	24.5	-6.11	-0.41				
		4G-5G7	25.1	-6.00	-1.18				
		4G-5G8	29.9	-5.24	0.85				
4G/3G Band 12,13,14,17,28,29	698-824	4G-5G1	34.1	-4.67	2.63				
		4G-5G2	32.0	-4.95	1.92				
		4G-5G3	35.7	-4.48	2.67				
		4G-5G4	42.9	-3.67	2.75				
		4G-5G5	32.0	-4.95	1.77				
		4G-5G6	26.4	-5.79	-0.11				
		4G-5G7	32.9	-4.83	1.97				
		4G-5G8	36.4	-4.39	2.24				
4G/3G/NB-IoT/Cat M Band 5,8,18,19,20,26,27	824-960	4G-5G1	38.3	-4.16	1.52				
		4G-5G2	36.0	-4.44	1.50				
		4G-5G3	28.3	-5.48	1.20				
		4G-5G4	35.5	-4.49	2.45				
		4G-5G5	29.9	-5.24	1.53				
		4G-5G6	28.7	-5.43	-0.35				
		4G-5G7	36.3	-4.40	2.66				
		4G-5G8	40.1	-3.97	2.58				
5G NR/4G Band 21,32,74,75,76	1427-1518	4G-5G1	37.4	-4.27	2.73				
		4G-5G2	41.9	-3.78	3.32				
		4G-5G3	33.1	-4.81	2.78				
		4G-5G4	32.9	-4.82	2.33				
		4G-5G5	31.2	-5.06	2.10				
		4G-5G6	31.5	-5.01	1.43				
		4G-5G7	39.7	-4.02	2.25				
		4G-5G8	25.7	-5.91	0.94				
4G/3G Band 1,2,3,4,9,23,25,35,39,66	1710-2200	4G-5G1	46.4	-3.34	4.93				
		4G-5G2	47.2	-3.26	4.61				
		4G-5G3	51.5	-2.88	5.48				
		4G-5G4	48.7	-3.13	5.34				
		4G-5G5	51.5	-2.88	6.07				
		4G-5G6	49.3	-3.07	6.07				
		4G-5G7	29.8	-5.26	4.22				
		4G-5G8	31.3	-5.04	2.93				
4G/3G Band 7,30,38,40,41	2300-2690	4G-5G1	49.9	-3.02	5.47				
		4G-5G2	48.3	-3.16	4.39				
		4G-5G3	48.2	-3.17	6.12				
		4G-5G4	38.8	-4.12	6.69				
		4G-5G5	39.2	-4.07	5.96				
		4G-5G6	49.2	-3.08	6.79				
		4G-5G7	39.7	-4.01	5.28				
		4G-5G8	43.1	-3.65	6.09				
5G NR/4G Band 22,42,48,77,78,79	3300-5000	4G-5G1	51.4	-2.89	6.13				
		4G-5G2	44.9	-3.48	7.46				
		4G-5G3	47.4	-3.24	5.75				
		4G-5G4	48.2	-3.17	6.88				
		4G-5G5	42.5	-3.72	5.24				
		4G-5G6	46.2	-3.35	5.90				
		4G-5G7	43.1	-3.65	5.37				
		4G-5G8	46.1	-3.36	6.02				
4G-5G5200/Wi-Fi5800	5150-5925	4G-5G1	43.2	-3.65	7.96				
		4G-5G2	42.7	-3.69	7.82				
		4G-5G3	43.4	-3.63	5.67				
		4G-5G4	46.5	-3.33	5.73				
		4G-5G5	42.7	-3.70	5.26				
		4G-5G6	43.6	-3.61	5.84				
		4G-5G7	40.1	-3.97	6.03				
		4G-5G8	44.6	-3.50	6.14				


*Results shown obtained with 300mm of TGC-302

Wi-Fi Electrical									
Band	Frequency (MHz)	Antenna MIMO	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
Wi-Fi - 2GHz	2400-2500	Wi-Fi1	56.5	-2.48	4.36	50 Ω	Linear	Omni	10W
		Wi-Fi2	58.2	-2.35	6.55				
		Wi-Fi3	56.1	-2.51	5.68				
		Wi-Fi4	58.1	-2.36	4.19				
		Wi-Fi5	53.3	-2.73	7.60				
		Wi-Fi6	52.7	-2.78	6.98				
Wi-Fi - 5GHz	5150-5850	Wi-Fi1	49.3	-3.07	5.71				
		Wi-Fi2	49.5	-3.05	7.47				
		Wi-Fi3	47.8	-3.20	5.63				
		Wi-Fi4	45.9	-3.38	6.10				
		Wi-Fi5	50.5	-2.97	8.04				
		Wi-Fi6	44.7	-3.50	8.51				
Wi-Fi - 6GHz	5925-7125	Wi-Fi1	47.1	-3.27	6.33				
		Wi-Fi2	49.9	-3.02	7.47				
		Wi-Fi3	48.4	-3.15	6.28				
		Wi-Fi4	43.1	-3.66	5.96				
		Wi-Fi5	46.2	-3.36	7.31				
		Wi-Fi6	43.7	-3.60	7.22				
*Results shown obtained with 300mm of TGC-302									

Mechanical	
Dimensions	330 x 75.5 x 45.2mm
Weight	3.32 Kg $\pm$ 3%
Material	PC
Connector	FAKRA - See drawing on page 9 for more details
Cable	TGC-200 - See drawing on page 9 for more details
IK Impact Rating	IK08 – 5 Joules / 1.7Kg dropped from 300mm


Environmental	
Temperature Range	-40 - +85°C
Relative Humidity	Non-condensing 65°C 95% RH
Ingress Protection	IP67
RoHS & REACH Compliant	Yes

3. Mechanical Drawing

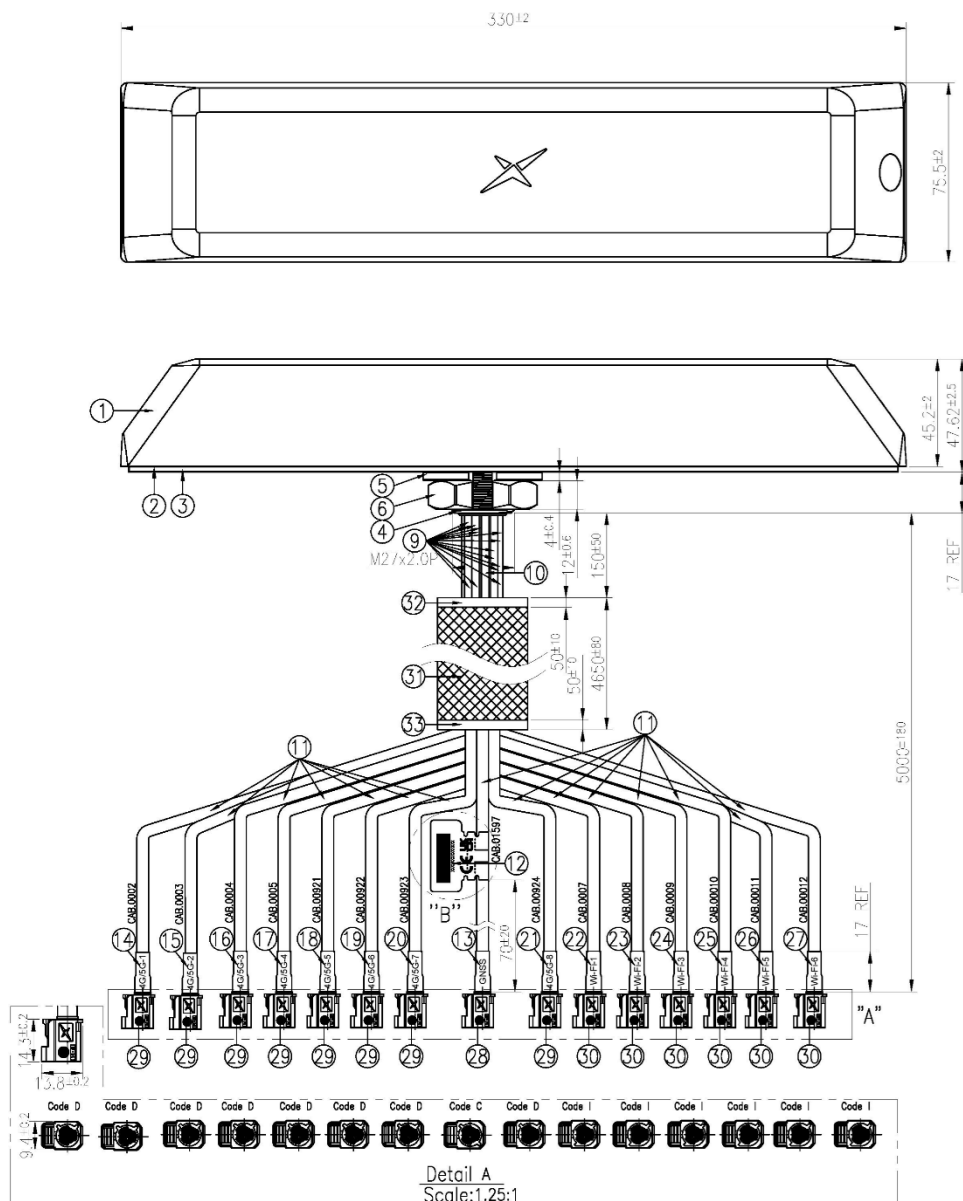


Inside Cable Rubber (Top View)

Cable Outlet:

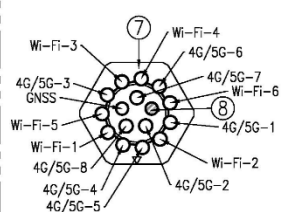

CE, WEEE and UKCA mark logo Label



	Name	Material	Finish	QTY
1	Top Housing	PC	Black	1
2	Bottom Housing	PO+1000F	Black	1
3	Double Sided Adhesive	3M 4685-CH305-30	Black Foam/White Line	1
4	Metal Stern	Zinc Alloy	Ni Plated	1
5	Washer 10x22x1.0x0.4H	Carbon Steel	Zn-Ni Plated	1
6	Nut M2.7x2.0x1.2H	Carbon Steel	Zn-Ni Plated	1
7	Cable Rubber	Silicone rubber	Black	1
8	Grommets Plug for RG174	ASA	Black	1
9	100-1005 Coaxial Cable (AWG18/15A/0.1)	XLPE	Black	14
10	RG174 Coaxial Cable (AWG18/15A/0.1)	PVC	Black	1
11	TGC-2000 Coaxial Cable	PE	Black	19
12	CE, WEEE and UKCA Label (49x30)	PEPA	White	1
13	Heat Shrink Tube (GNSS)	PE	Blue Tube/White Text	1
14	Heat Shrink Tube (4G/5G-1)	PE	Red Tube/White Text	1
15	Heat Shrink Tube (4G/5G-2)	PE	Red Tube/White Text	1
16	Heat Shrink Tube (4G/5G-3)	PE	Red Tube/White Text	1
17	Heat Shrink Tube (4G/5G-4)	PE	Red Tube/White Text	1
18	Heat Shrink Tube (4G/5G-5)	PE	Red Tube/White Text	1
19	Heat Shrink Tube (4G/5G-6)	PE	Red Tube/White Text	1
20	Heat Shrink Tube (4G/5G-7)	PE	Red Tube/White Text	1
21	Heat Shrink Tube (4G/5G-8)	PE	Red Tube/White Text	1
22	Heat Shrink Tube (Wi-Fi-1)	PE	Yellow Tube/Black Text	1
23	Heat Shrink Tube (Wi-Fi-2)	PE	Yellow Tube/Black Text	1
24	Heat Shrink Tube (Wi-Fi-3)	PE	Yellow Tube/Black Text	1
25	Heat Shrink Tube (Wi-Fi-4)	PE	Yellow Tube/Black Text	1
26	Heat Shrink Tube (Wi-Fi-5)	PE	Yellow Tube/Black Text	1
27	Heat Shrink Tube (Wi-Fi-6)	PE	Yellow Tube/Black Text	1
28	Extra code C SMD(F35T)	PA66	Blue	1
29	Extra code D SMD(F35T)	PA66	Bordeaux Violet	8
30	Extra code I SMD(F35T)	PA66	Belge	6
31	Centenary Brand	BSPET	Black	1
32	Heat Shrink Tube	PE With Glue	Black	1
33	Heat Shrink Tube	PE With Glue	Black	1

4. Packaging


1pc Antenna per Large PE Bag
 Bag Dimensions: 590x420mm
 Weight (Kg): 3.32 $\pm$ 3%



4pcs per Carton
 Carton Dimensions: 400x400x360mm
 Weight (Kg): 14.36 $\pm$ 3%



5. Installation Guide

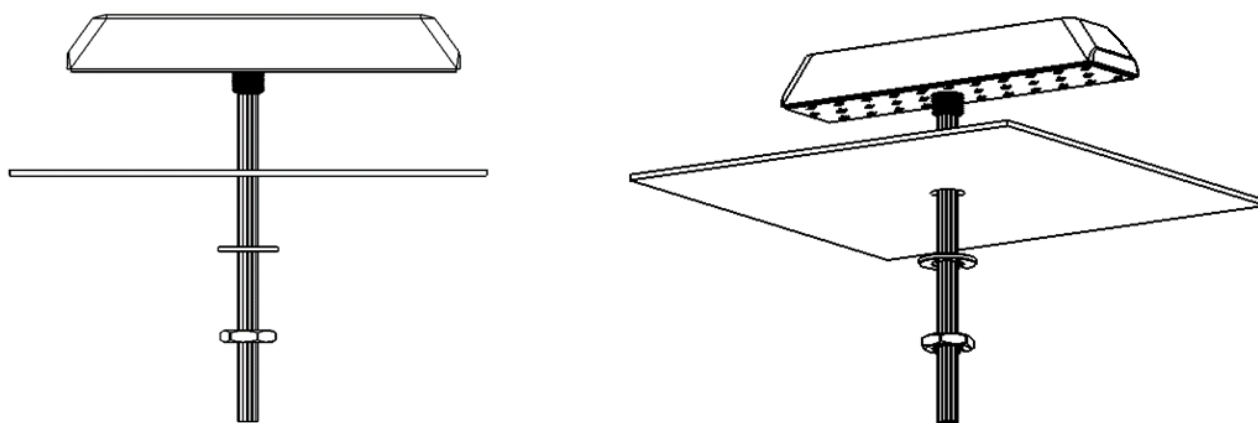

Correct installation of the Raptor Max is required to ensure that the waterproof integrity of the vehicle or enclosure is not compromised.


Step 1: Drill the recommended 30mm diameter hole as indicated below.

Step 2: Ensure that the surface you are mounting to is clean, dry and flat to receive the Raptor Max.

Step 3: Feed the cables through the hole and remove the 3m adhesive backing from the base.

Step 4: Position the Raptor Max into the correct orientation on the mounting surface and firmly press down to activate the 3M adhesive.

Step 5: To permanently mount the antenna, slide the washer and nut over the cable assembly and hand tighten to ensure a secure fit.

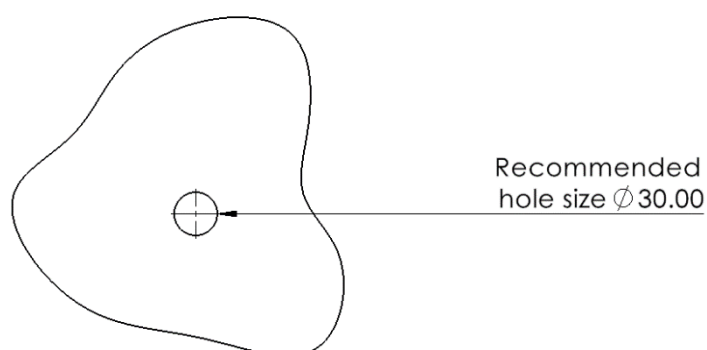


6. Characteristics

6.1 Test Setup


AUT

Vector Network Analyzer

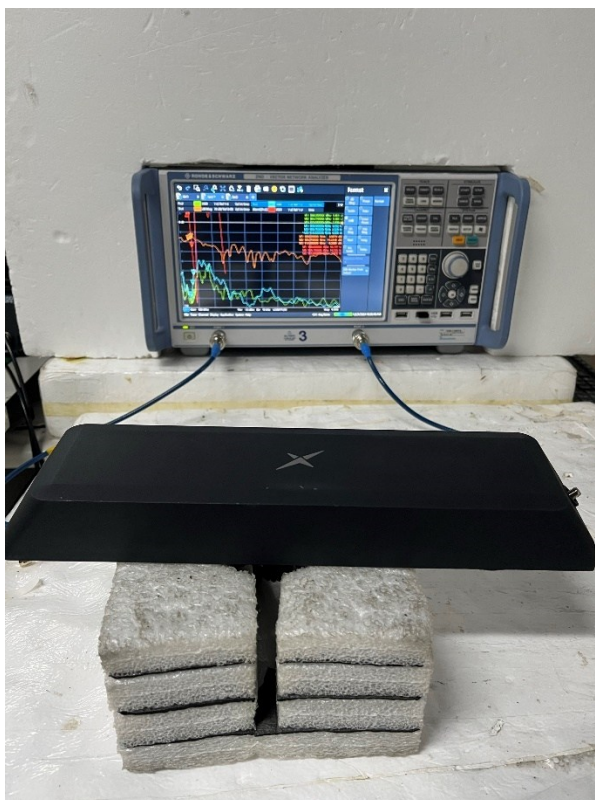


VNA Test Set-up


6.2 GNSS - Return Loss

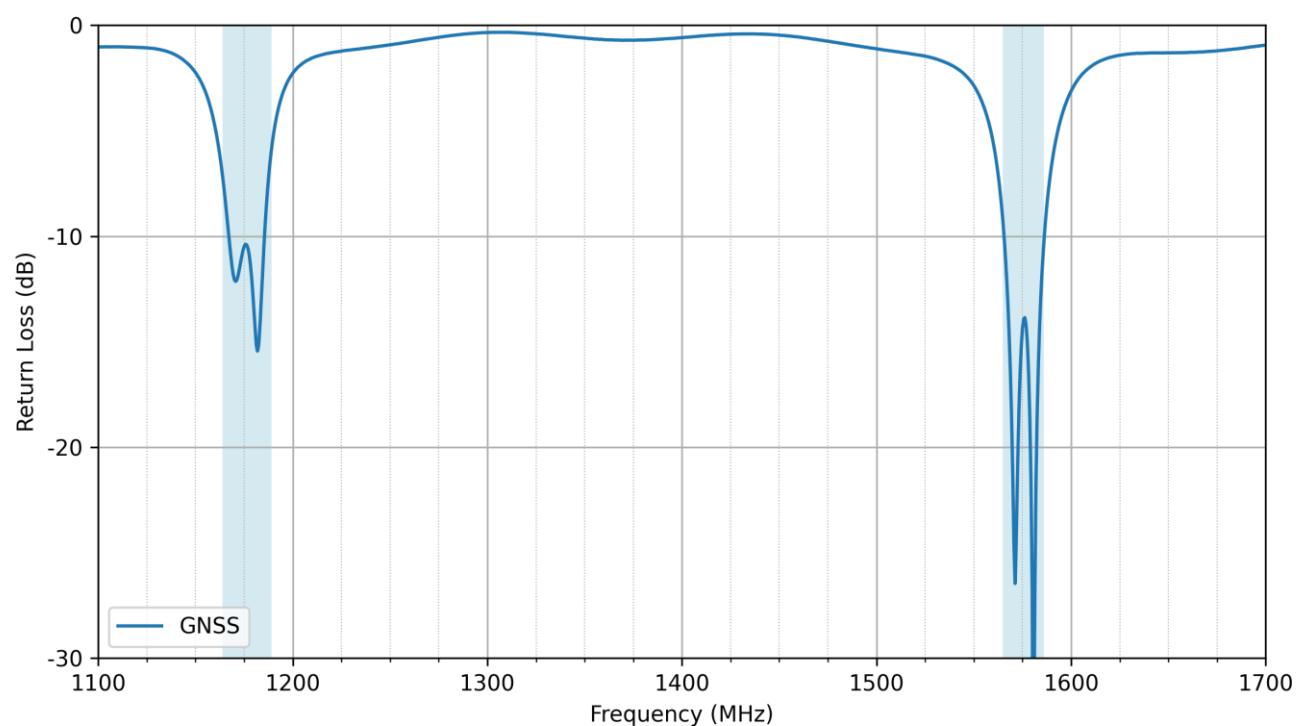


6.3 GNSS - VSWR

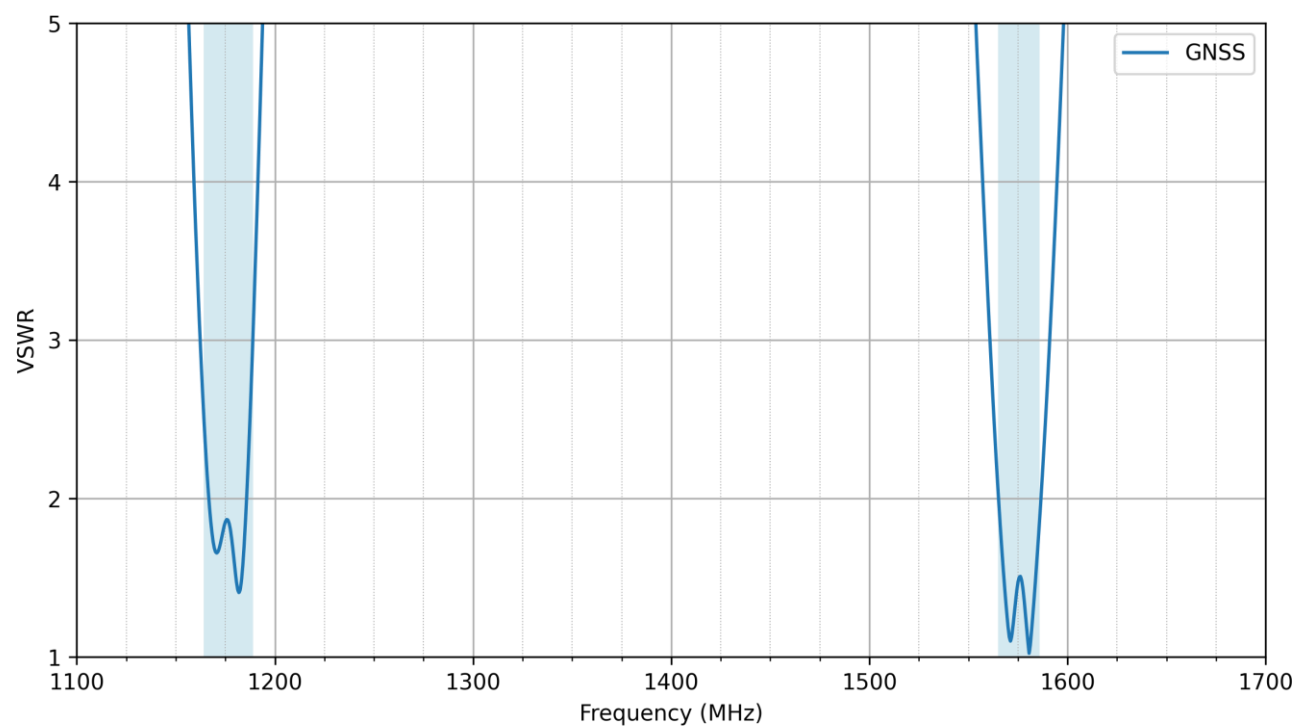


6.4 GNSS - Efficiency

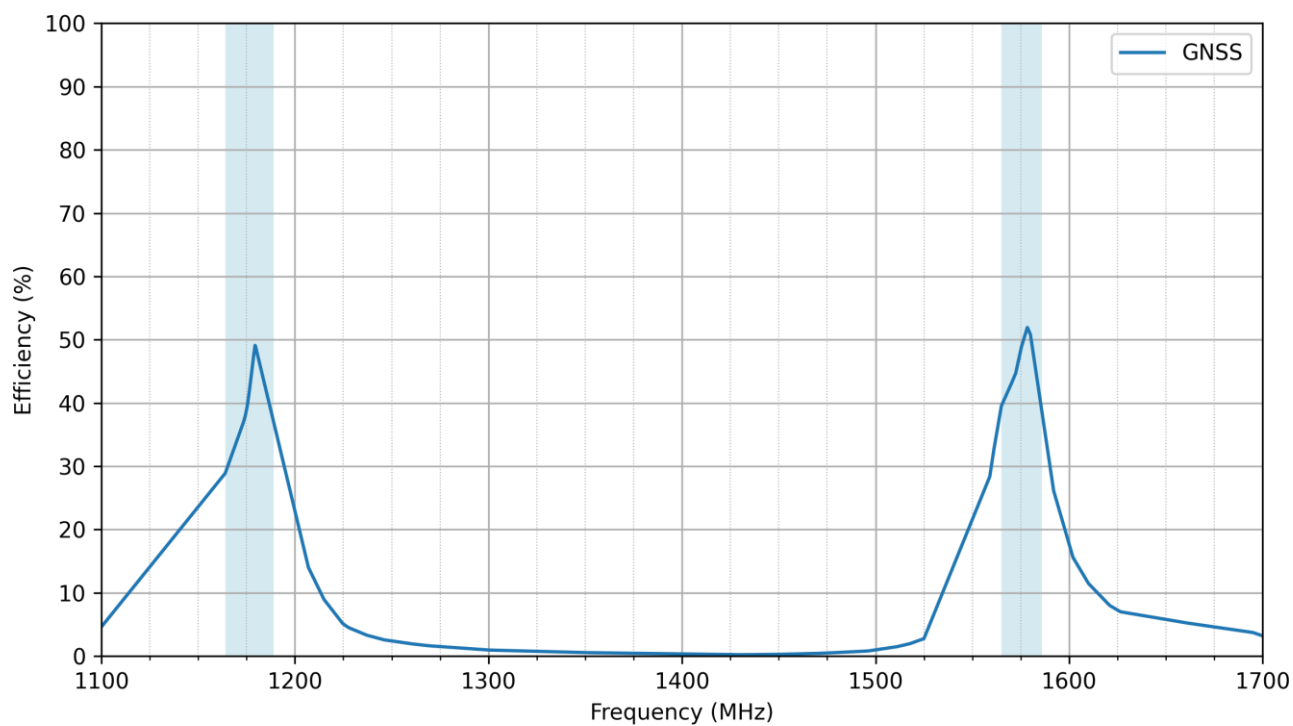


6.5 GNSS - Average Gain

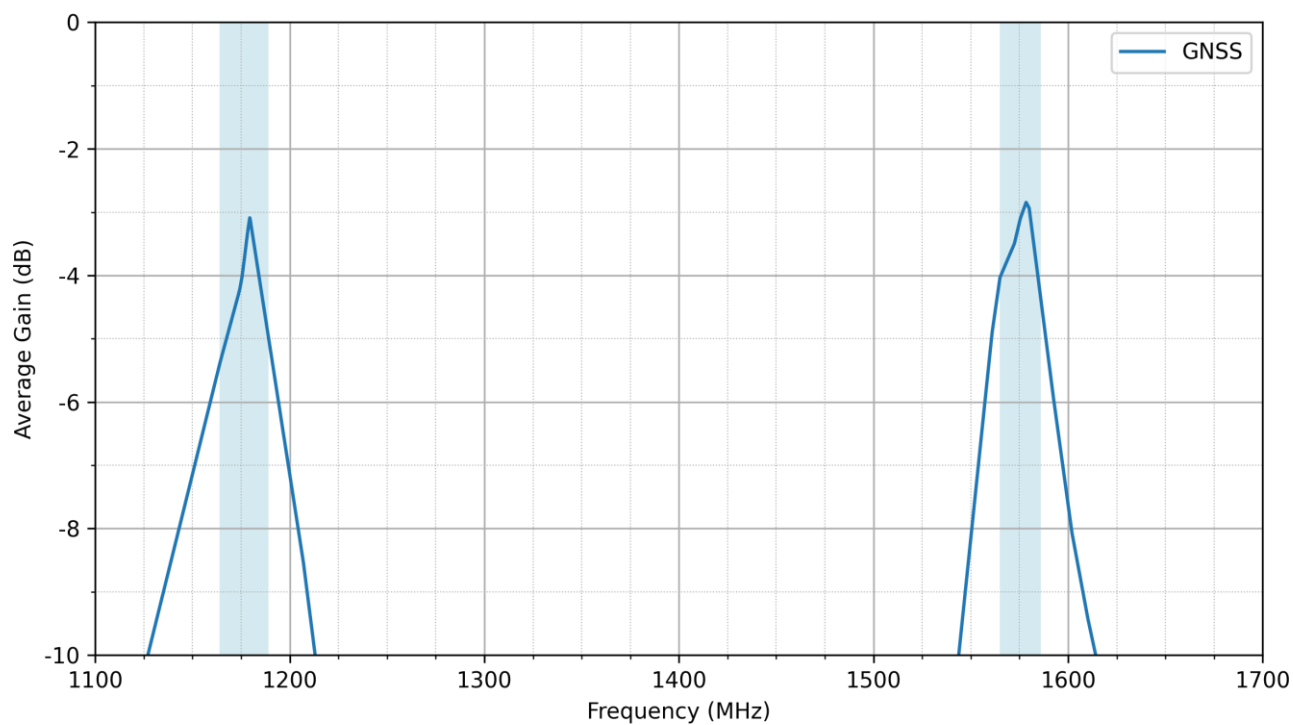


6.6 GNSS - Peak Gain

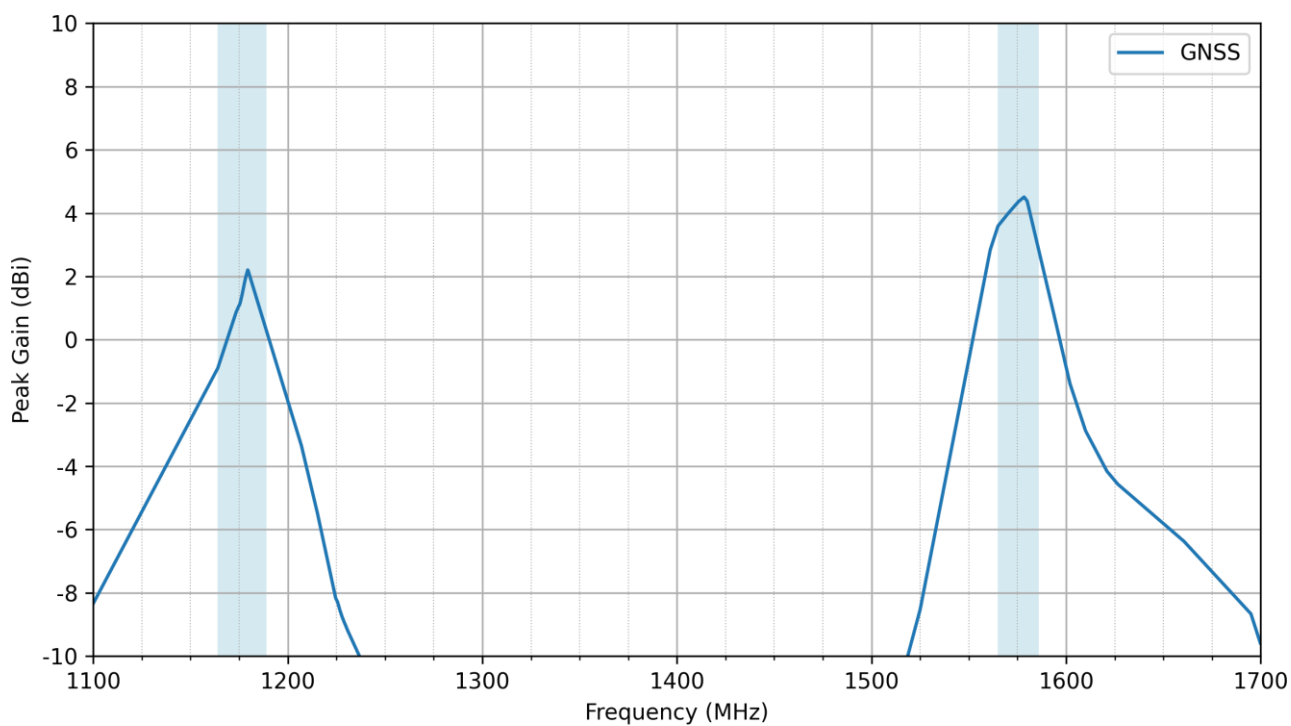


6.7 4G-5G - Return Loss

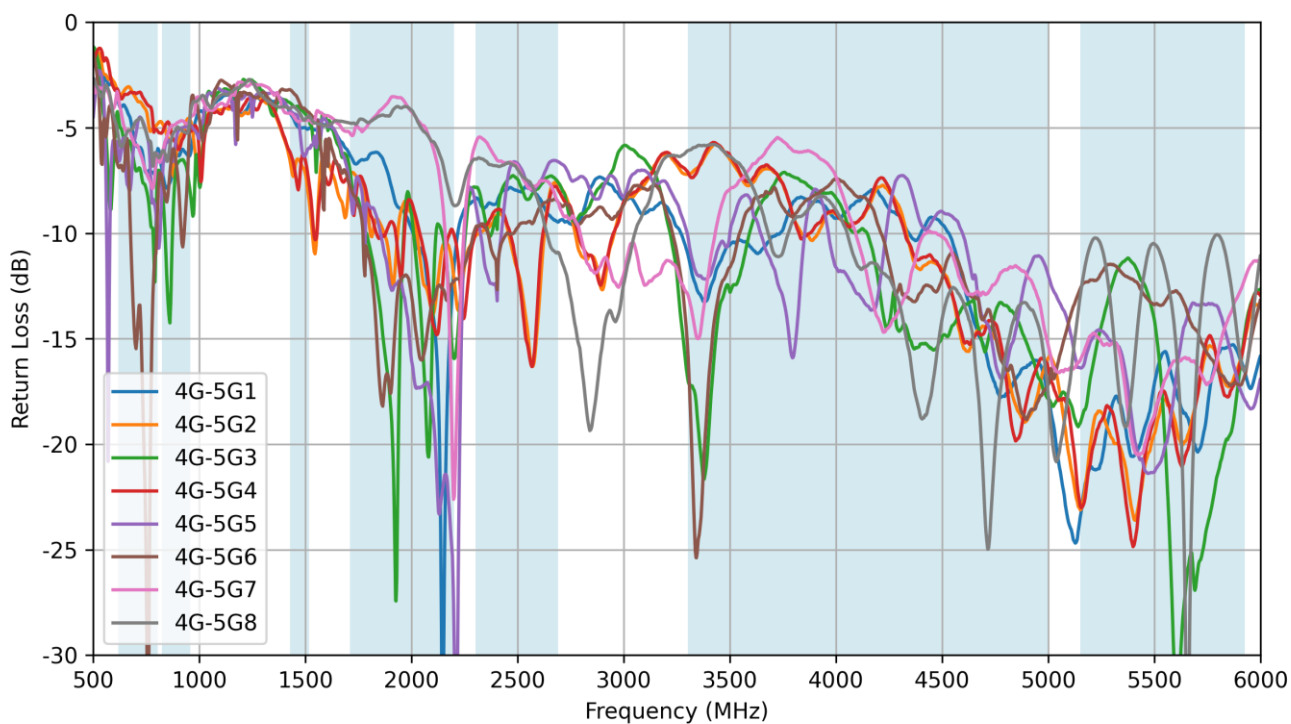


6.8 4G-5G - VSWR

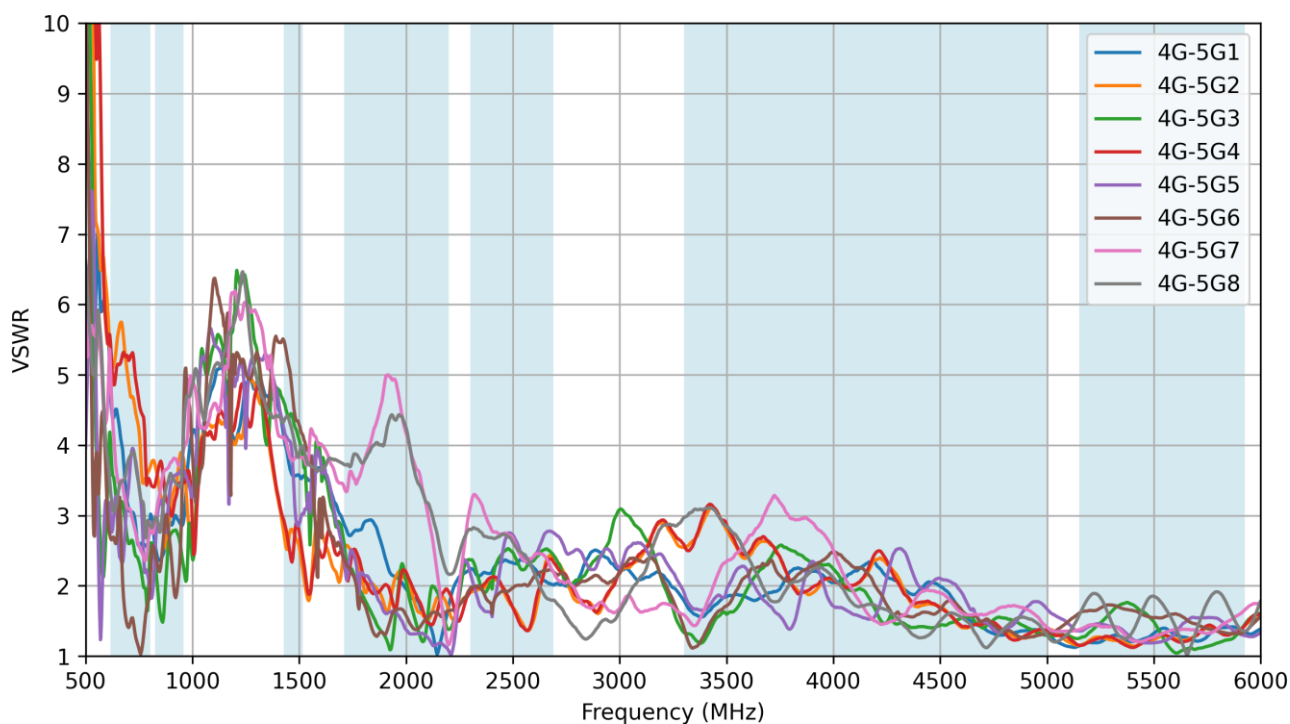


6.9 Isolation

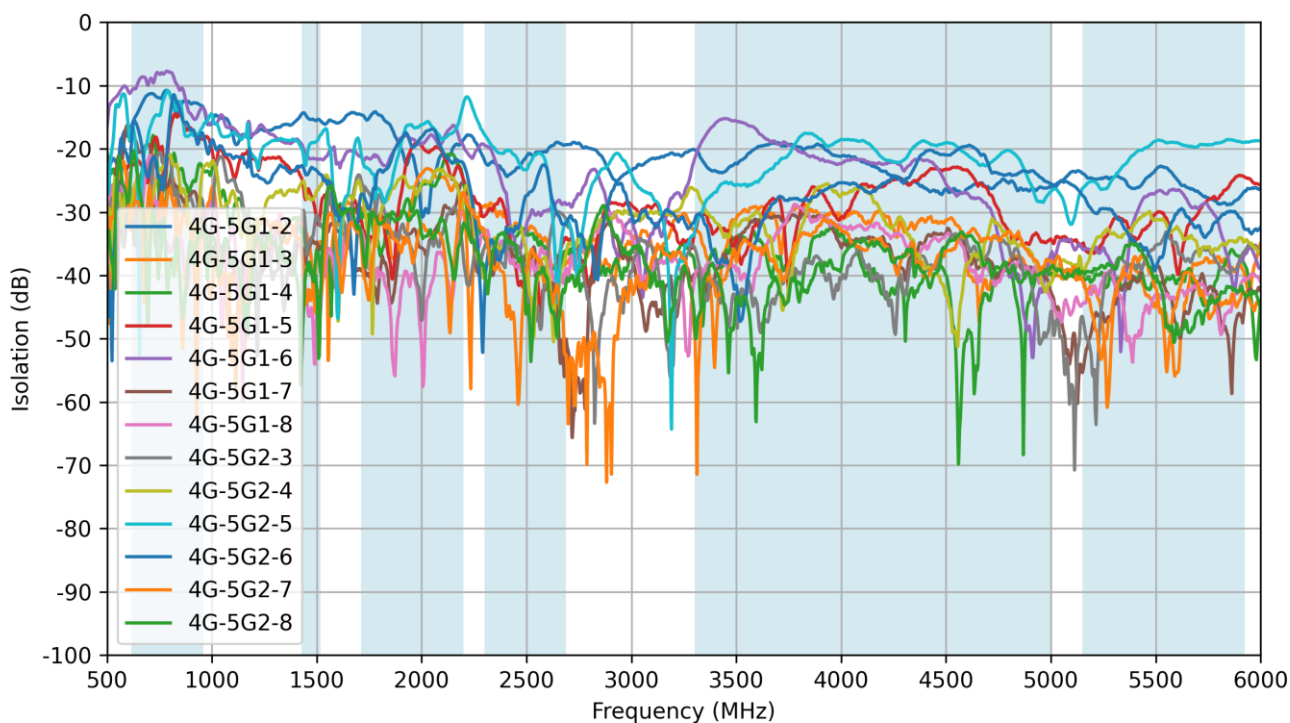


6.10 Isolation

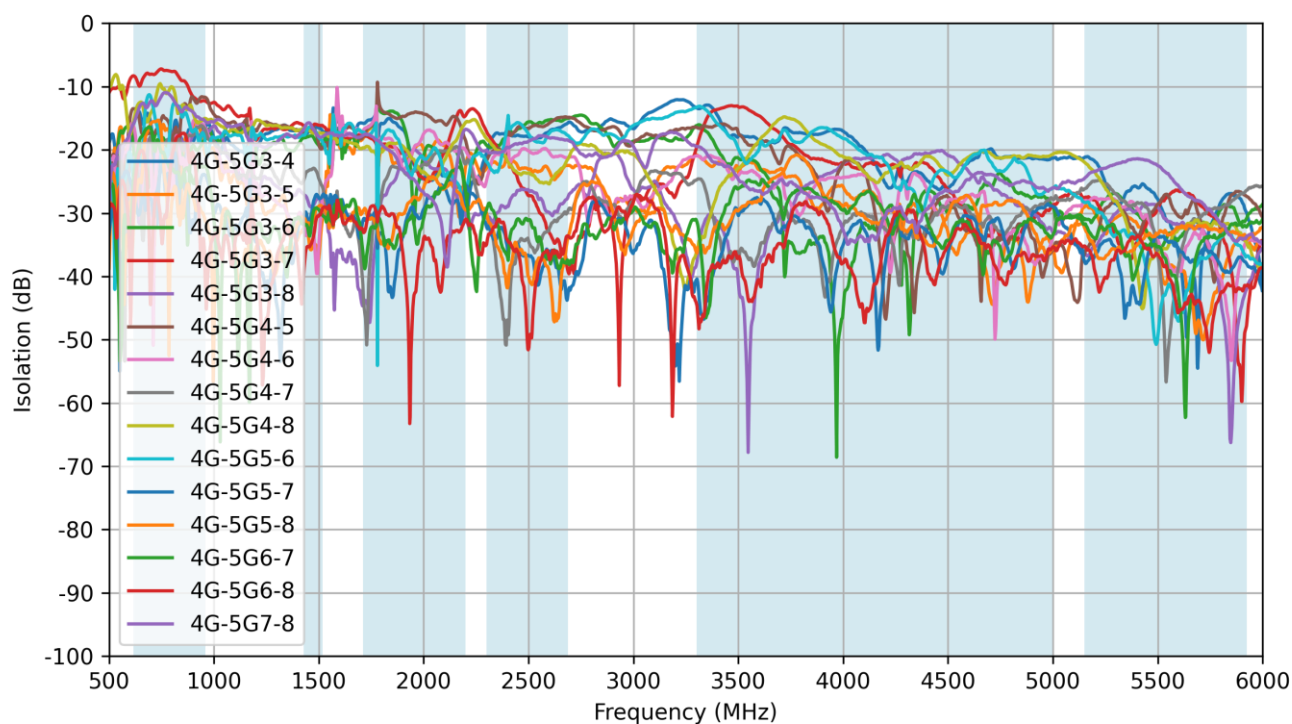


6.11 4G-5G - Efficiency

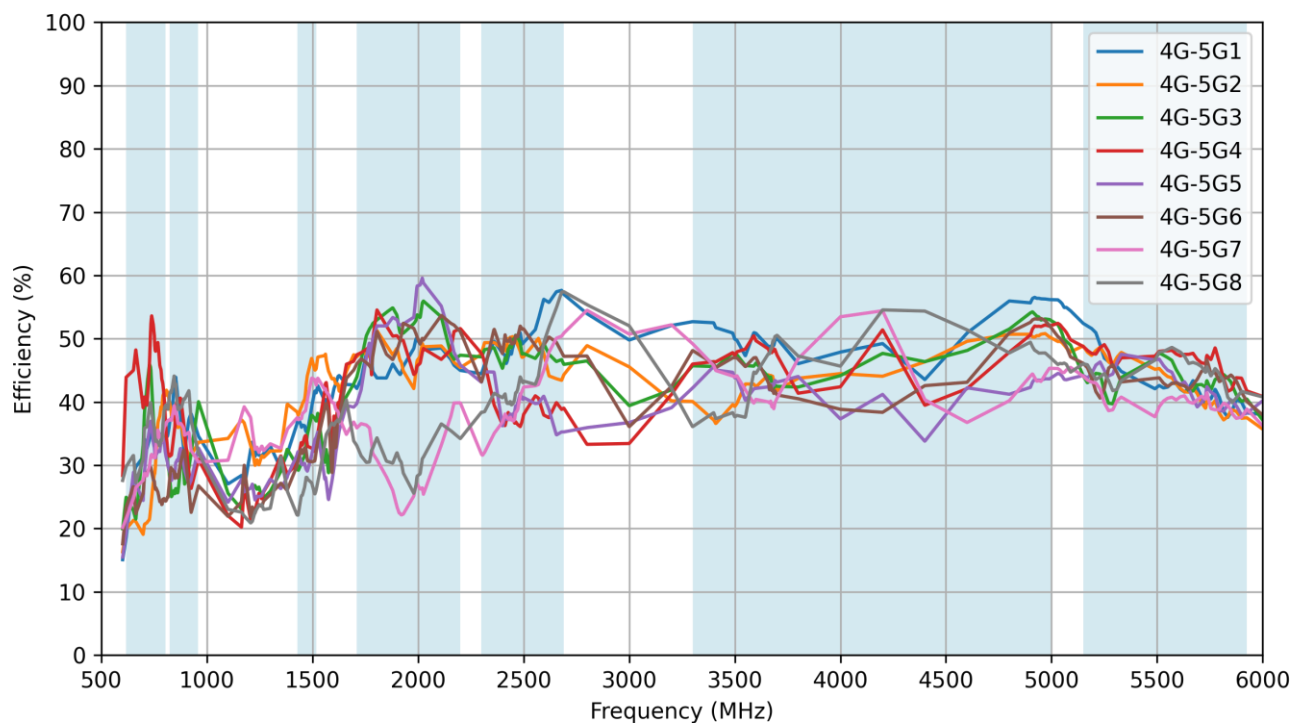


6.12 4G-5G - Average Gain

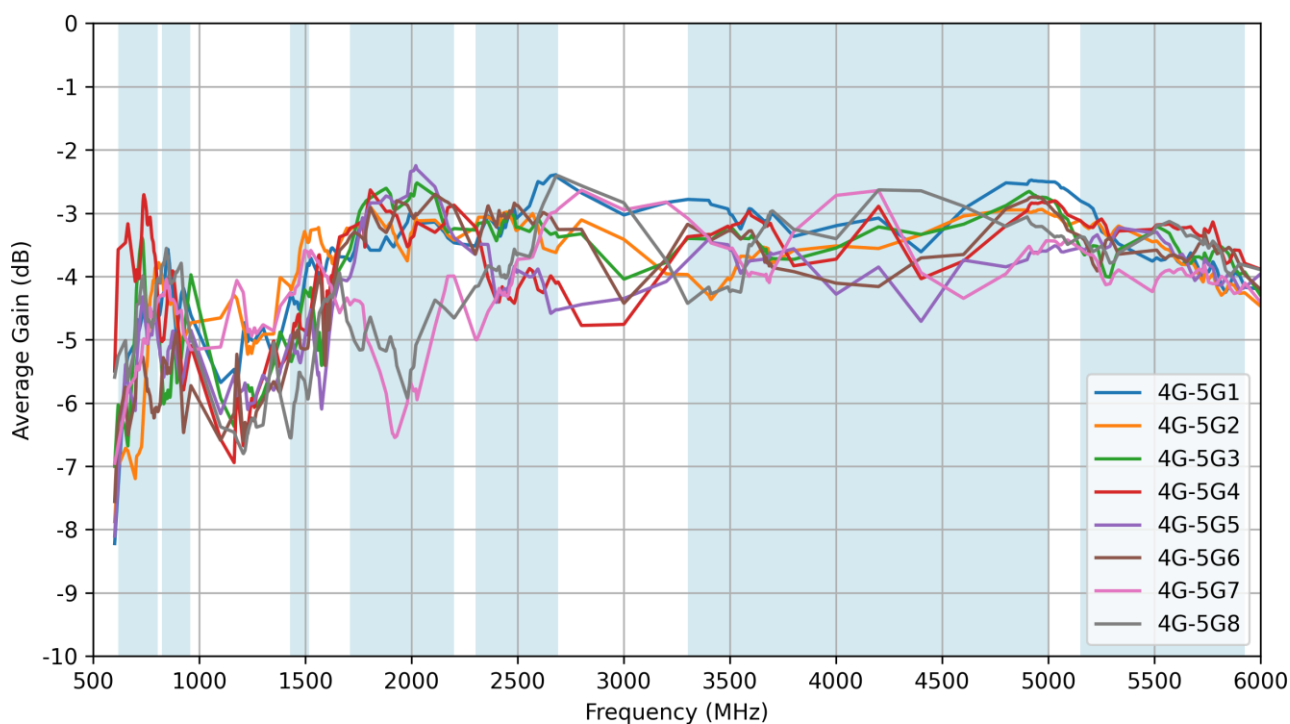


6.13 4G-5G - Peak Gain

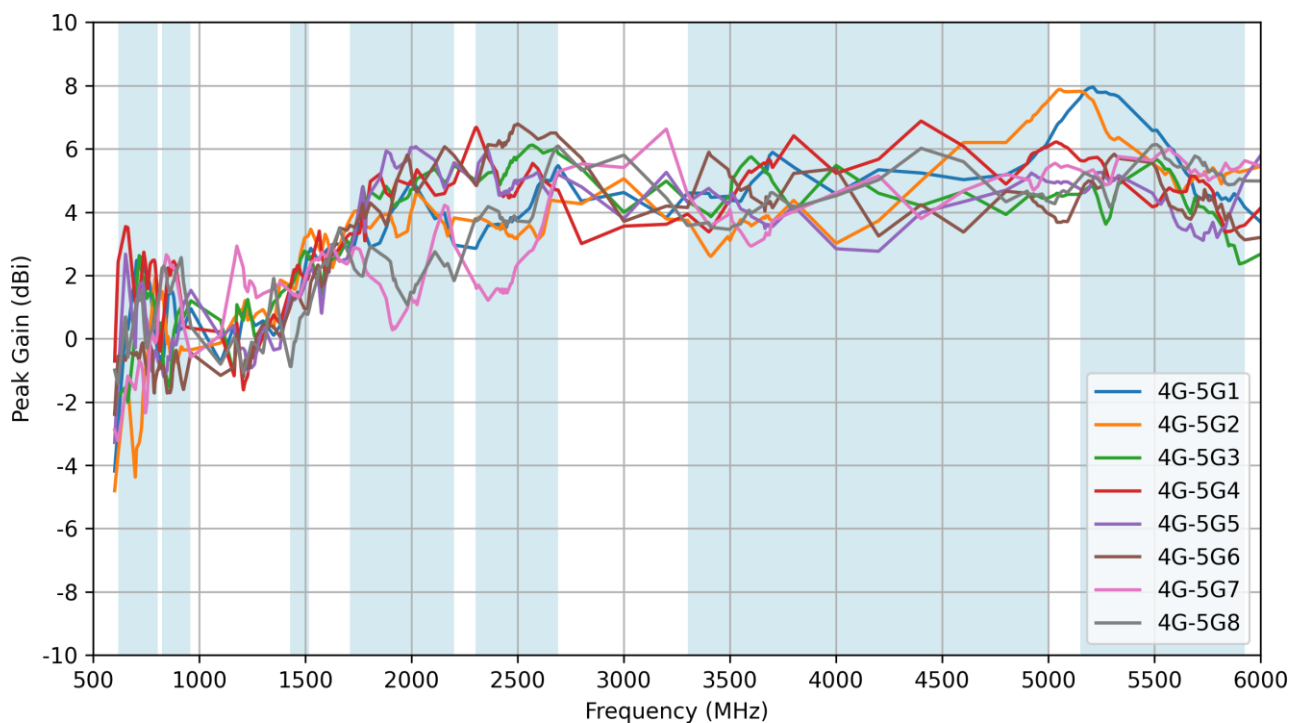


6.14 Wi-Fi - Return Loss

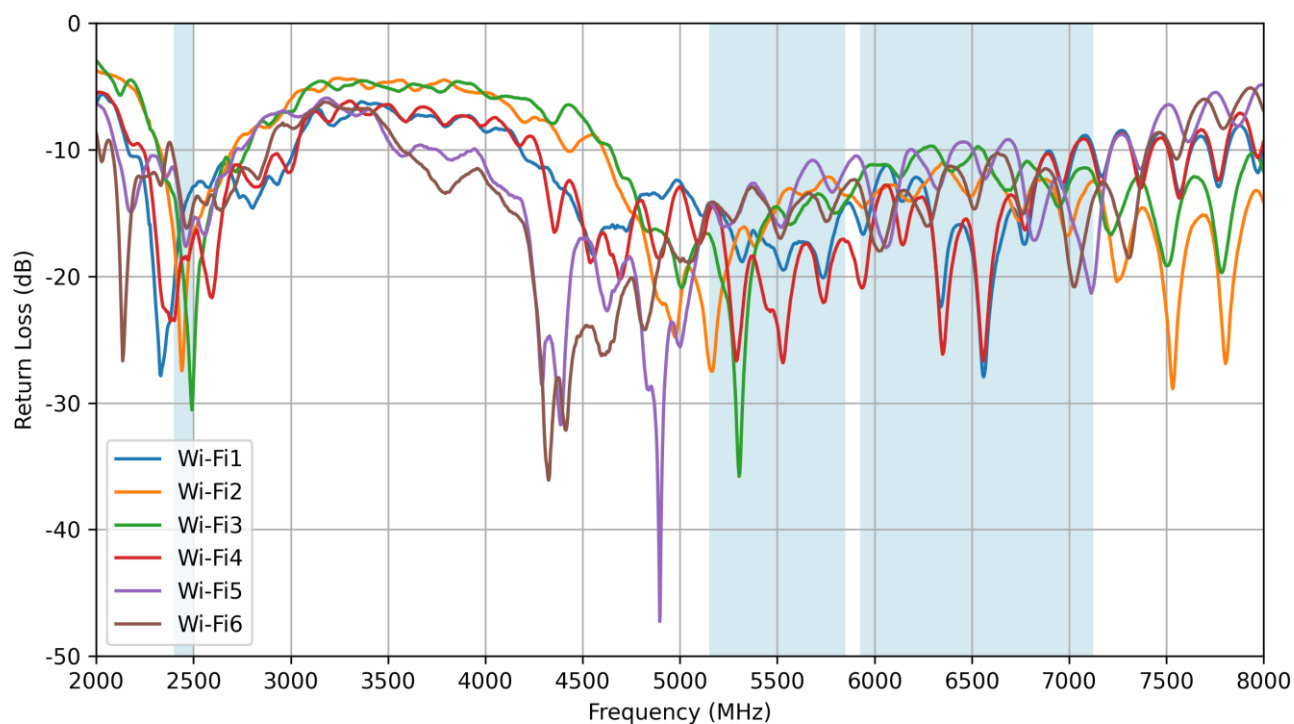


6.15 Wi-Fi - VSWR

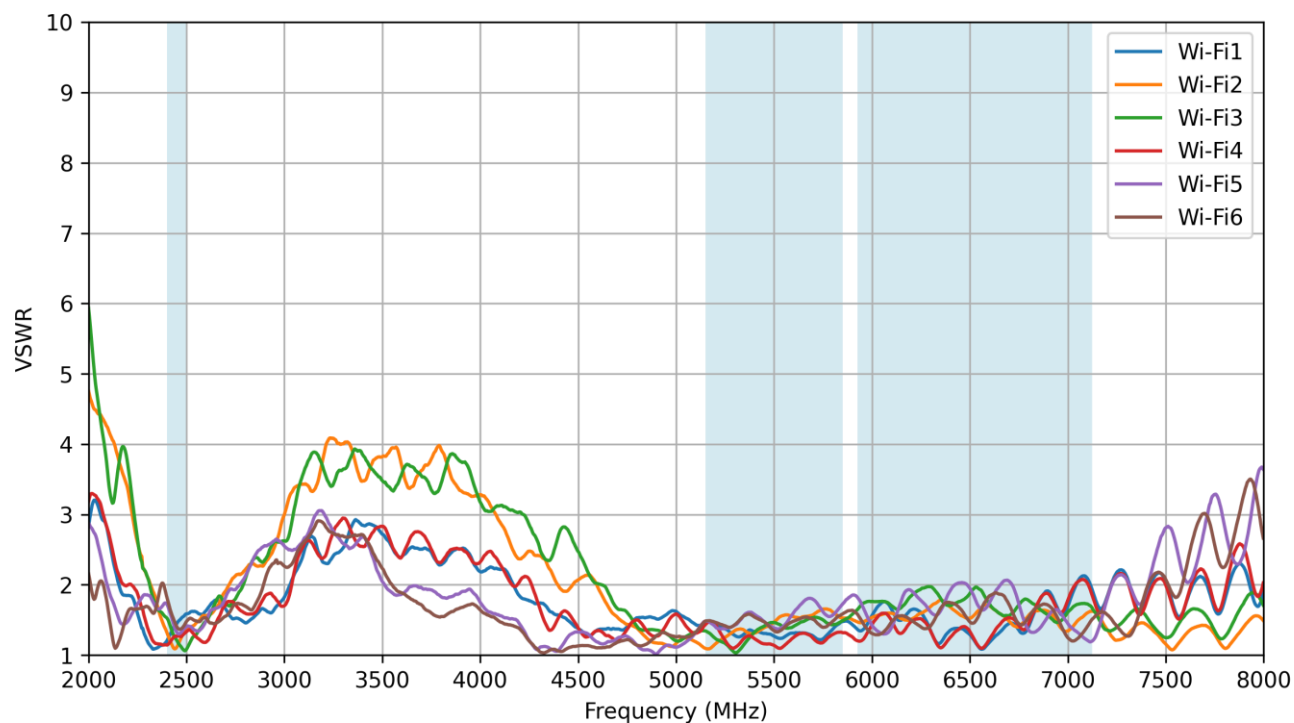


6.16 Wi-Fi - Isolation

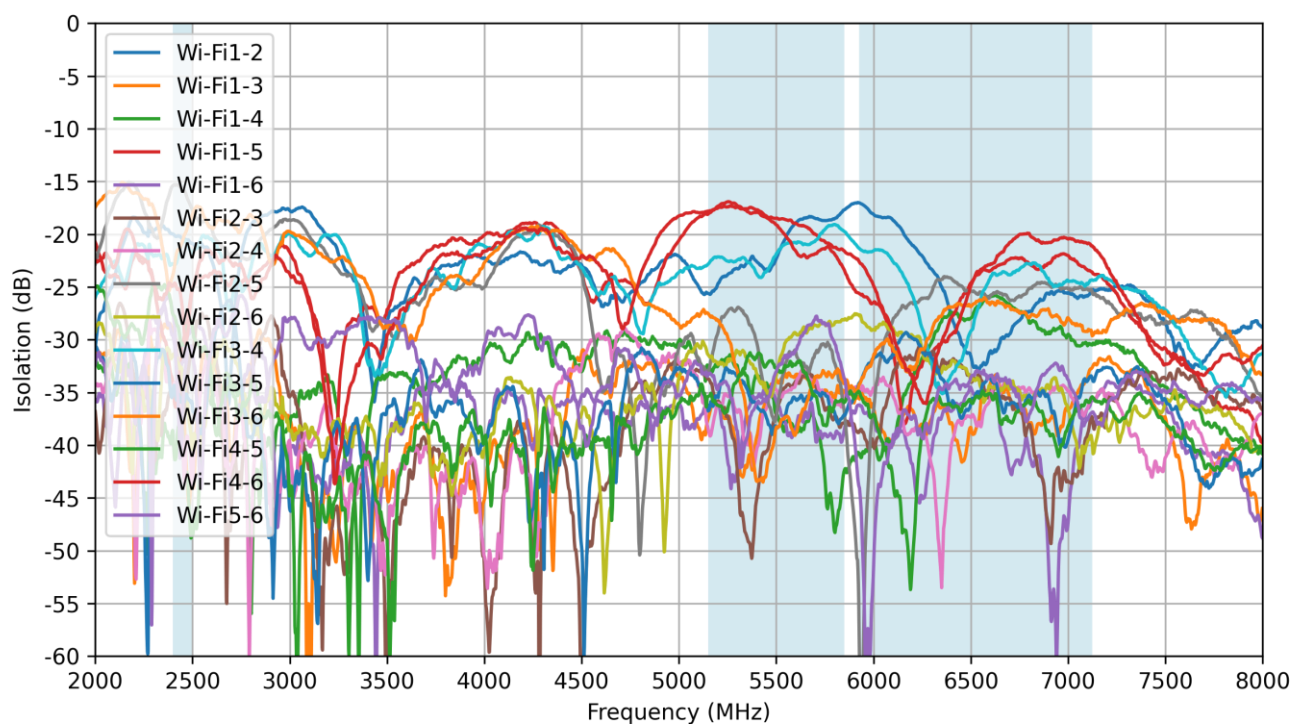


6.17 Wi-Fi - Efficiency

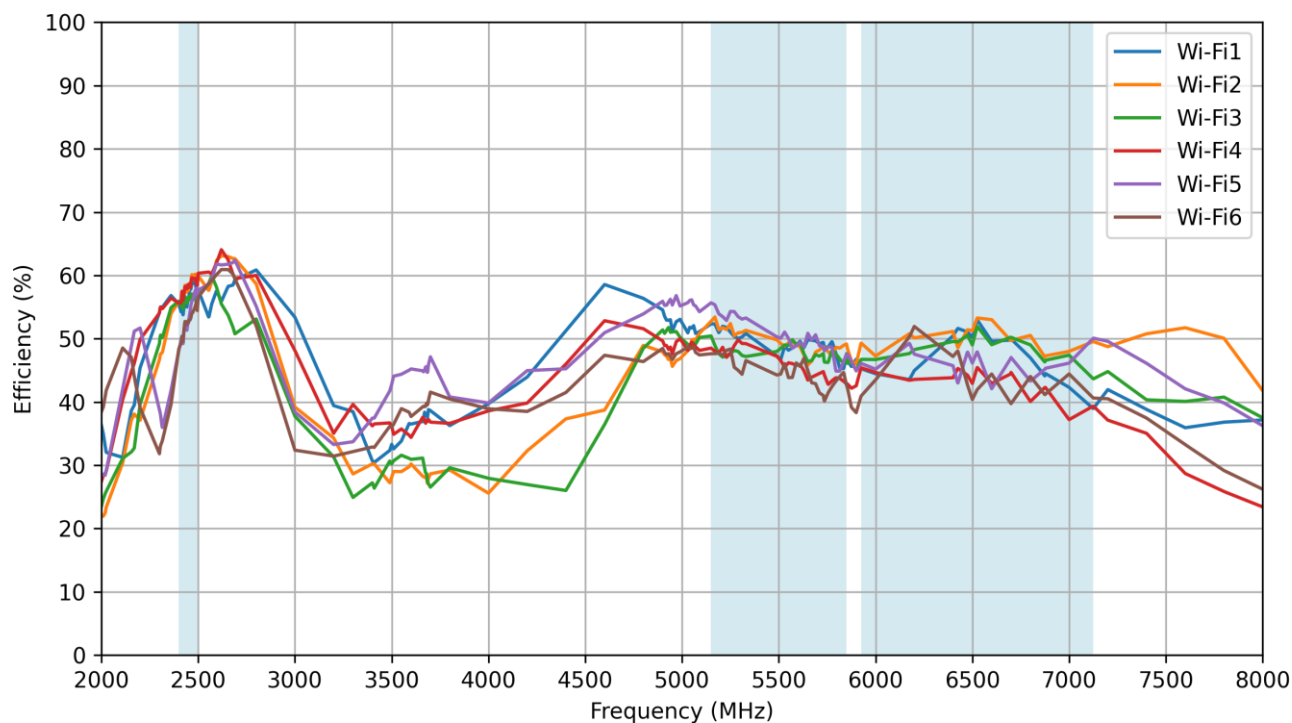

6.18 Wi-Fi - Average Gain

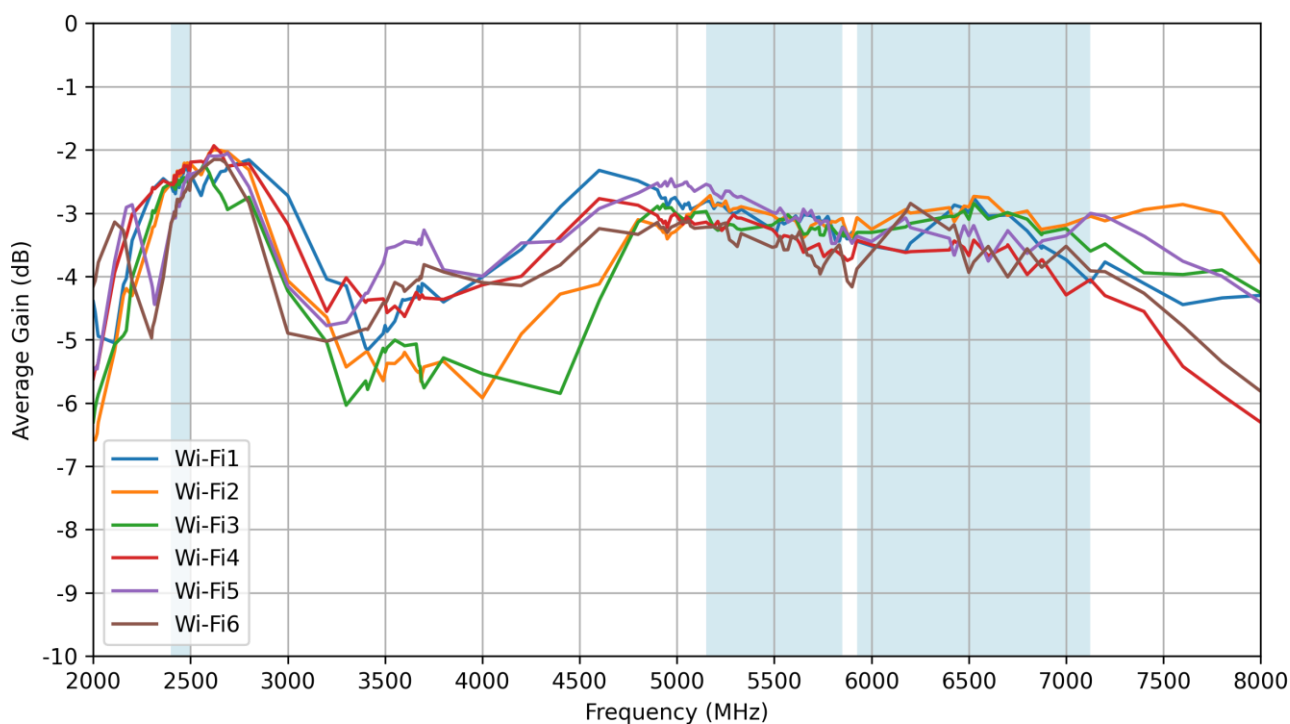


6.19 Wi-Fi - Peak Gain

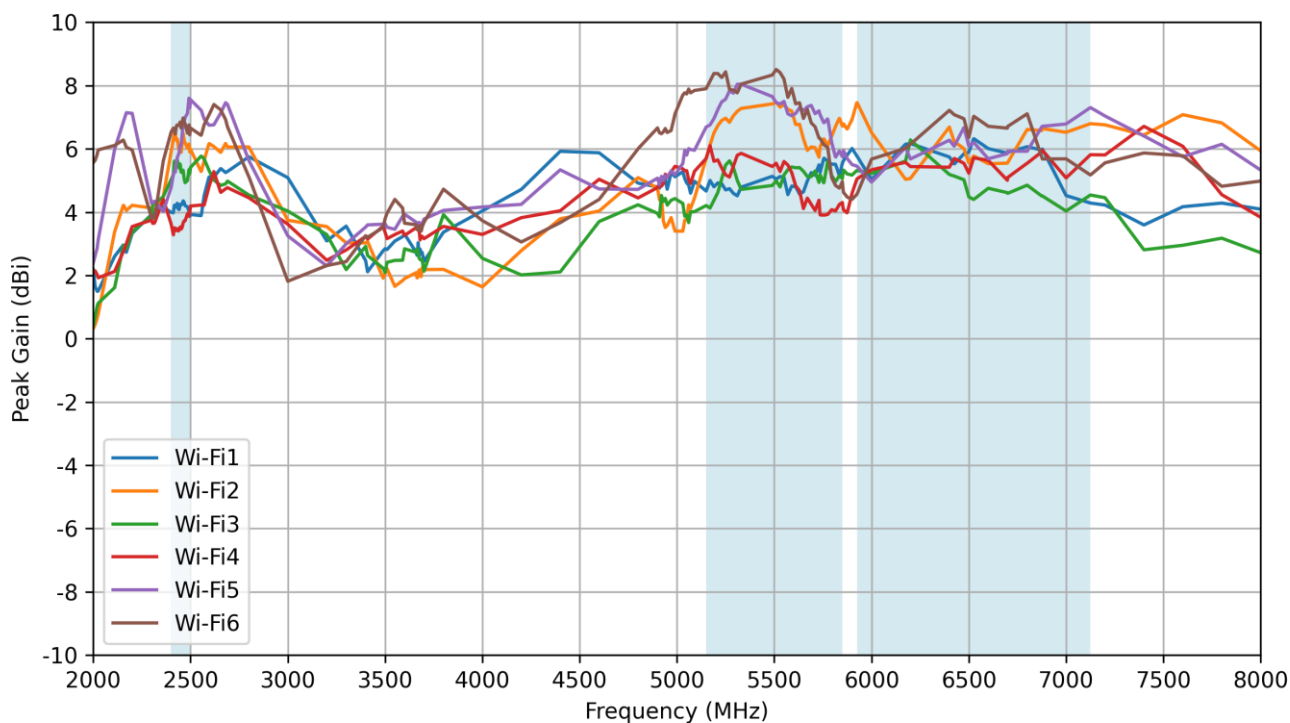


7. LNA Characteristics


7.1 Block Diagram

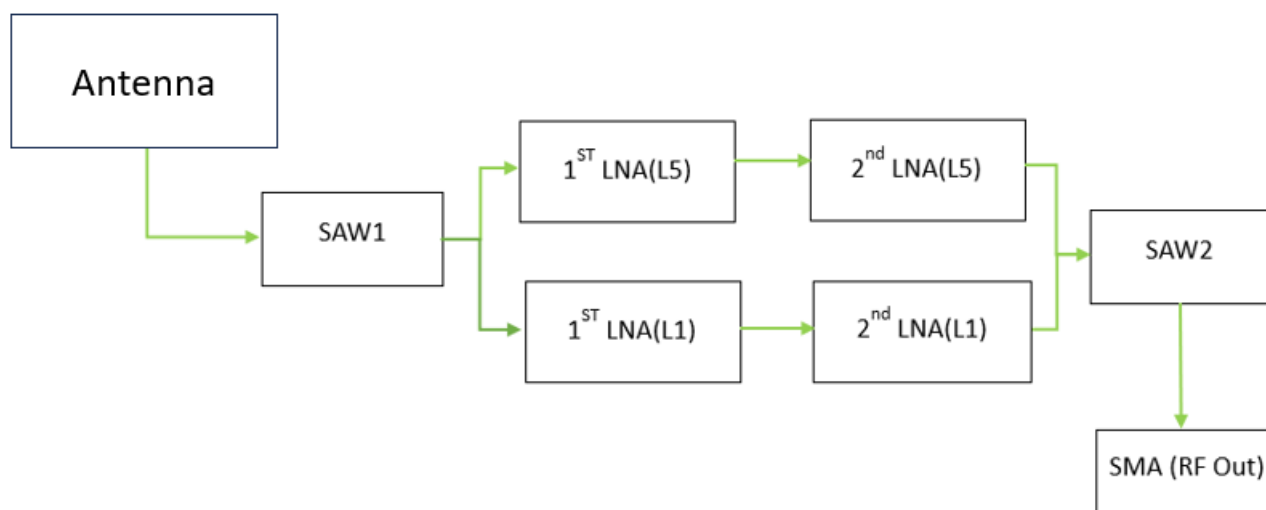


7.2 Noise Figure – Low-Band

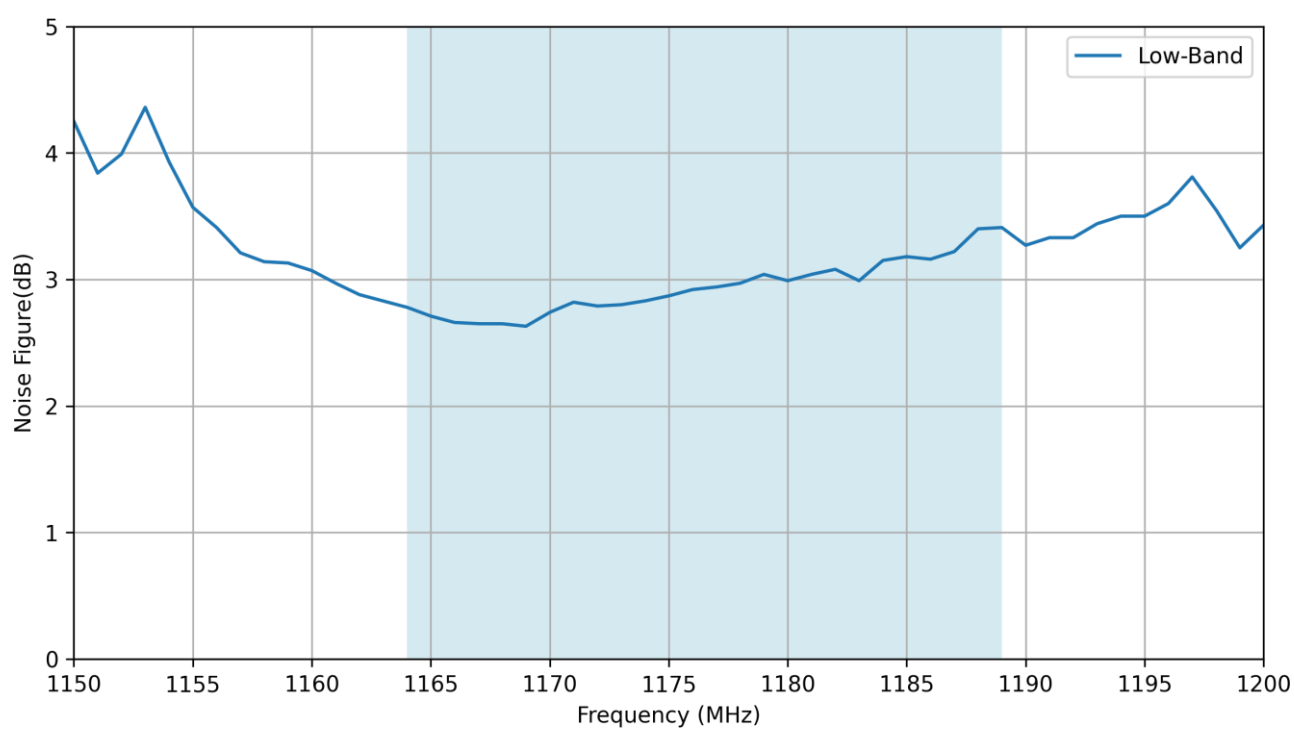


7.3 Noise Figure – High-Band

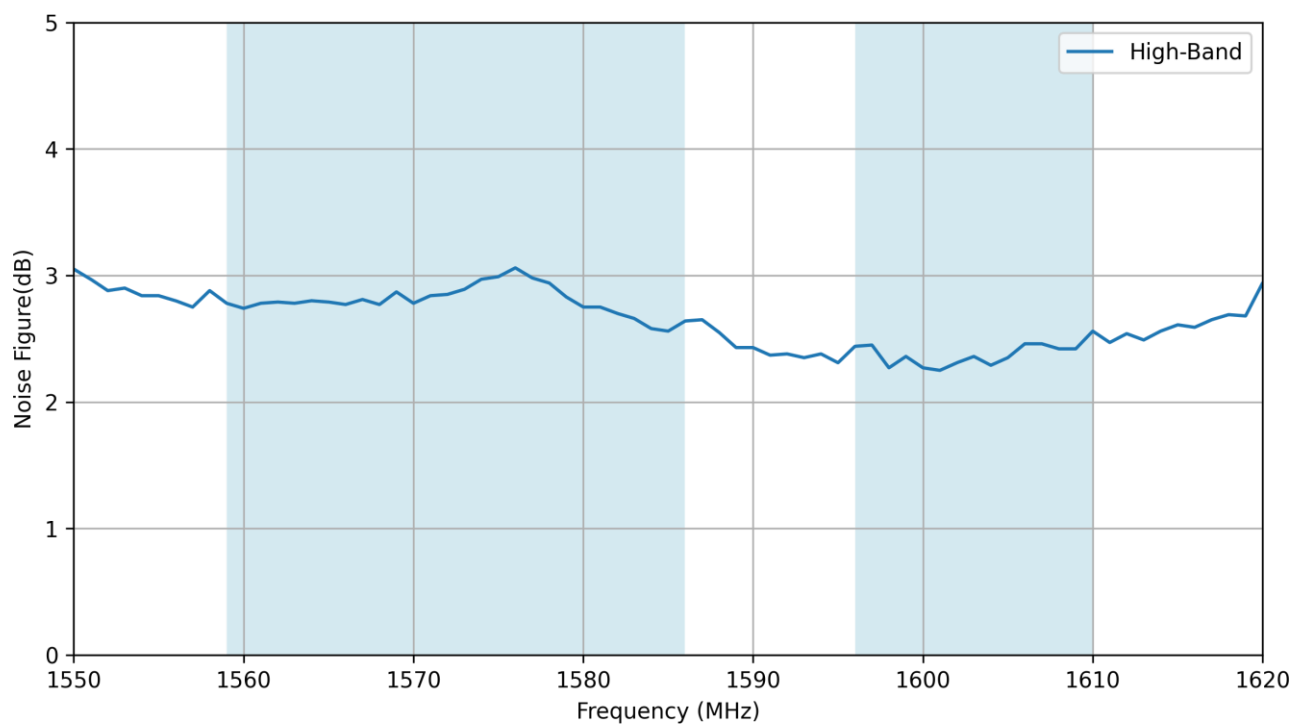


7.4 Gain – Low-Band

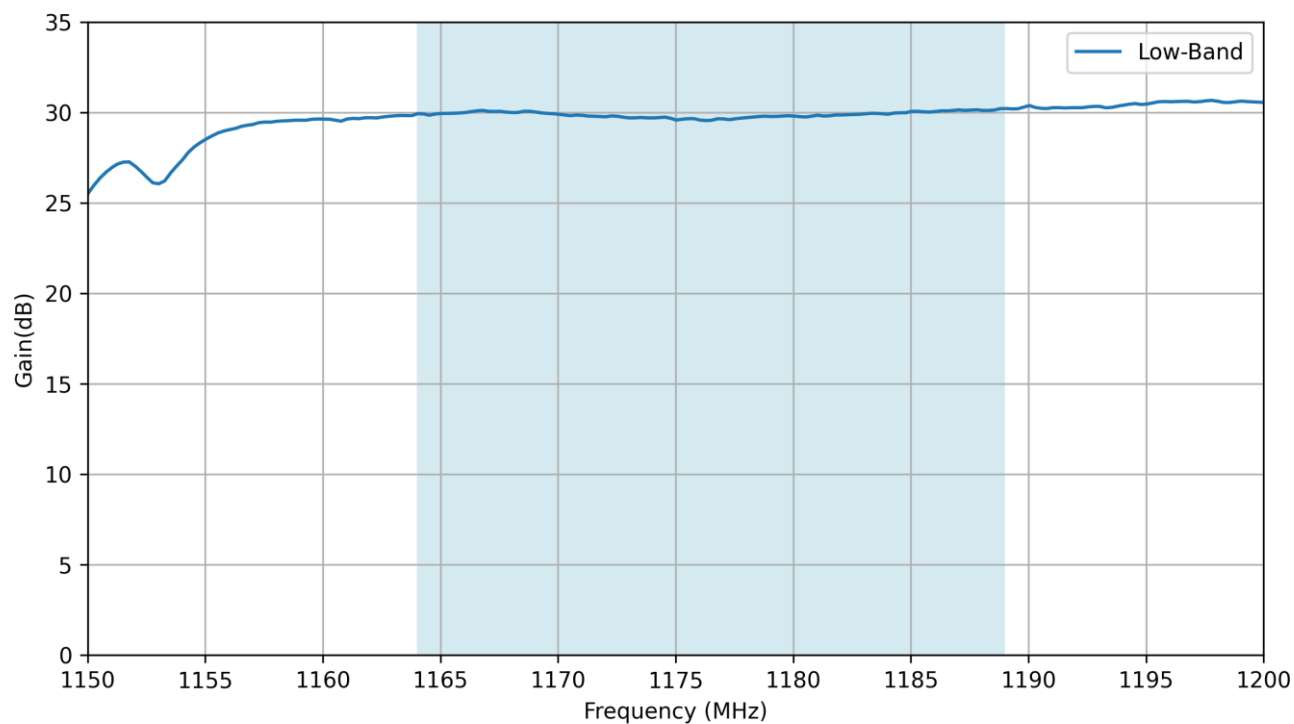


7.5 Gain – High-Band

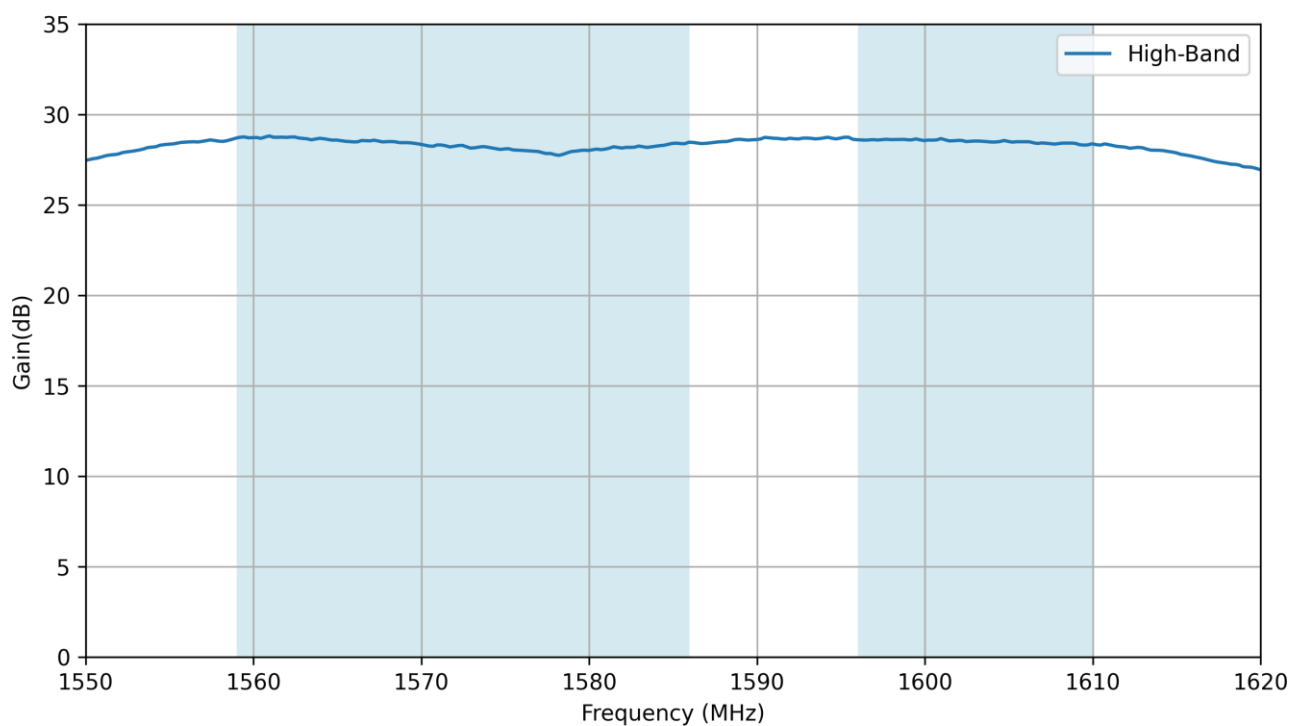


7.6 Gain – Wide-Band

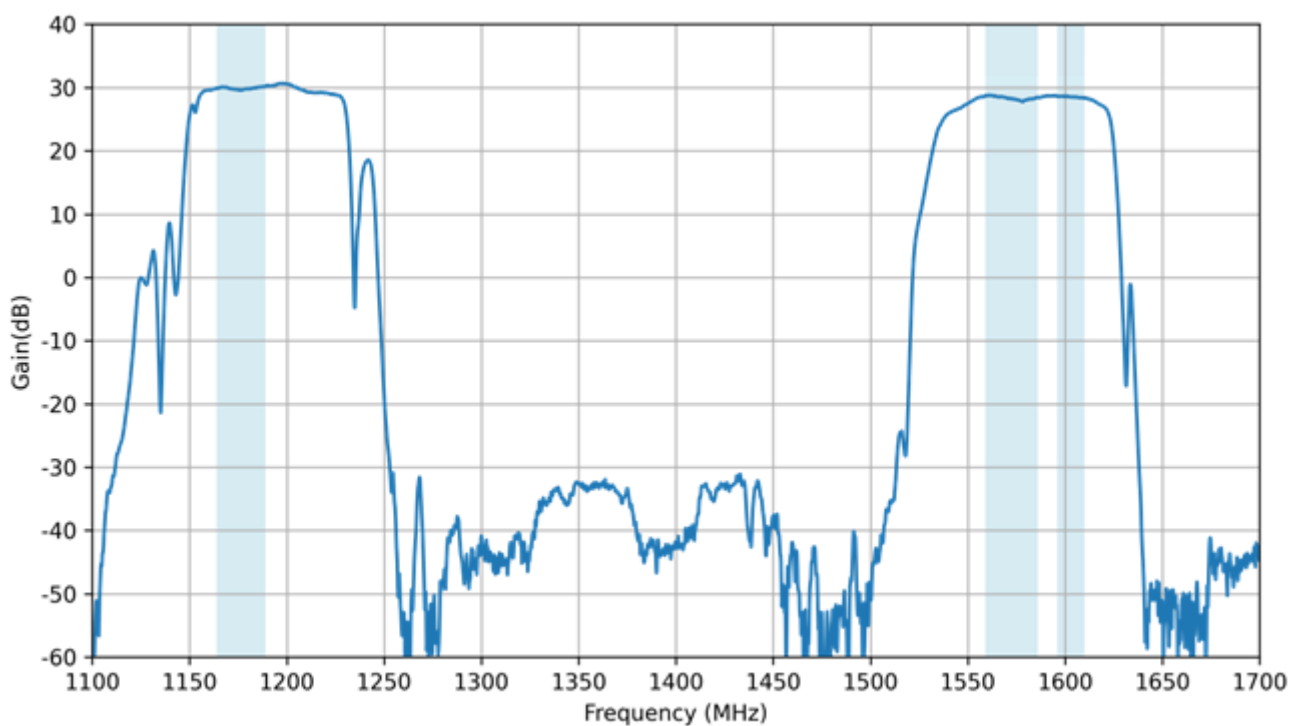


7.7 Out Of Band Rejection

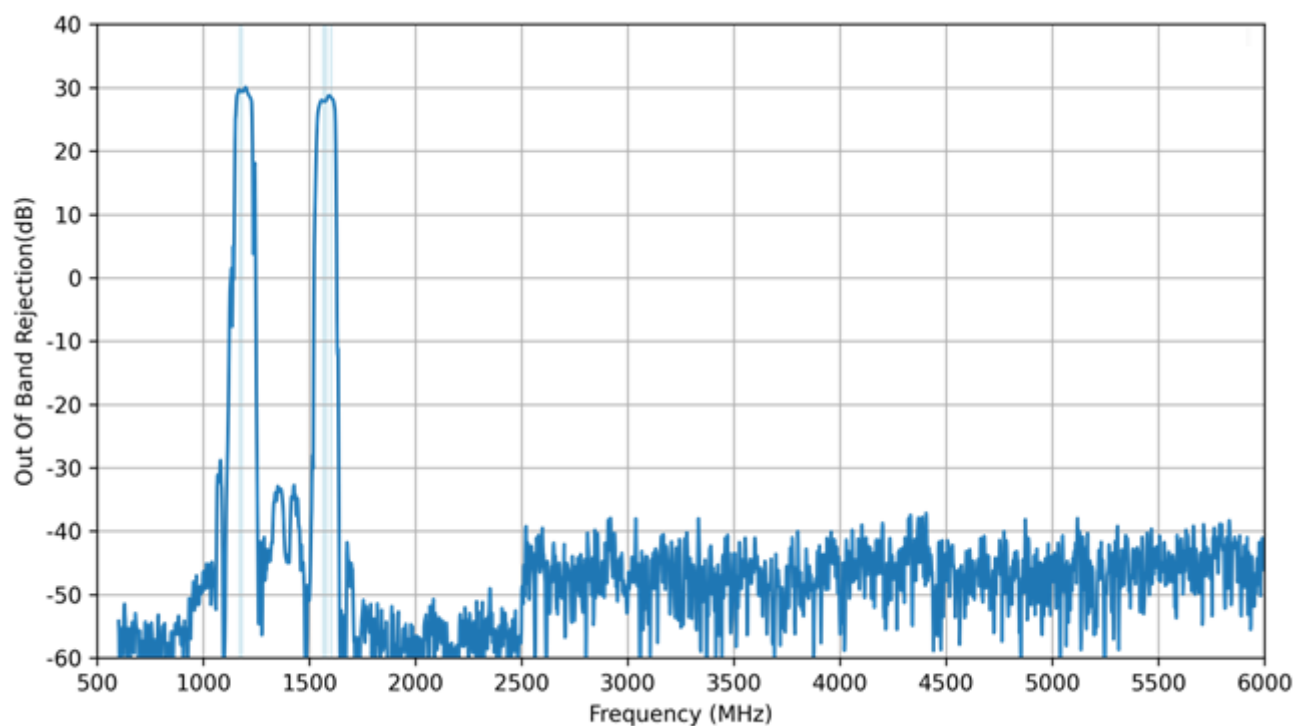

7.8 Group Delay - High-Band


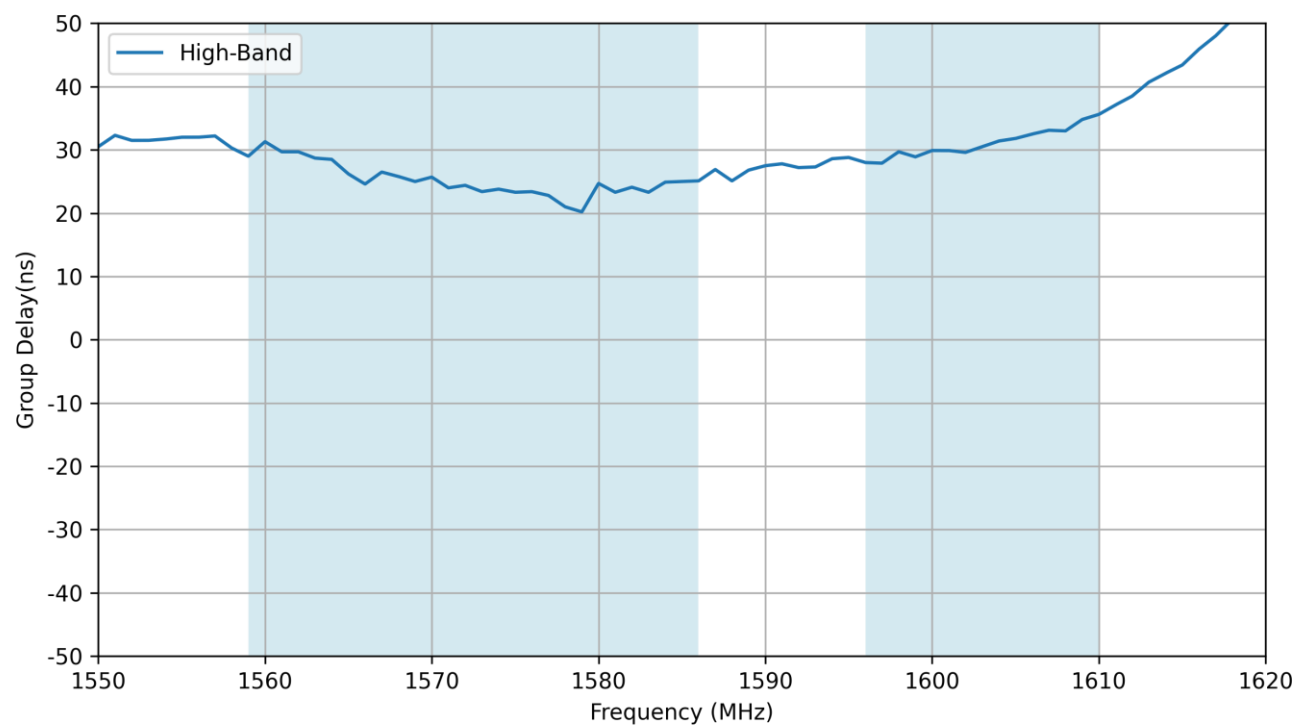


7.9 Group Delay - Low-Band

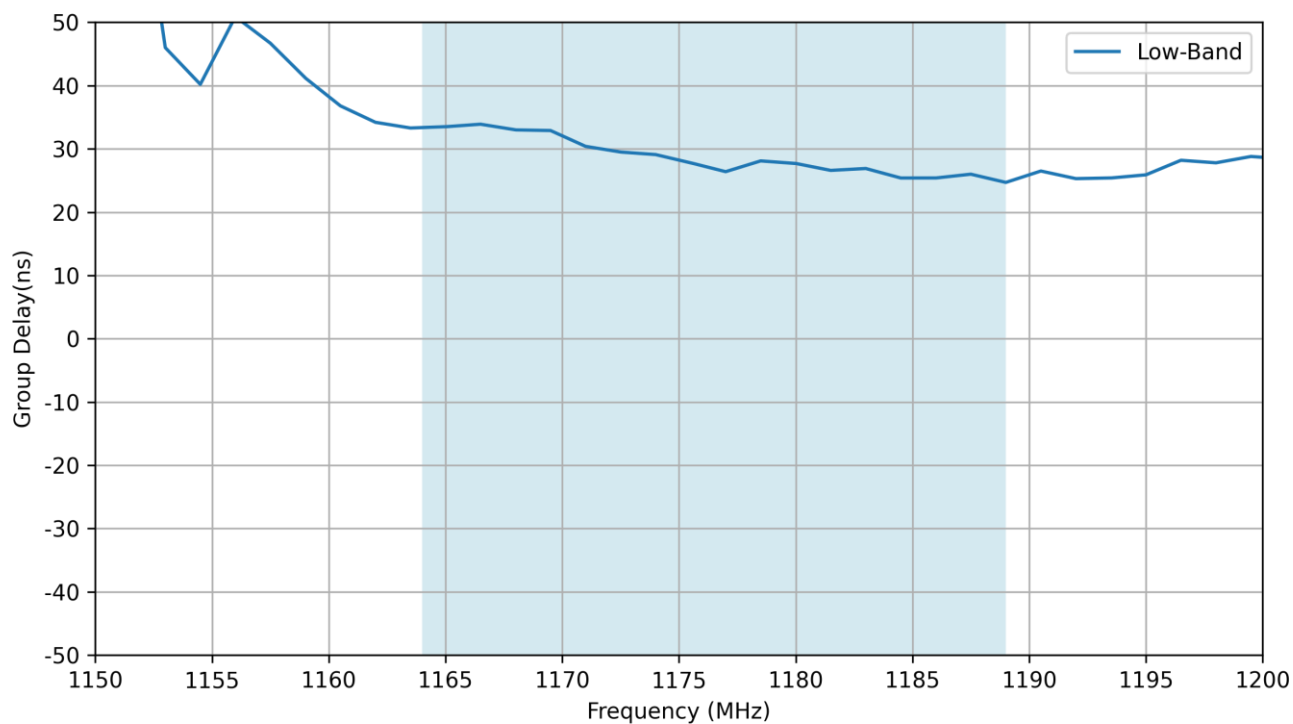


8. Radiation Patterns


8.1 Test Setup

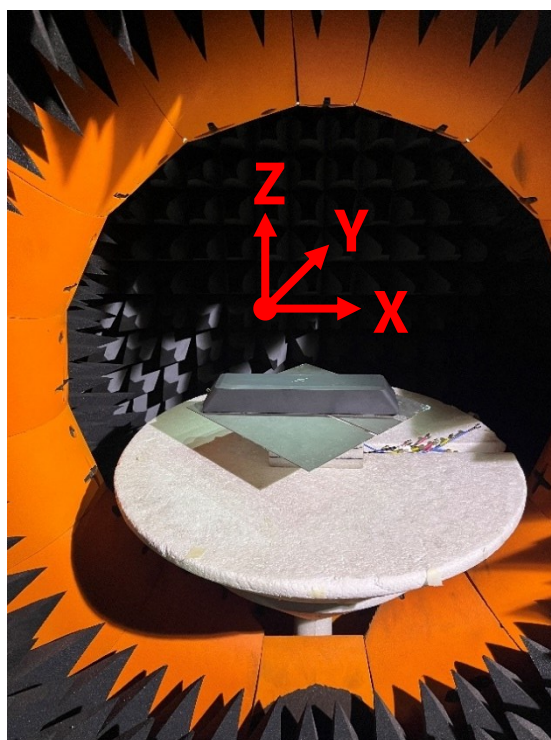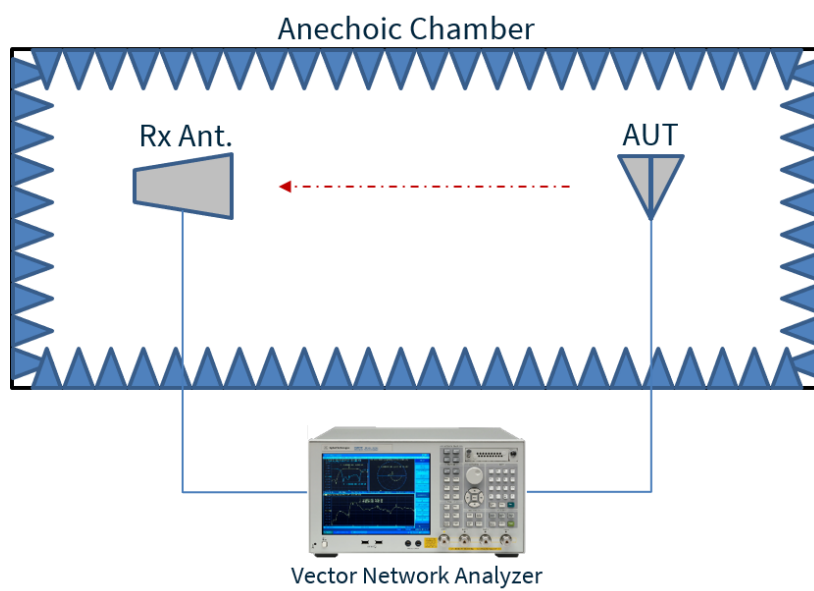



8.2 GNSS Patterns at 1176 MHz

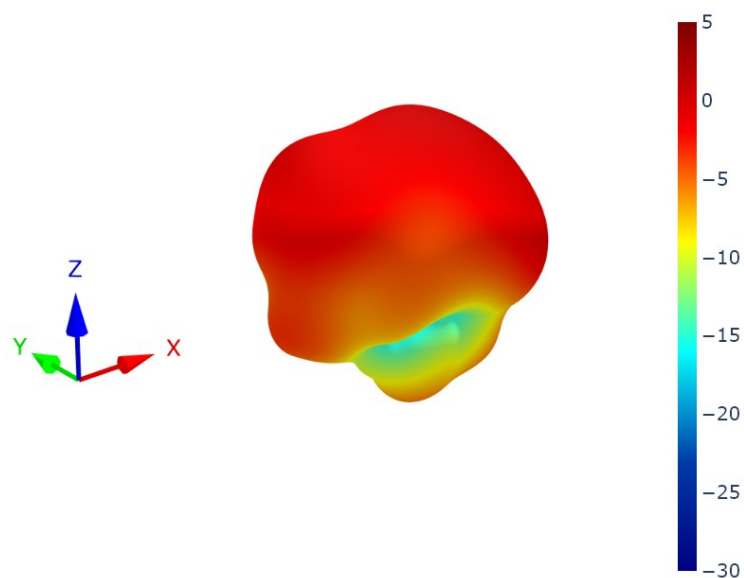


XZ Plane

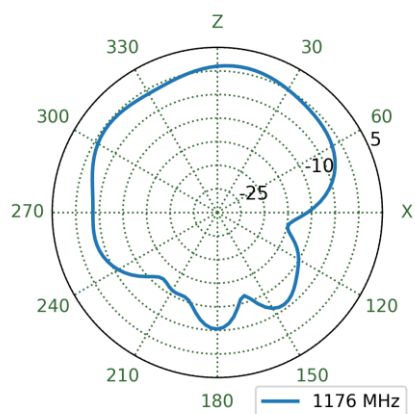


8.3 GNSS Patterns at 1575 MHz

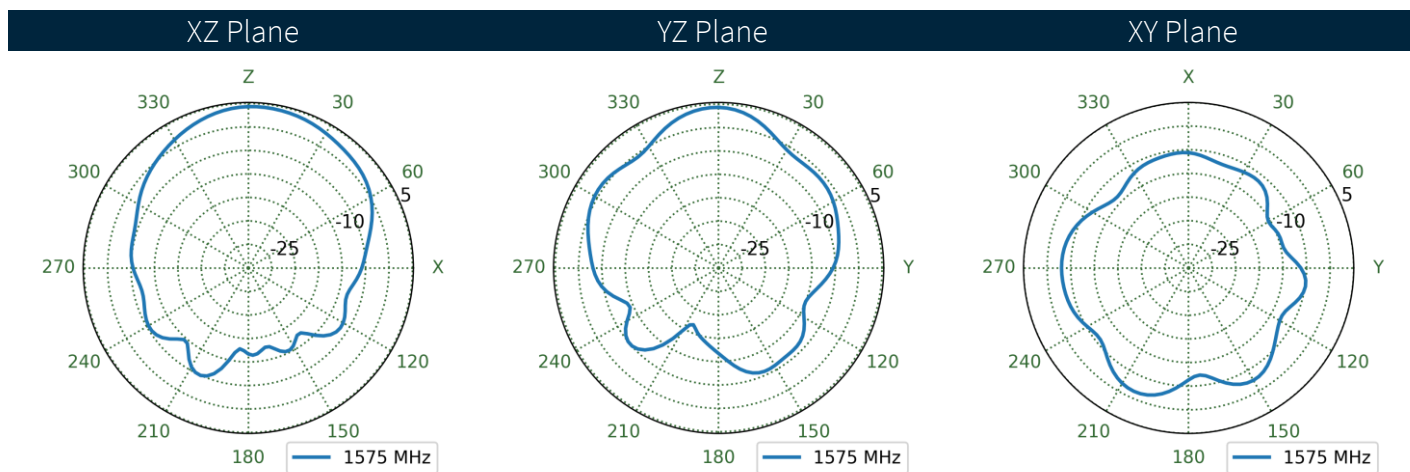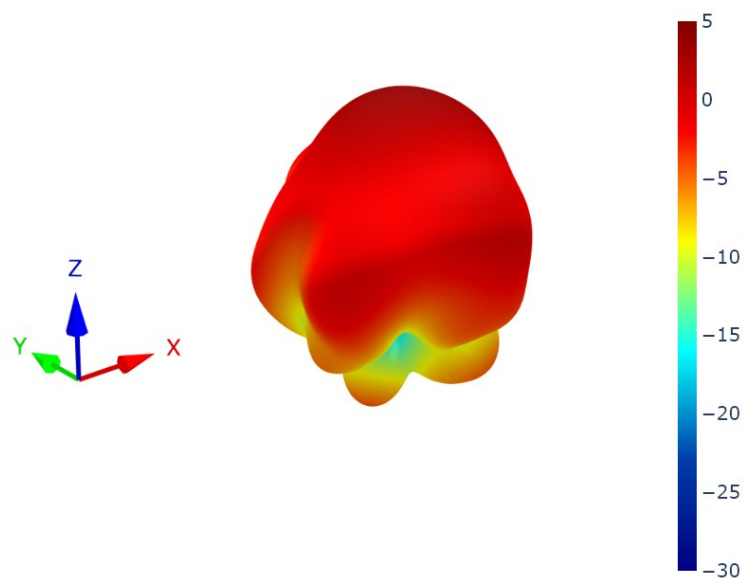


8.4 4G-5G 1 Patterns at 652 MHz

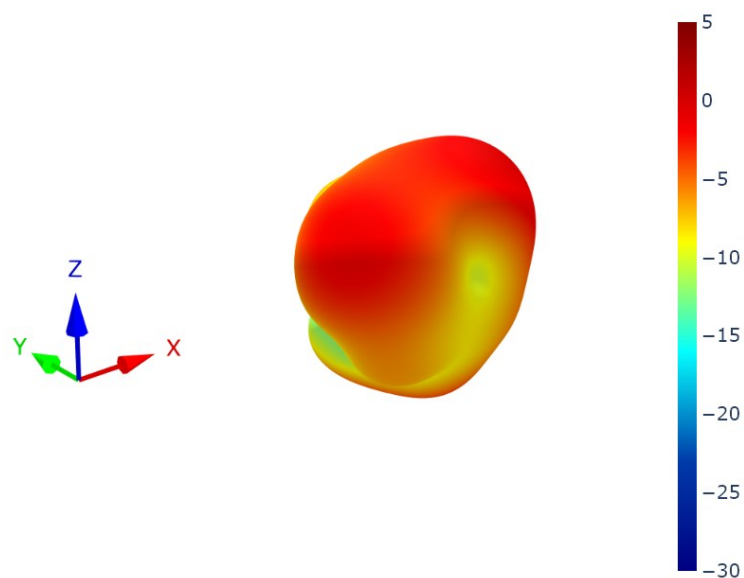


XZ Plane

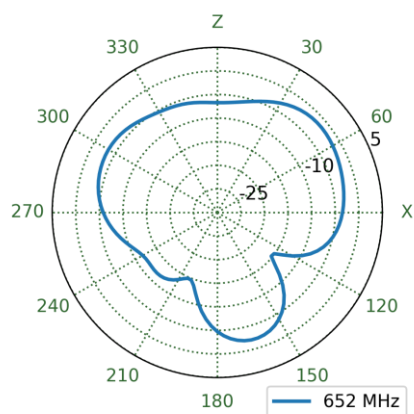


YZ Plane

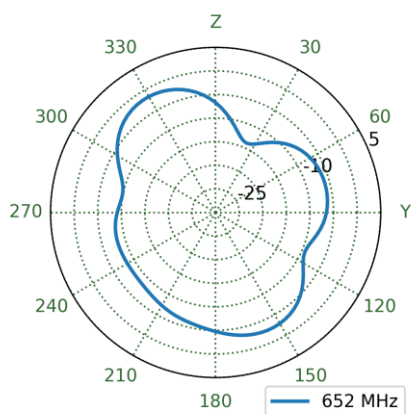


XY Plane

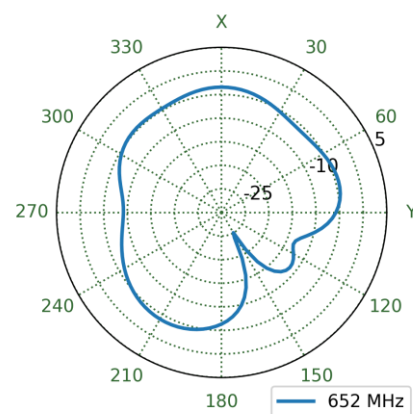


8.5 4G-5G 2 Patterns at 652 MHz

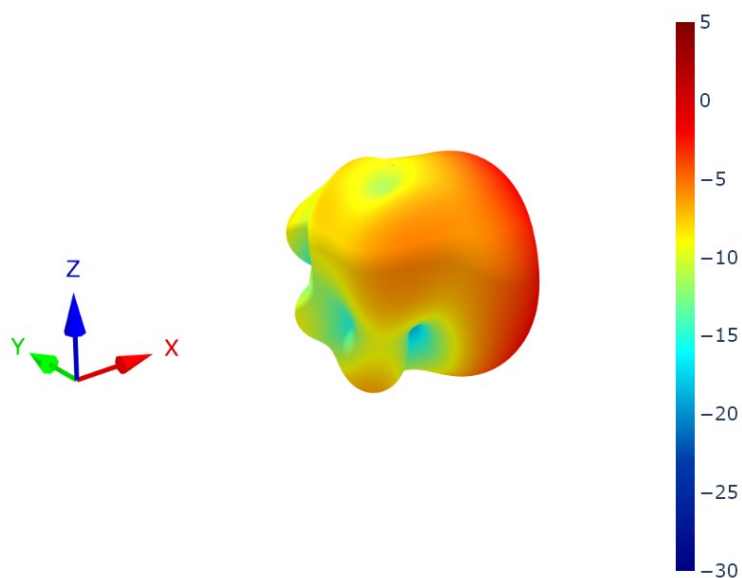


XZ Plane

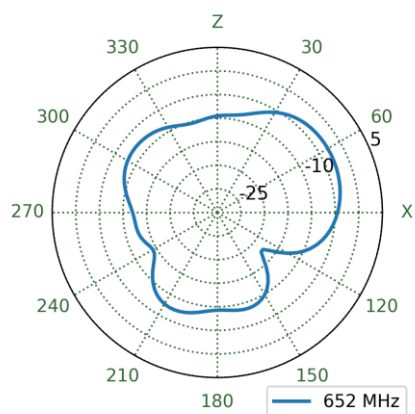


YZ Plane

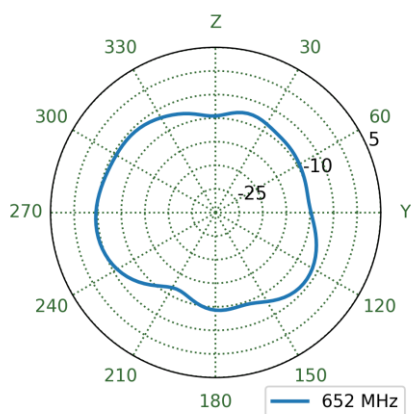


XY Plane

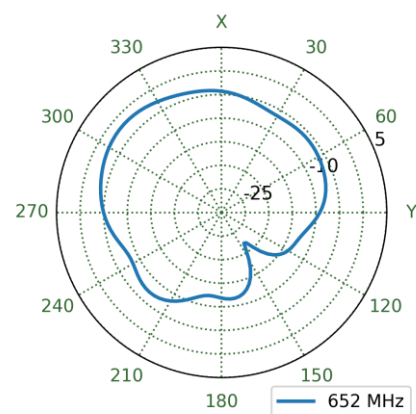


8.6 4G-5G 3 Patterns at 652 MHz

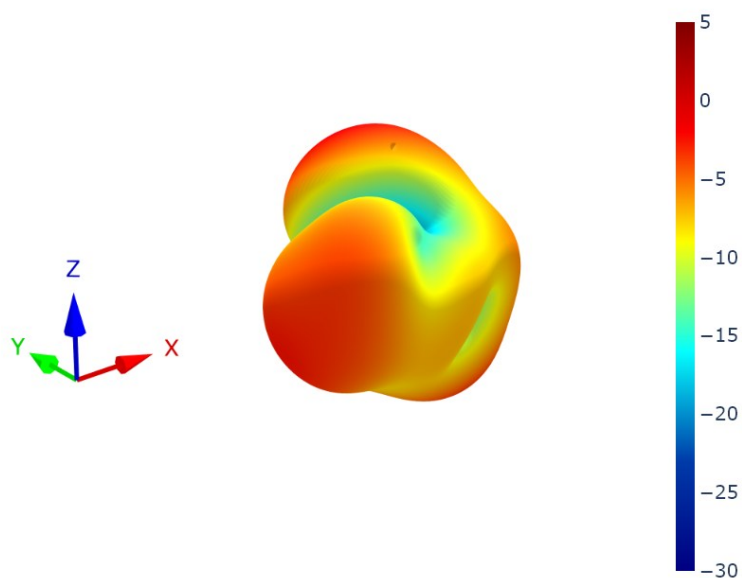


XZ Plane

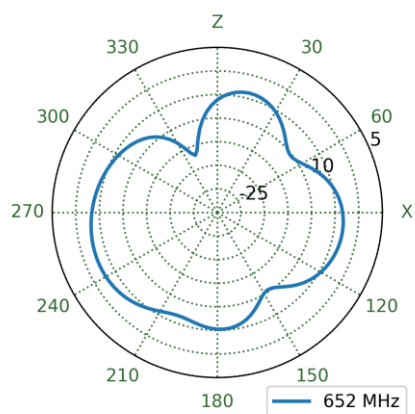


YZ Plane

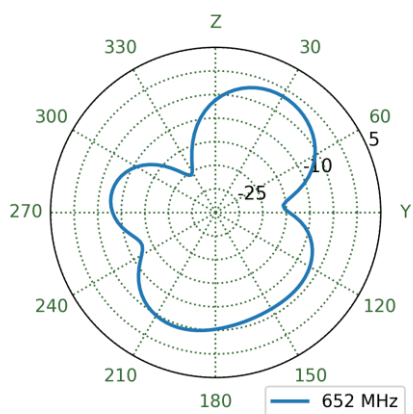


XY Plane

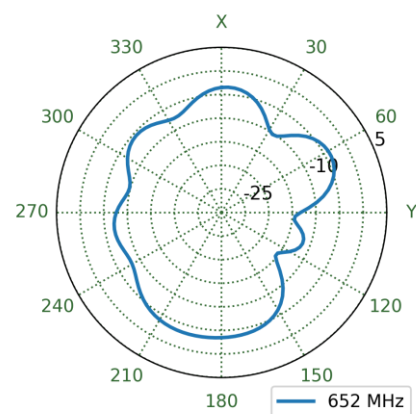


8.7 4G-5G 4 Patterns at 652 MHz

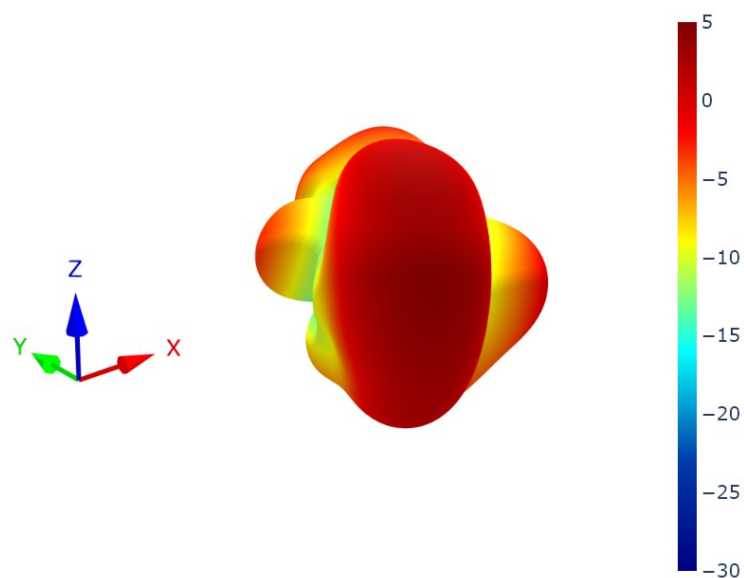


XZ Plane

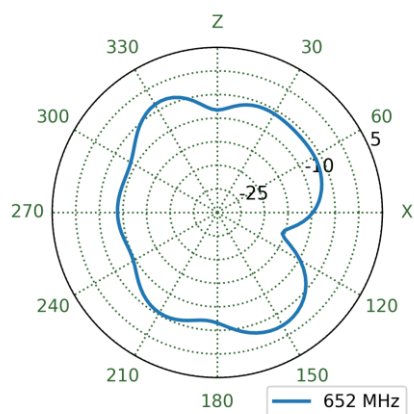


YZ Plane

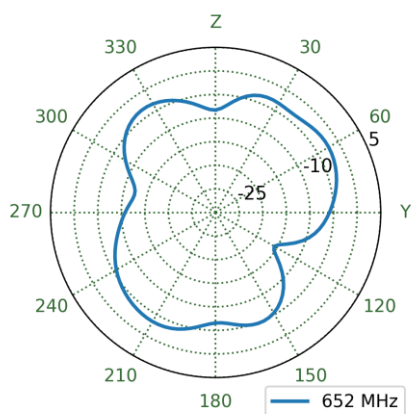


XY Plane

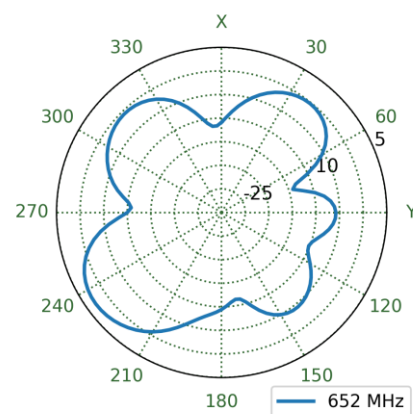


8.8 4G-5G 5 Patterns at 652 MHz

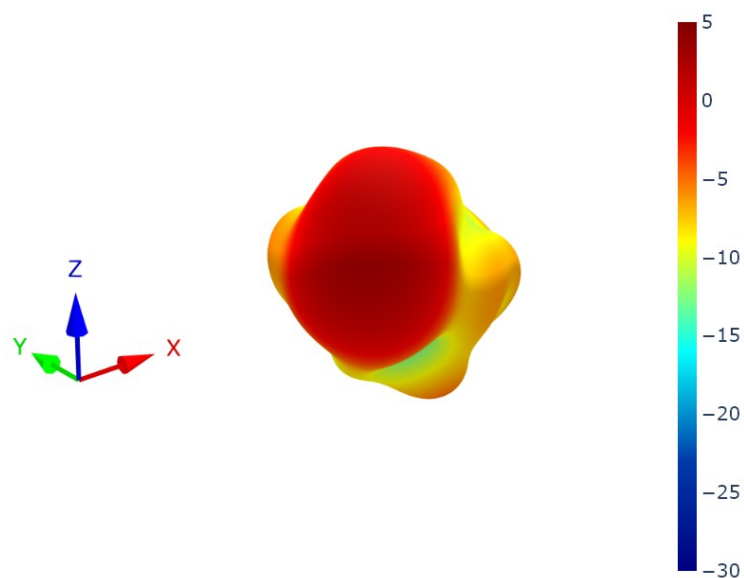


XZ Plane

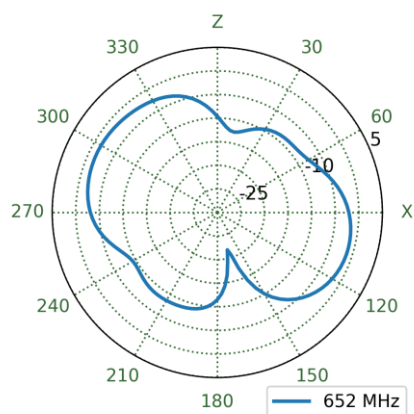


YZ Plane

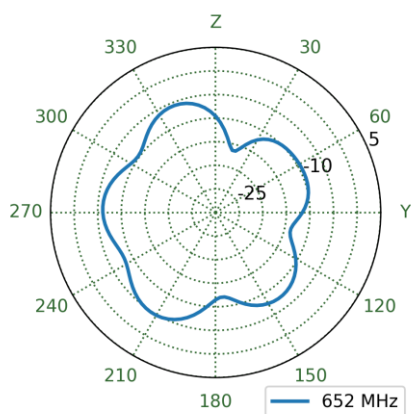


XY Plane

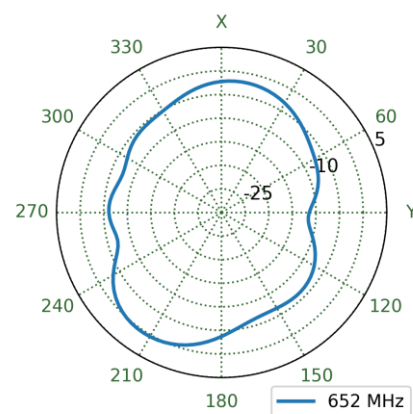


8.9 4G-5G 6 Patterns at 652 MHz

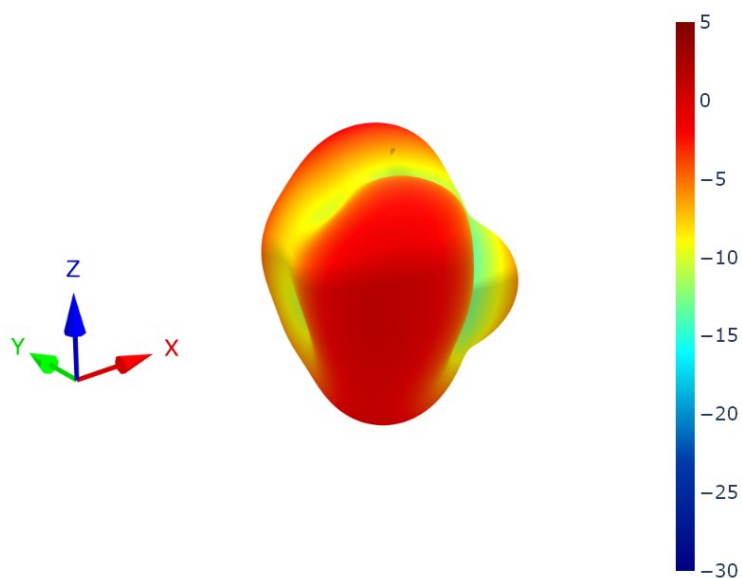


XZ Plane

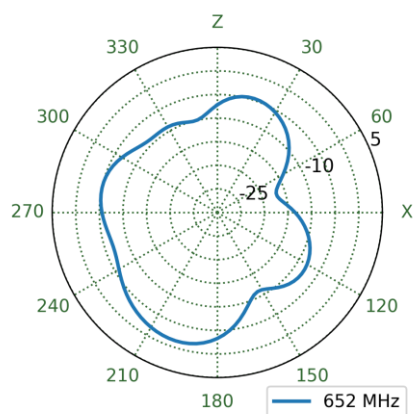


YZ Plane

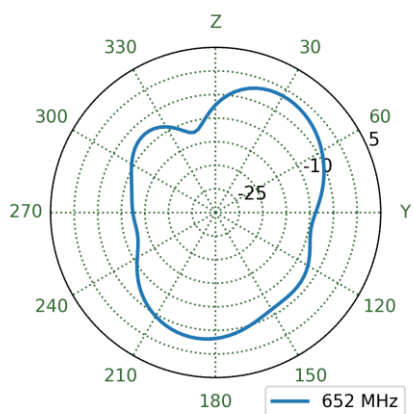


XY Plane

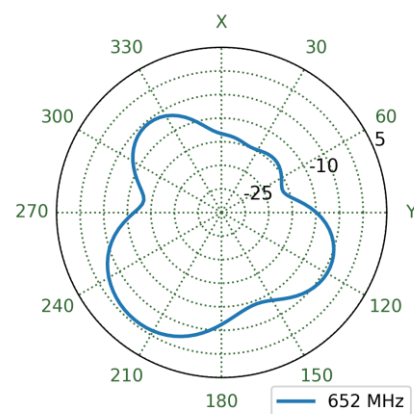


8.10 4G-5G 7 Patterns at 652 MHz

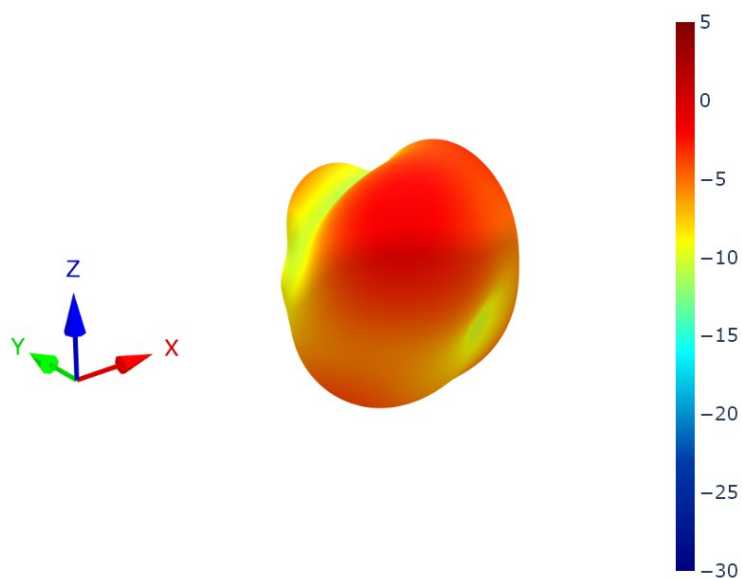


XZ Plane

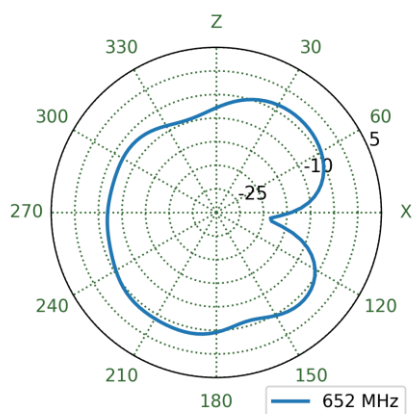


YZ Plane

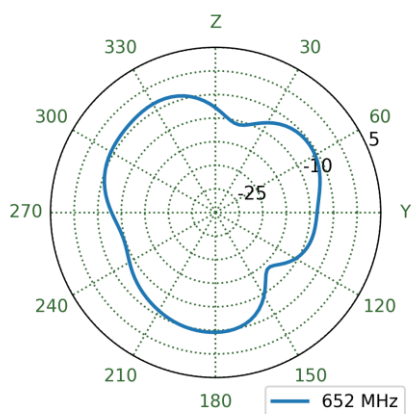


XY Plane

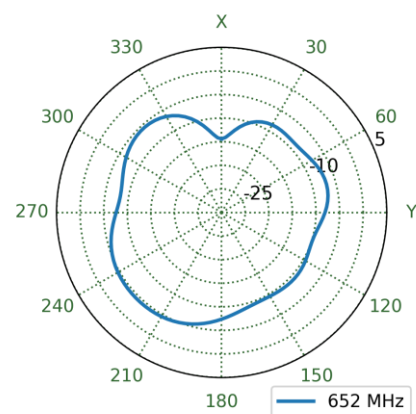


8.11 4G-5G 8 Patterns at 652 MHz

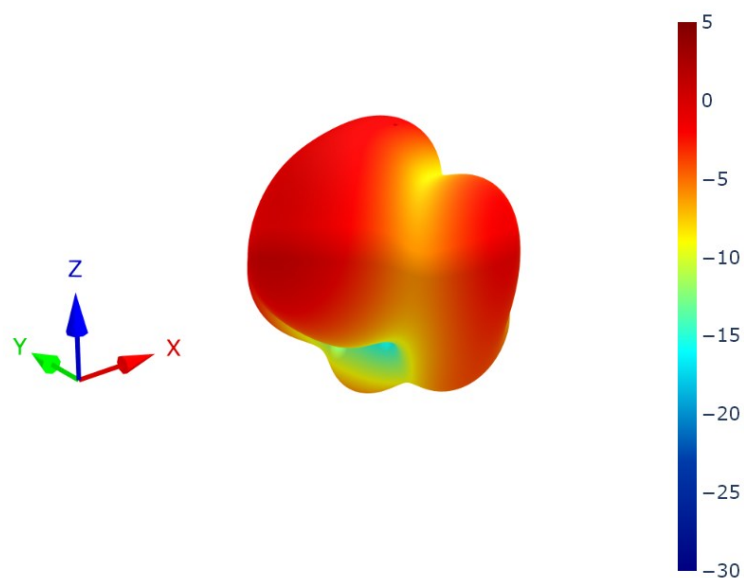


XZ Plane

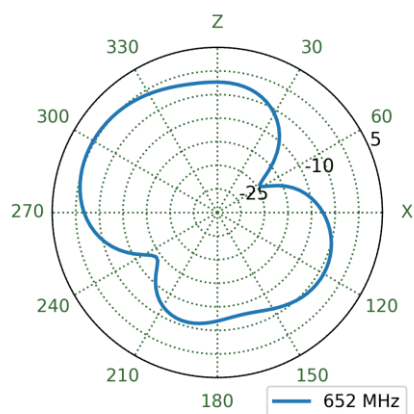


YZ Plane

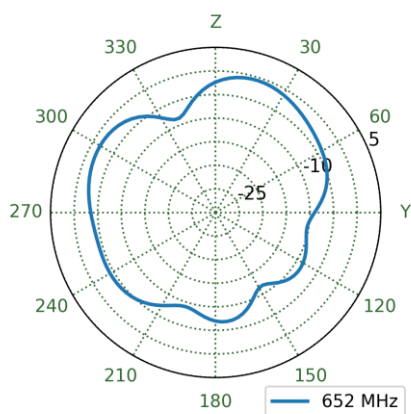


XY Plane

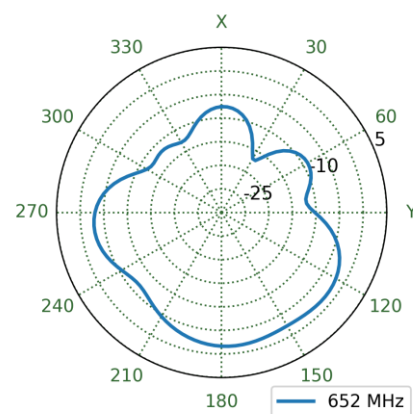


8.12 4G-5G 1 Patterns at 751 MHz

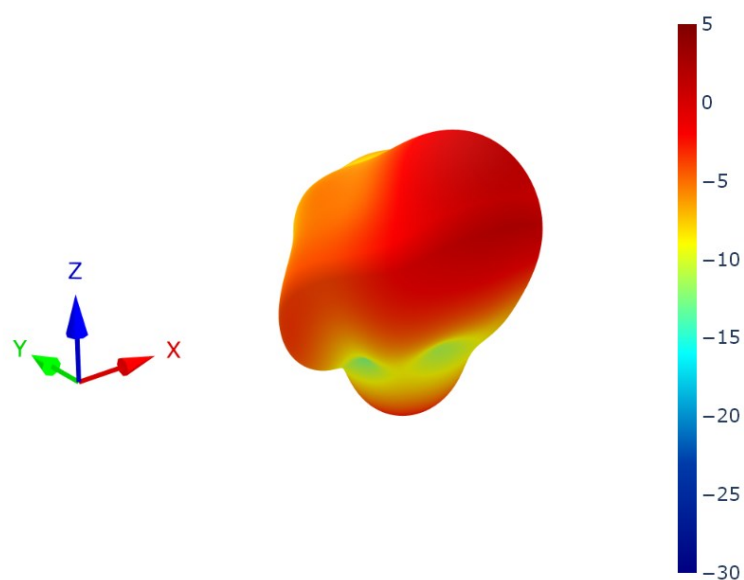


XZ Plane

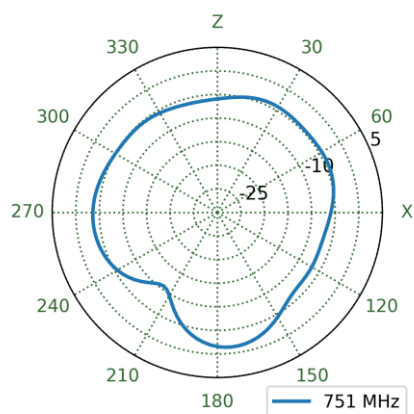


YZ Plane

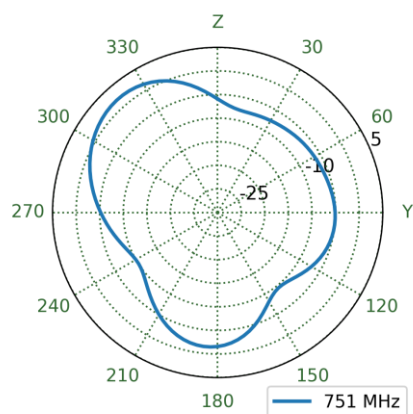


XY Plane

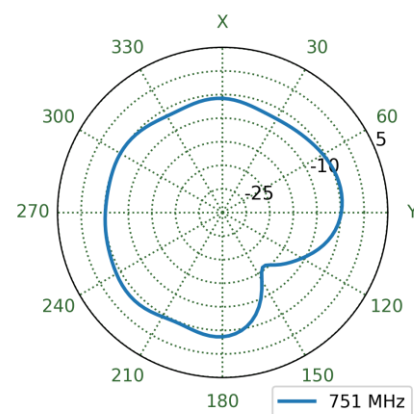


8.13 4G-5G 2 Patterns at 751 MHz

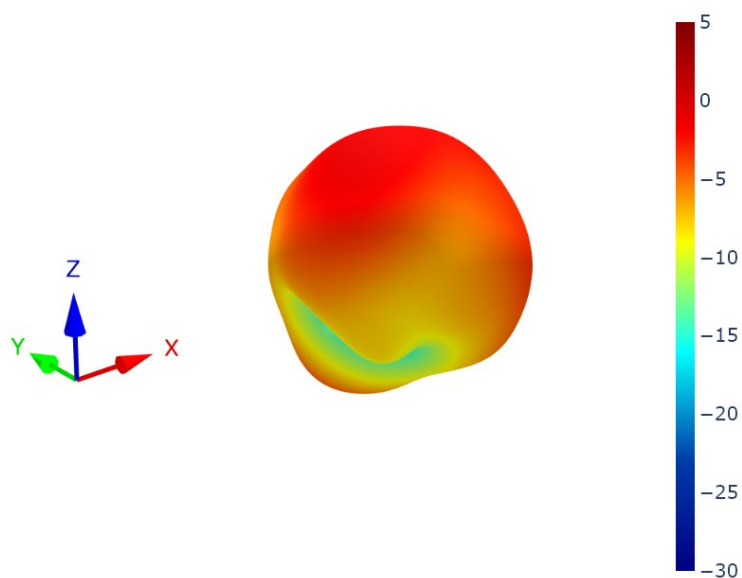


XZ Plane

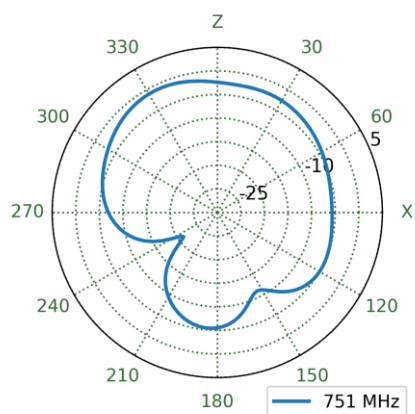


YZ Plane

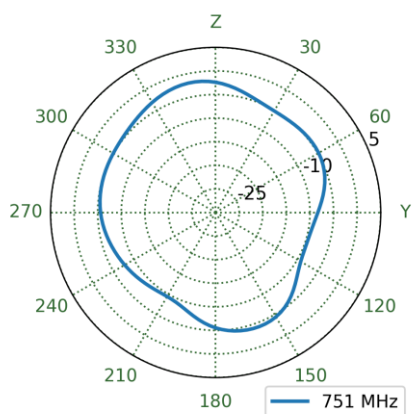


XY Plane

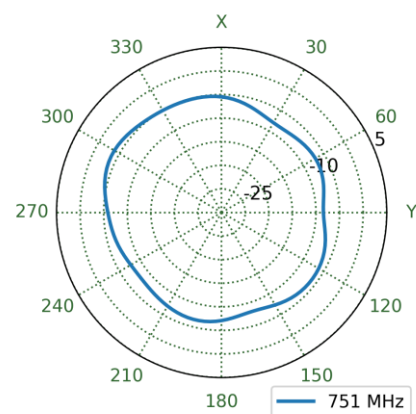


8.14 4G-5G 3 Patterns at 751 MHz

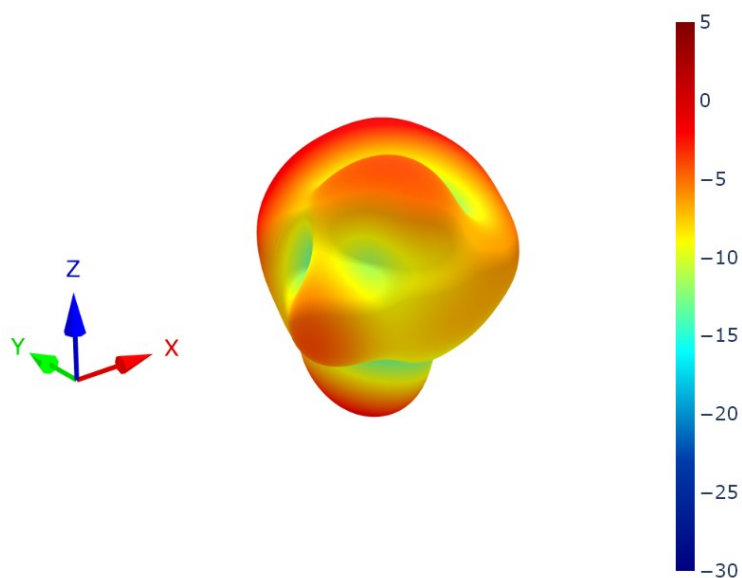


XZ Plane

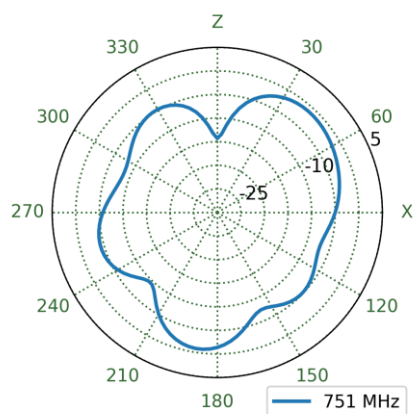


YZ Plane

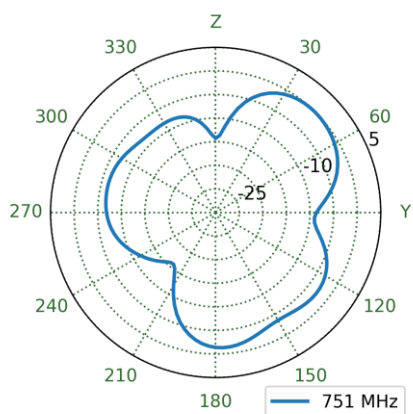


XY Plane

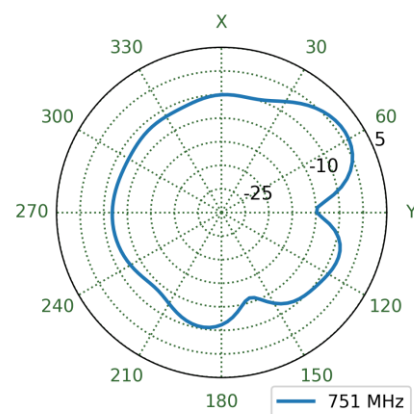


8.15 4G-5G 4 Patterns at 751 MHz

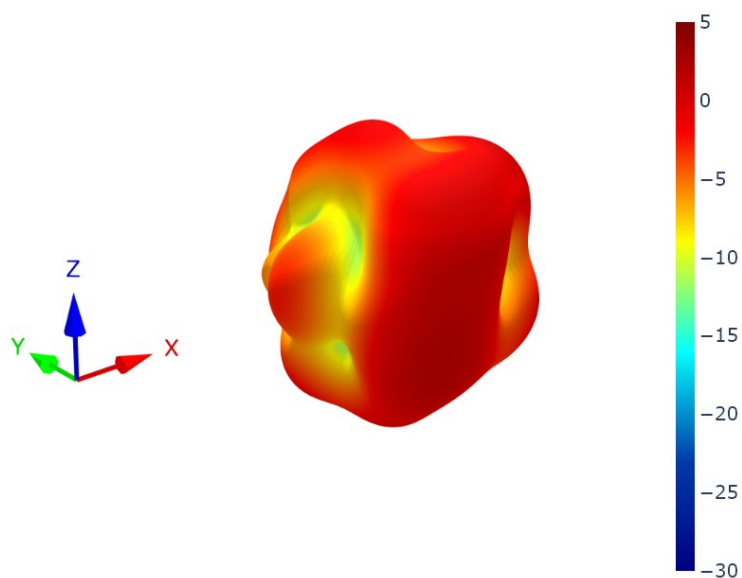


XZ Plane

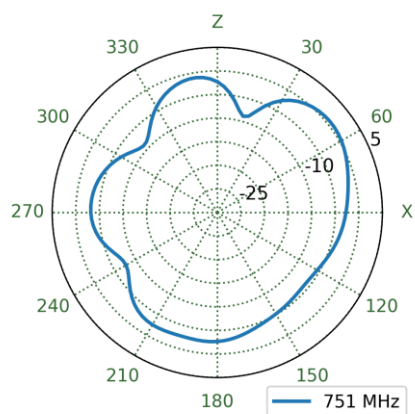


YZ Plane

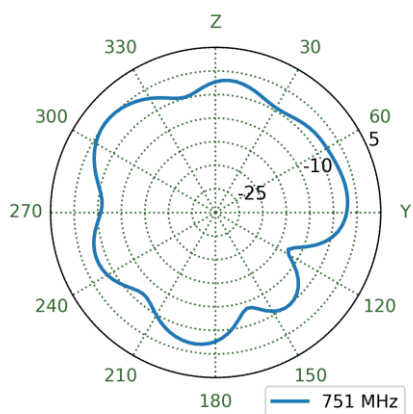


XY Plane

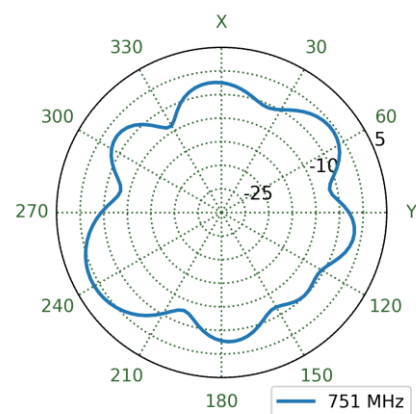


8.16 4G-5G 5 Patterns at 751 MHz

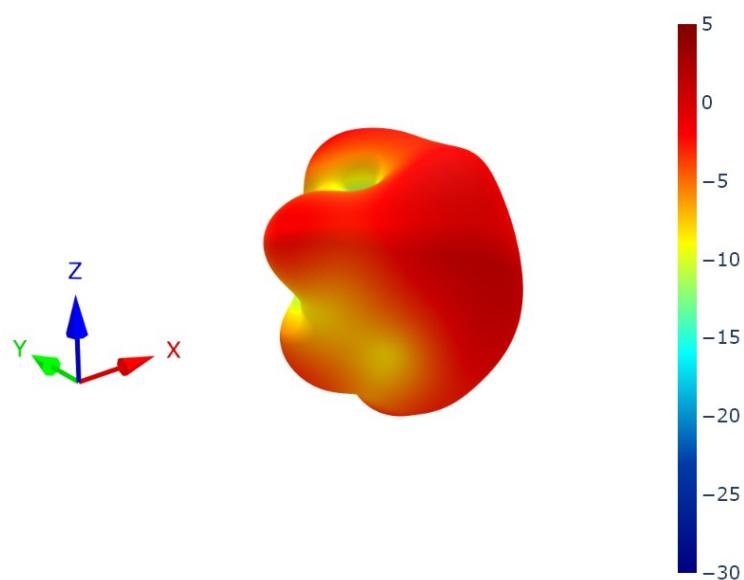


XZ Plane

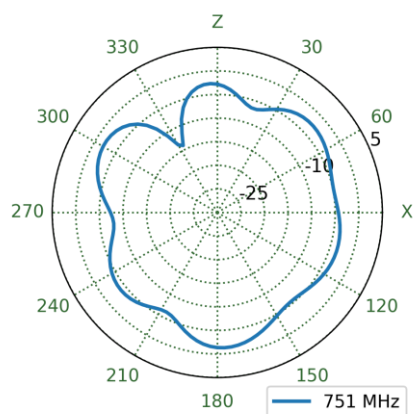


YZ Plane

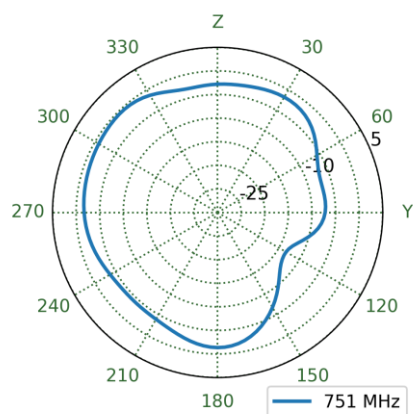


XY Plane

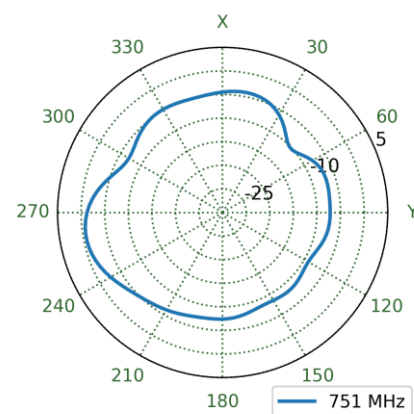


8.17 4G-5G 6 Patterns at 751 MHz

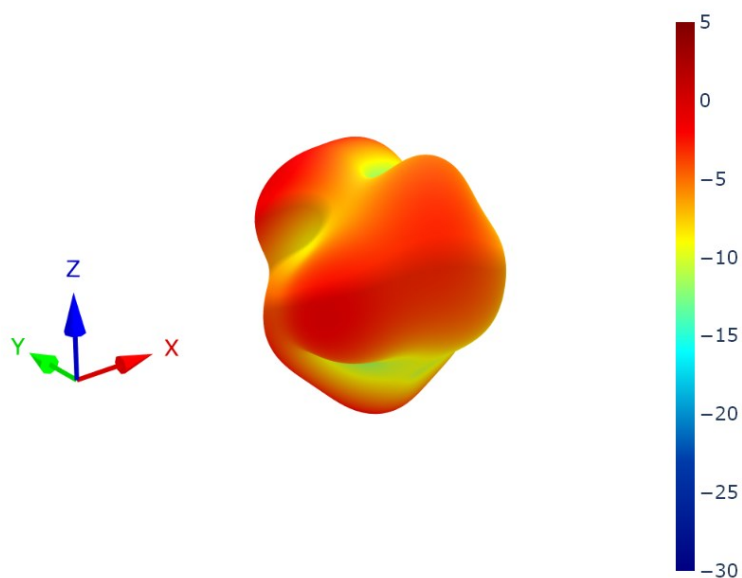


XZ Plane

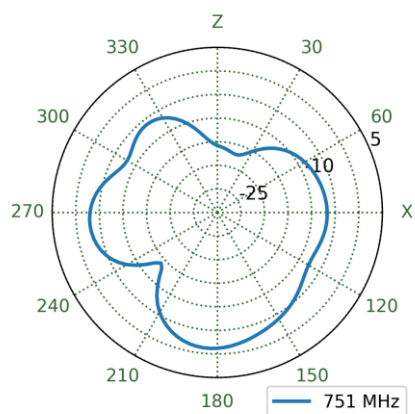


YZ Plane

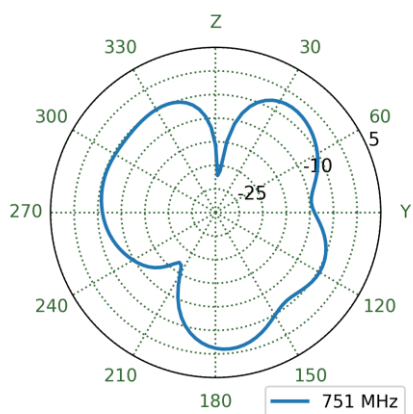


XY Plane

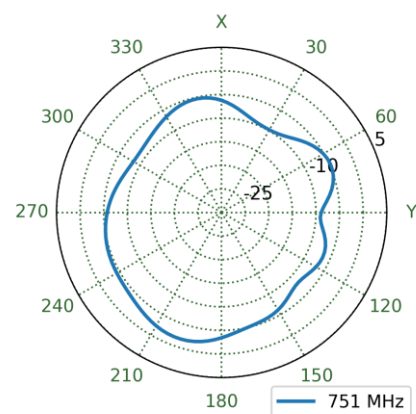


8.18 4G-5G 7 Patterns at 751 MHz

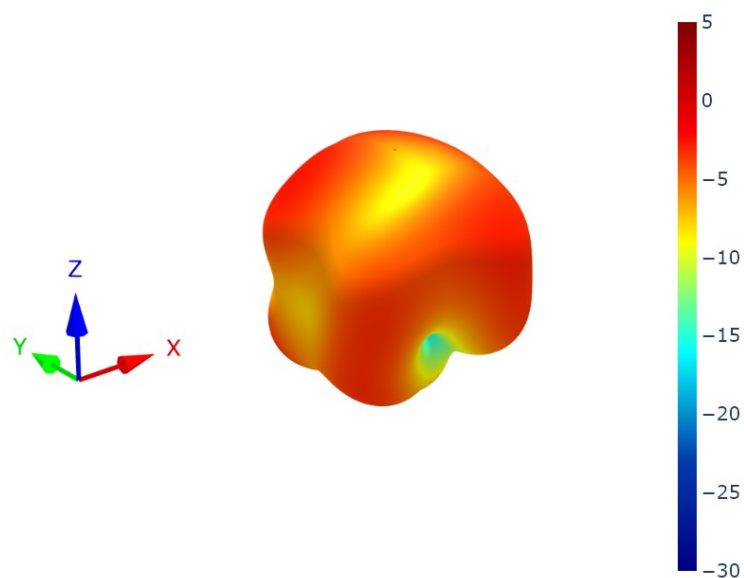


XZ Plane

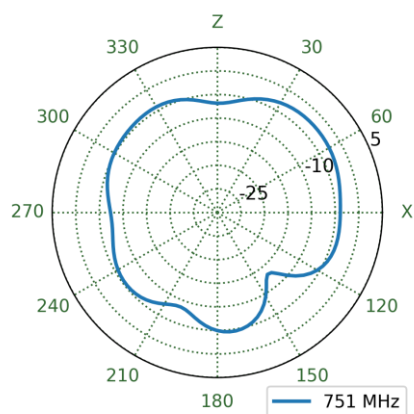


YZ Plane

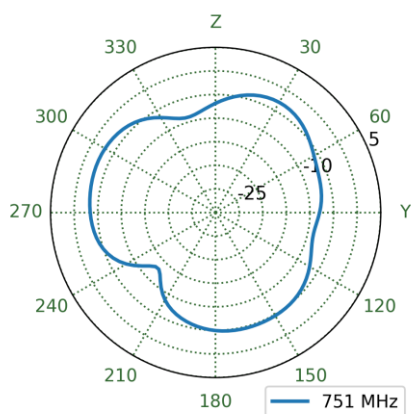


XY Plane

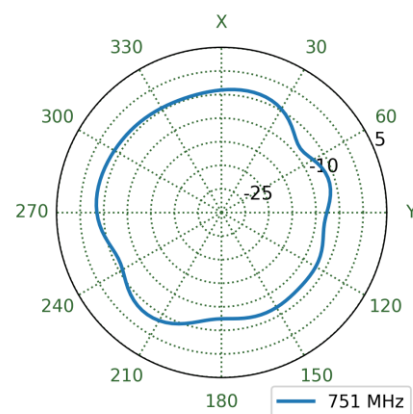


8.19 4G-5G 8 Patterns at 751 MHz

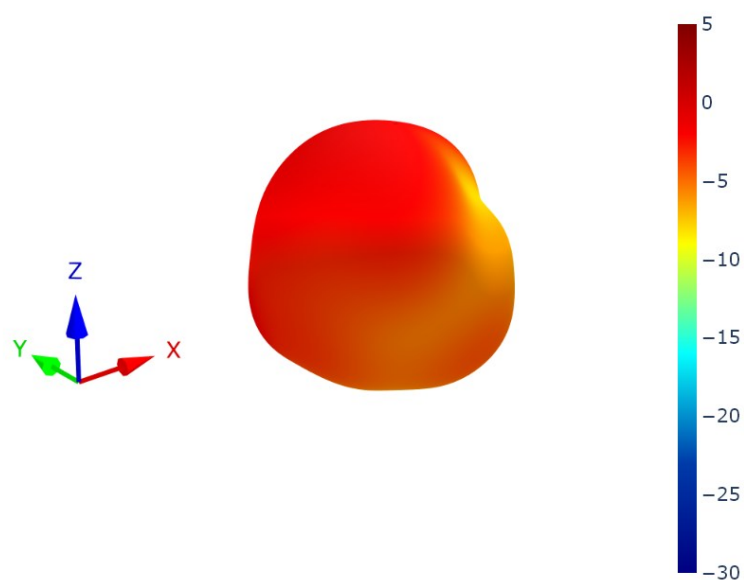


XZ Plane

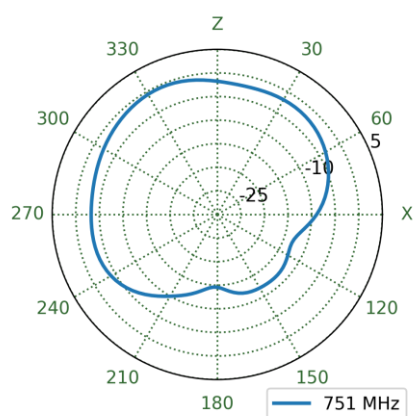


YZ Plane

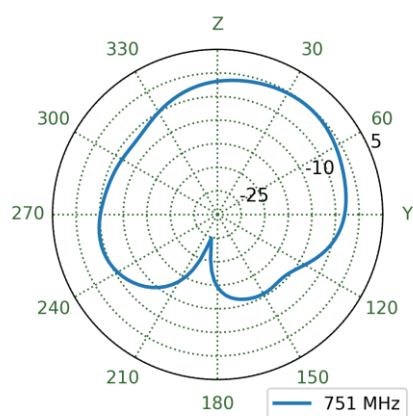


XY Plane

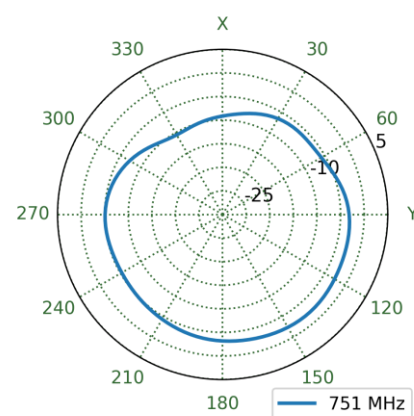


8.20 4G-5G 1 Patterns at 890 MHz

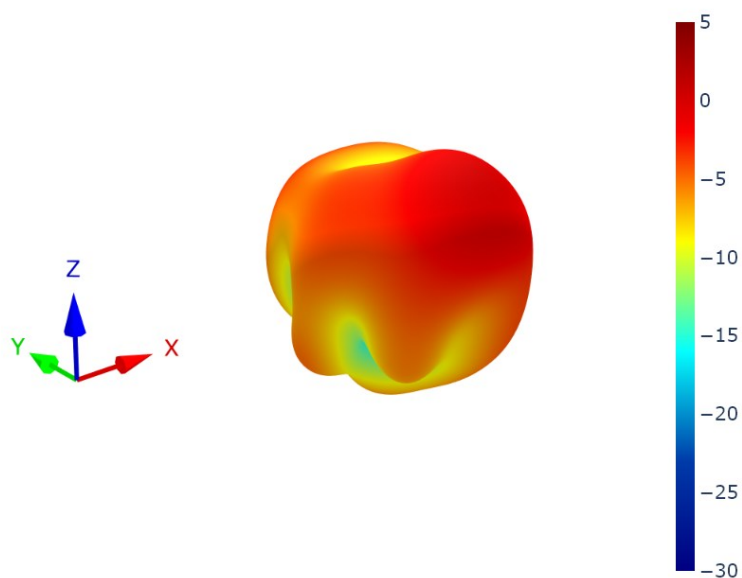


XZ Plane

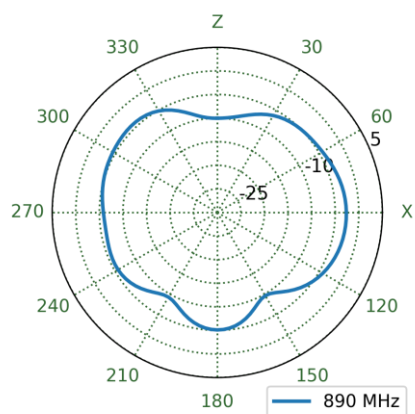


YZ Plane

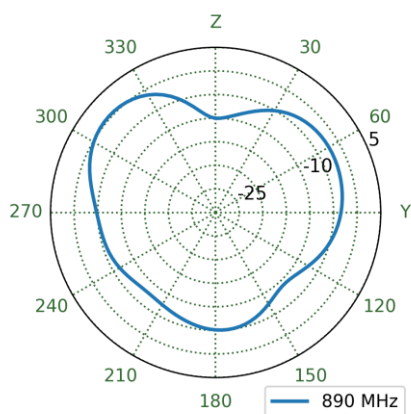


XY Plane

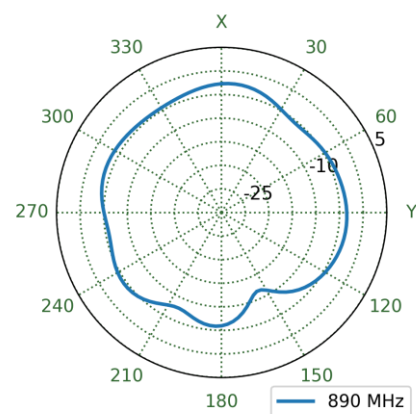


8.21 4G-5G 2 Patterns at 890 MHz

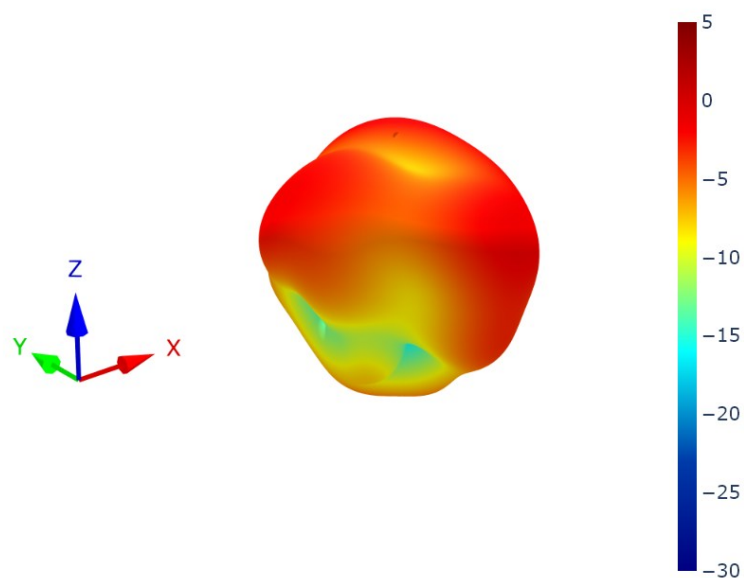


XZ Plane

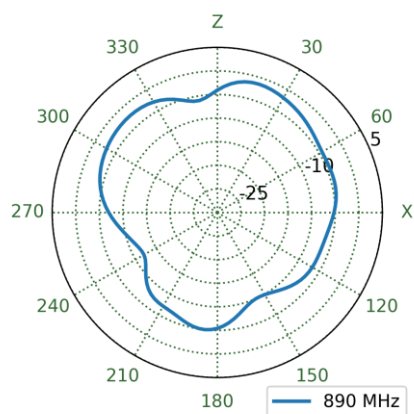


YZ Plane

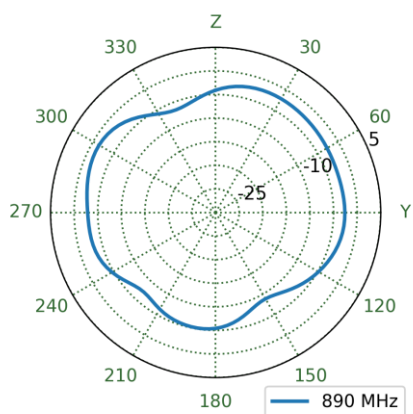


XY Plane

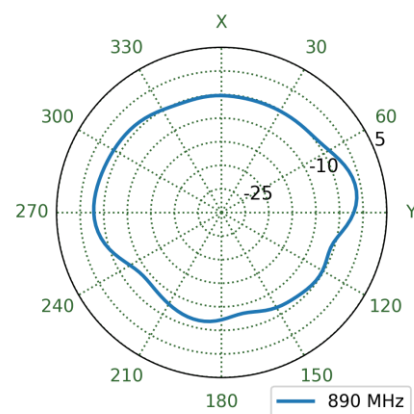


8.22 4G-5G 3 Patterns at 890 MHz

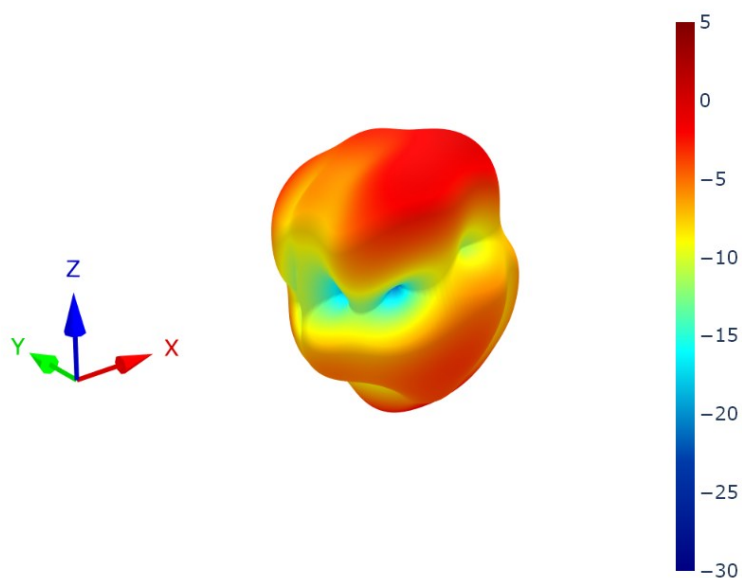


XZ Plane

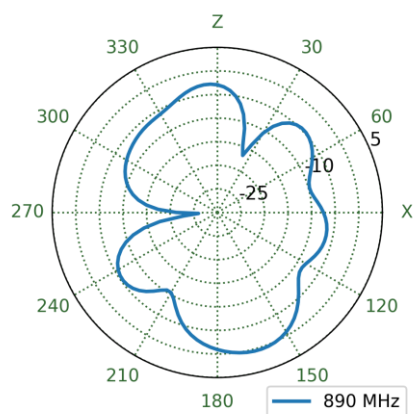


YZ Plane

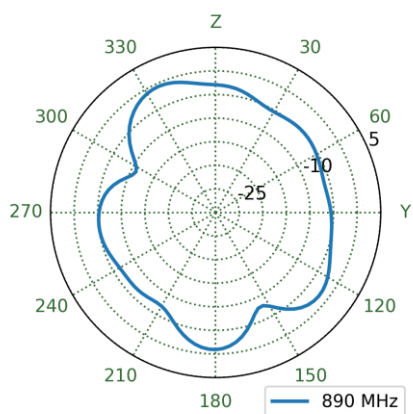


XY Plane

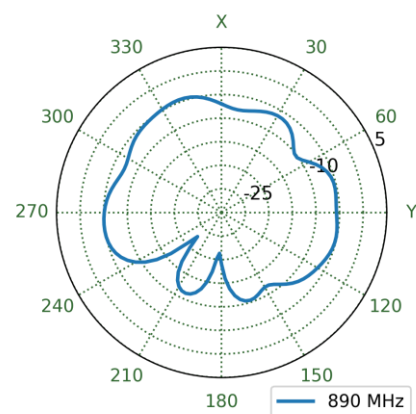


8.23 4G-5G 4 Patterns at 890 MHz

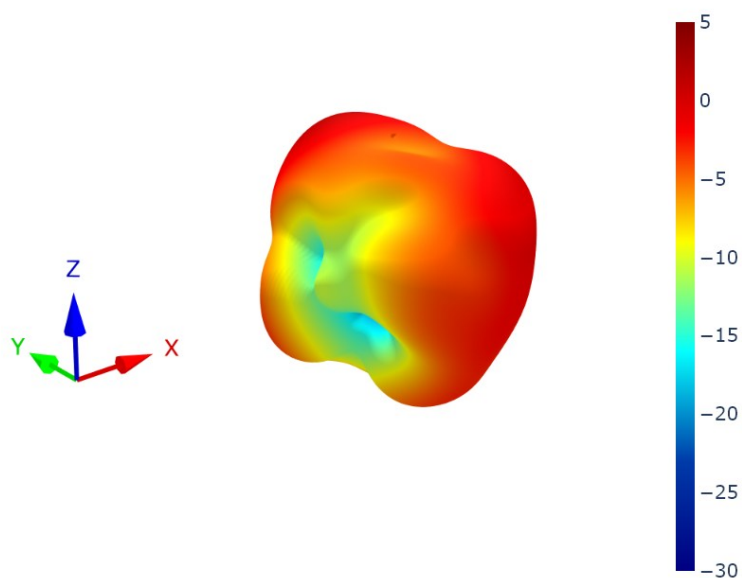


XZ Plane

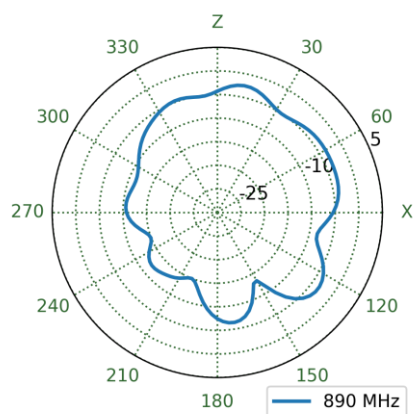


YZ Plane

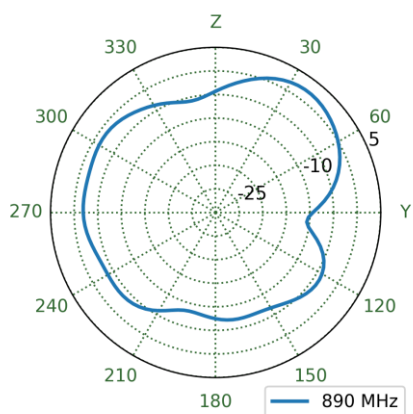


XY Plane

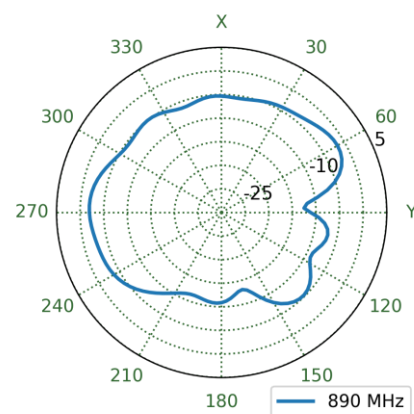


8.24 4G-5G 5 Patterns at 890 MHz

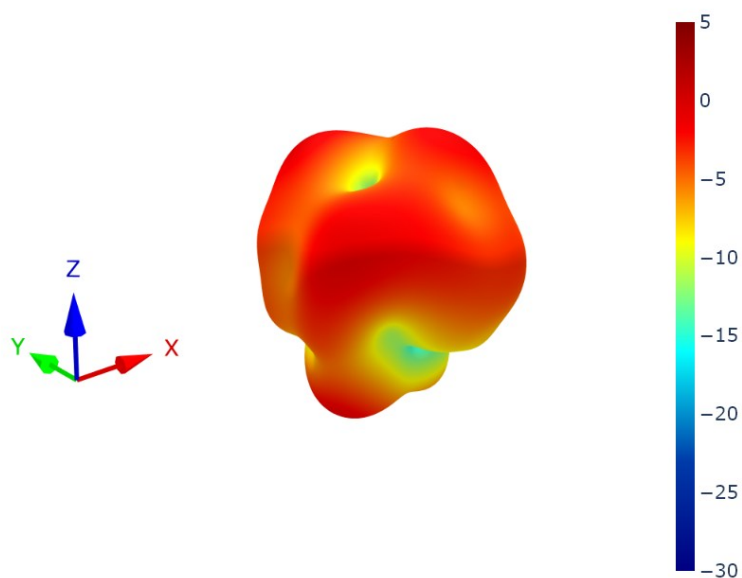


XZ Plane

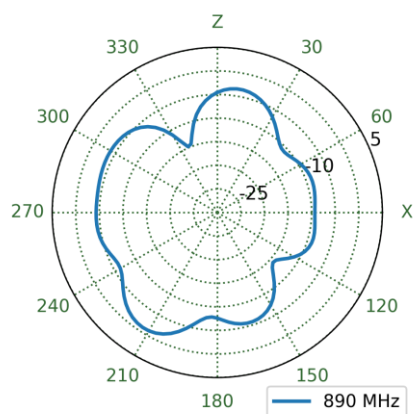


YZ Plane

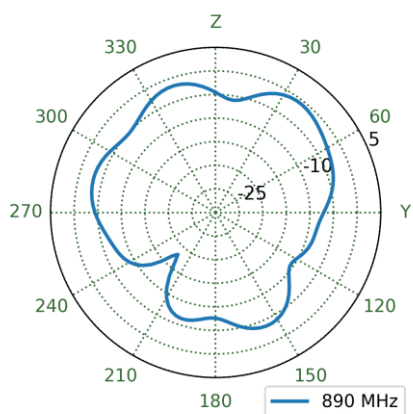


XY Plane

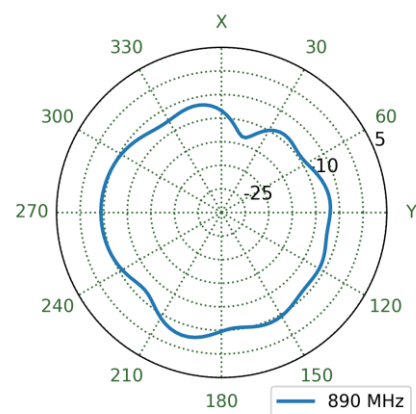


8.25 4G-5G 6 Patterns at 890 MHz

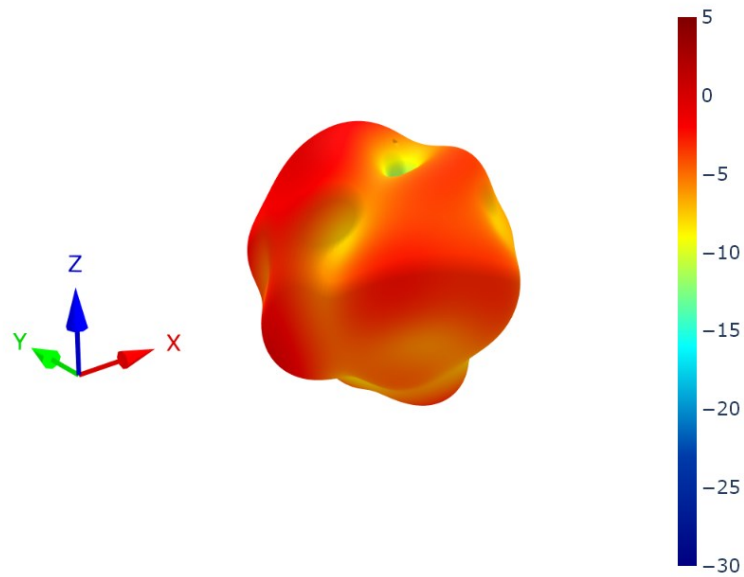


XZ Plane

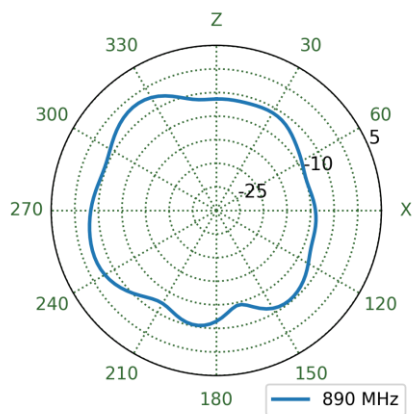


YZ Plane

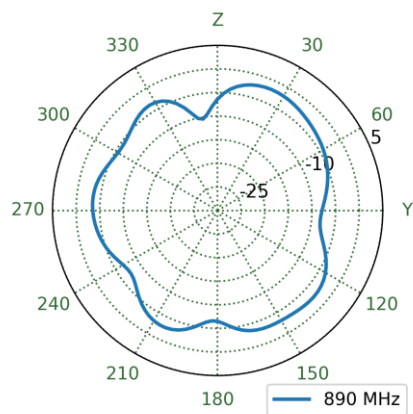


XY Plane

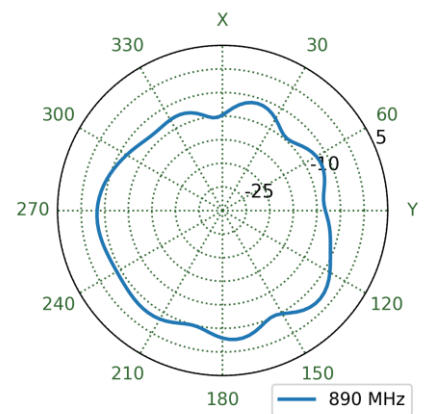


8.26 4G-5G 7 Patterns at 890 MHz

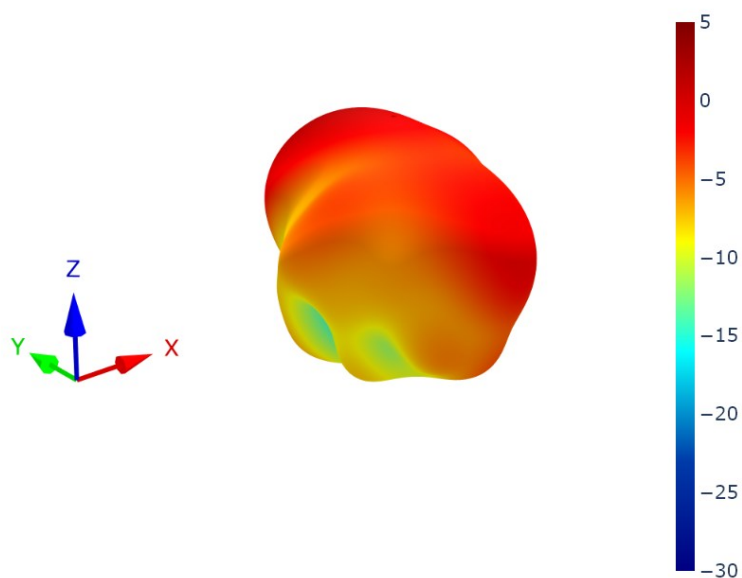


XZ Plane

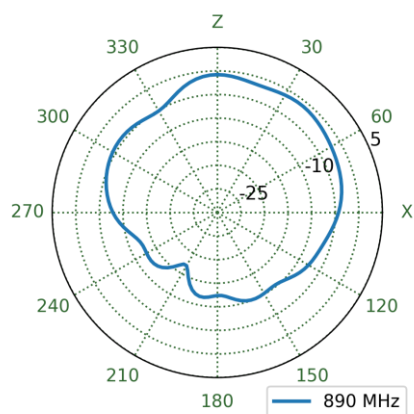


YZ Plane

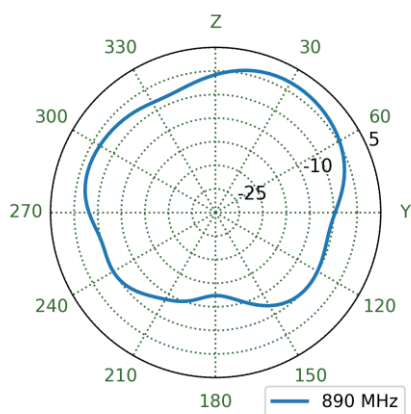


XY Plane

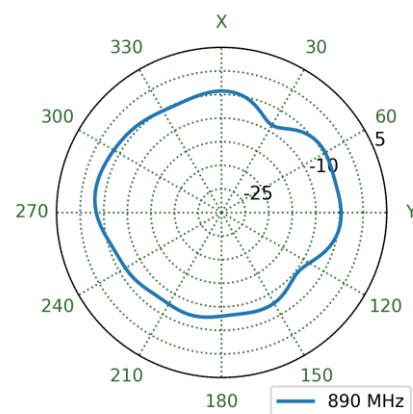


8.27 4G-5G 8 Patterns at 890 MHz

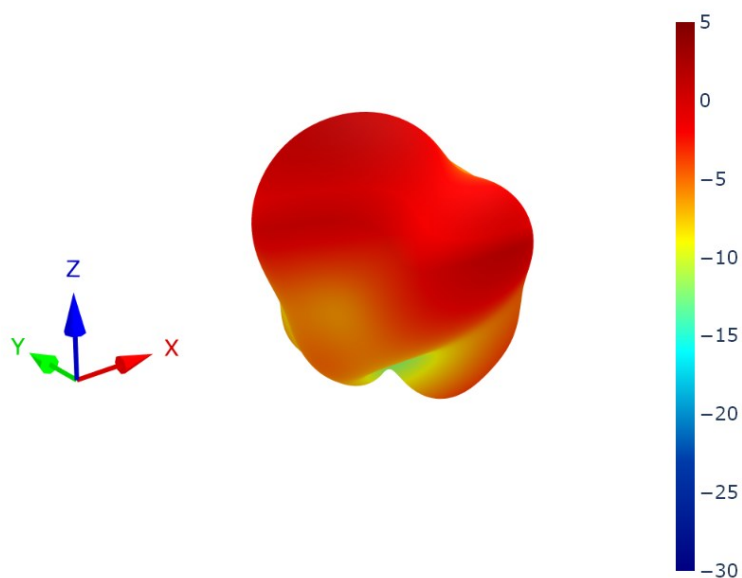


XZ Plane

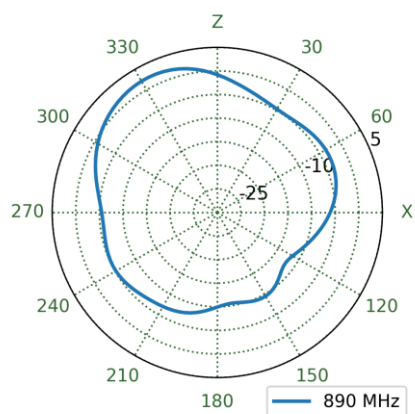


YZ Plane

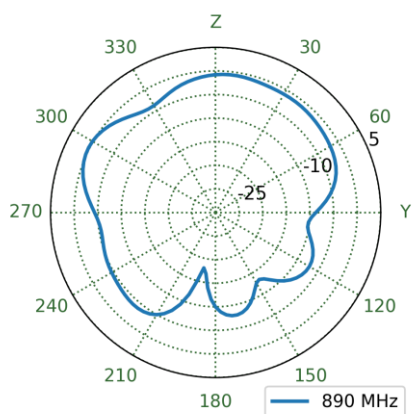


XY Plane

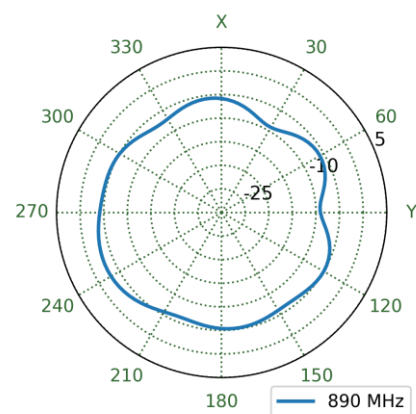


8.28 4G-5G 1 Patterns at 1470 MHz

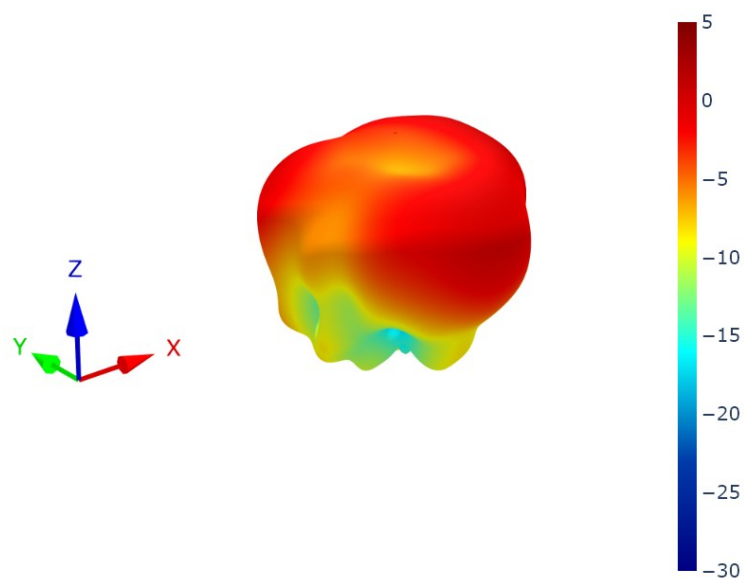


XZ Plane

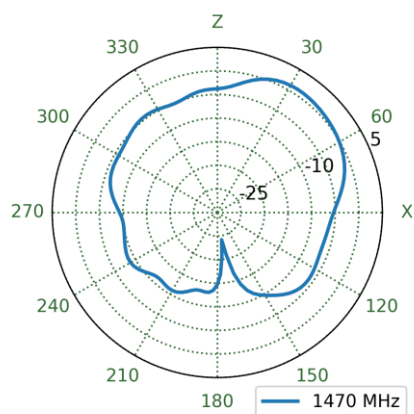


YZ Plane

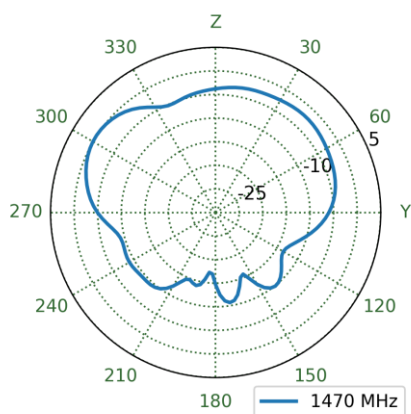


XY Plane

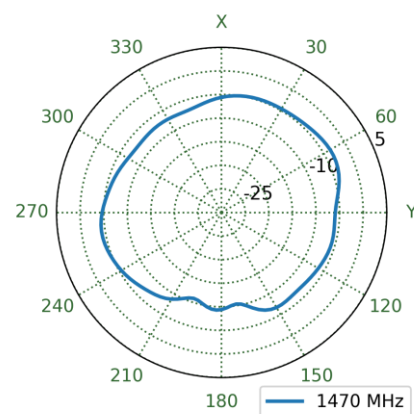


8.29 4G-5G 2 Patterns at 1470 MHz

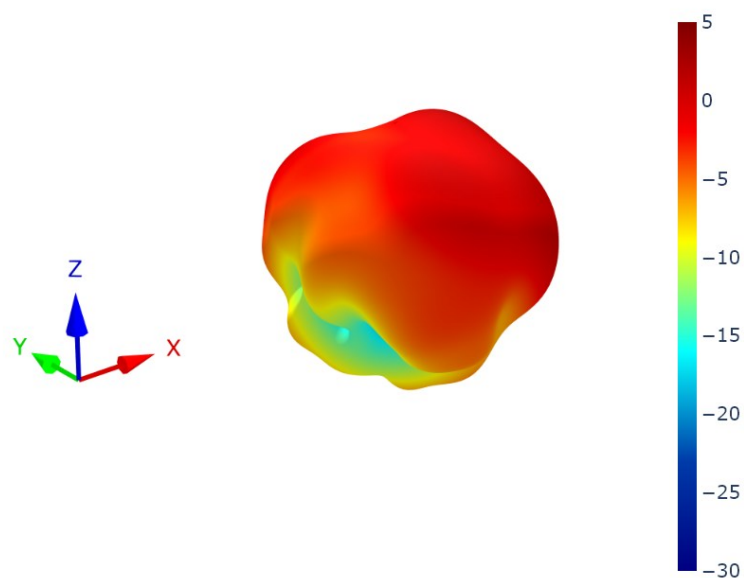


XZ Plane

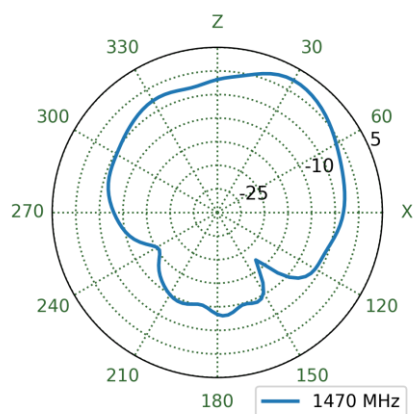


YZ Plane

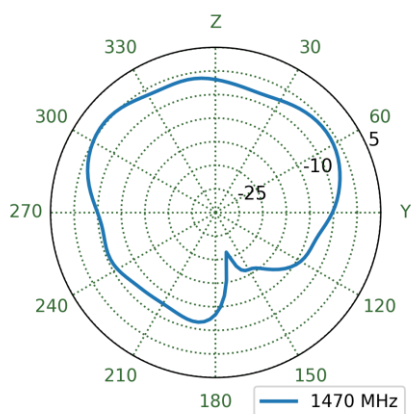


XY Plane

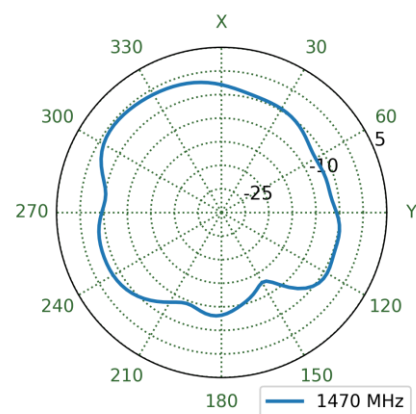


8.30 4G-5G 3 Patterns at 1470 MHz

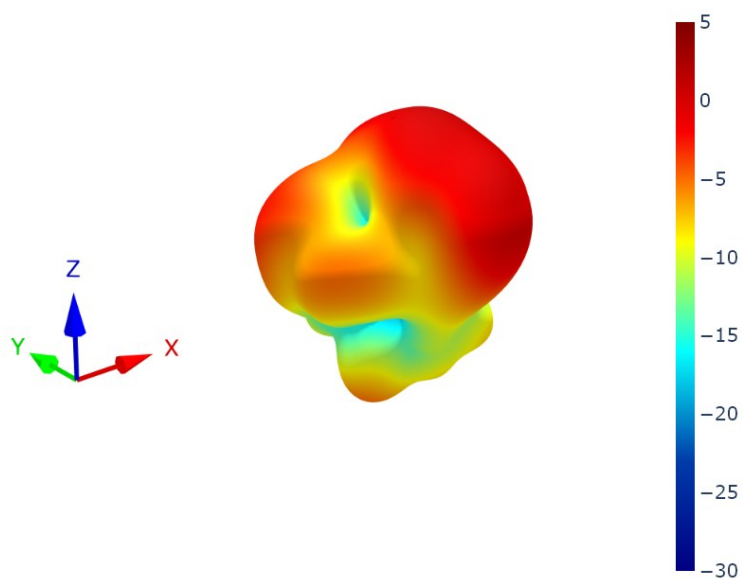


XZ Plane

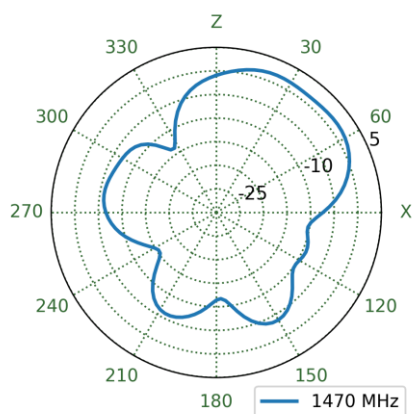


YZ Plane

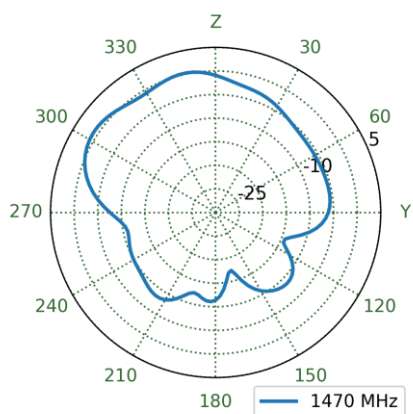


XY Plane

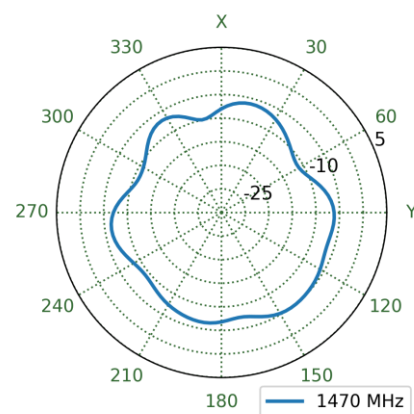


8.31 4G-5G 4 Patterns at 1470 MHz

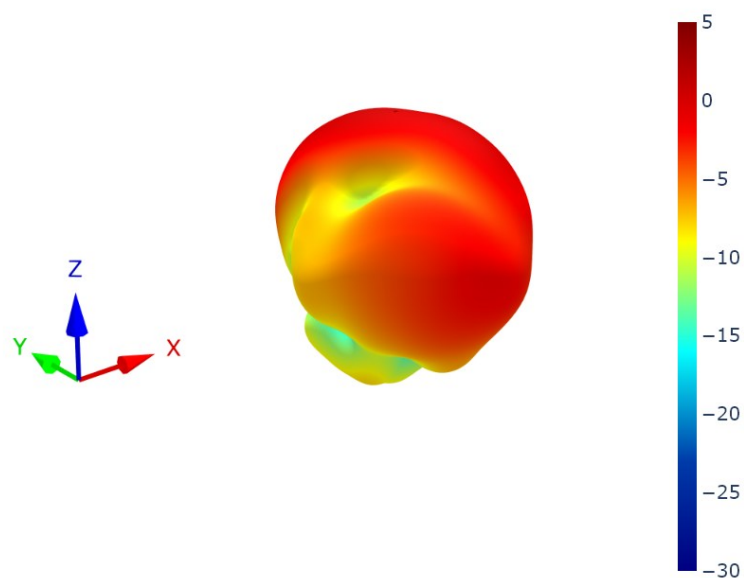


XZ Plane

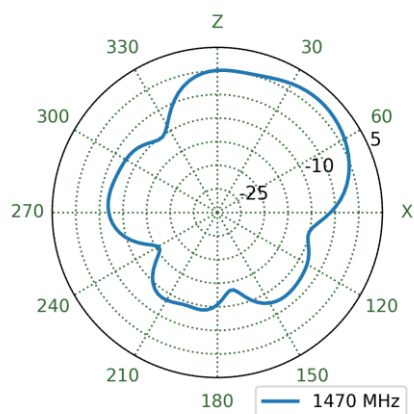


YZ Plane

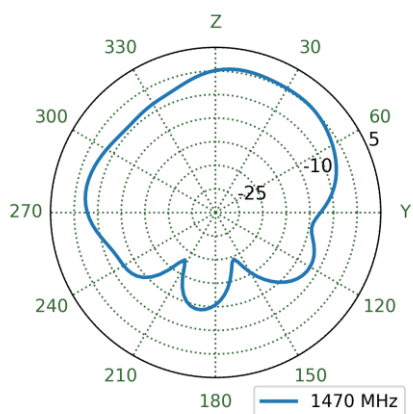


XY Plane

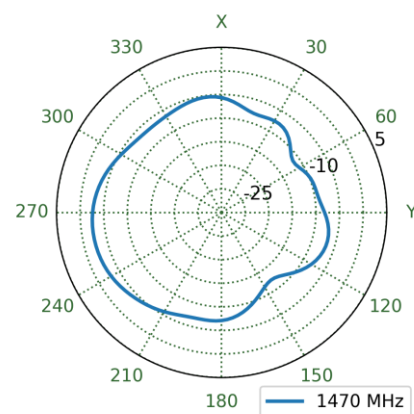


8.32 4G-5G 5 Patterns at 1470 MHz

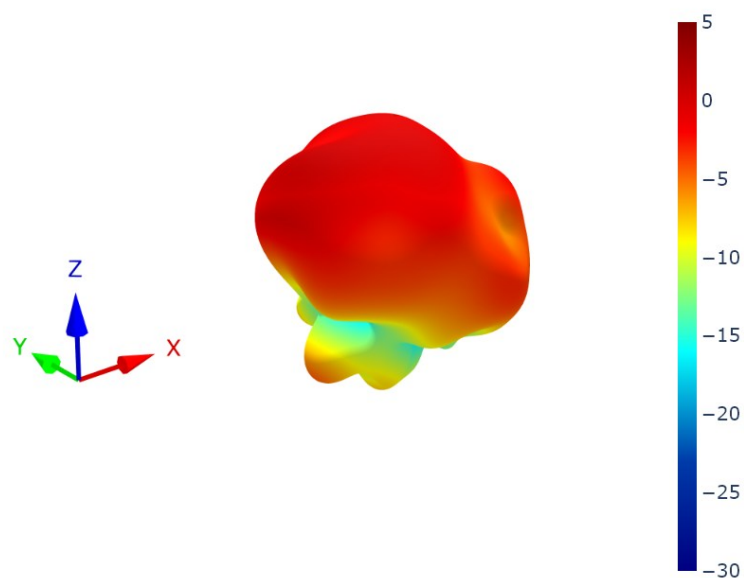


XZ Plane

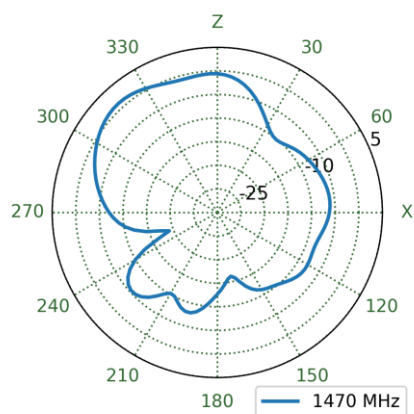


YZ Plane

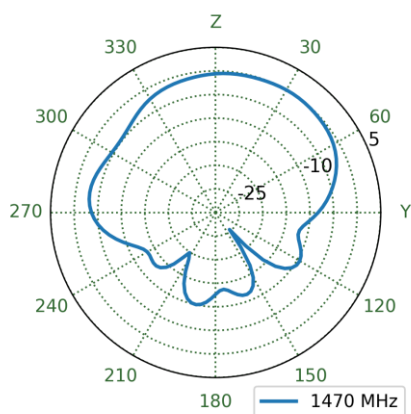


XY Plane

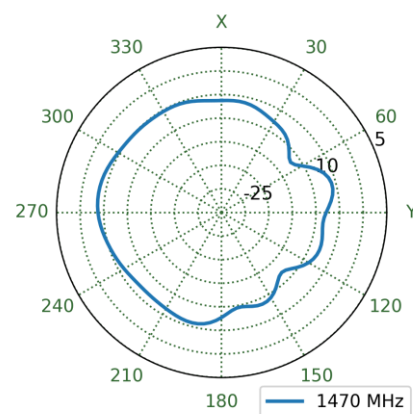


8.33 4G-5G 6 Patterns at 1470 MHz

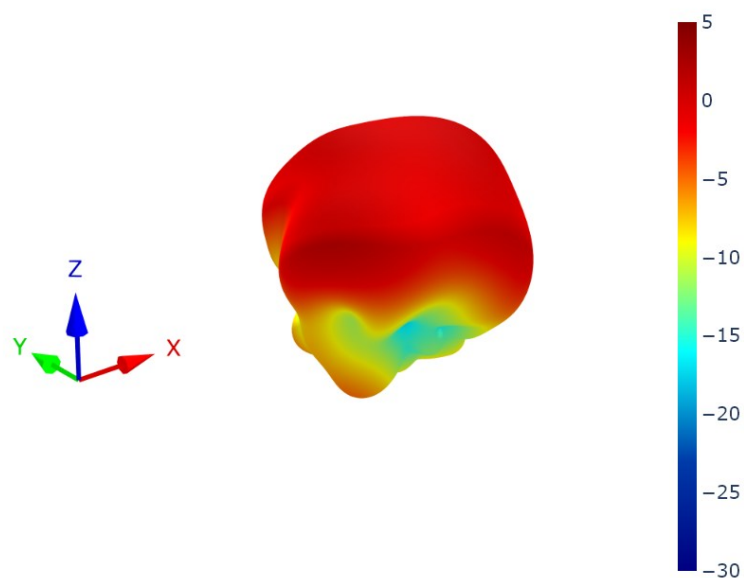


XZ Plane

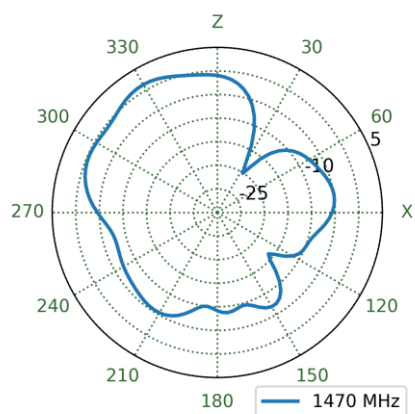


YZ Plane

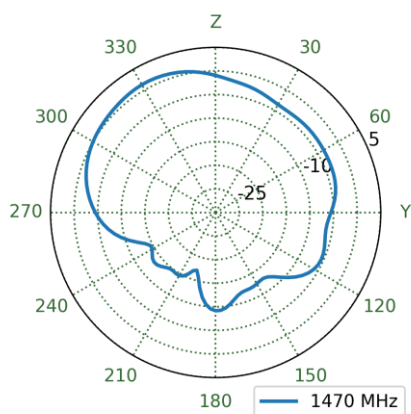


XY Plane

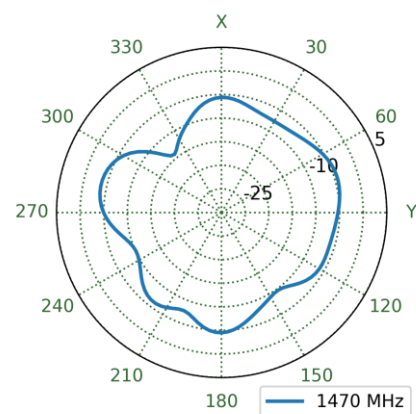


8.34 4G-5G 7 Patterns at 1470 MHz

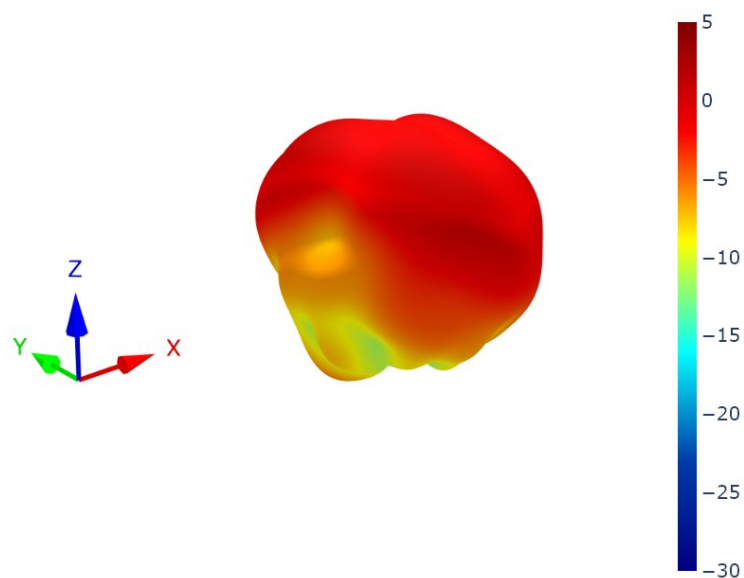


XZ Plane

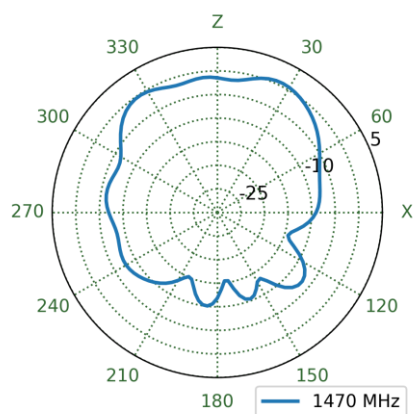


YZ Plane

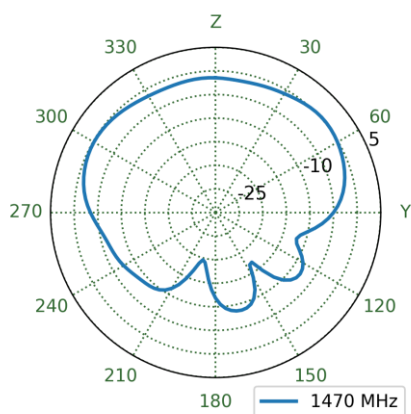


XY Plane

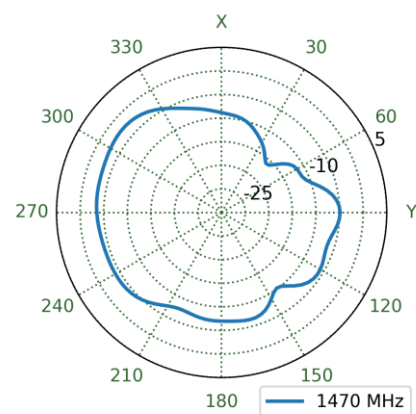


8.35 4G-5G 8 Patterns at 1470 MHz

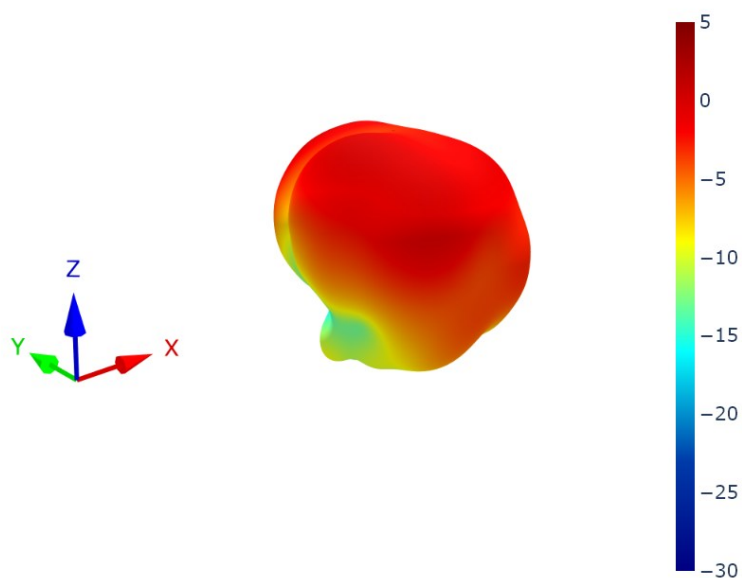


XZ Plane

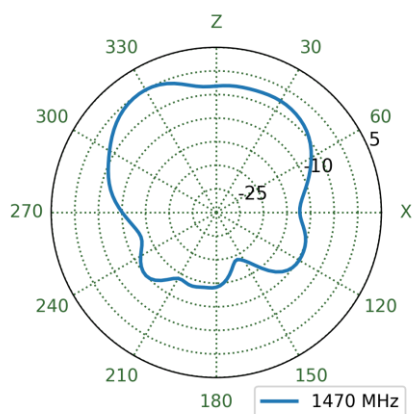


YZ Plane

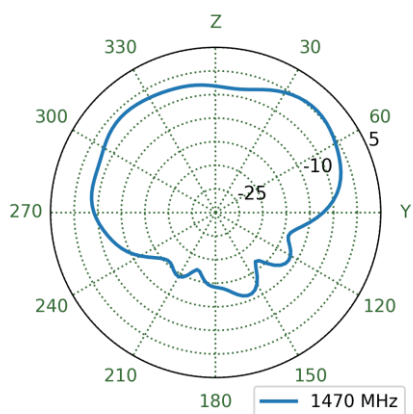


XY Plane

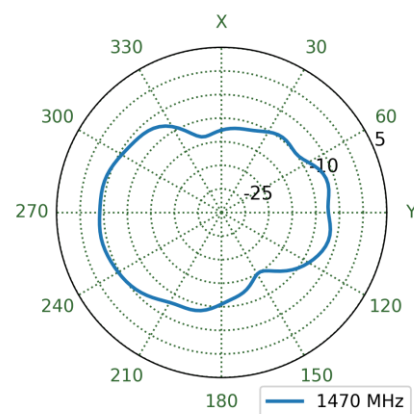


8.36 4G-5G 1 Patterns at 1805 MHz

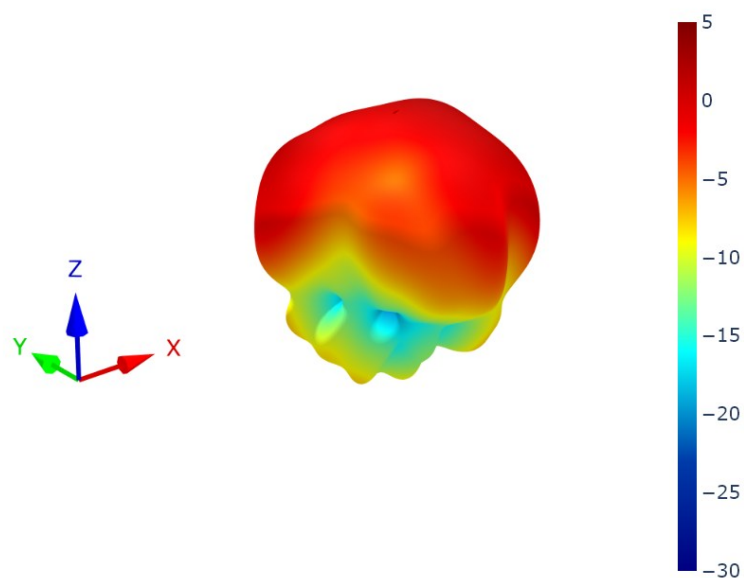


XZ Plane

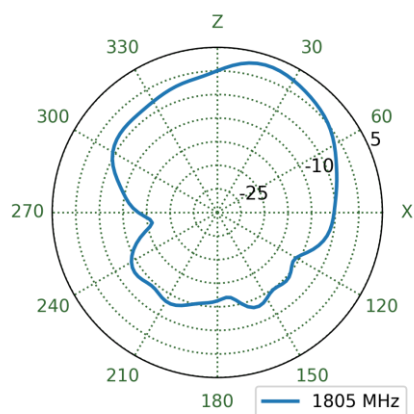


YZ Plane

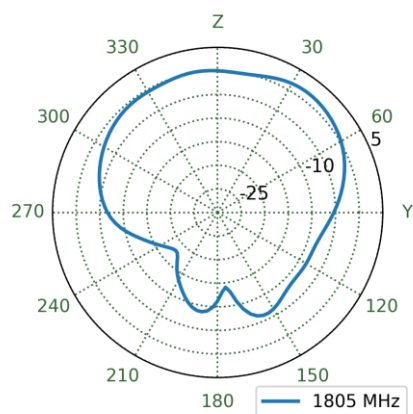


XY Plane

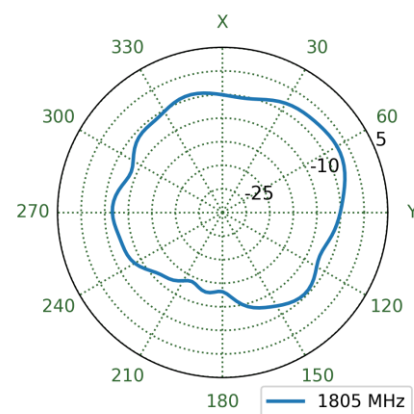


8.37 4G-5G 2 Patterns at 1805 MHz

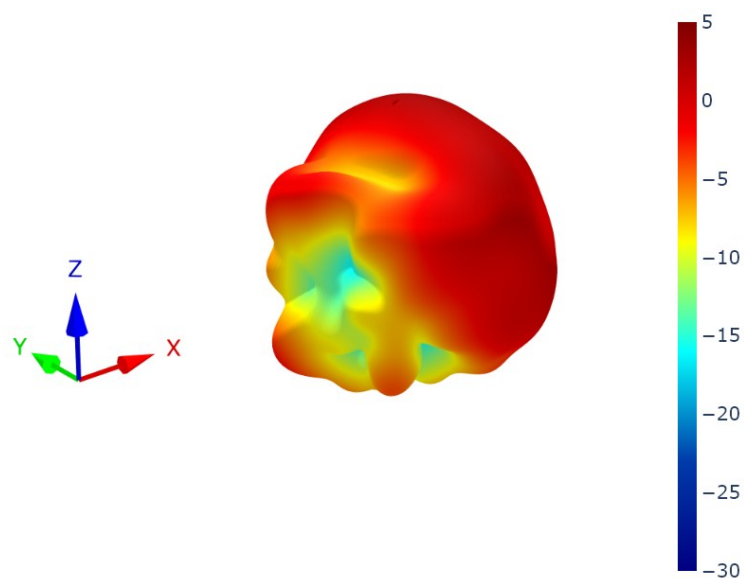


XZ Plane

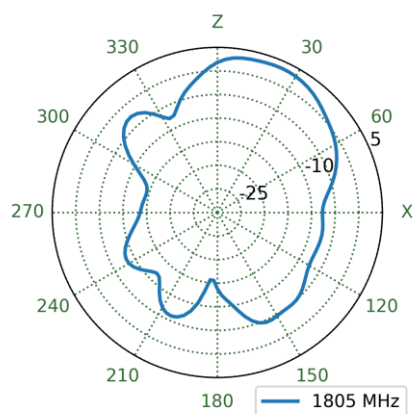


YZ Plane

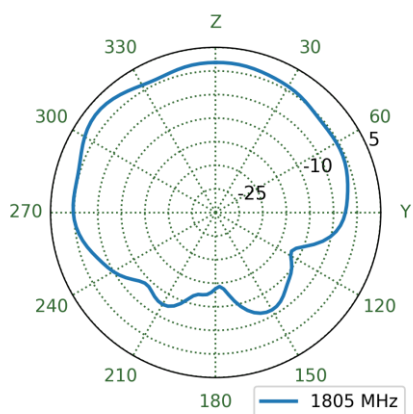


XY Plane

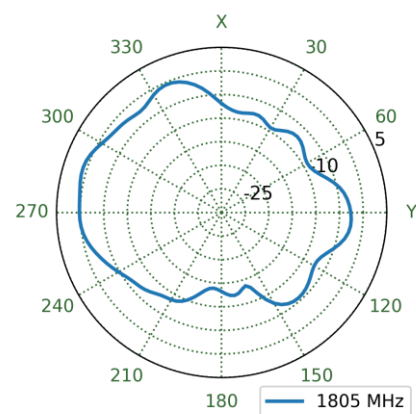


8.38 4G-5G 3 Patterns at 1805 MHz

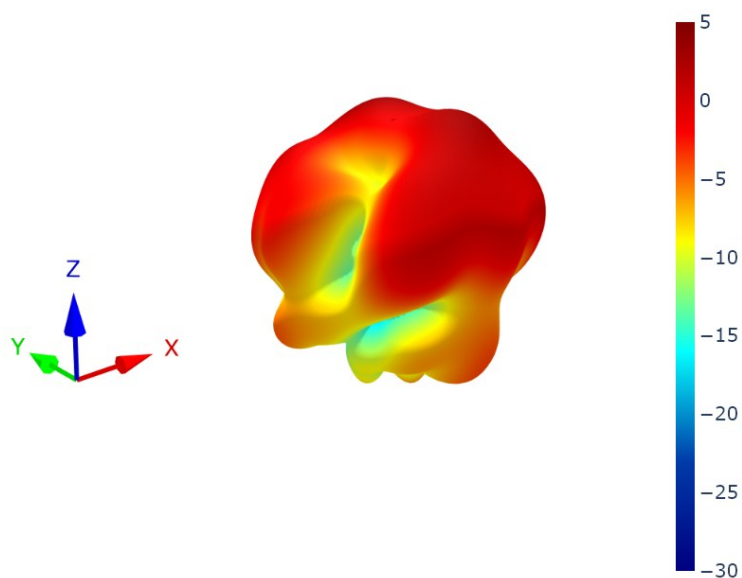


XZ Plane

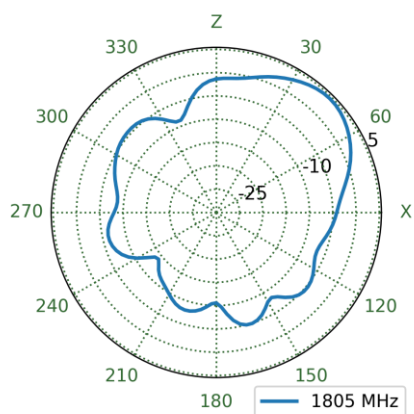


YZ Plane

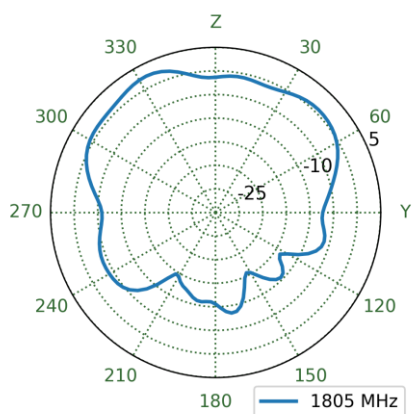


XY Plane

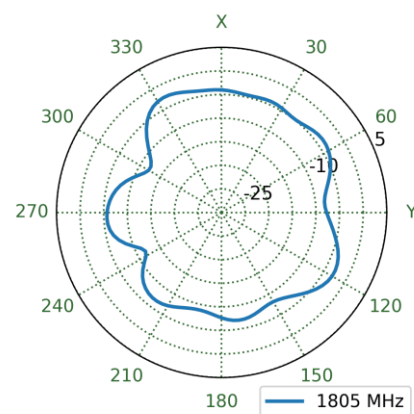


8.39 4G-5G 4 Patterns at 1805 MHz

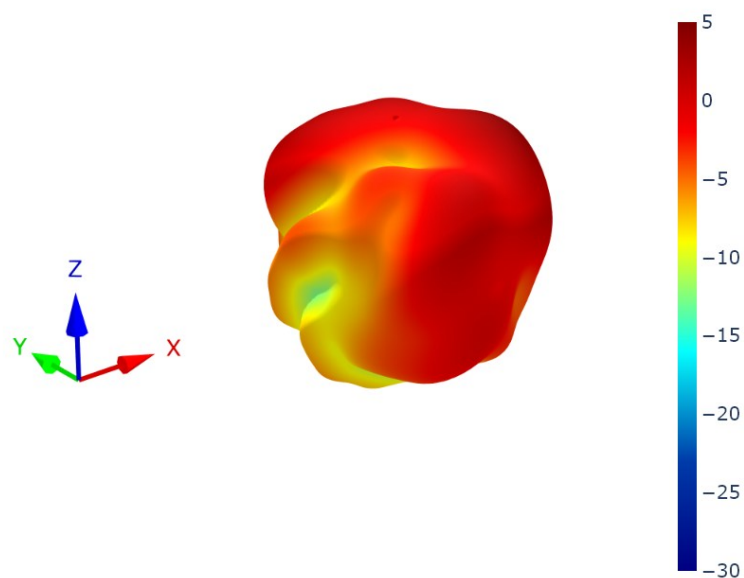


XZ Plane

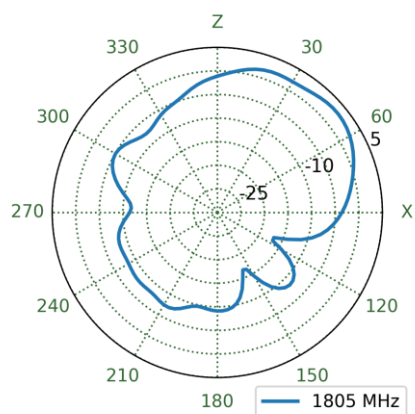


YZ Plane

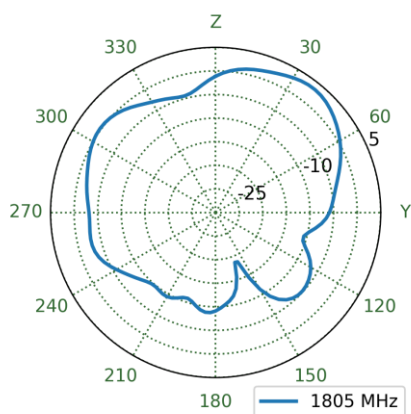


XY Plane

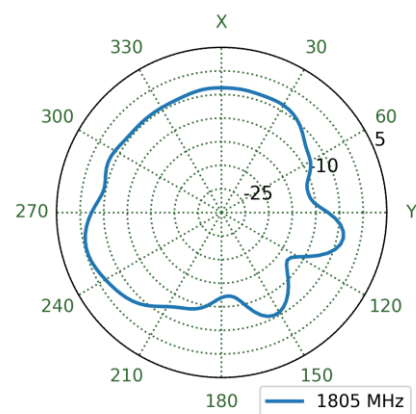


8.40 4G-5G 5 Patterns at 1805 MHz

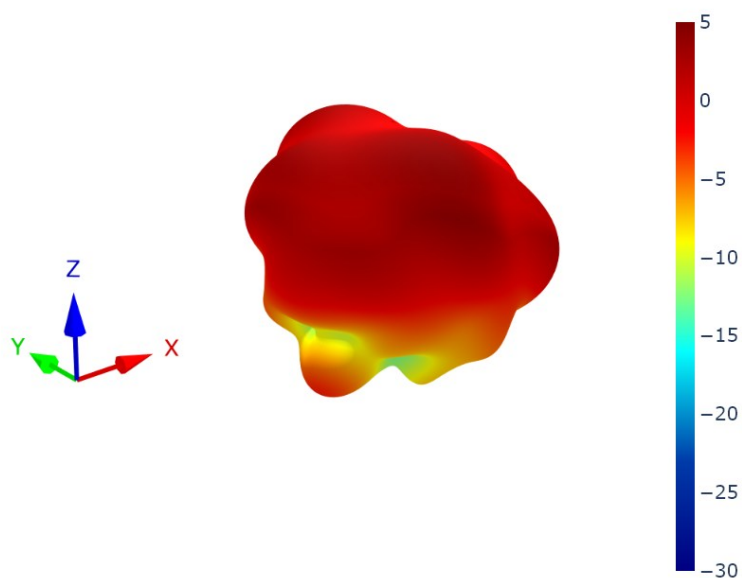


XZ Plane

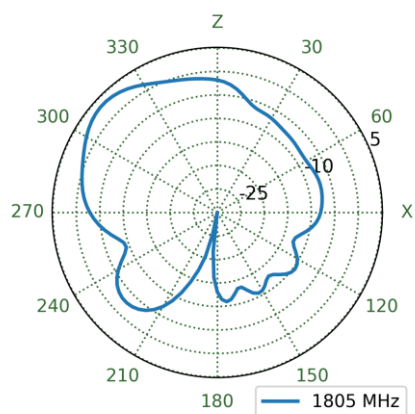


YZ Plane

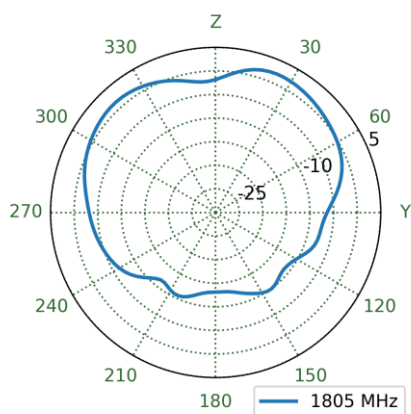


XY Plane

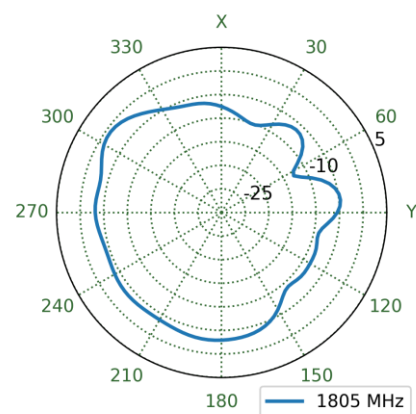


8.41 4G-5G 6 Patterns at 1805 MHz

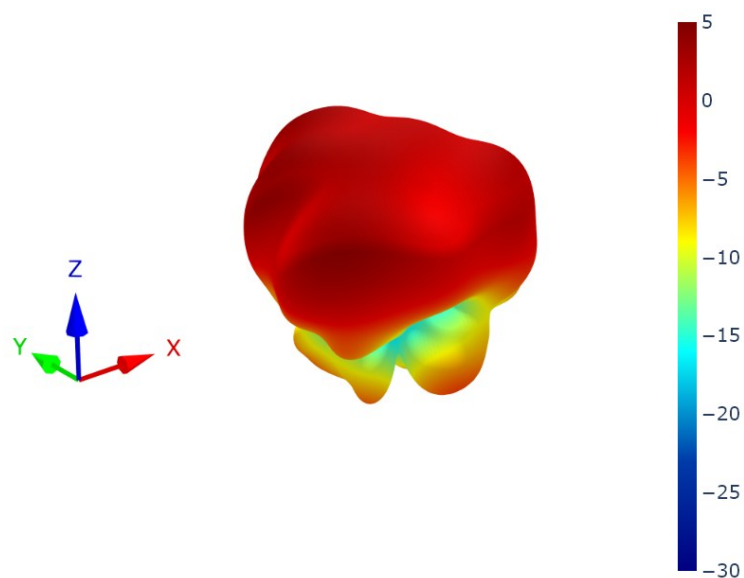


XZ Plane

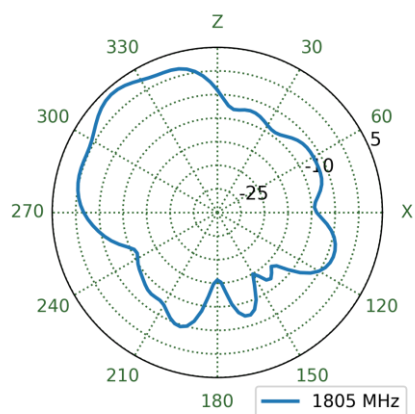


YZ Plane

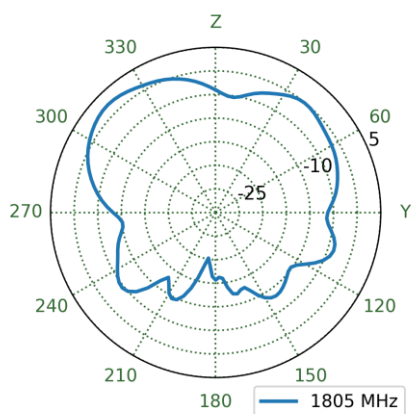


XY Plane

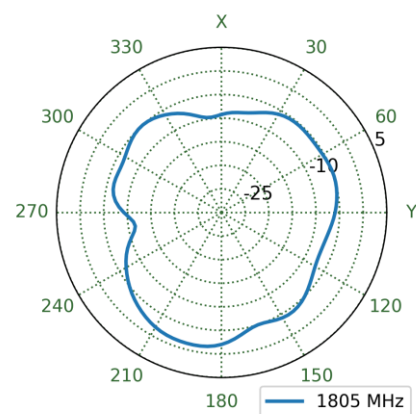


8.42 4G-5G 7 Patterns at 1805 MHz

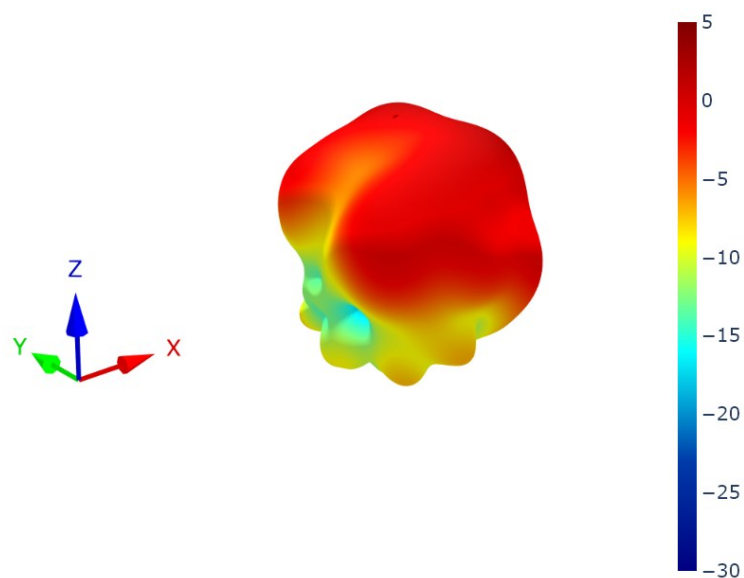


XZ Plane

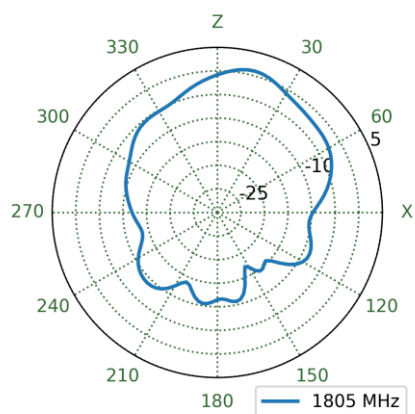


YZ Plane

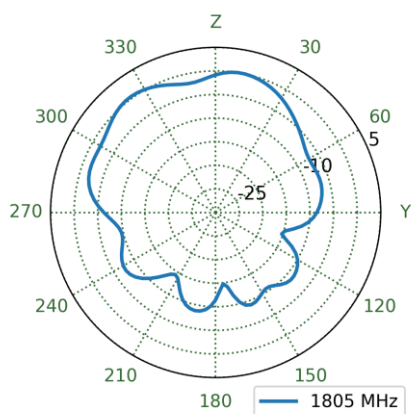


XY Plane

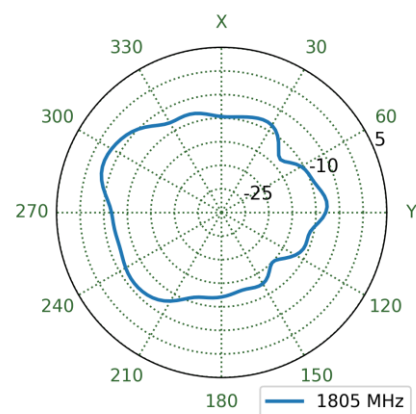


8.43 4G-5G 8 Patterns at 1805 MHz

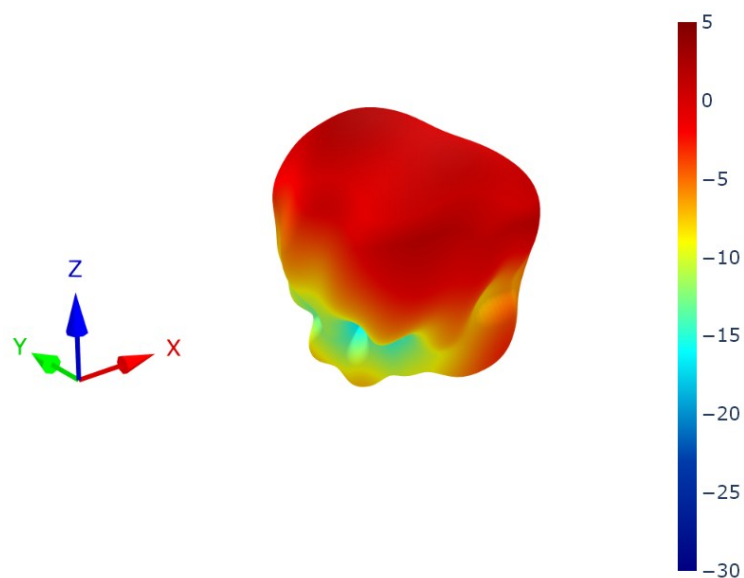


XZ Plane

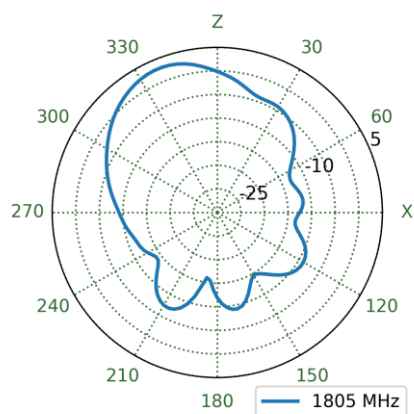


YZ Plane

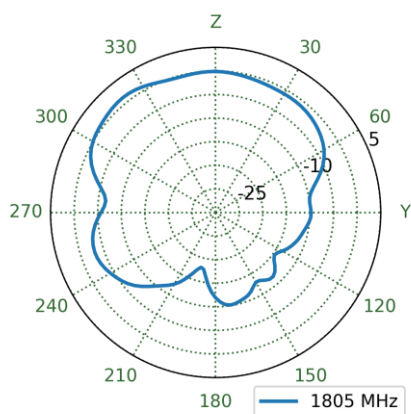


XY Plane

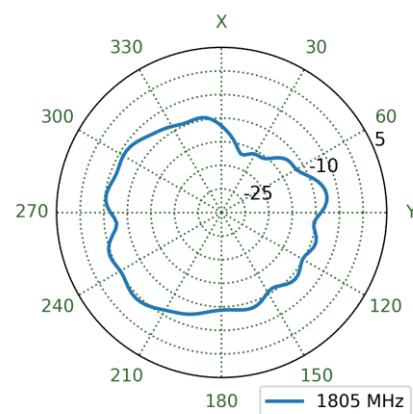


8.44 4G-5G 1 Patterns at 1920 MHz

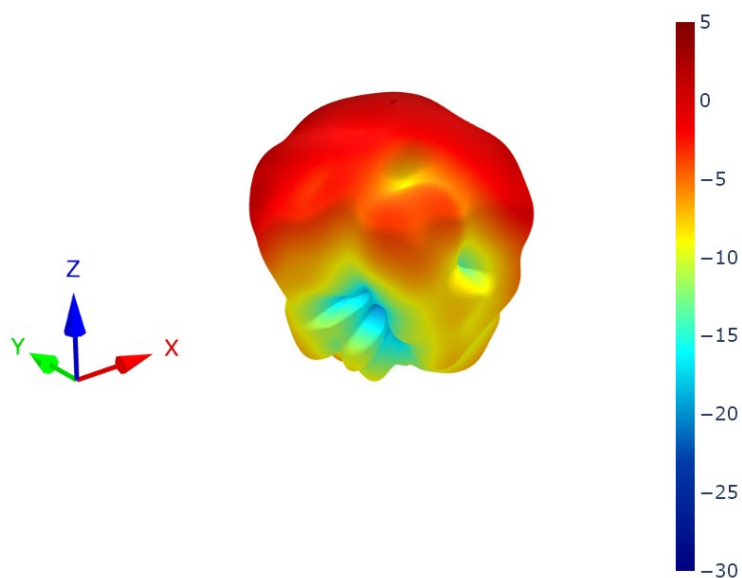


XZ Plane

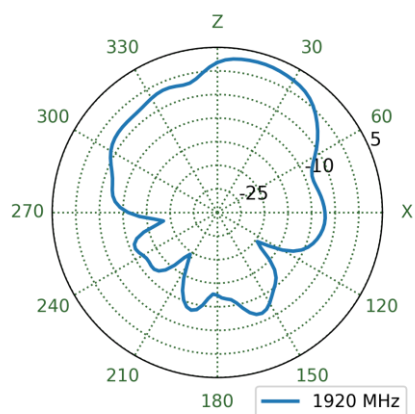


YZ Plane

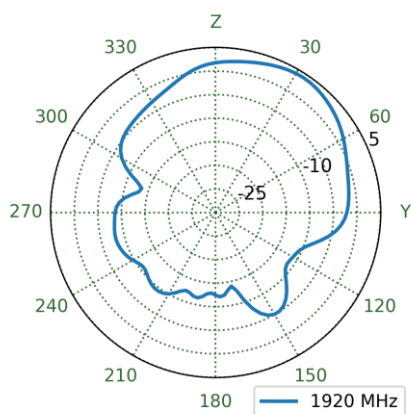


XY Plane

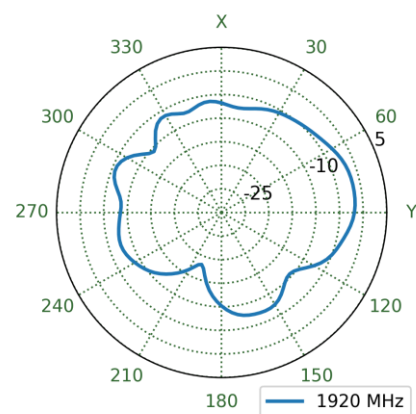


8.45 4G-5G 2 Patterns at 1920 MHz

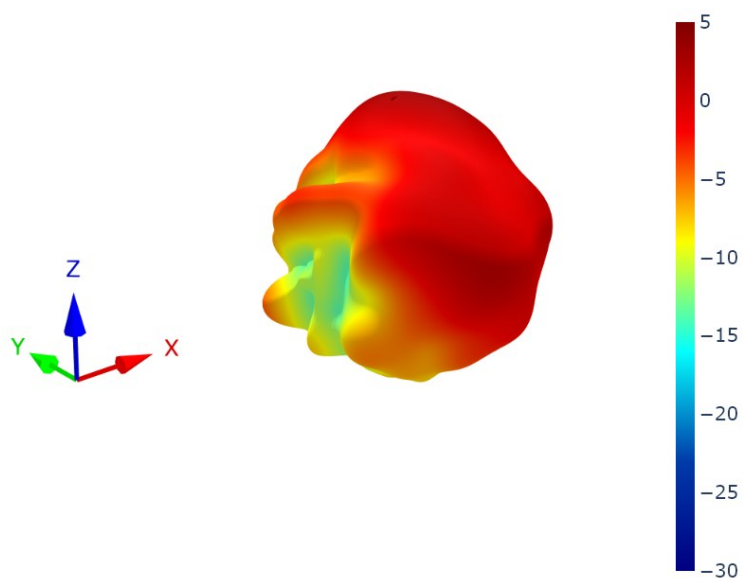


XZ Plane

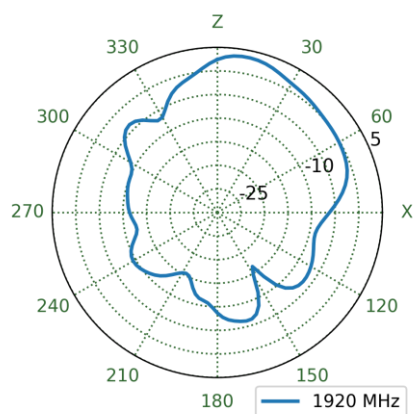


YZ Plane

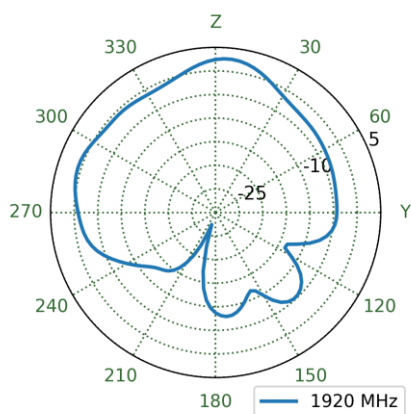


XY Plane

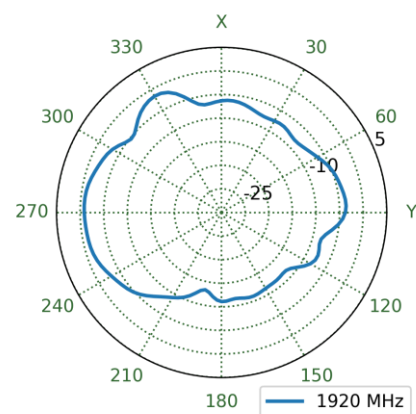


8.46 4G-5G 3 Patterns at 1920 MHz

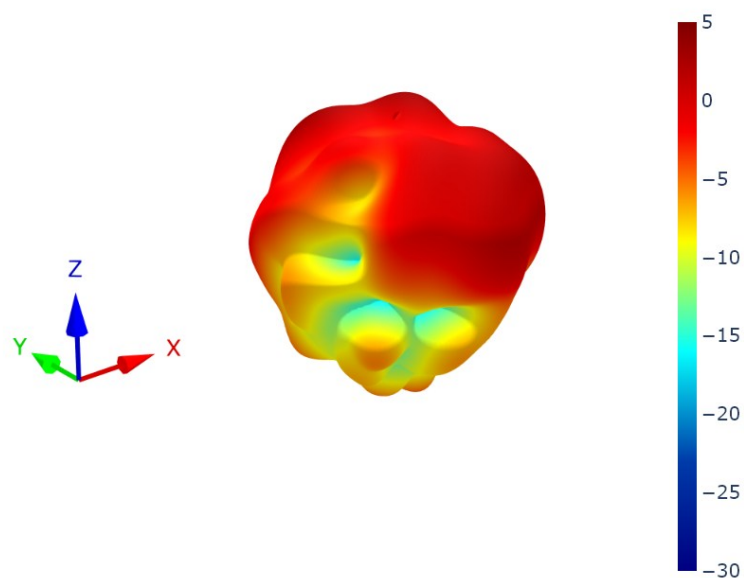


XZ Plane

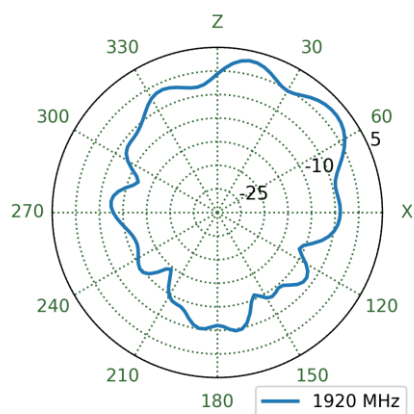


YZ Plane

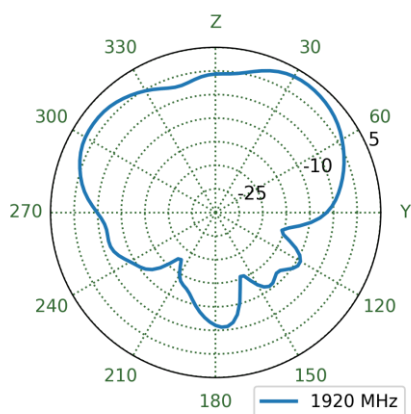


XY Plane

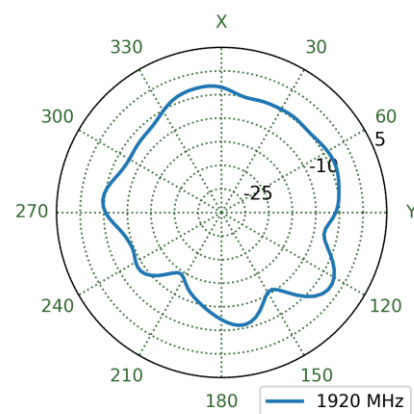


8.47 4G-5G 4 Patterns at 1920 MHz

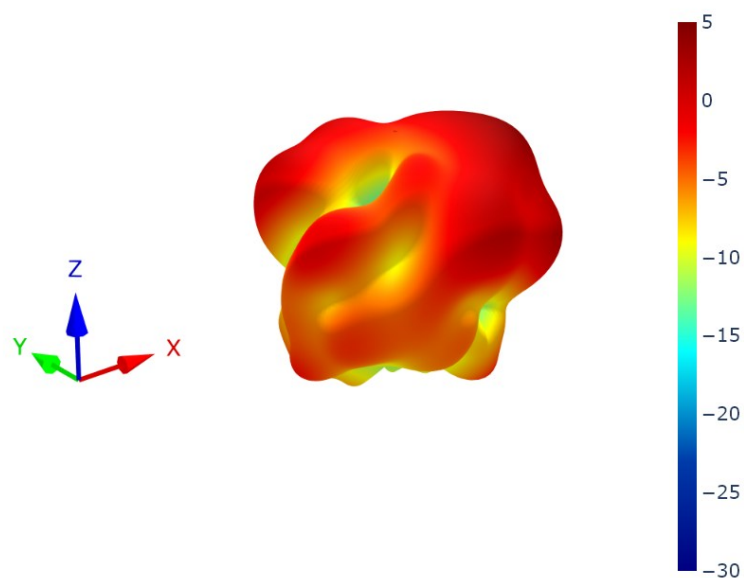


XZ Plane

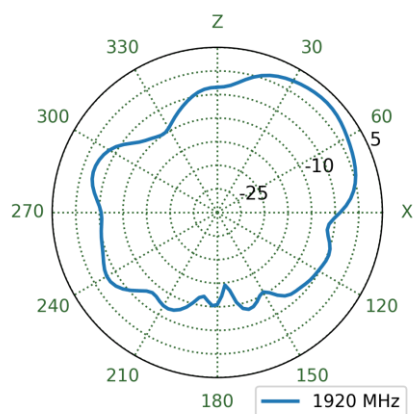


YZ Plane

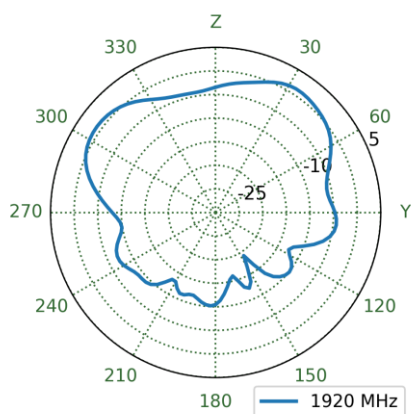


XY Plane

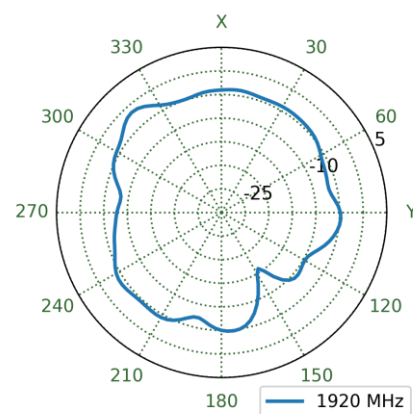


8.48 4G-5G 5 Patterns at 1920 MHz

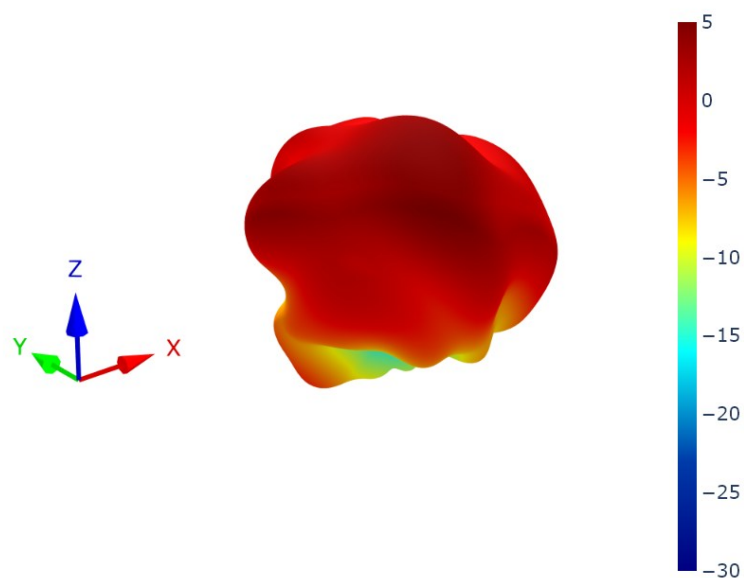


XZ Plane

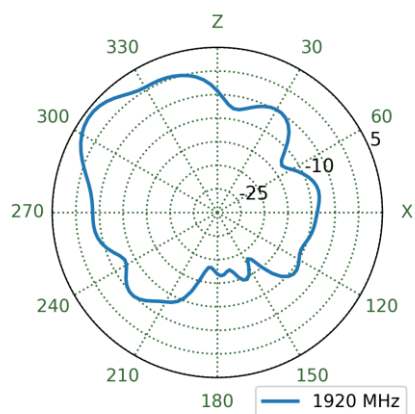


YZ Plane

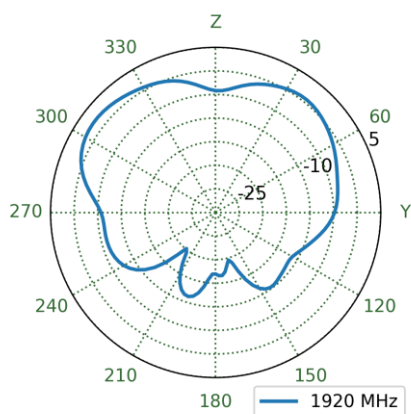


XY Plane

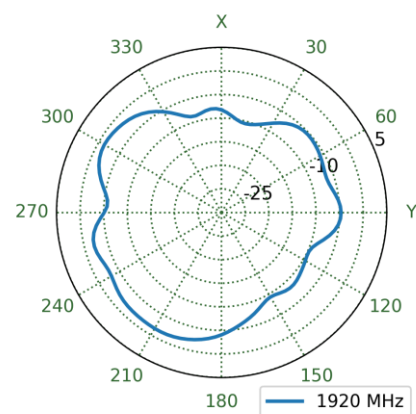


8.49 4G-5G 6 Patterns at 1920 MHz

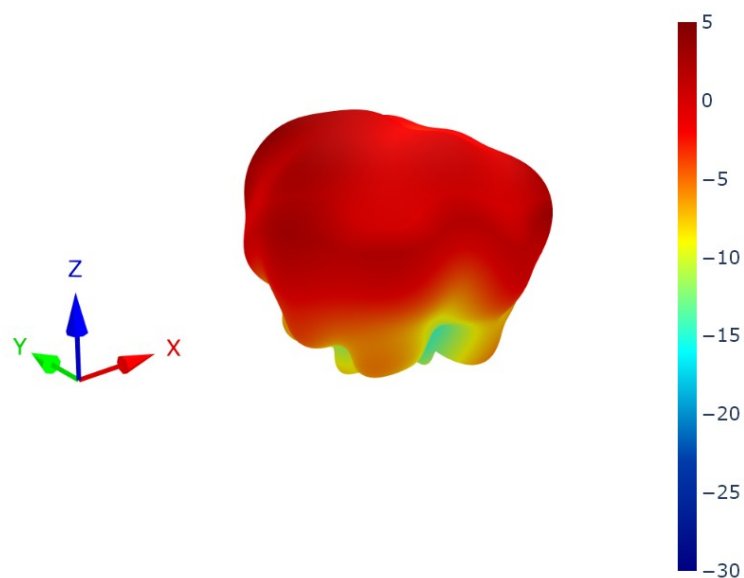


XZ Plane

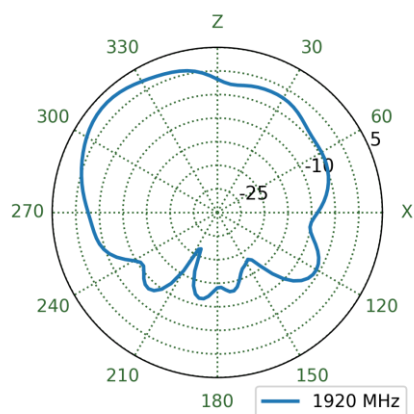


YZ Plane

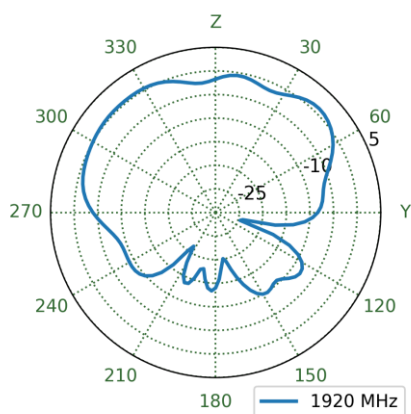


XY Plane

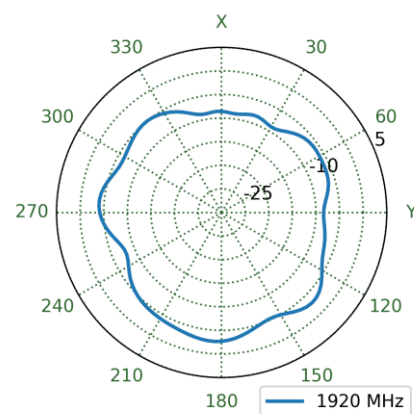


8.50 4G-5G 7 Patterns at 1920 MHz

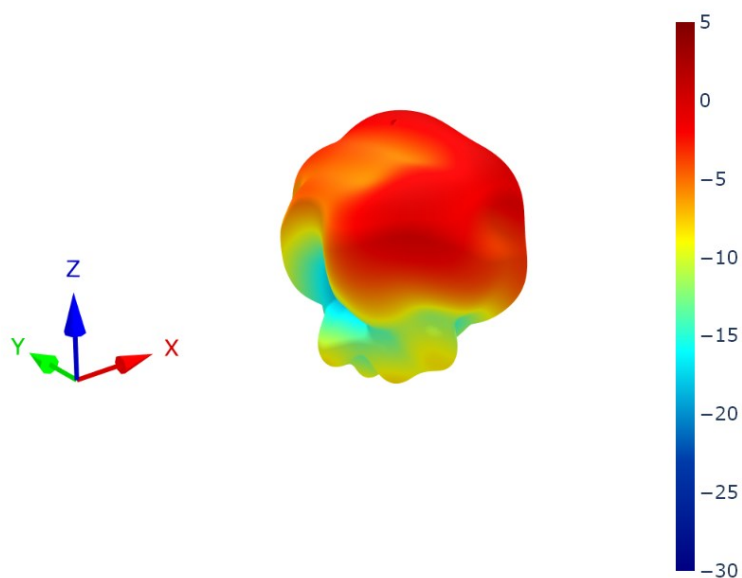


XZ Plane

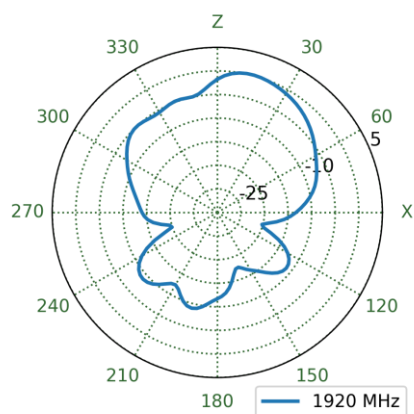


YZ Plane

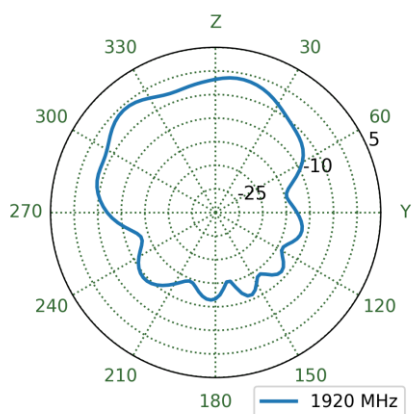


XY Plane

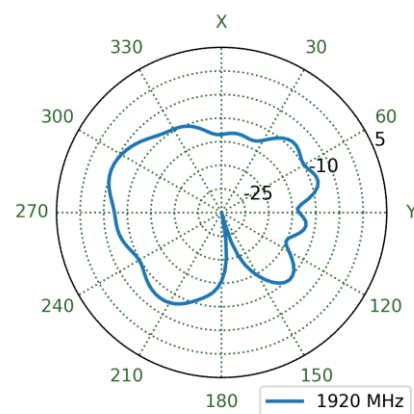


8.51 4G-5G 8 Patterns at 1920 MHz

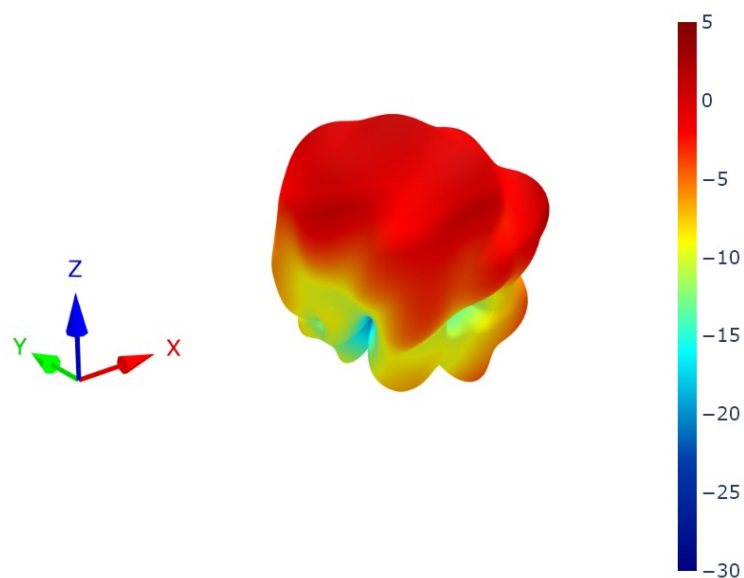


XZ Plane

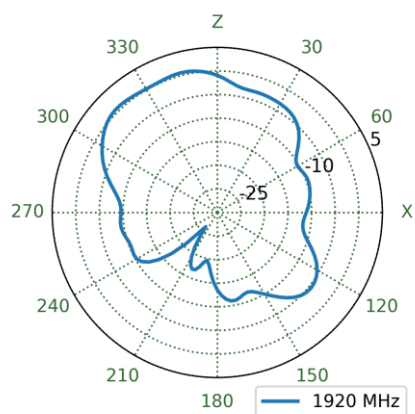


YZ Plane

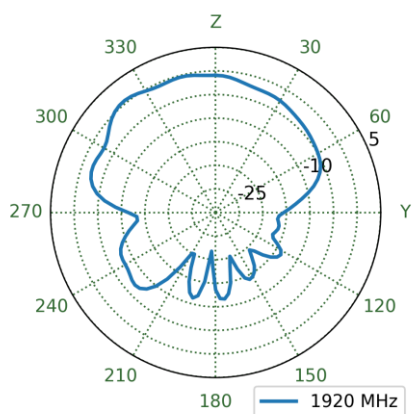


XY Plane

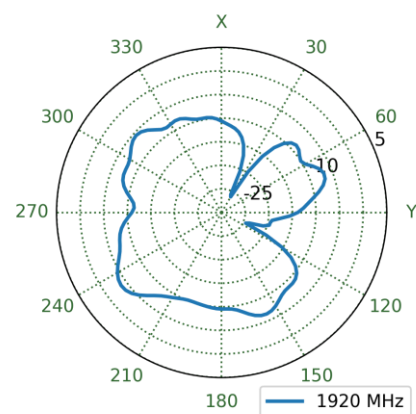


8.52 4G-5G 1 Patterns at 1990 MHz

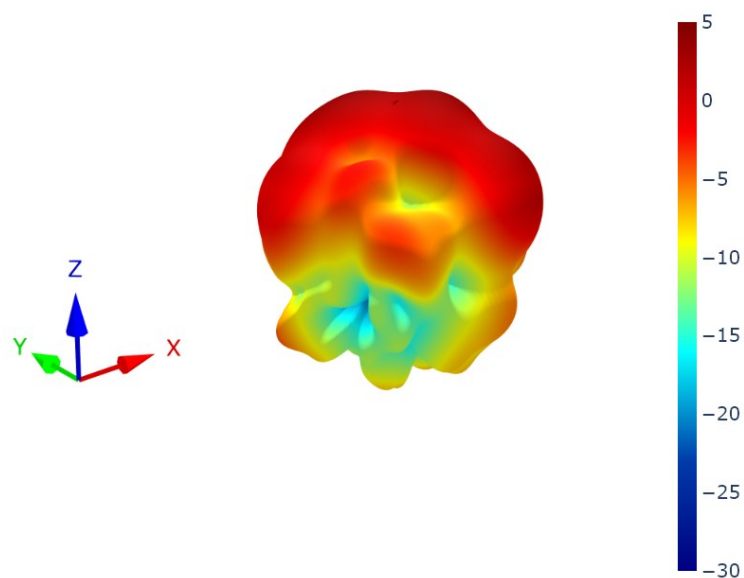


XZ Plane

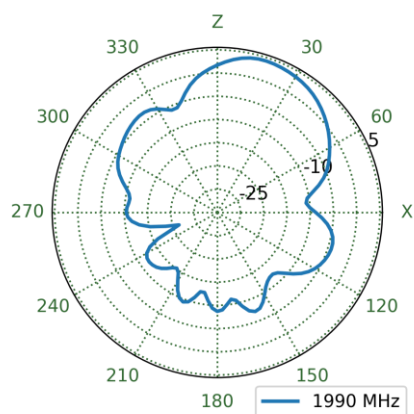


YZ Plane

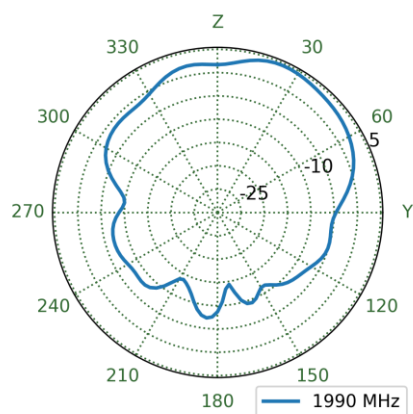


XY Plane

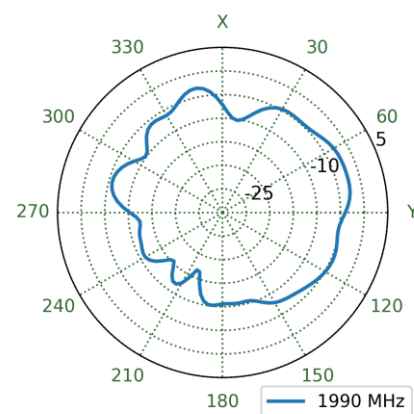


8.53 4G-5G 2 Patterns at 1990 MHz

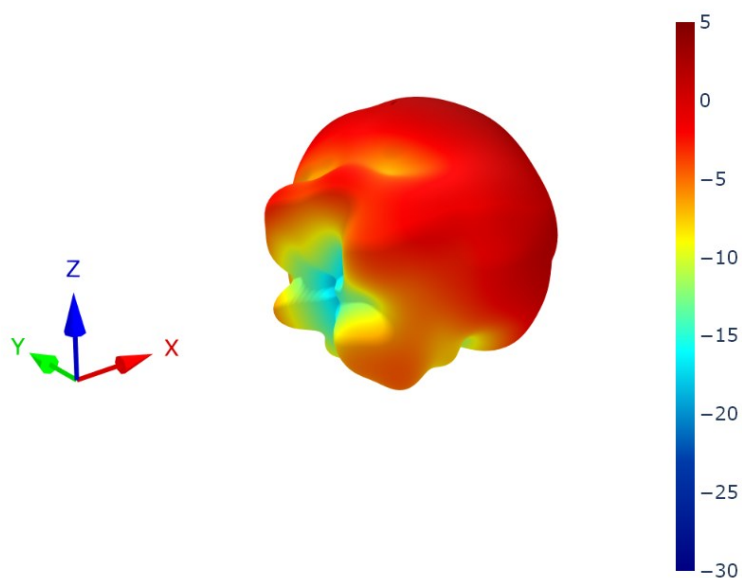


XZ Plane

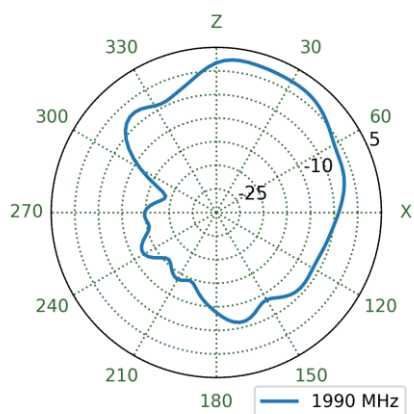


YZ Plane

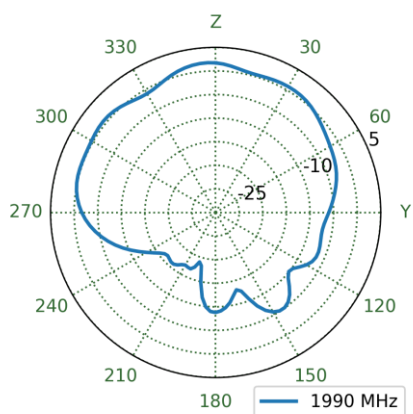


XY Plane

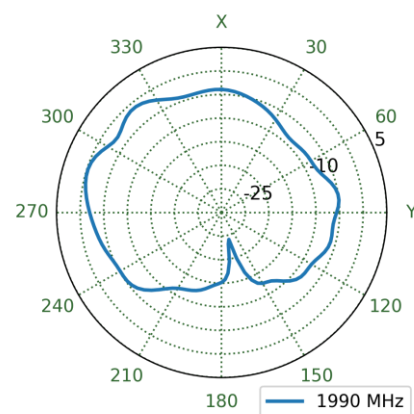


8.54 4G-5G 3 Patterns at 1990 MHz

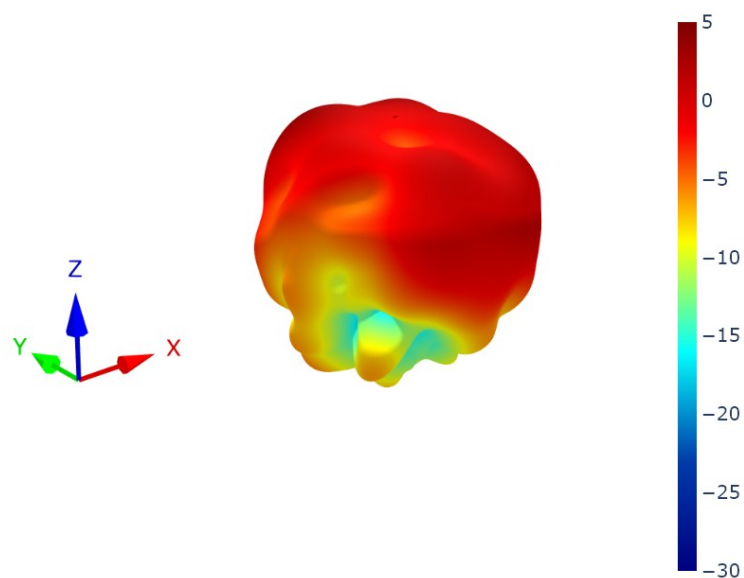


XZ Plane

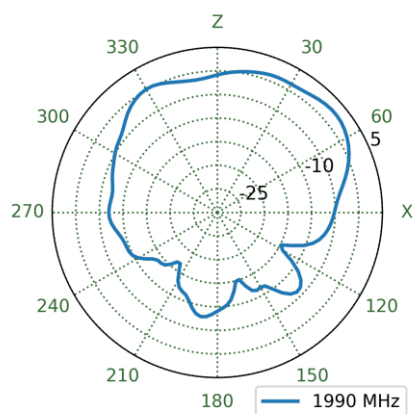


YZ Plane

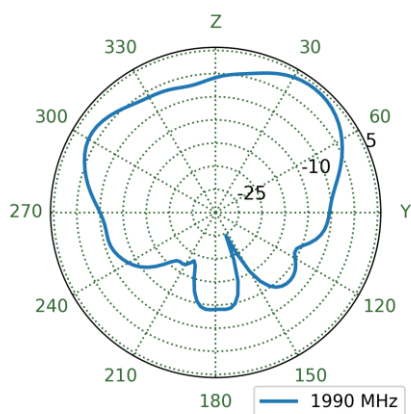


XY Plane

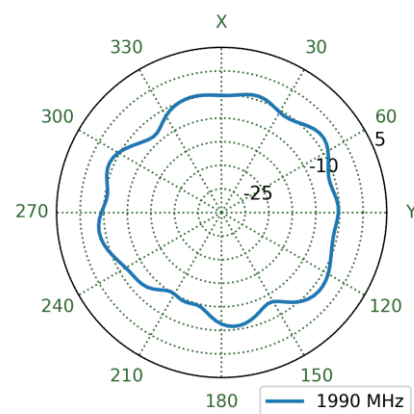


8.55 4G-5G 4 Patterns at 1990 MHz

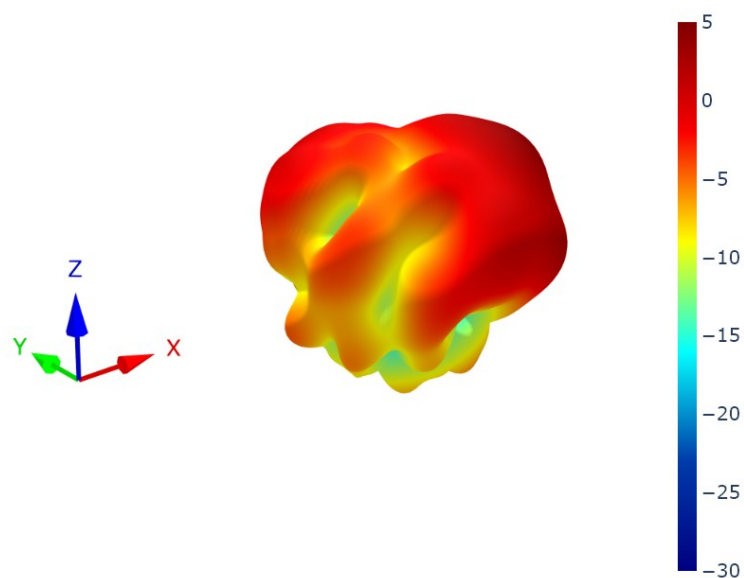


XZ Plane

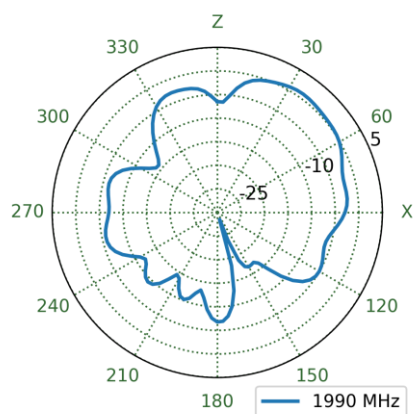


YZ Plane

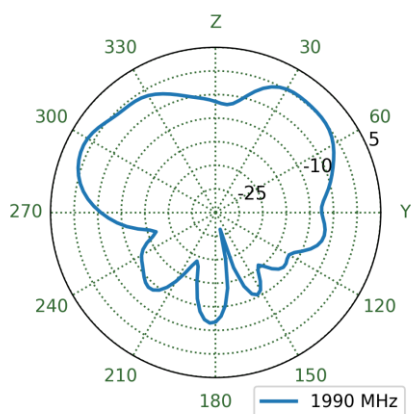


XY Plane

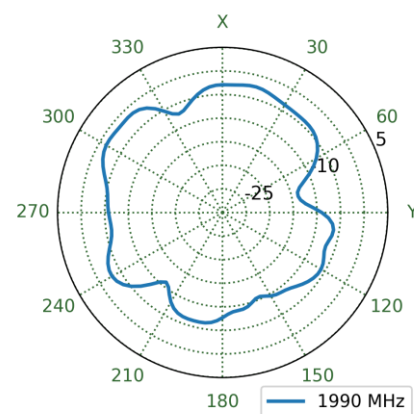


8.56 4G-5G 5 Patterns at 1990 MHz

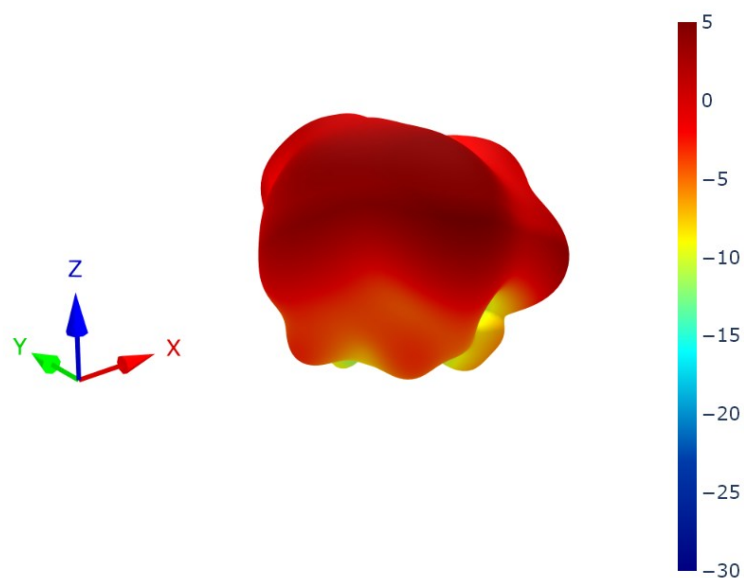


XZ Plane

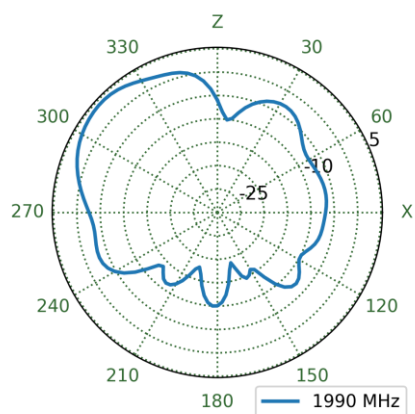


YZ Plane

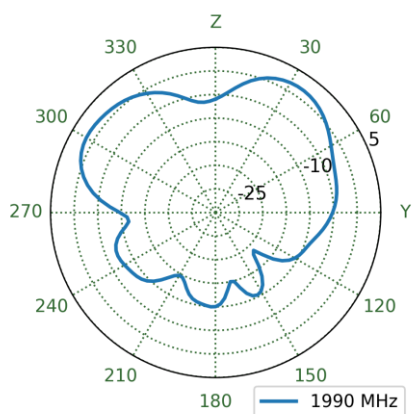


XY Plane

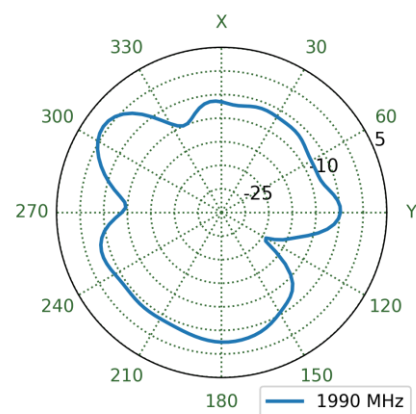


8.57 4G-5G 6 Patterns at 1990 MHz

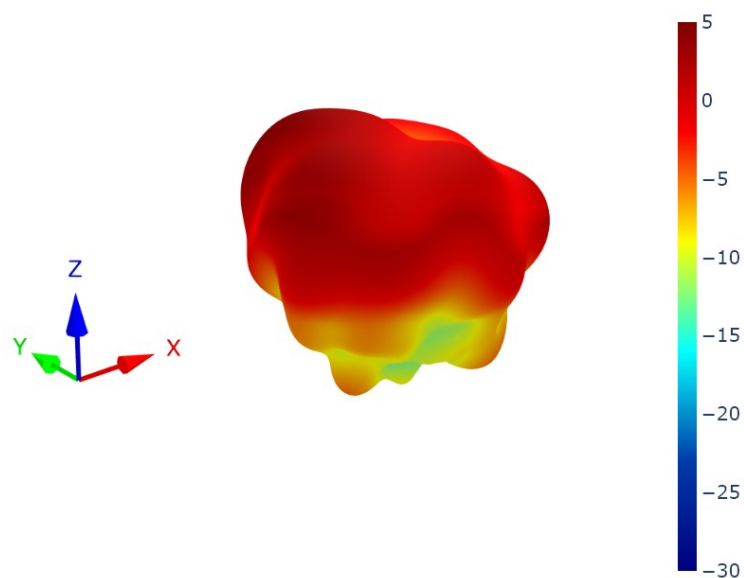


XZ Plane

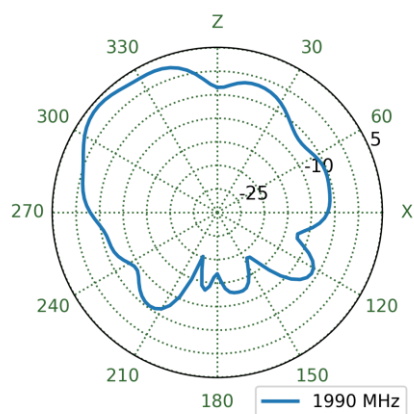


YZ Plane

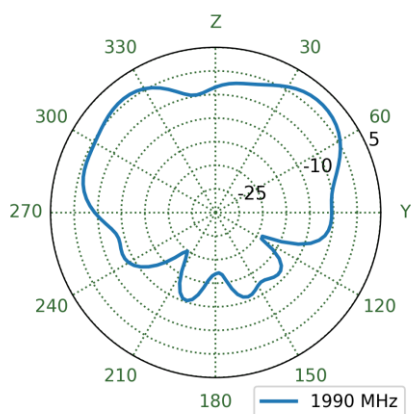


XY Plane

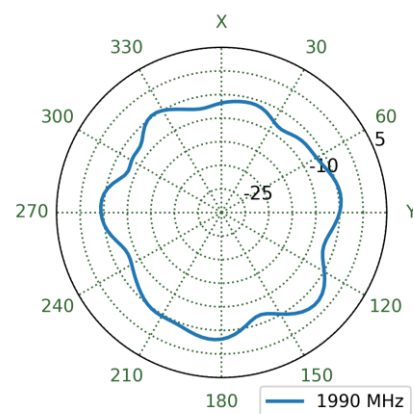


8.58 4G-5G 7 Patterns at 1990 MHz

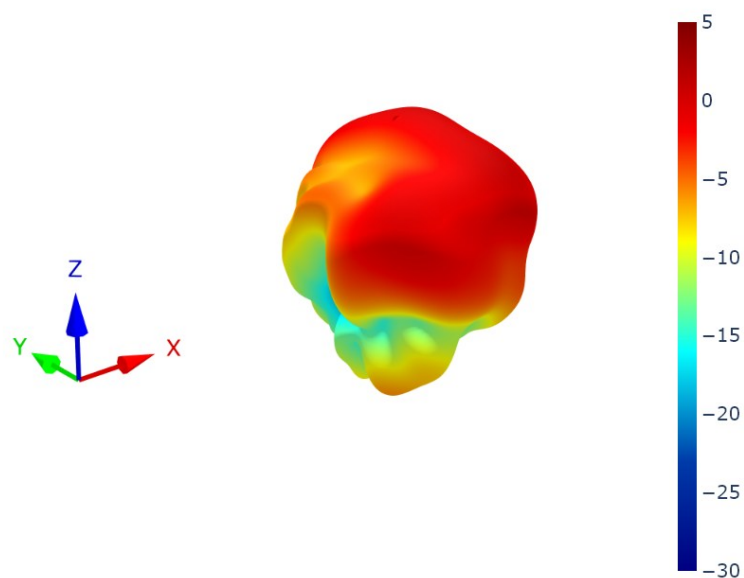


XZ Plane

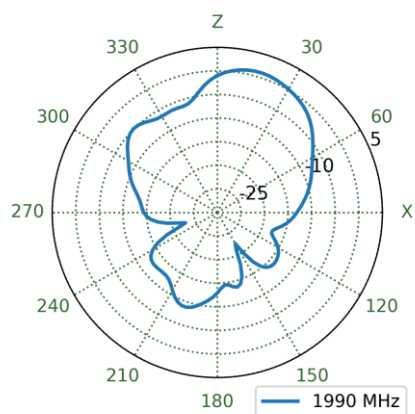


YZ Plane

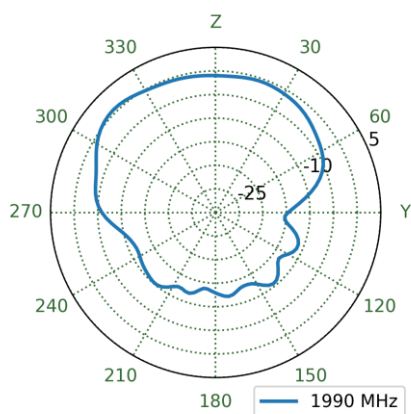


XY Plane

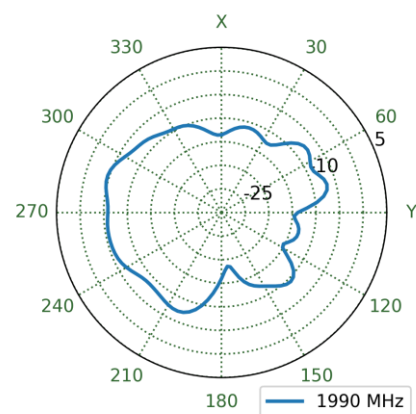


8.59 4G-5G 8 Patterns at 1990 MHz

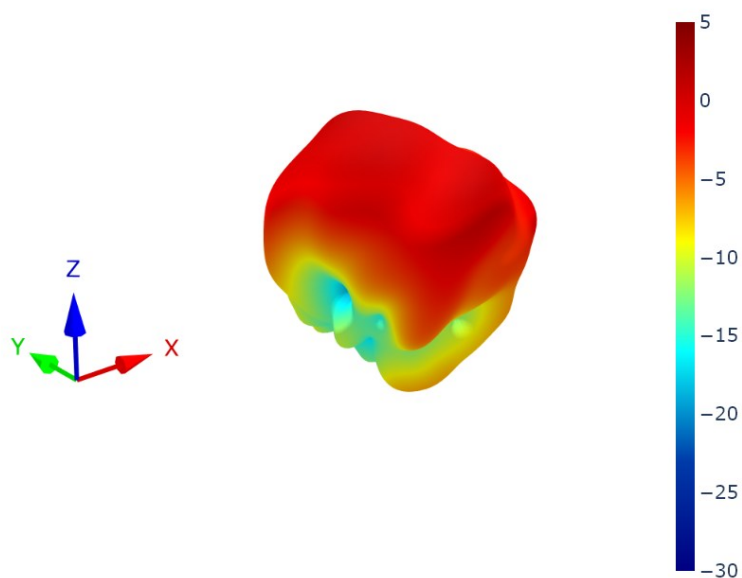


XZ Plane

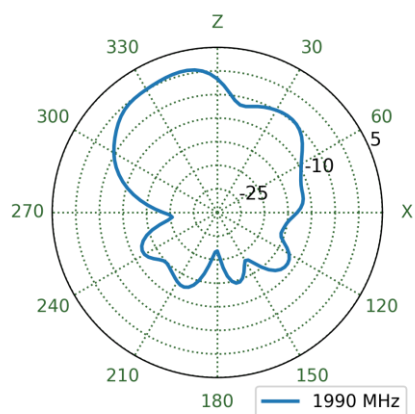


YZ Plane

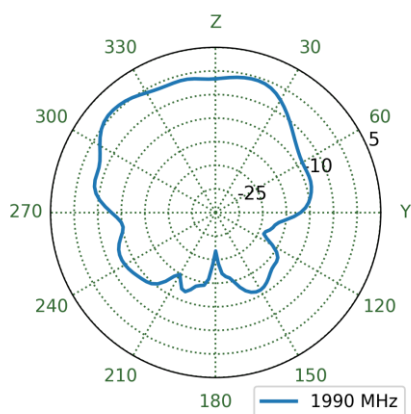


XY Plane

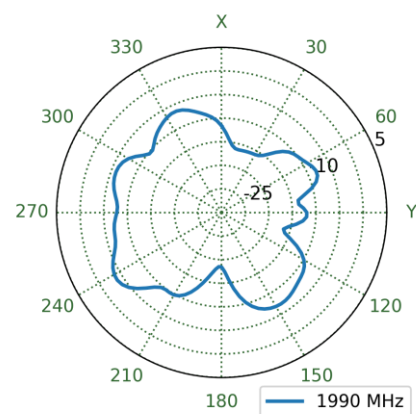


8.60 4G-5G 1 Patterns at 2360 MHz

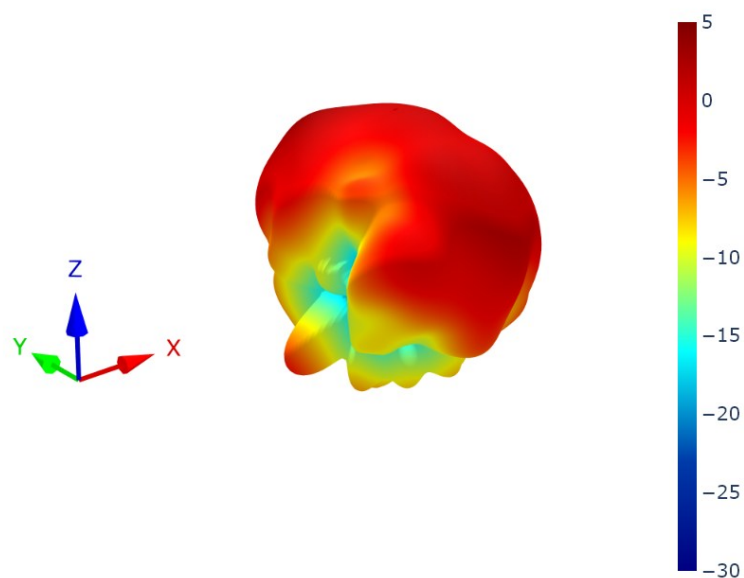


XZ Plane

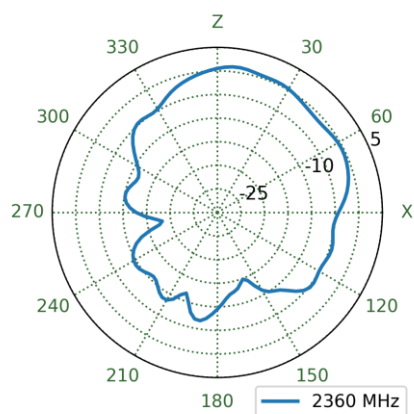


YZ Plane

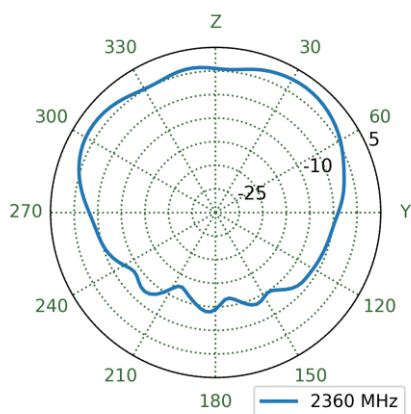


XY Plane

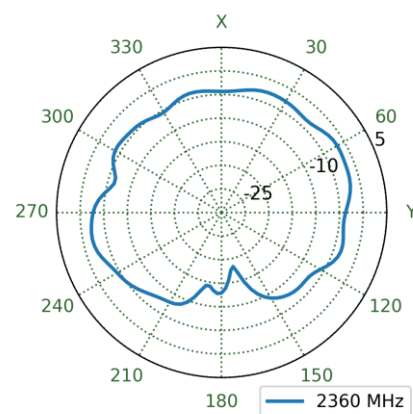


8.61 4G-5G 2 Patterns at 2360 MHz

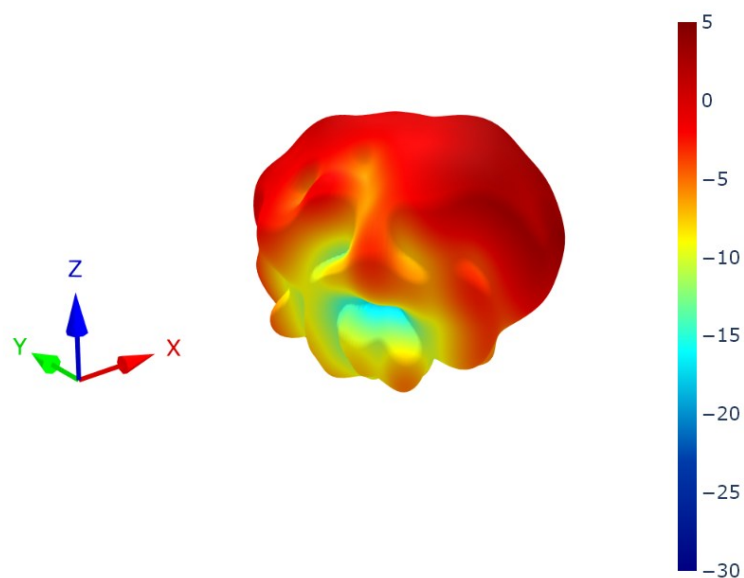


XZ Plane

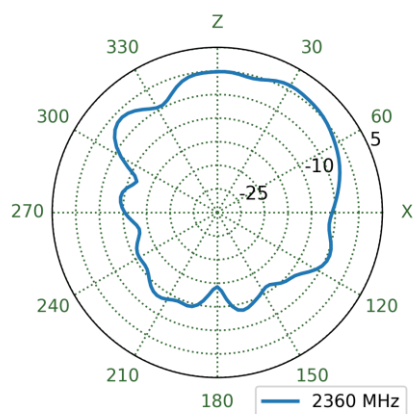


YZ Plane

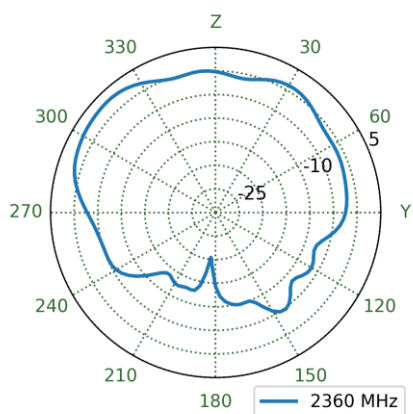


XY Plane

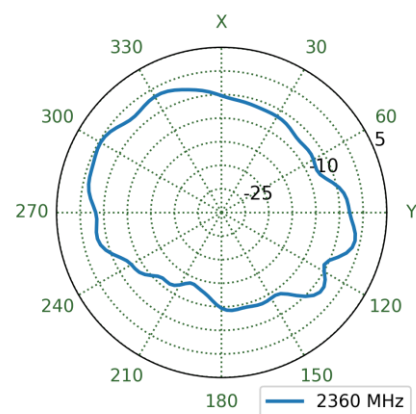


8.62 4G-5G 3 Patterns at 2360 MHz

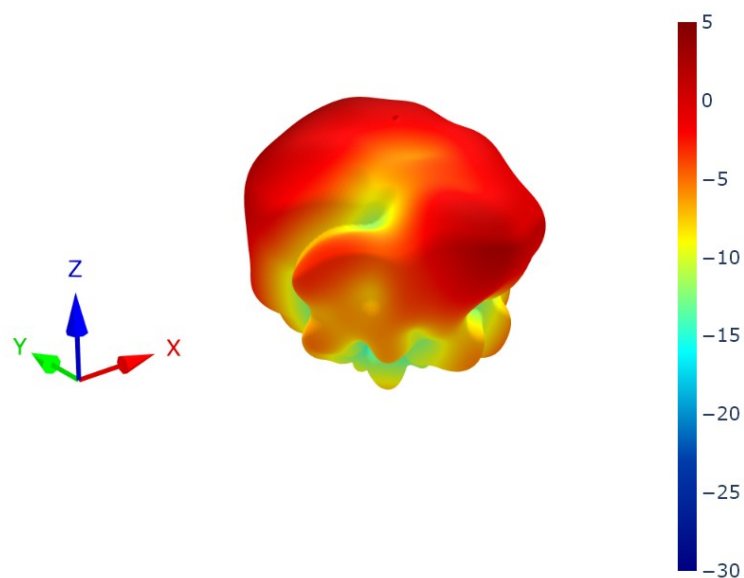


XZ Plane

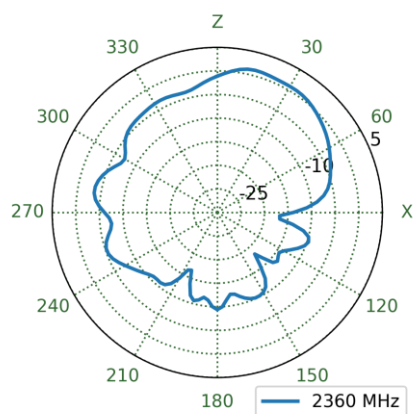


YZ Plane

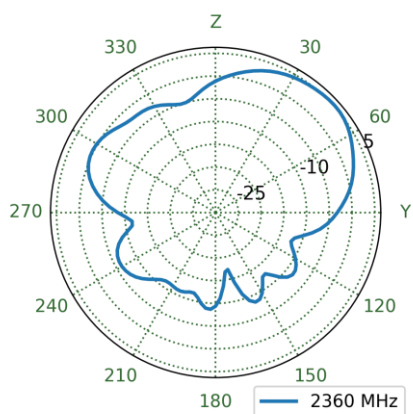


XY Plane

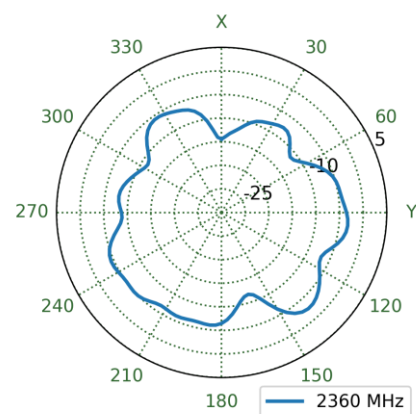


8.63 4G-5G 4 Patterns at 2360 MHz

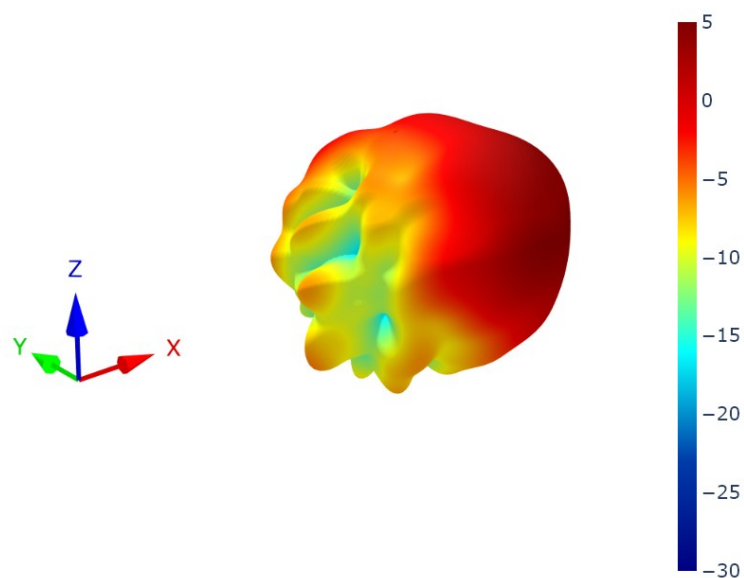


XZ Plane

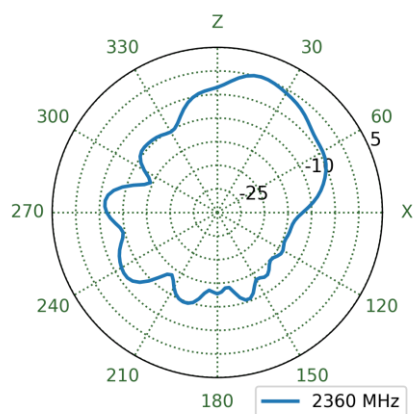


YZ Plane

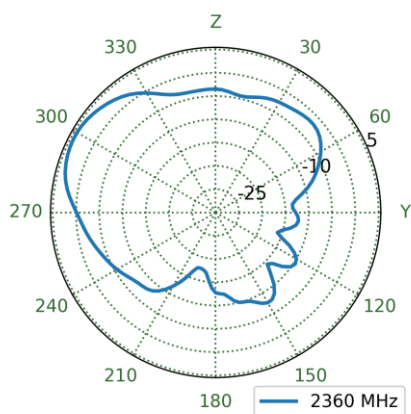


XY Plane

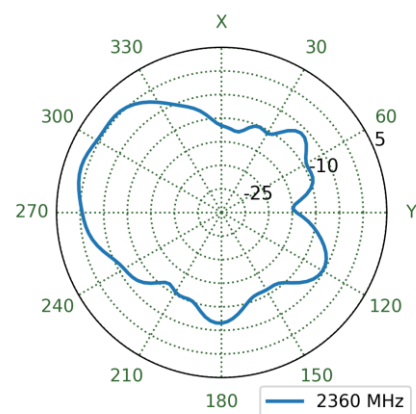


8.64 4G-5G 5 Patterns at 2360 MHz

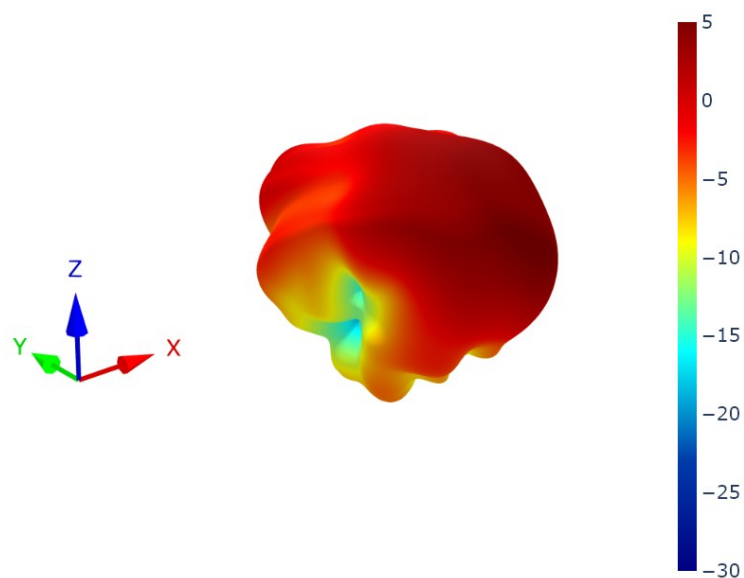


XZ Plane

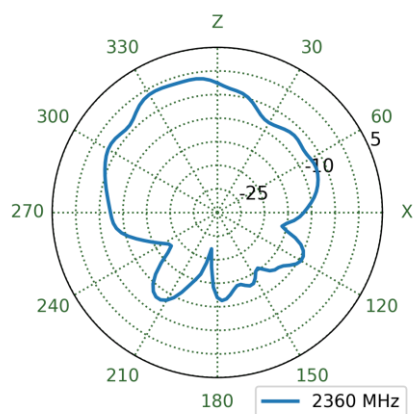


YZ Plane

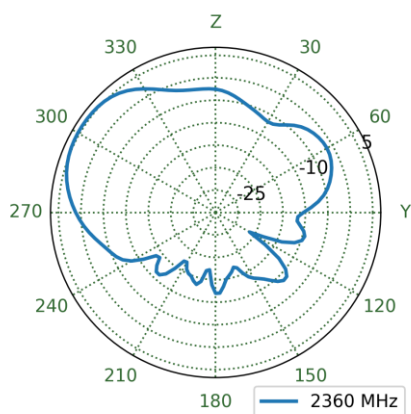


XY Plane

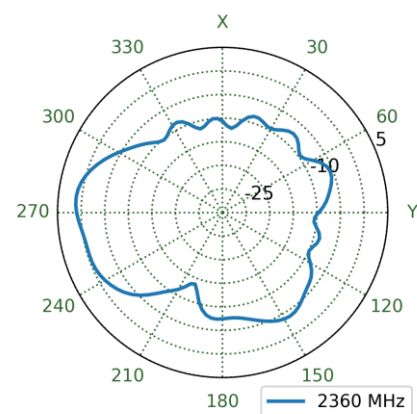


8.65 4G-5G 6 Patterns at 2360 MHz

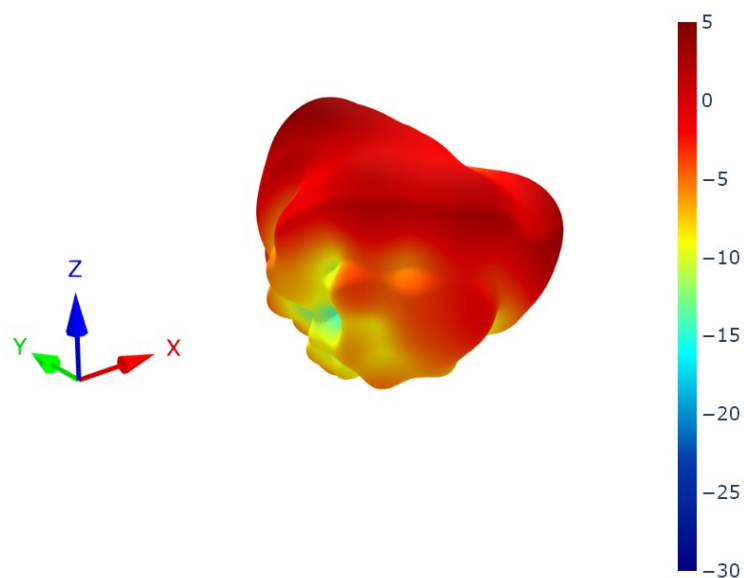


XZ Plane

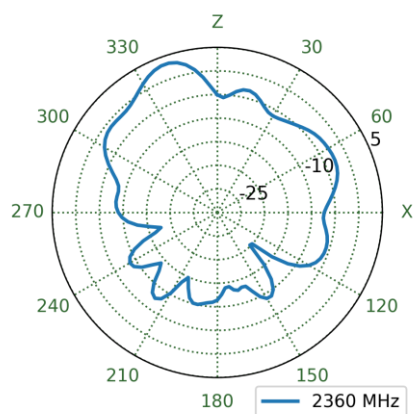


YZ Plane

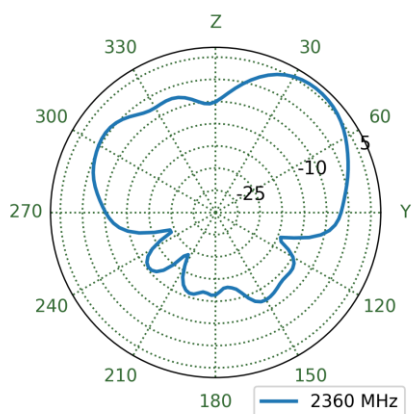


XY Plane

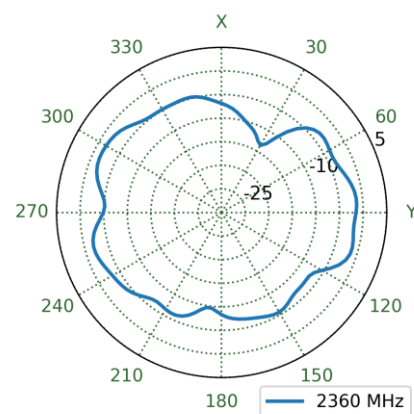


8.66 4G-5G 7 Patterns at 2360 MHz

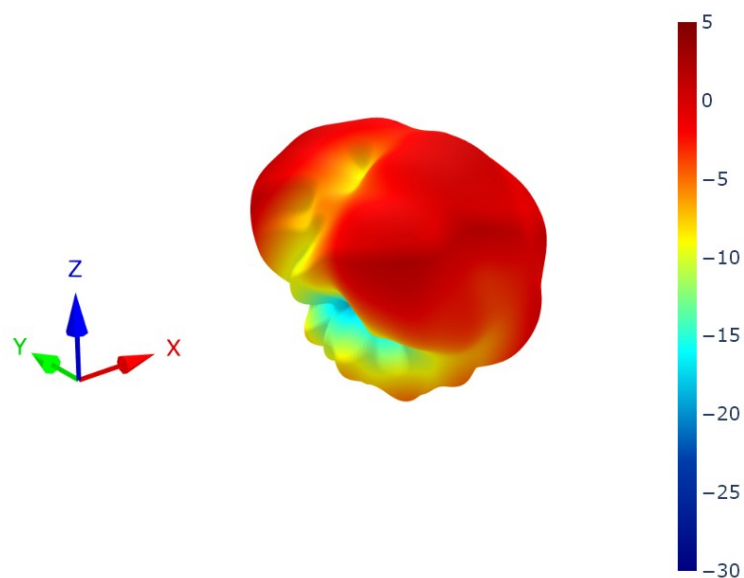


XZ Plane

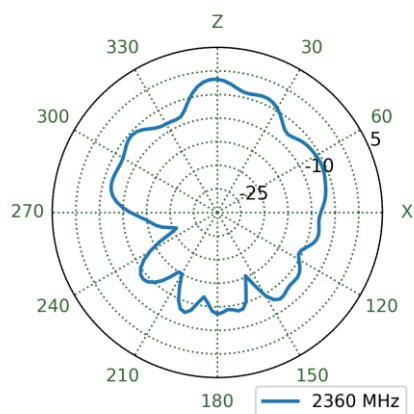


YZ Plane

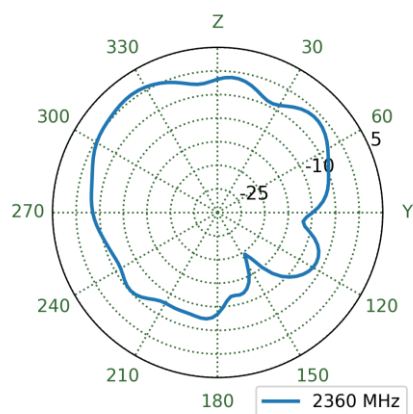


XY Plane

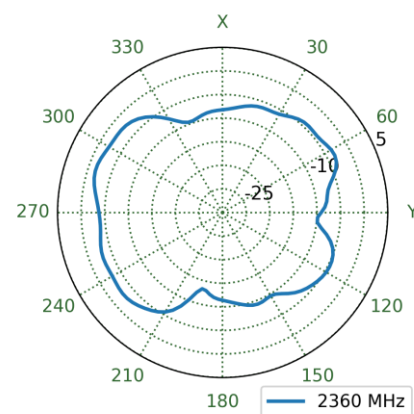


8.67 4G-5G 8 Patterns at 2360 MHz

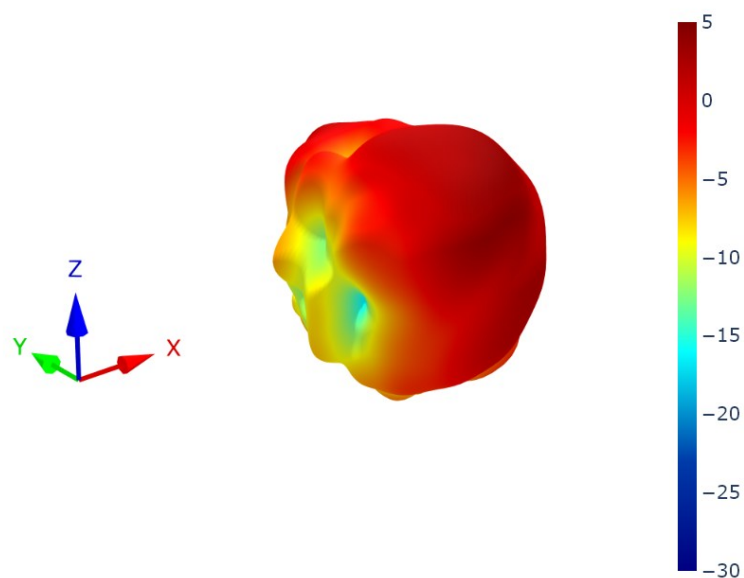


XZ Plane

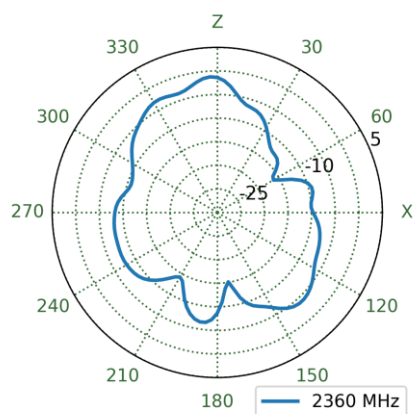


YZ Plane

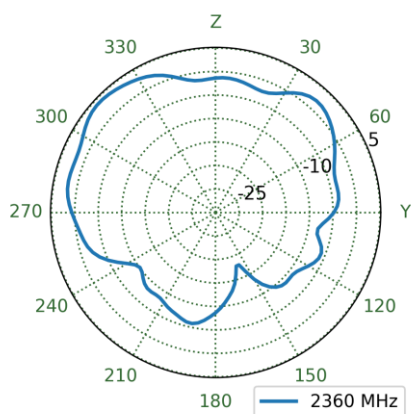


XY Plane

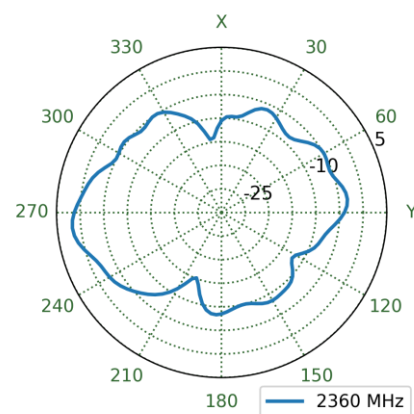


8.68 4G-5G 1 Patterns at 2595 MHz

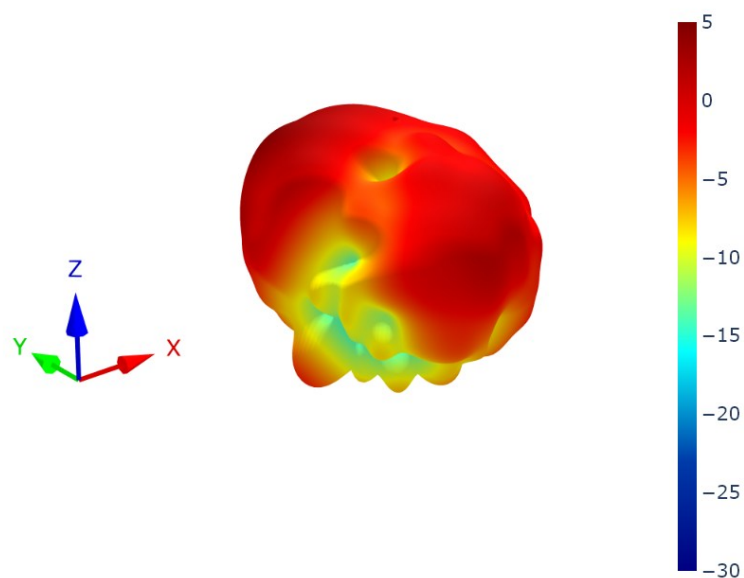


XZ Plane

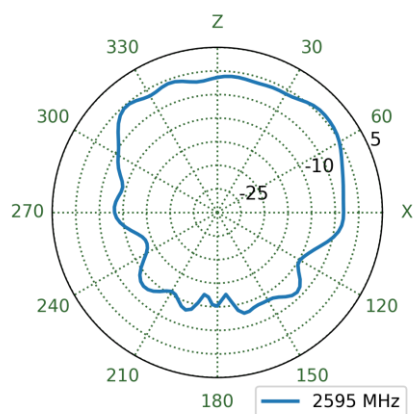


YZ Plane

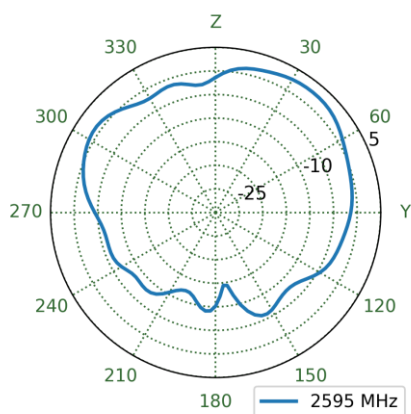


XY Plane

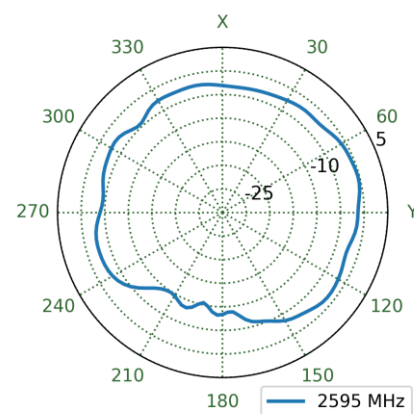


8.69 4G-5G 2 Patterns at 2595 MHz

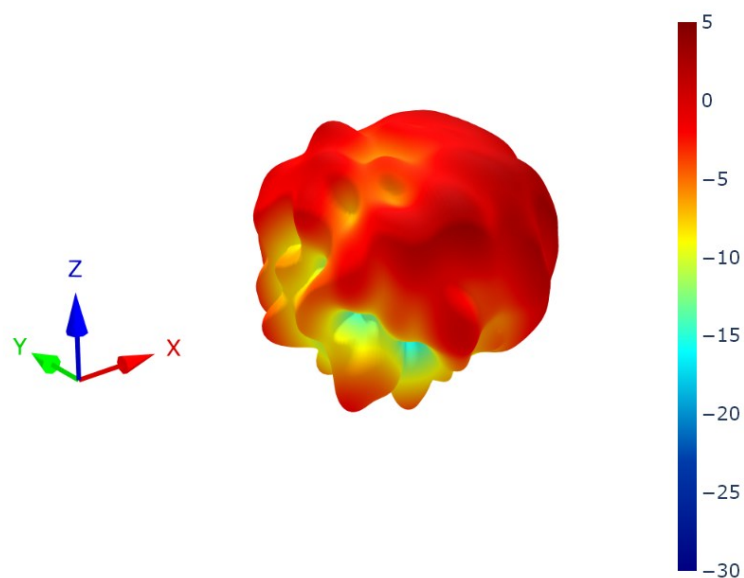


XZ Plane

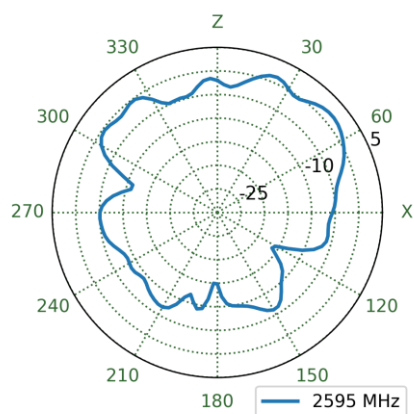


YZ Plane

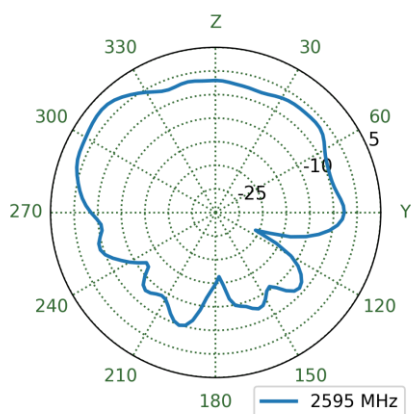


XY Plane

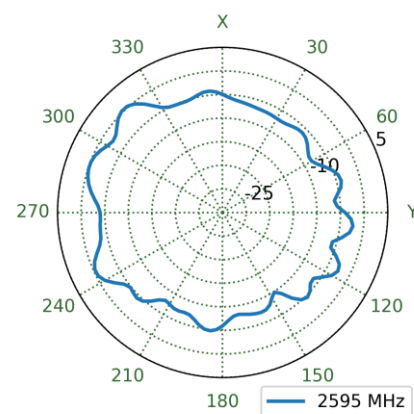


8.70 4G-5G 3 Patterns at 2595 MHz

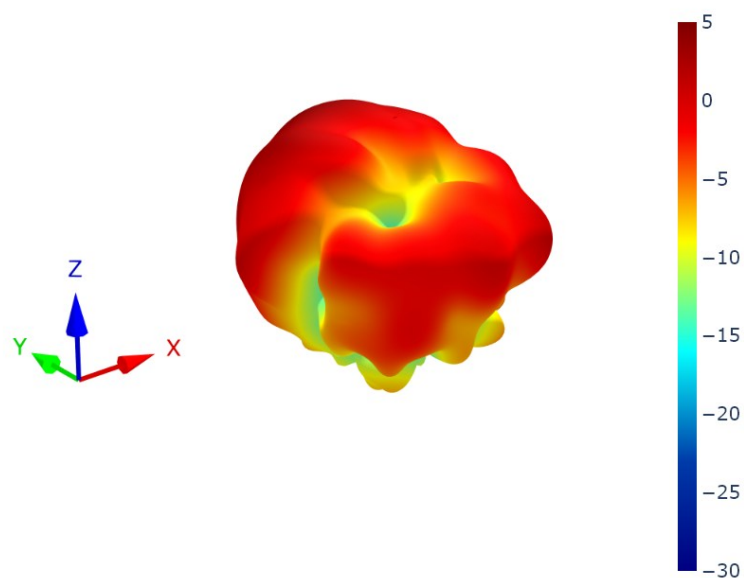


XZ Plane

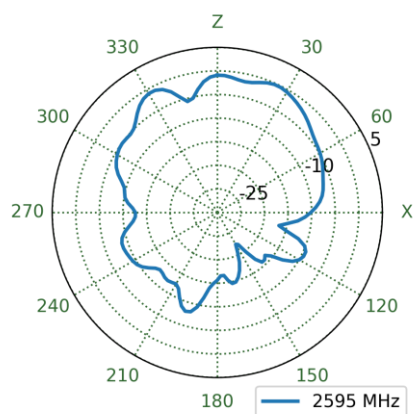


YZ Plane

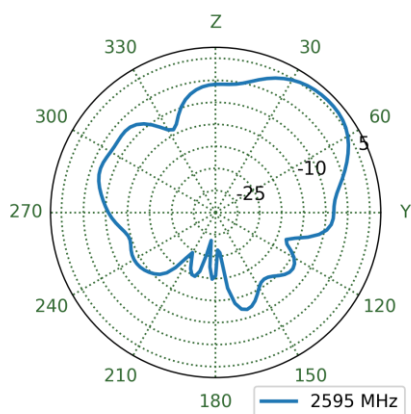


XY Plane

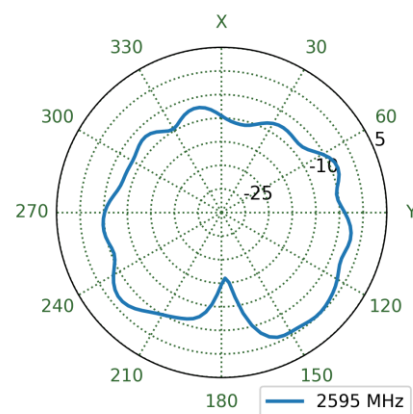


8.71 4G-5G 4 Patterns at 2595 MHz

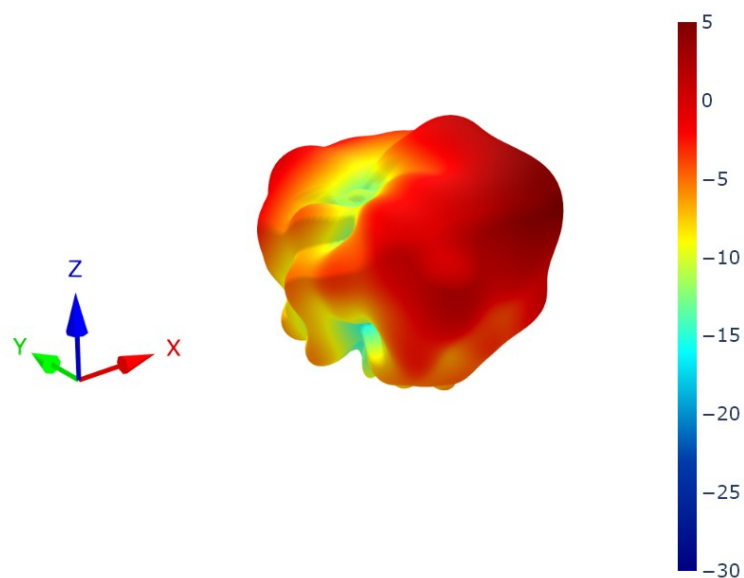


XZ Plane

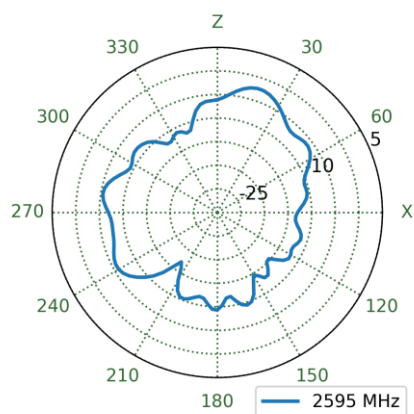


YZ Plane

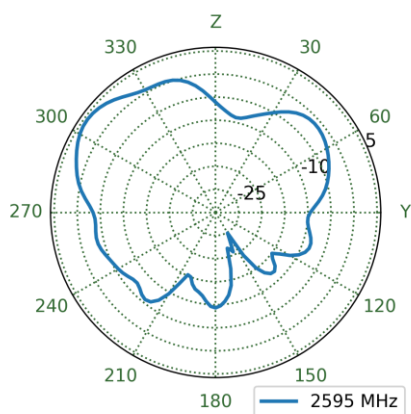


XY Plane

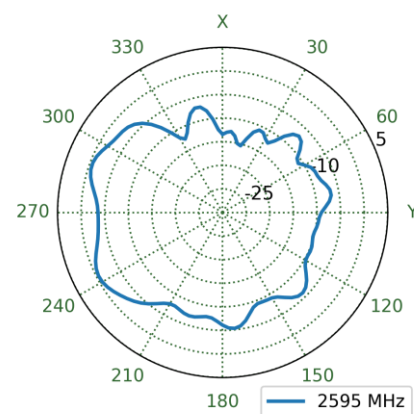


8.72 4G-5G 5 Patterns at 2595 MHz

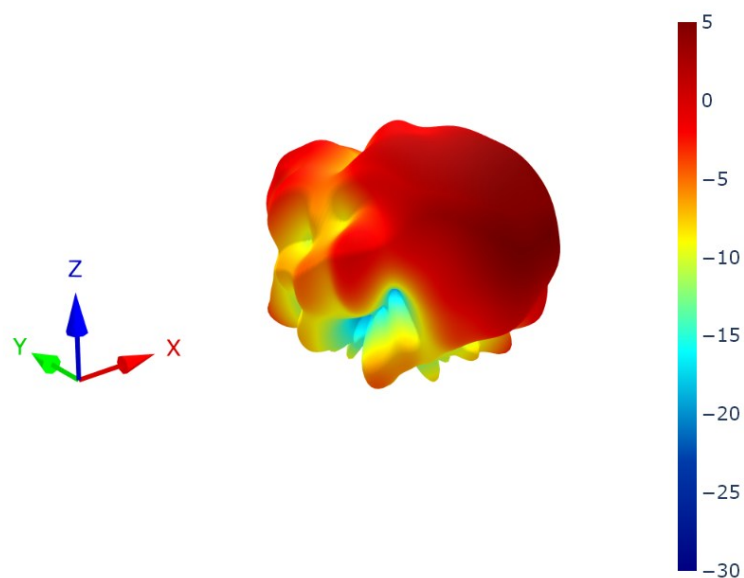


XZ Plane

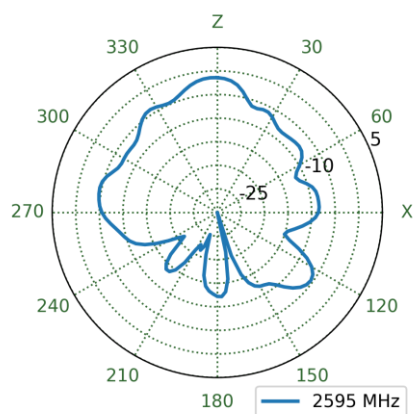


YZ Plane

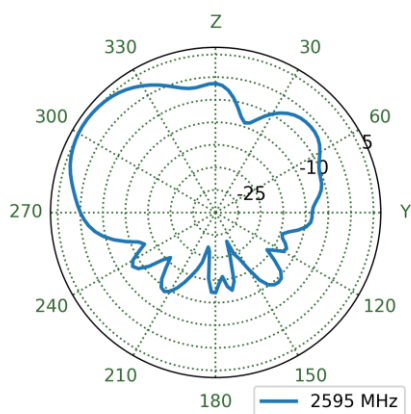


XY Plane

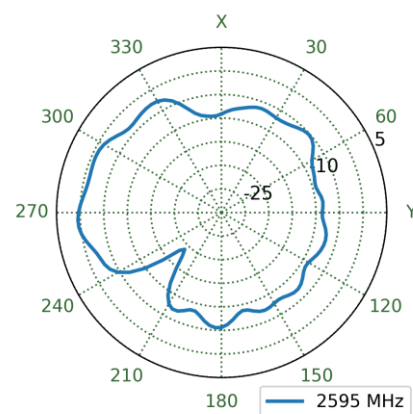


8.73 4G-5G 6 Patterns at 2595 MHz

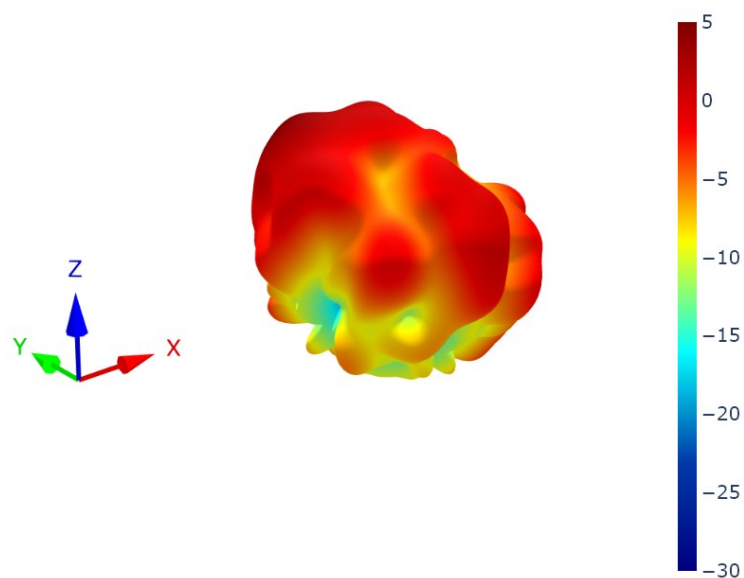


XZ Plane

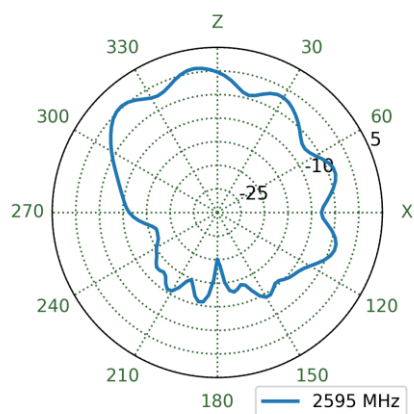


YZ Plane

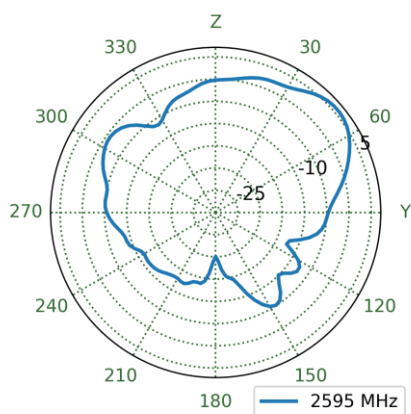


XY Plane

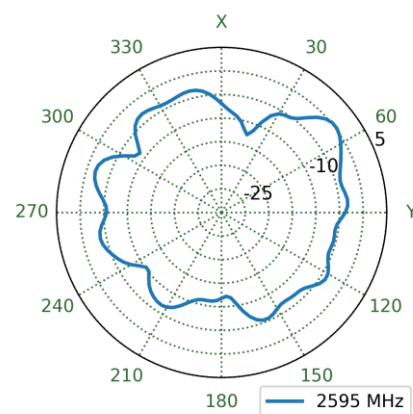


8.74 4G-5G 7 Patterns at 2595 MHz

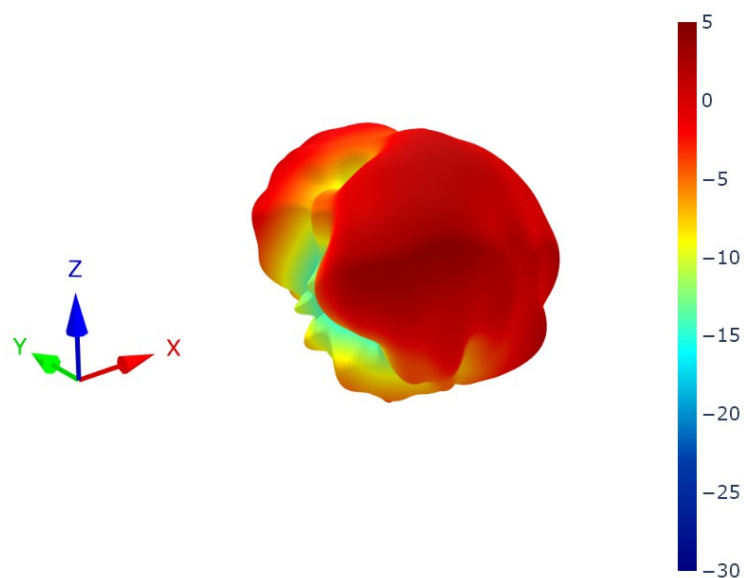


XZ Plane

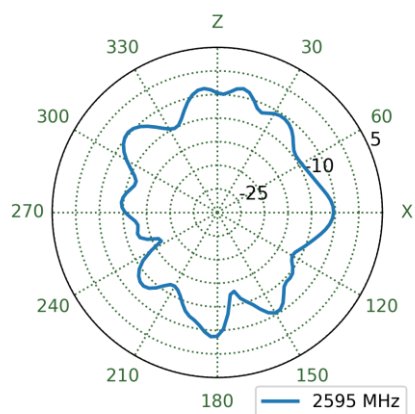


YZ Plane

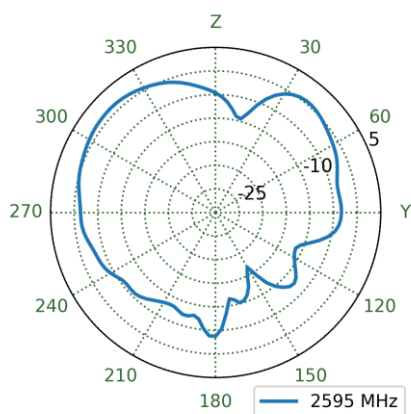


XY Plane

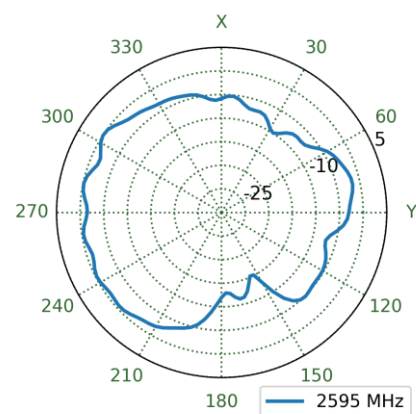


8.75 4G-5G 8 Patterns at 2595 MHz

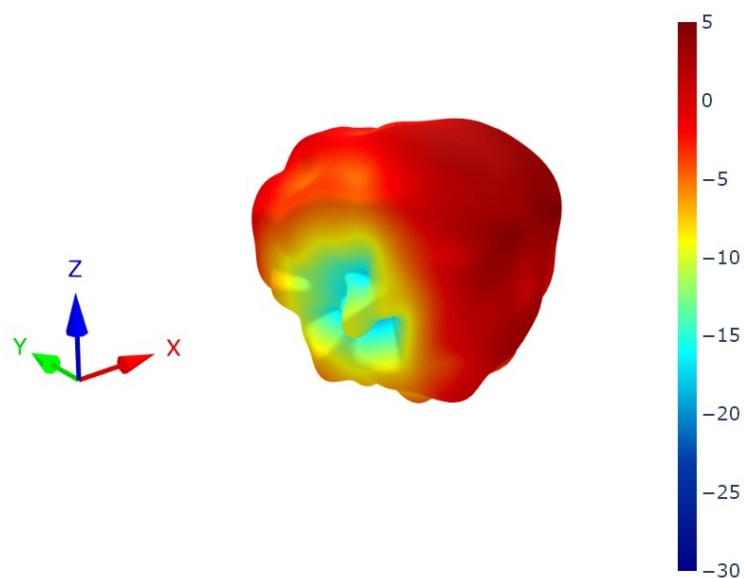


XZ Plane

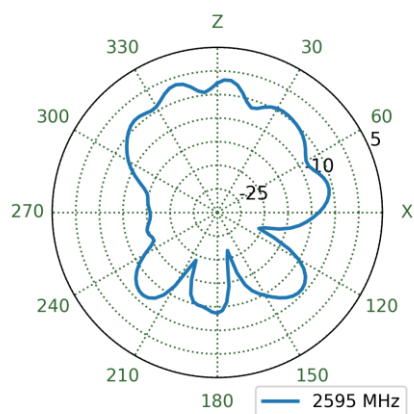


YZ Plane

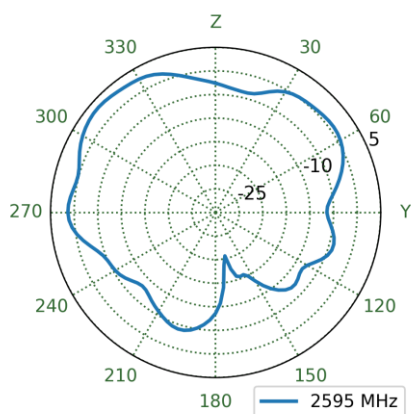


XY Plane

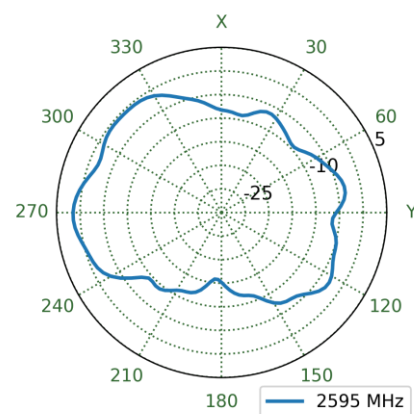


8.76 4G-5G 1 Patterns at 3550 MHz

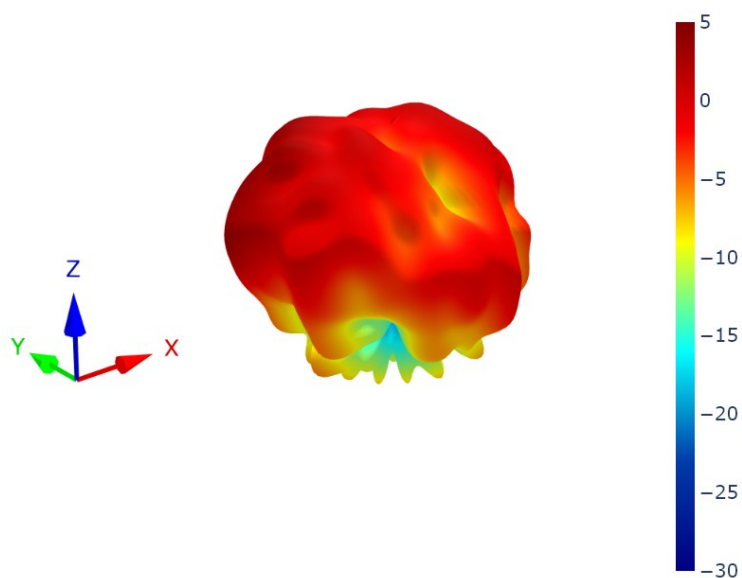


XZ Plane

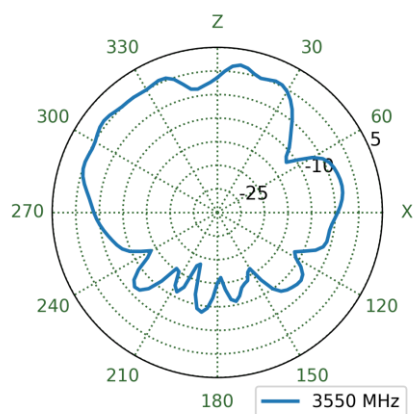


YZ Plane

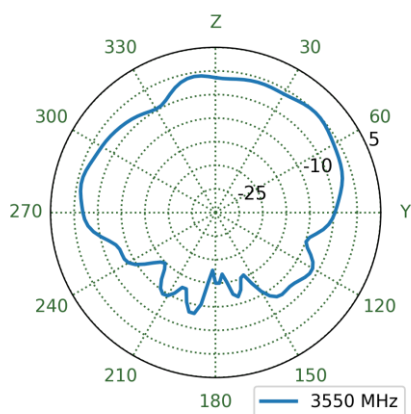


XY Plane

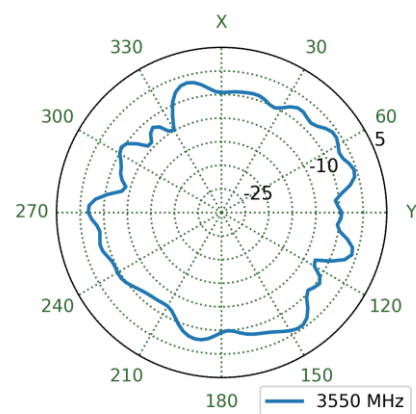


8.77 4G-5G 2 Patterns at 3550 MHz

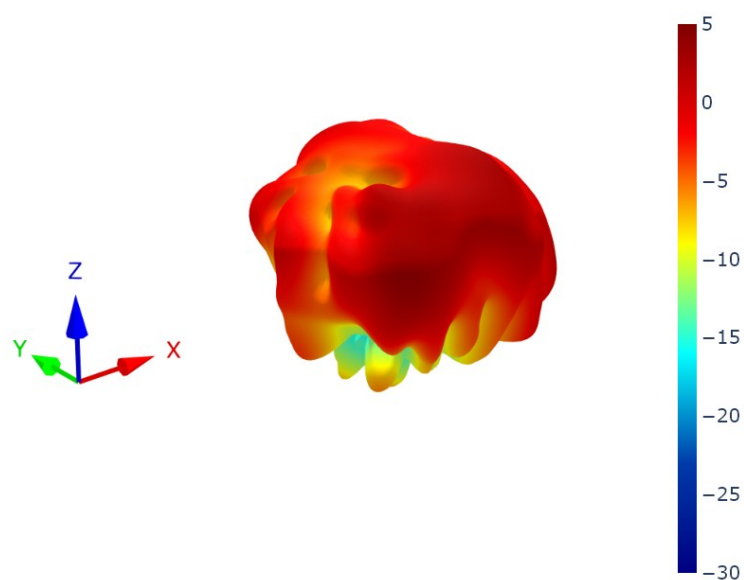


XZ Plane

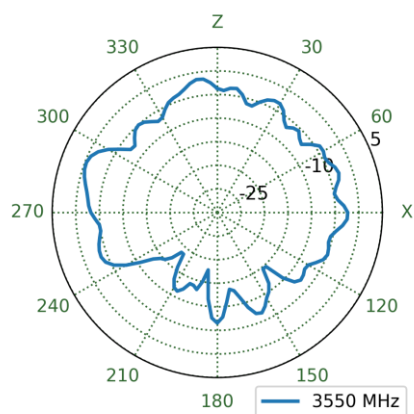


YZ Plane

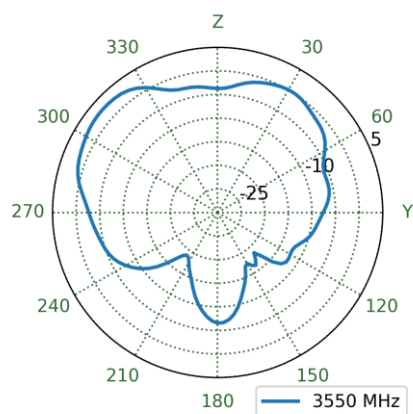


XY Plane

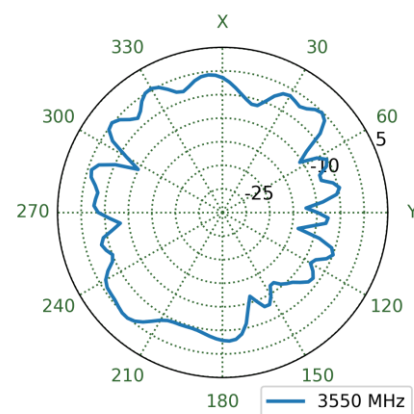


8.78 4G-5G 3 Patterns at 3550 MHz

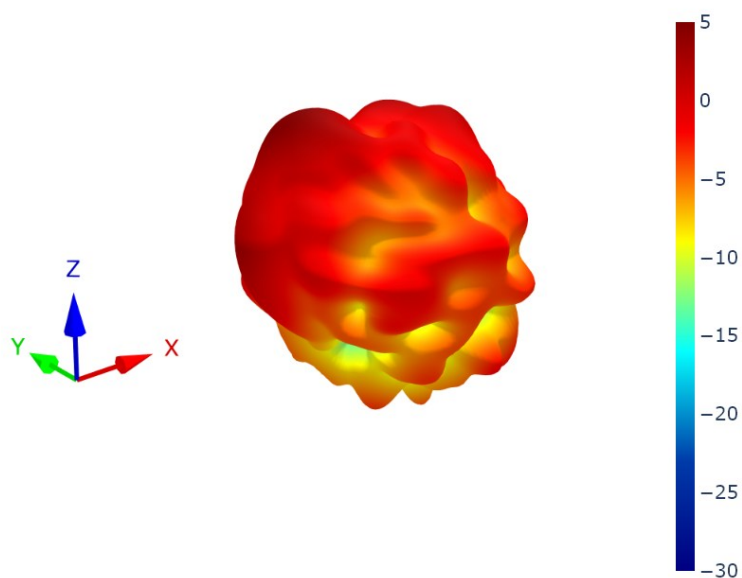


XZ Plane

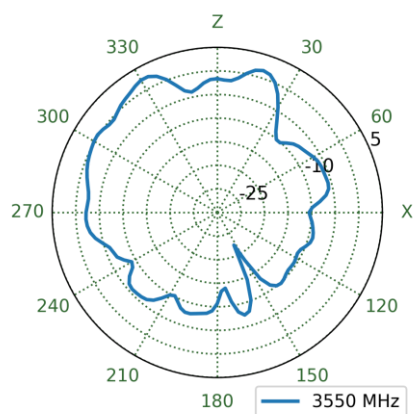


YZ Plane

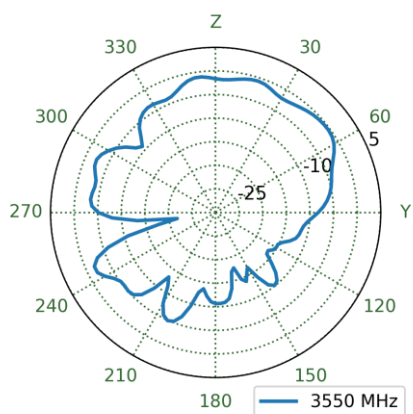


XY Plane

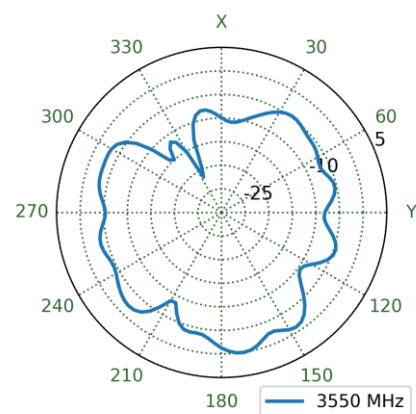


8.79 4G-5G 4 Patterns at 3550 MHz

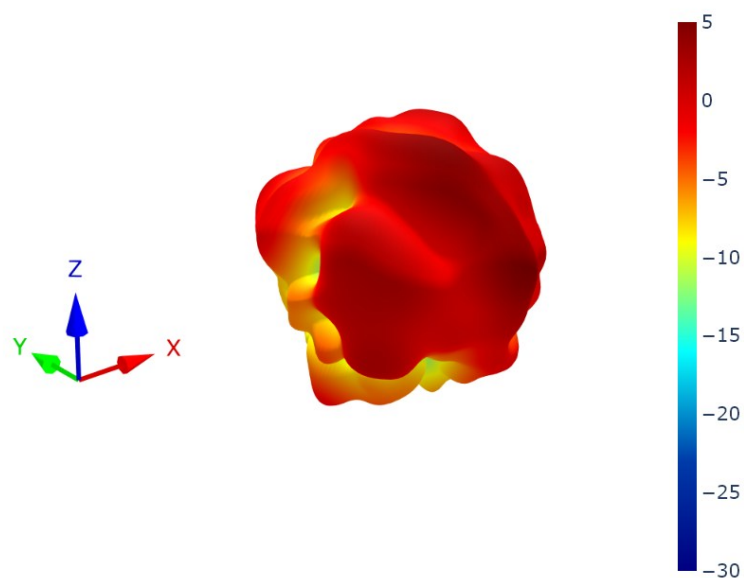


XZ Plane

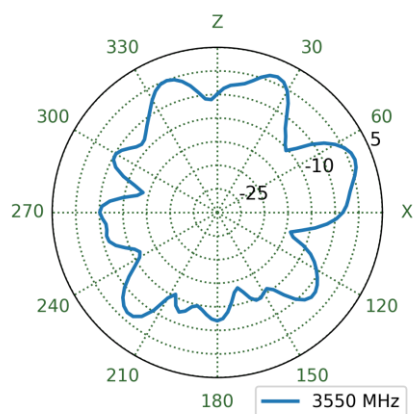


YZ Plane

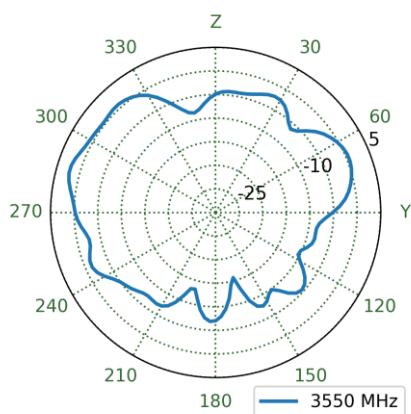


XY Plane

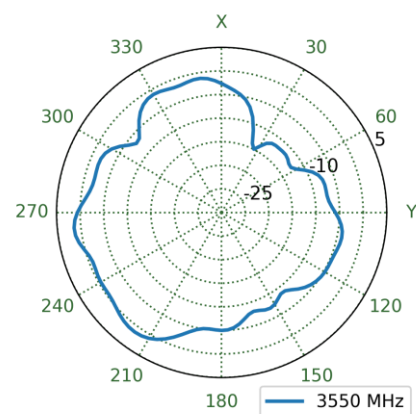


8.80 4G-5G 5 Patterns at 3550 MHz

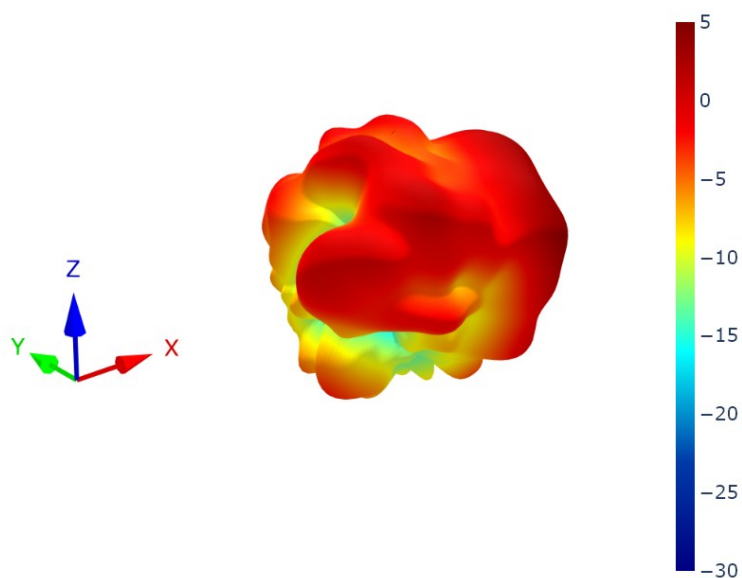


XZ Plane

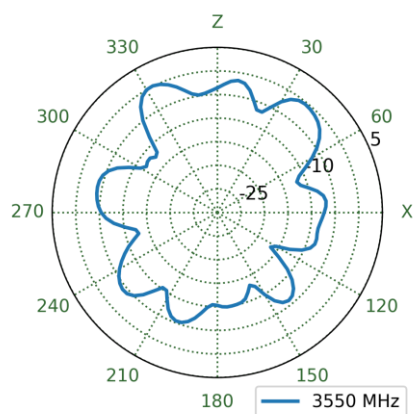


YZ Plane

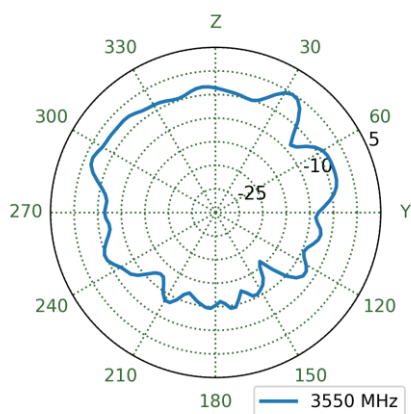


XY Plane

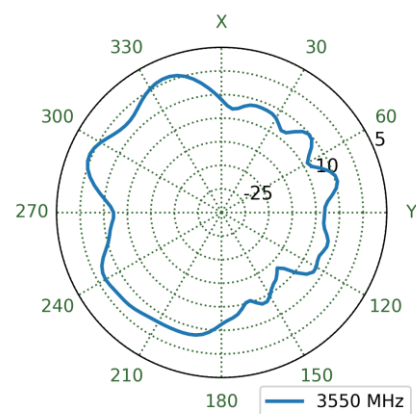


8.81 4G-5G 6 Patterns at 3550 MHz

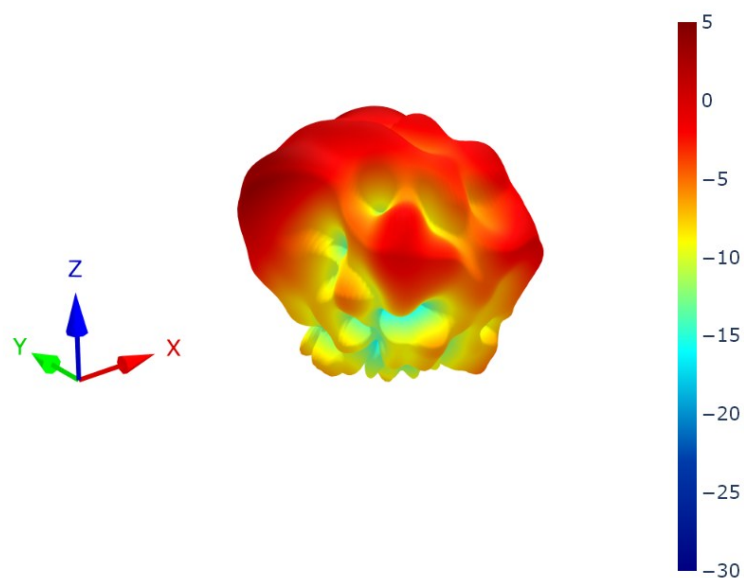


XZ Plane

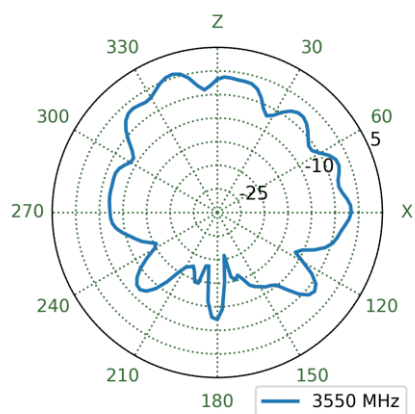


YZ Plane

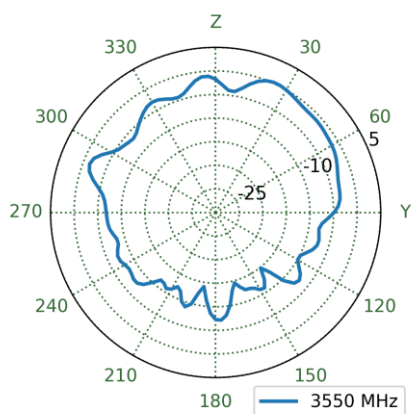


XY Plane

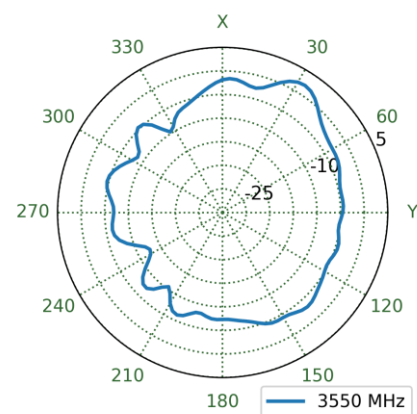


8.82 4G-5G 7 Patterns at 3550 MHz

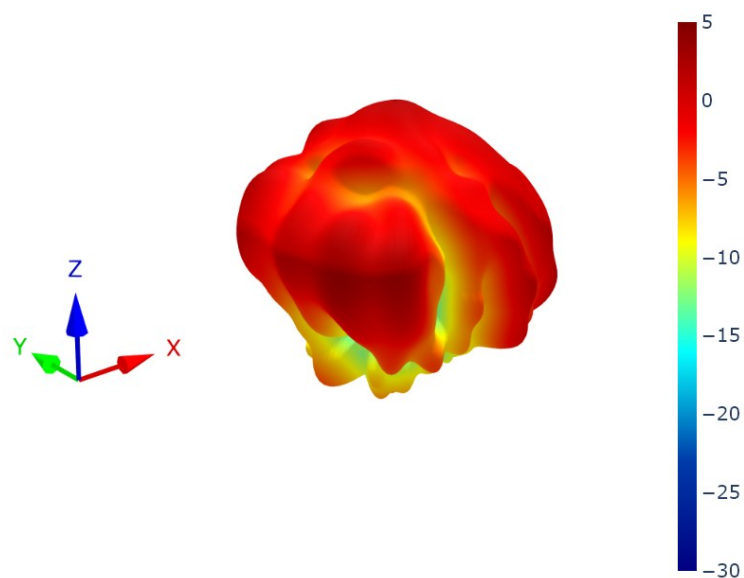


XZ Plane

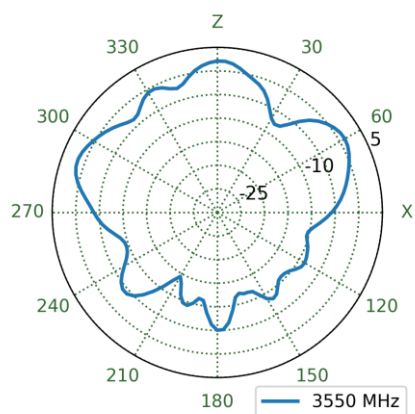


YZ Plane

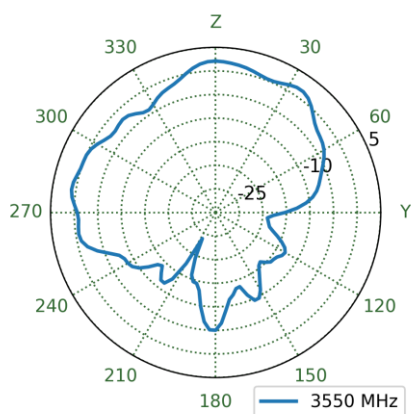


XY Plane

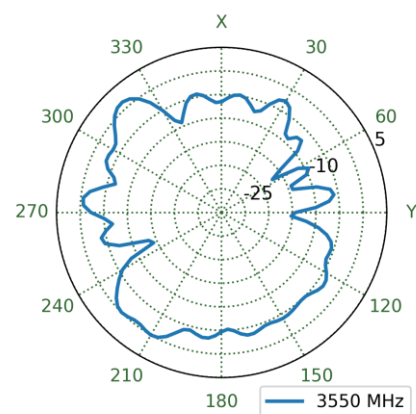


8.83 4G-5G 8 Patterns at 3550 MHz

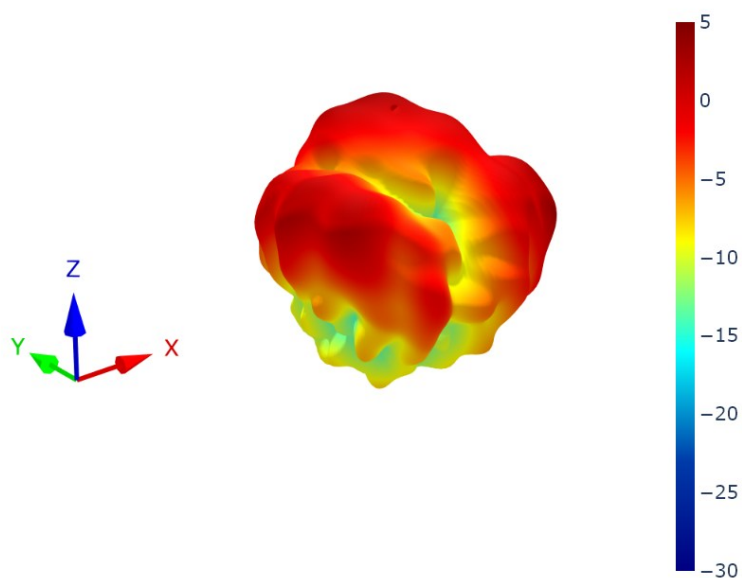


XZ Plane

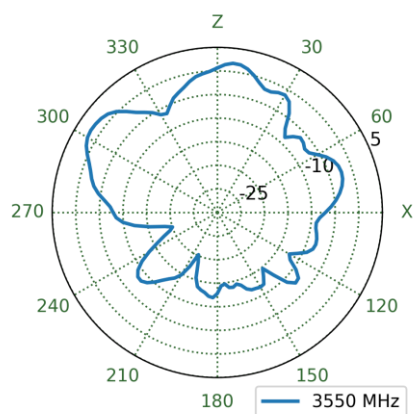


YZ Plane

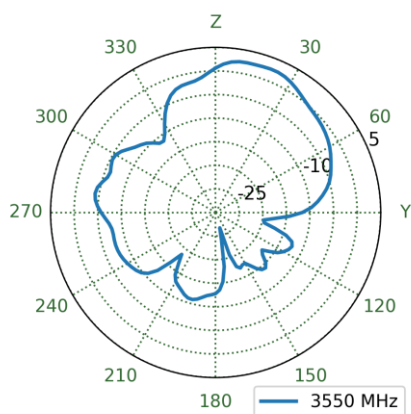


XY Plane

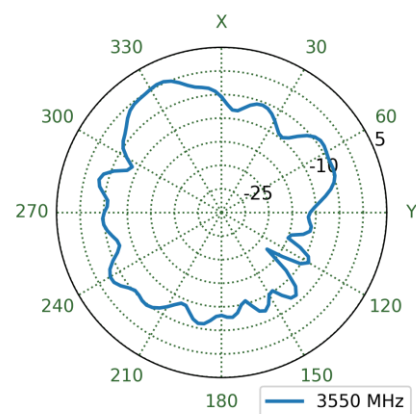


8.84 4G-5G 1 Patterns at 4600 MHz

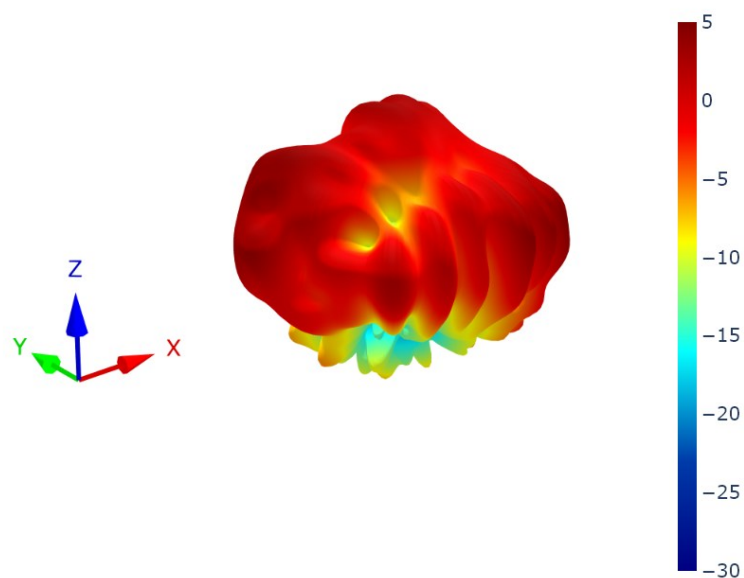


XZ Plane

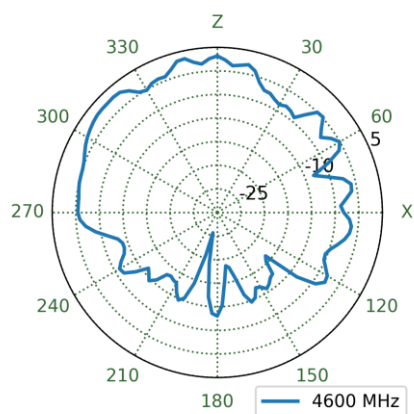


YZ Plane

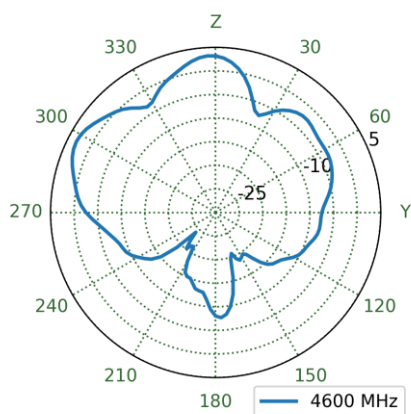


XY Plane

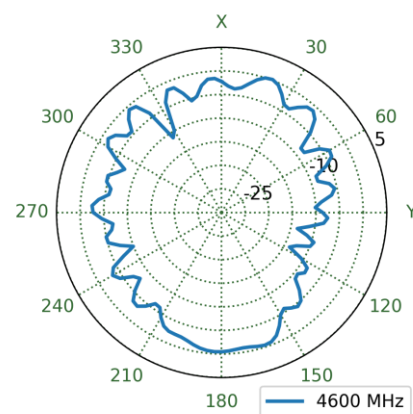


8.85 4G-5G 2 Patterns at 4600 MHz

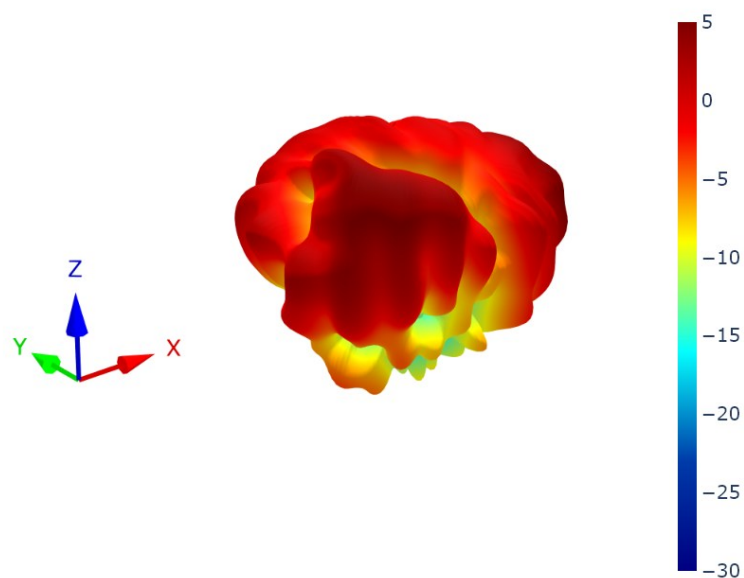


XZ Plane

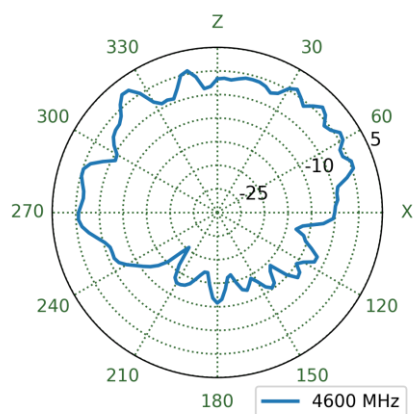


YZ Plane

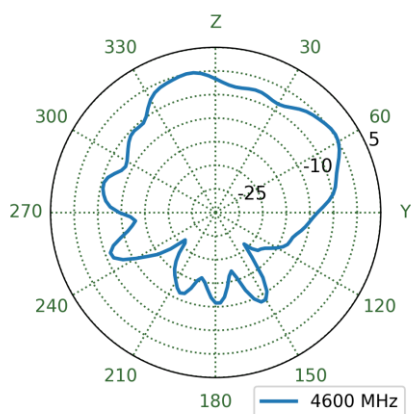


XY Plane

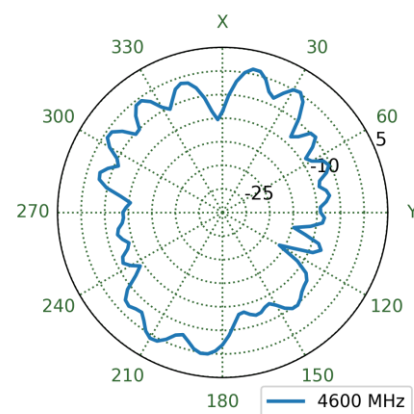


8.86 4G-5G 3 Patterns at 4600 MHz

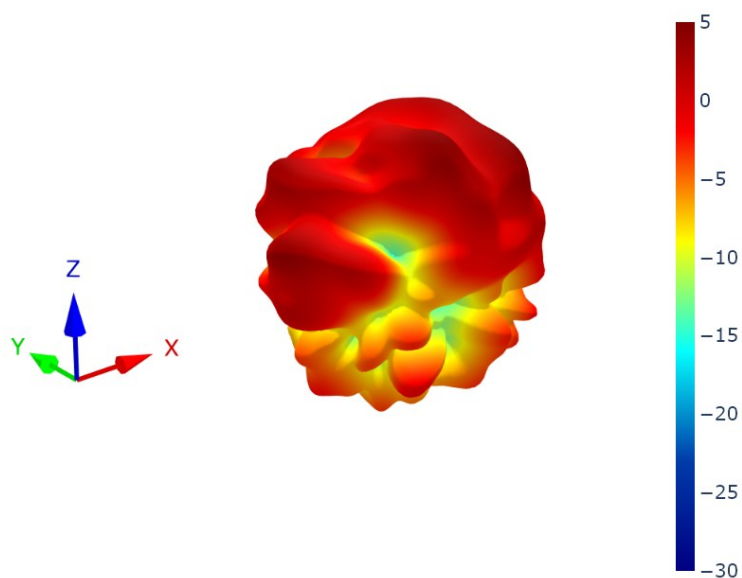


XZ Plane

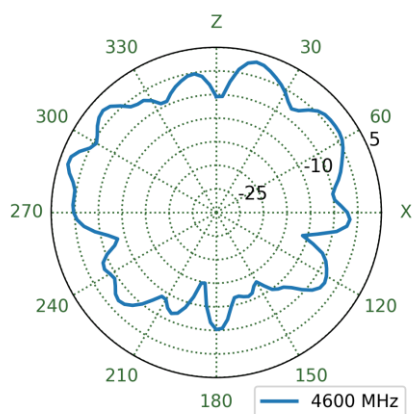


YZ Plane

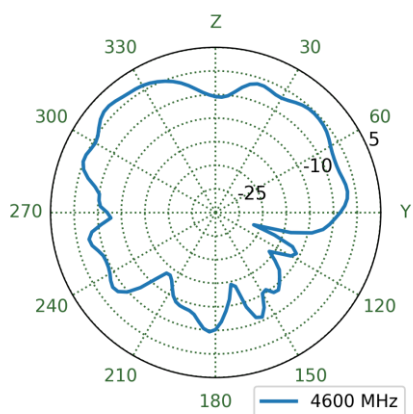


XY Plane

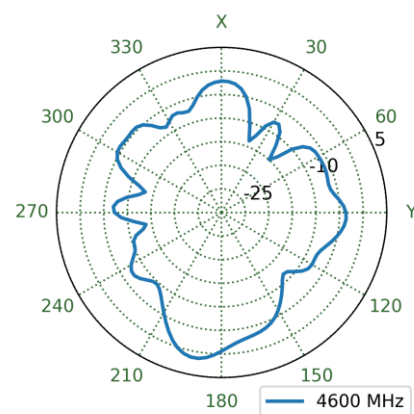


8.87 4G-5G 4 Patterns at 4600 MHz

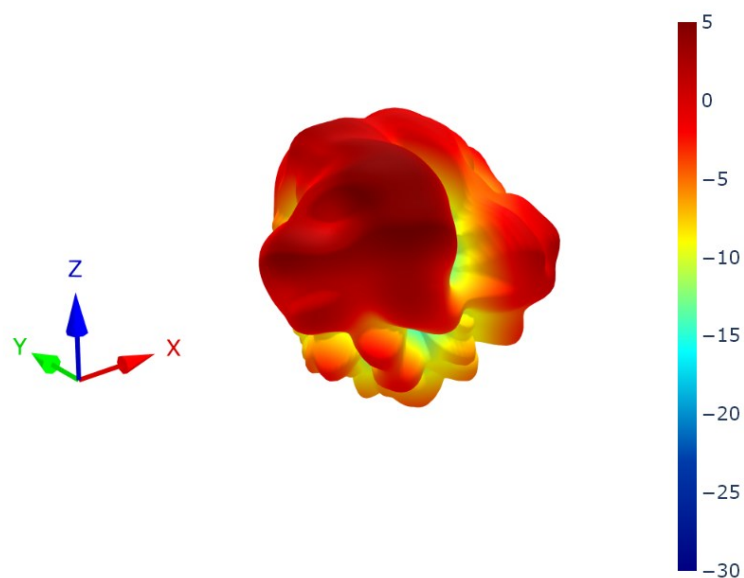


XZ Plane

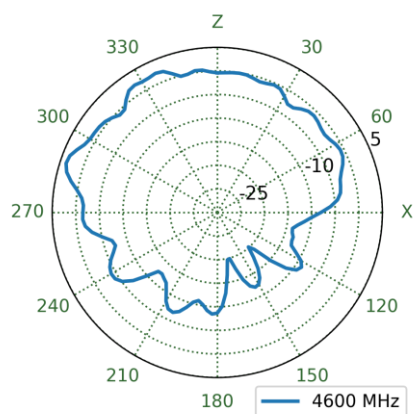


YZ Plane

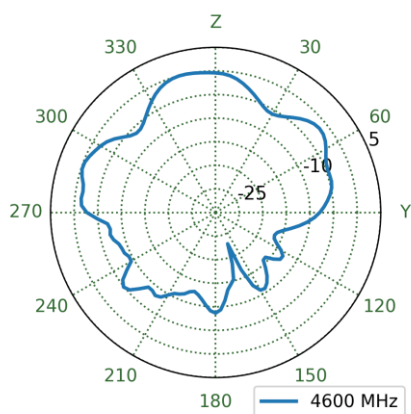


XY Plane

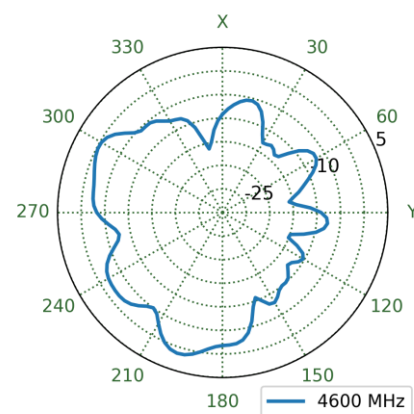


8.88 4G-5G 5 Patterns at 4600 MHz

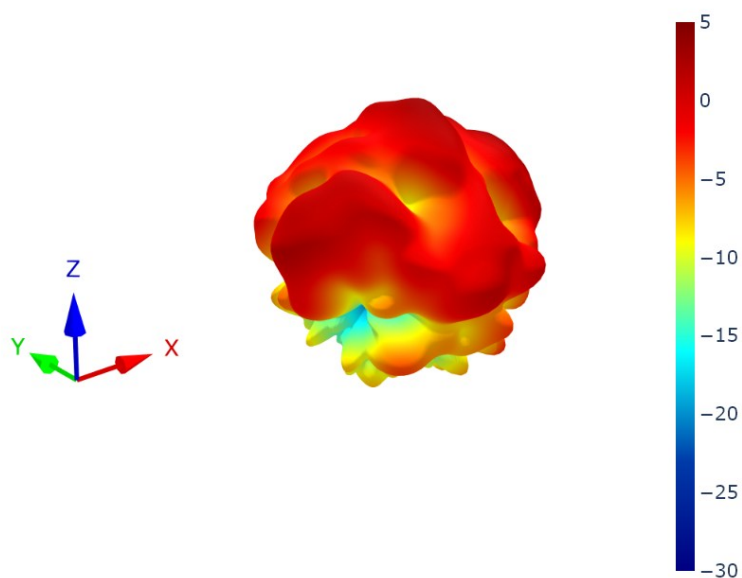


XZ Plane

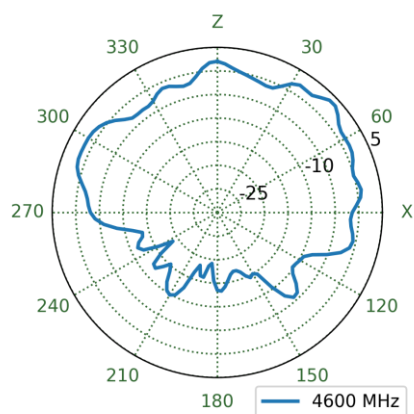


YZ Plane

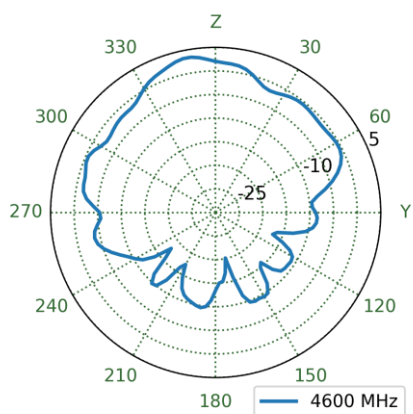


XY Plane

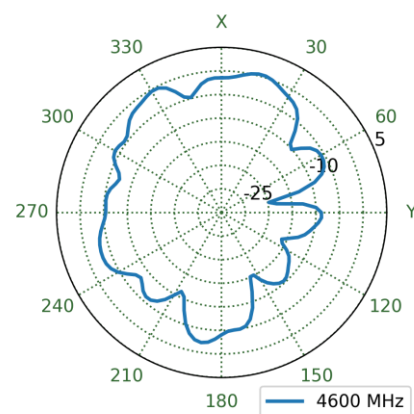


8.89 4G-5G 6 Patterns at 4600 MHz

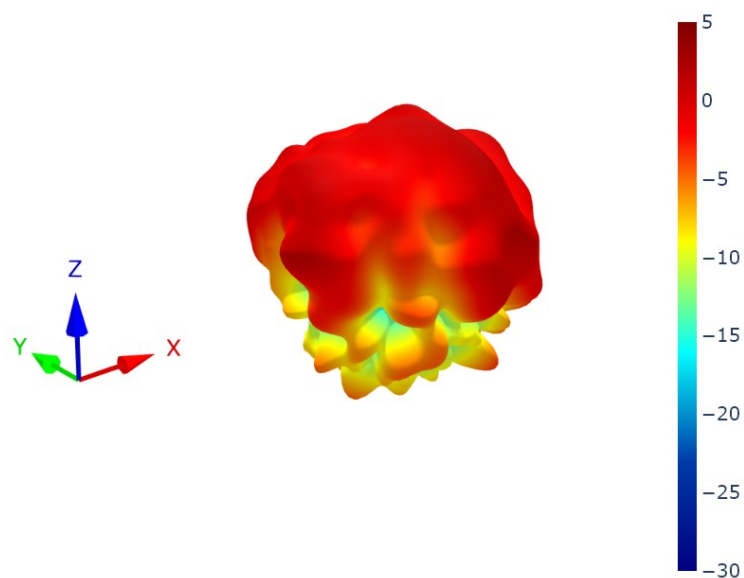


XZ Plane

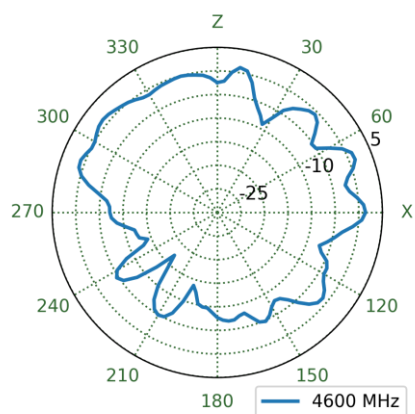


YZ Plane

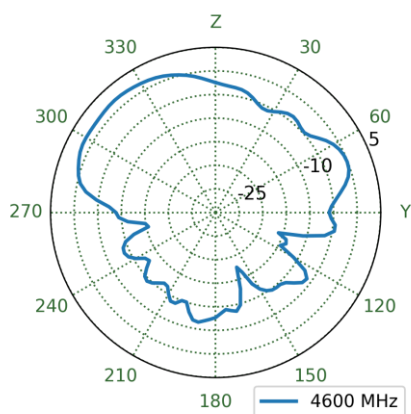


XY Plane

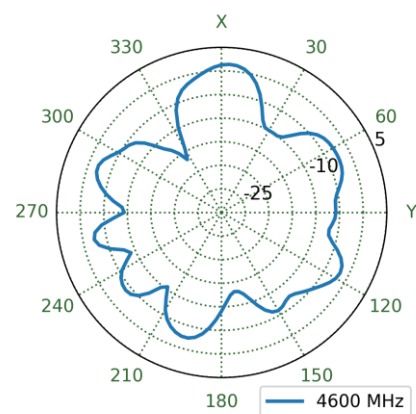


8.90 4G-5G 7 Patterns at 4600 MHz

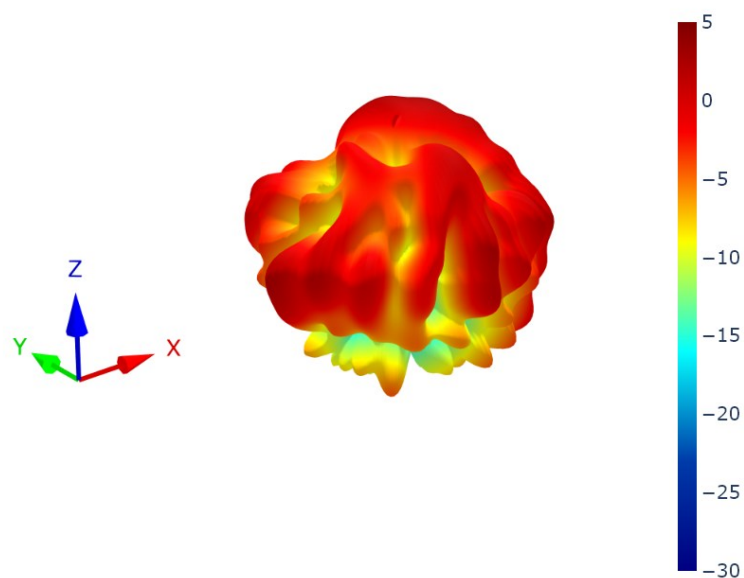


XZ Plane

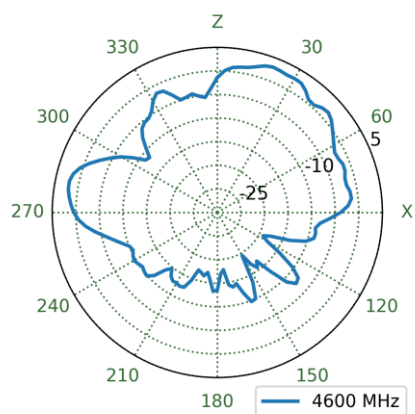


YZ Plane

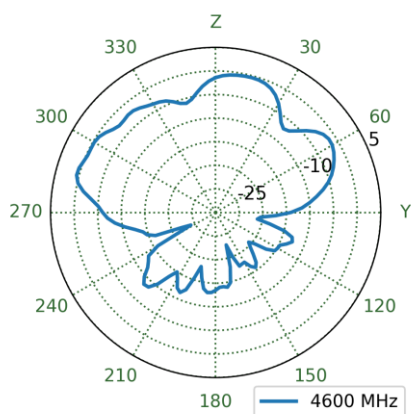


XY Plane

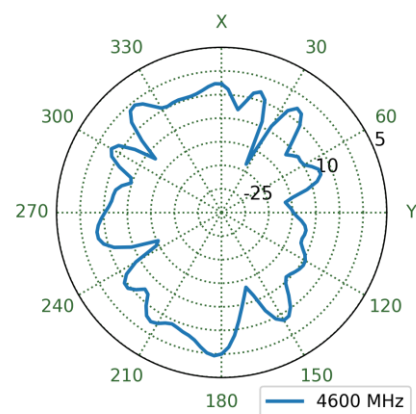


8.91 4G-5G 8 Patterns at 4600 MHz

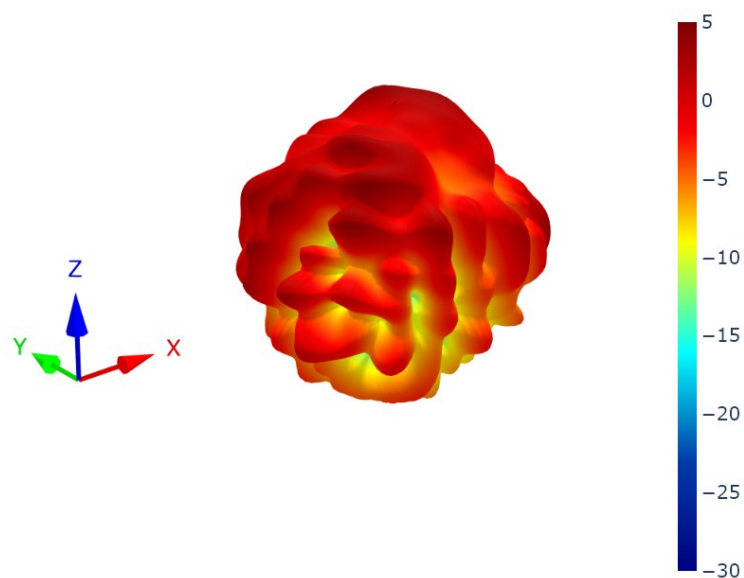


XZ Plane

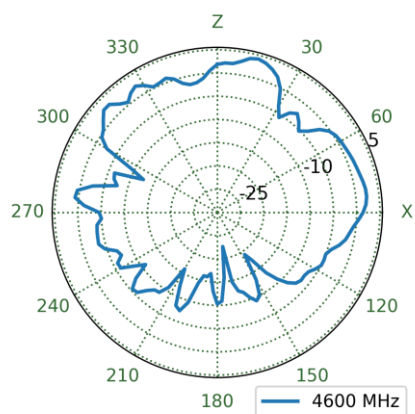


YZ Plane

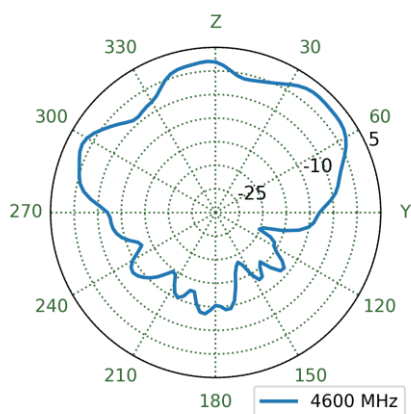


XY Plane

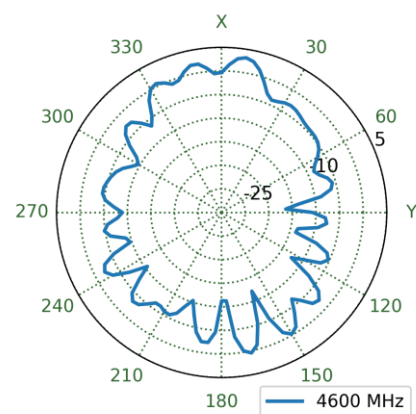


8.92 4G-5G 1 Patterns at 4800 MHz

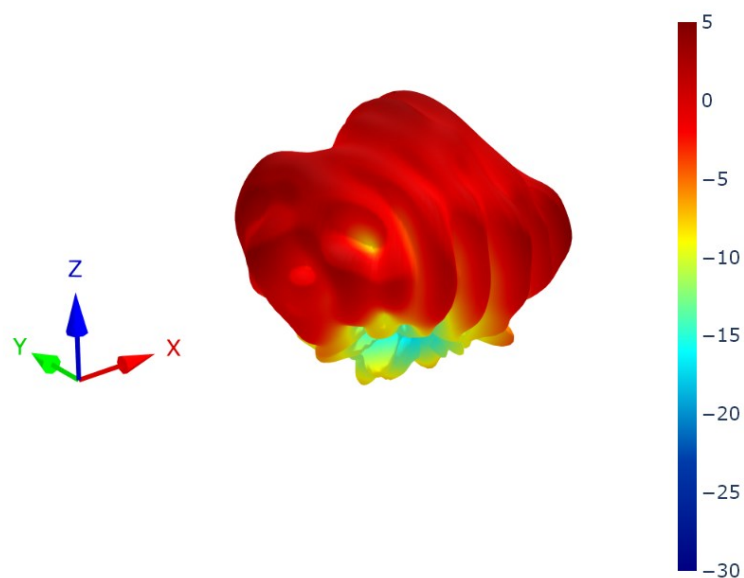


XZ Plane

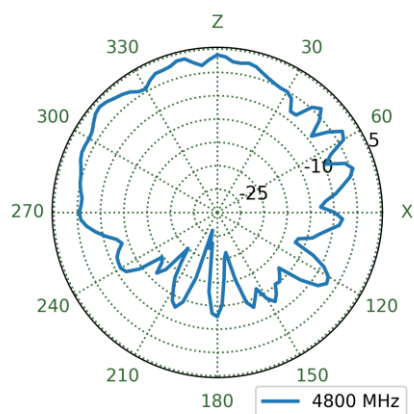


YZ Plane

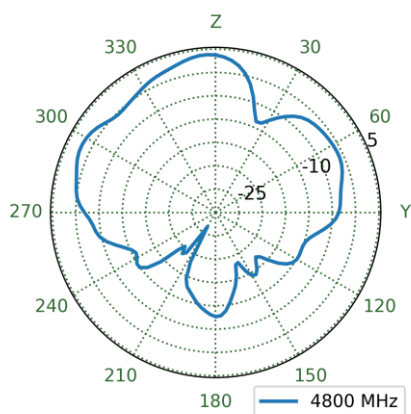


XY Plane

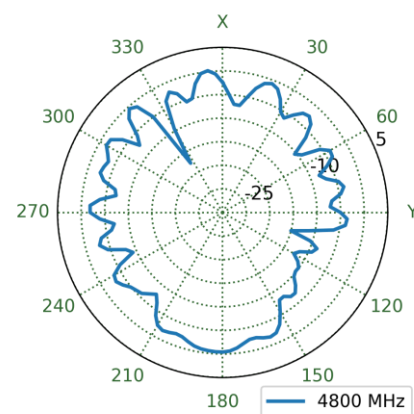


8.93 4G-5G 2 Patterns at 4800 MHz

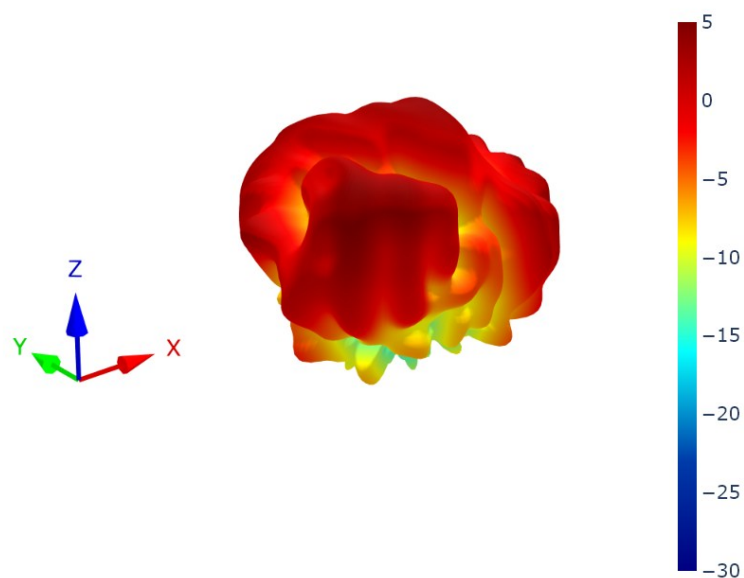


XZ Plane

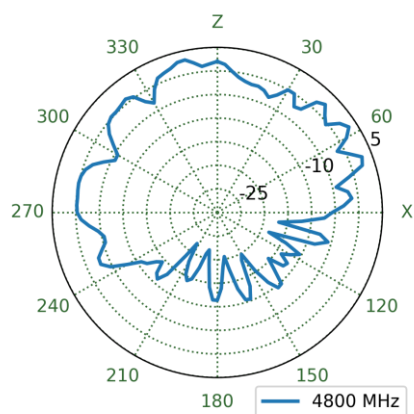


YZ Plane

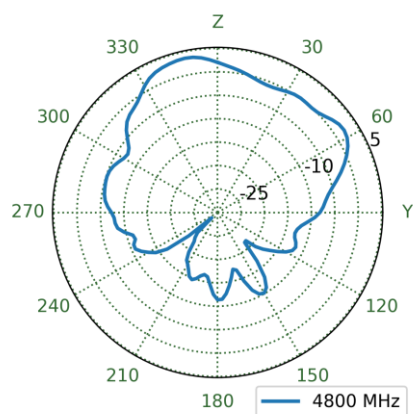


XY Plane

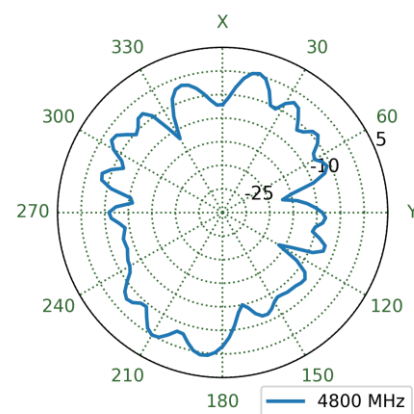


8.94 4G-5G 3 Patterns at 4800 MHz

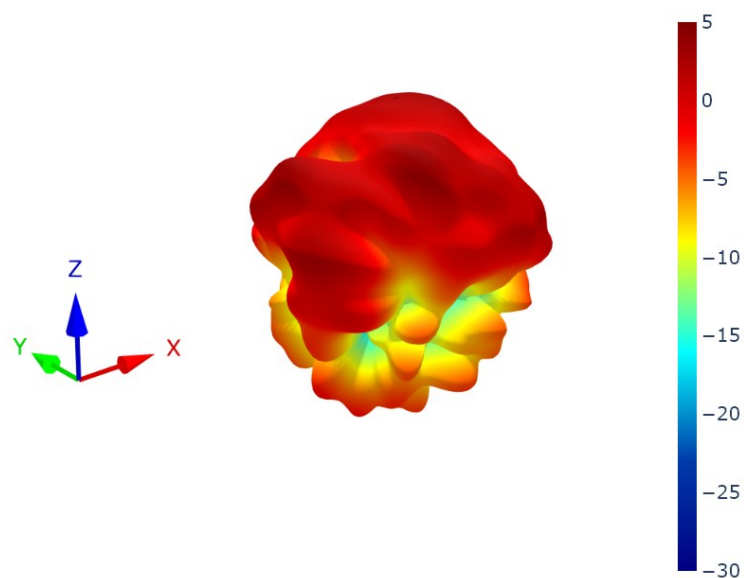


XZ Plane

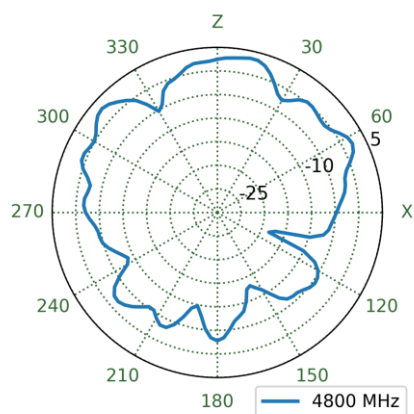


YZ Plane

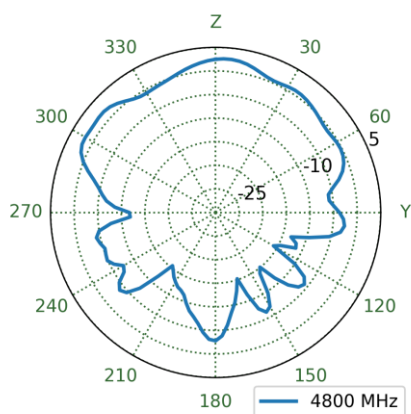


XY Plane

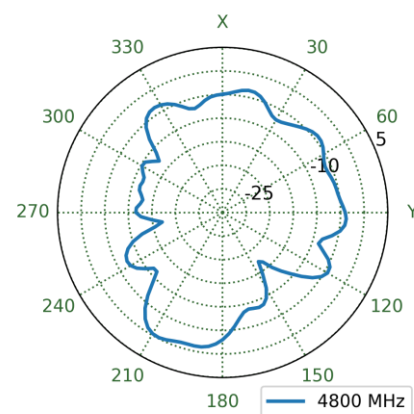


8.95 4G-5G 4 Patterns at 4800 MHz

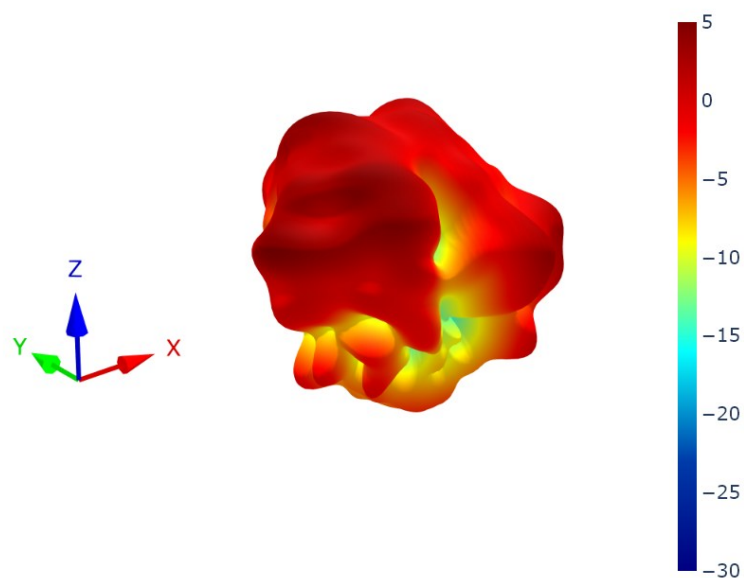


XZ Plane

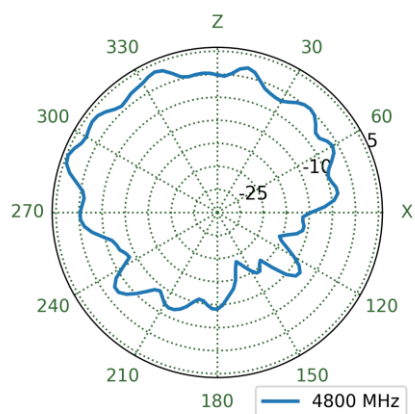


YZ Plane

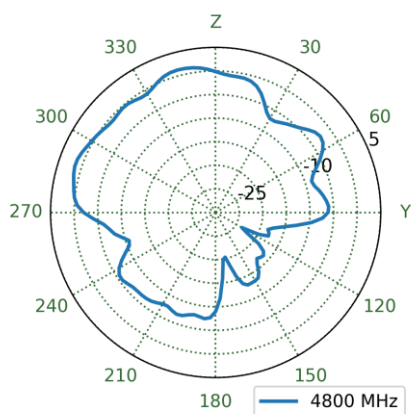


XY Plane

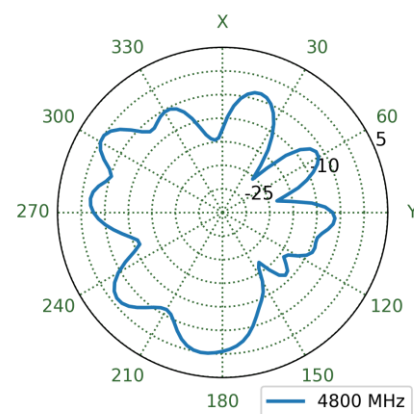


8.96 4G-5G 5 Patterns at 4800 MHz

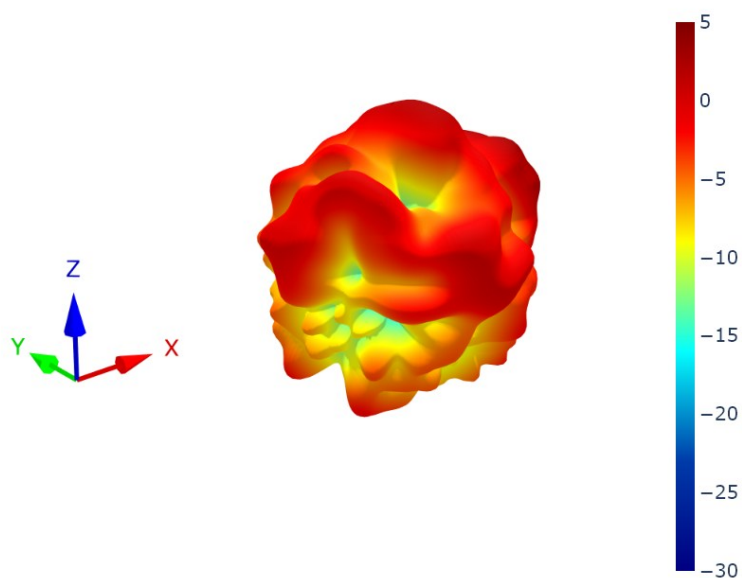


XZ Plane

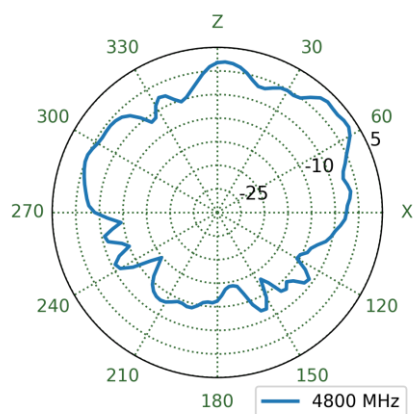


YZ Plane

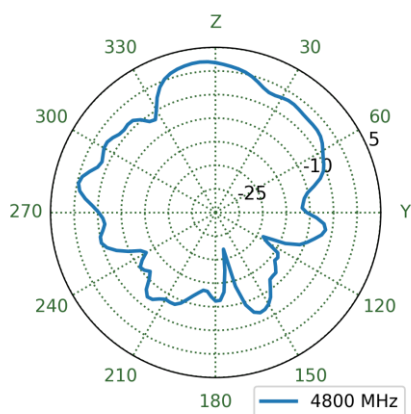


XY Plane

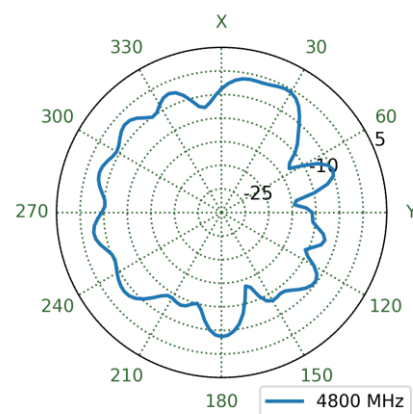


8.97 4G-5G 6 Patterns at 4800 MHz

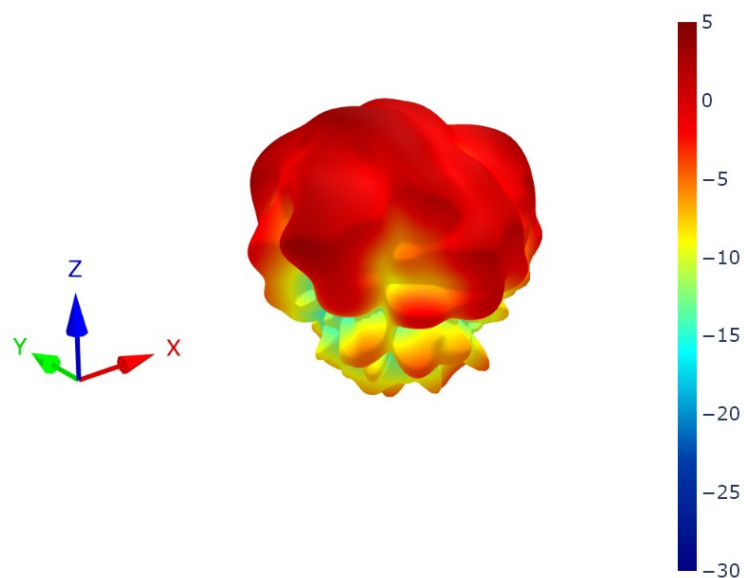


XZ Plane

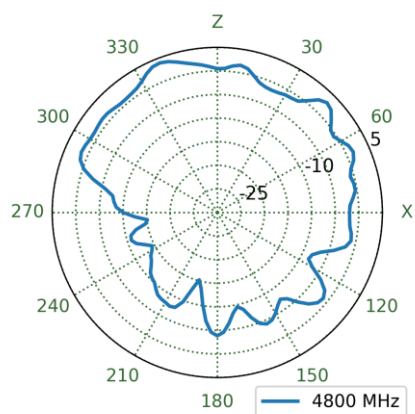


YZ Plane

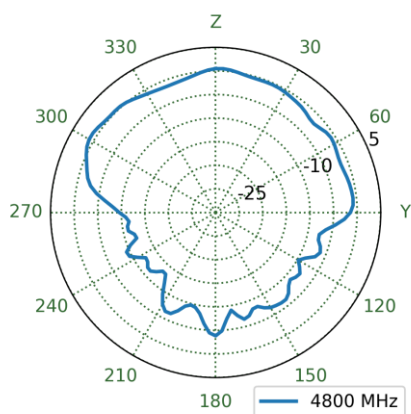


XY Plane

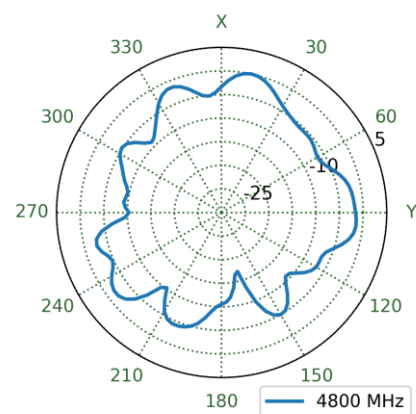


8.98 4G-5G 7 Patterns at 4800 MHz

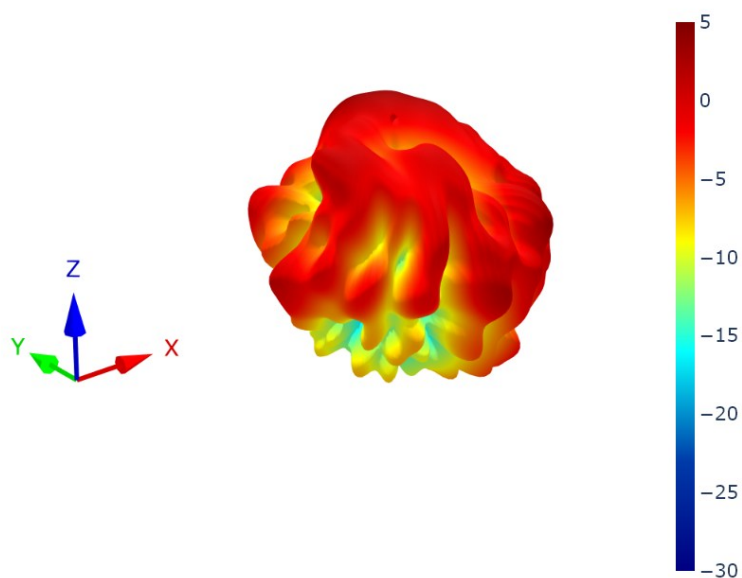


XZ Plane

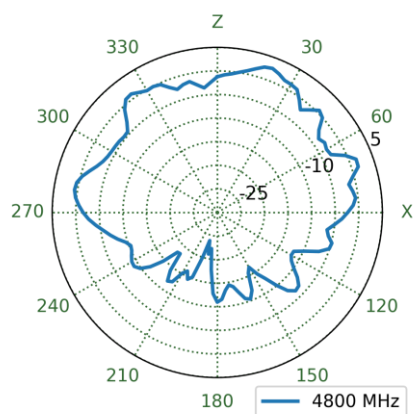


YZ Plane

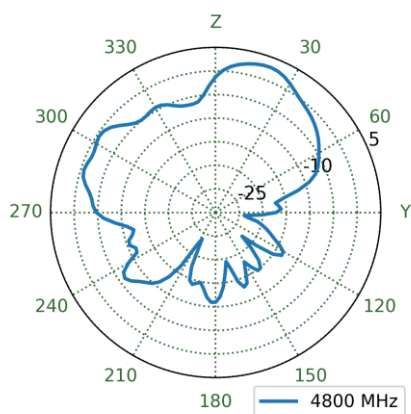


XY Plane

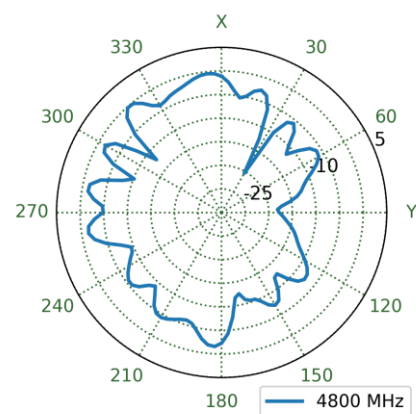


8.99 4G-5G 8 Patterns at 4800 MHz

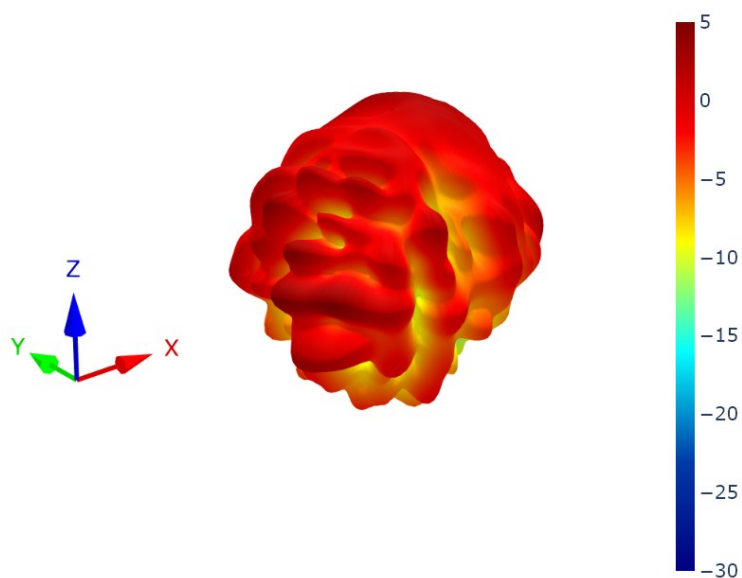


XZ Plane

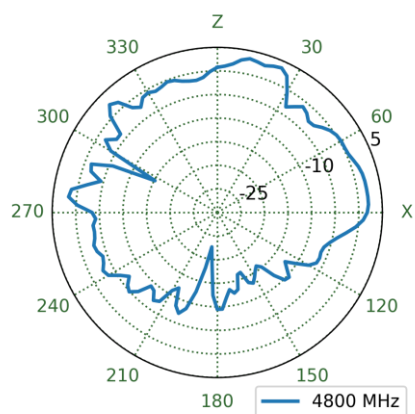


YZ Plane

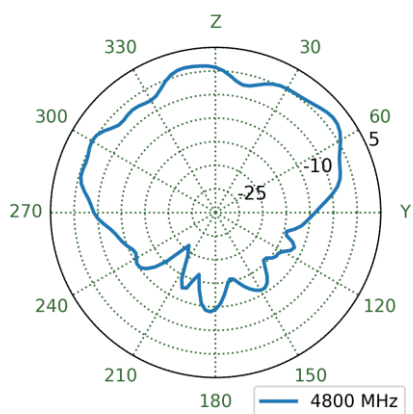


XY Plane

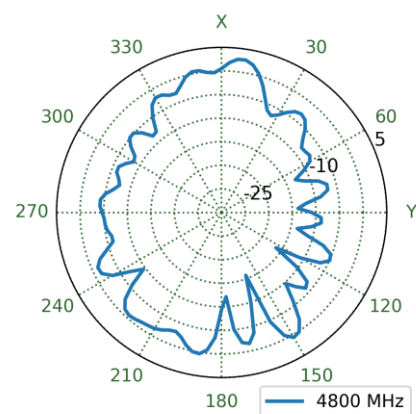


8.100 4G-5G 1 Patterns at 5530 MHz

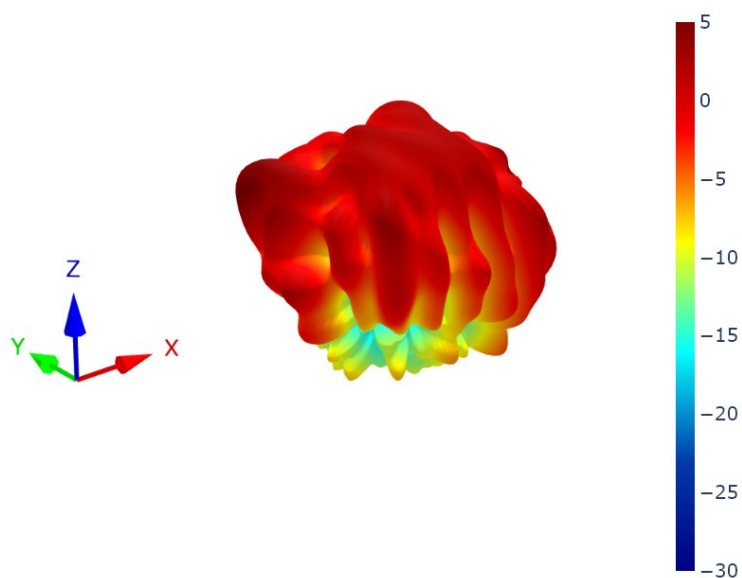


XZ Plane

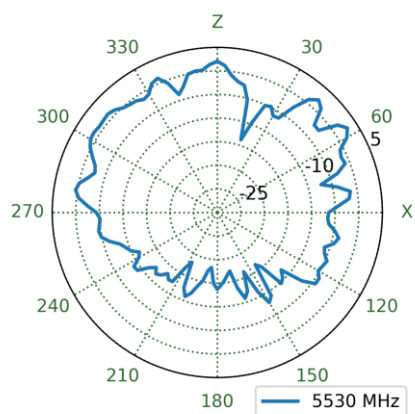


YZ Plane

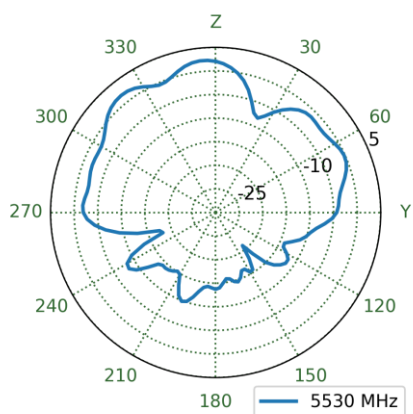


XY Plane

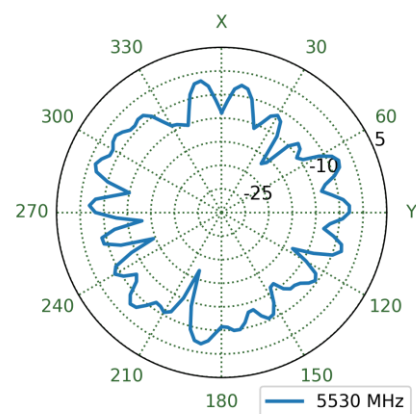


8.101 4G-5G 2 Patterns at 5530 MHz

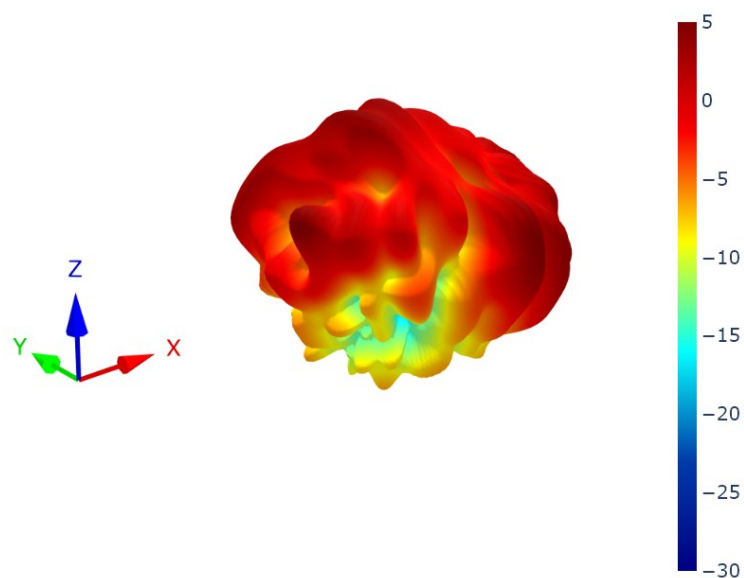


XZ Plane

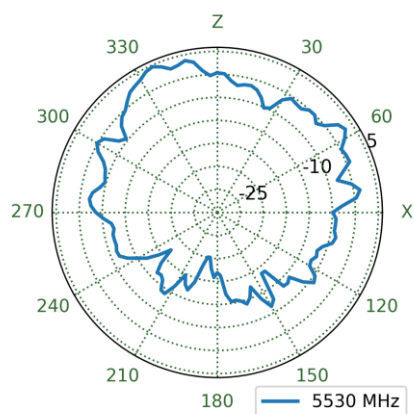


YZ Plane

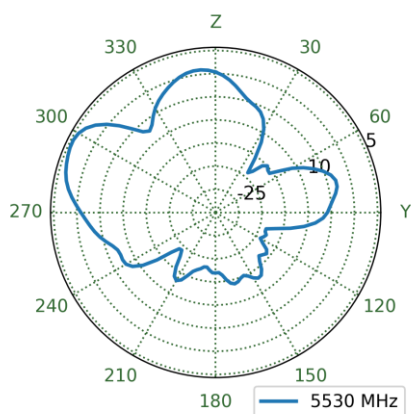


XY Plane

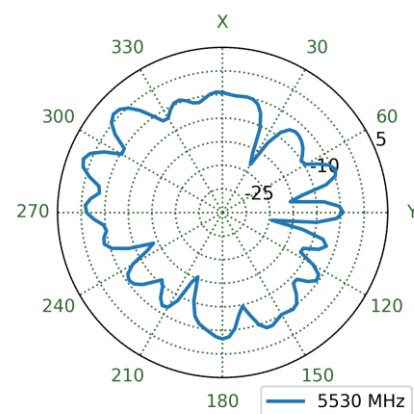


8.102 4G-5G 3 Patterns at 5530 MHz

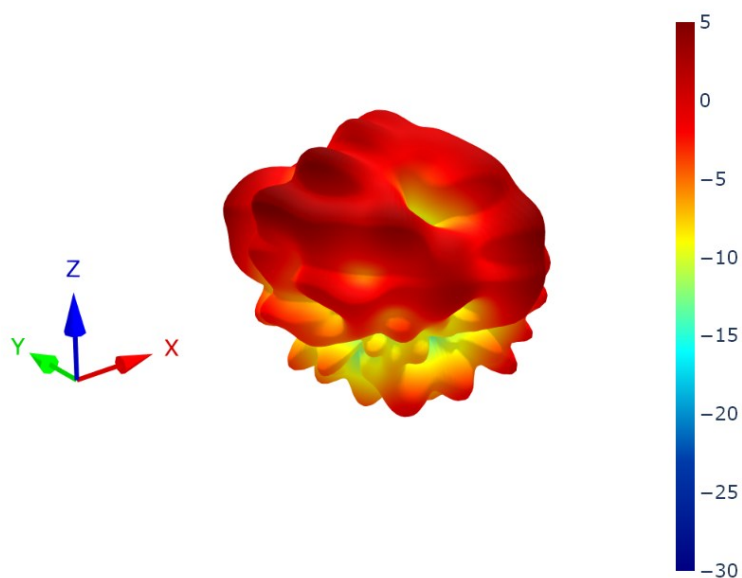


XZ Plane

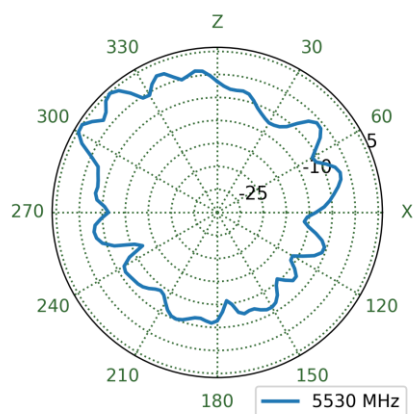


YZ Plane

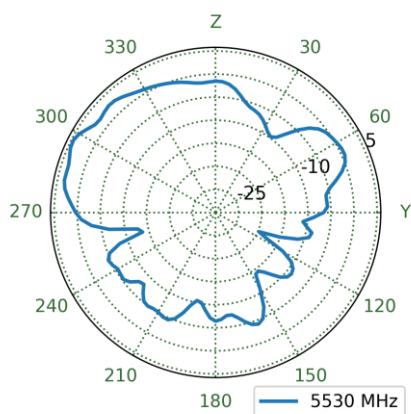


XY Plane

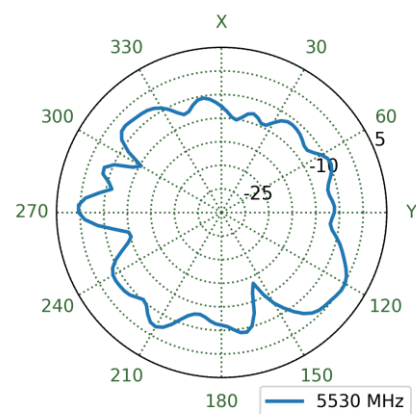


8.103 4G-5G 4 Patterns at 5530 MHz

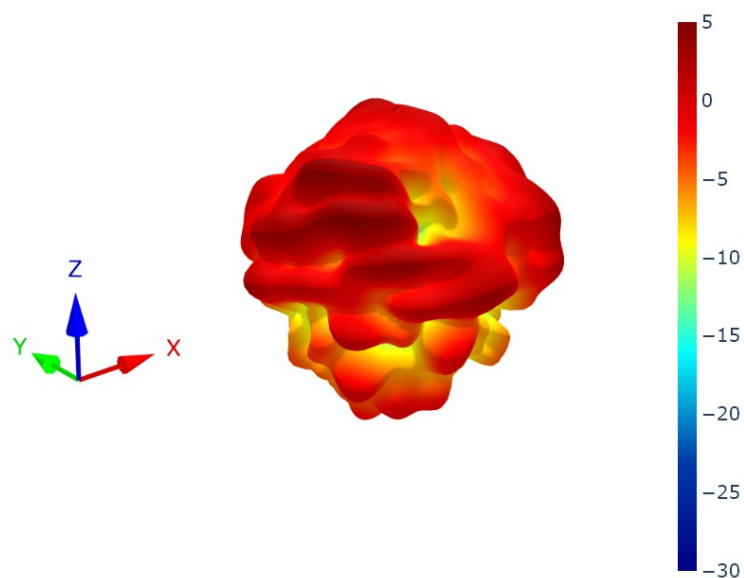


XZ Plane

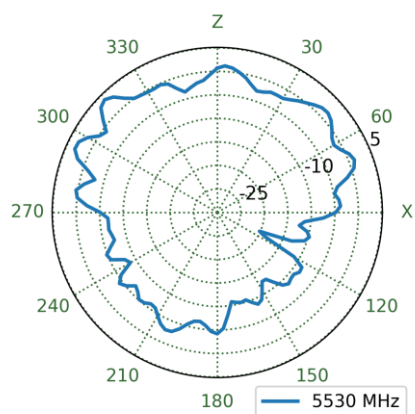


YZ Plane

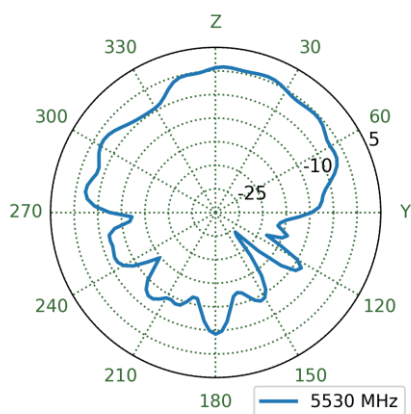


XY Plane

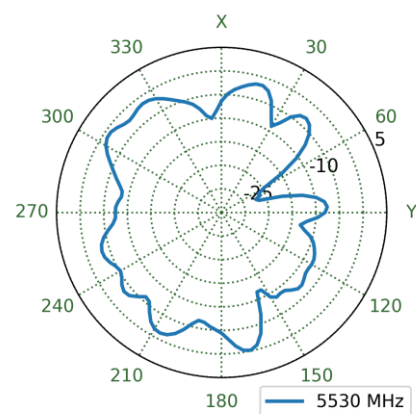


8.104 4G-5G 5 Patterns at 5530 MHz

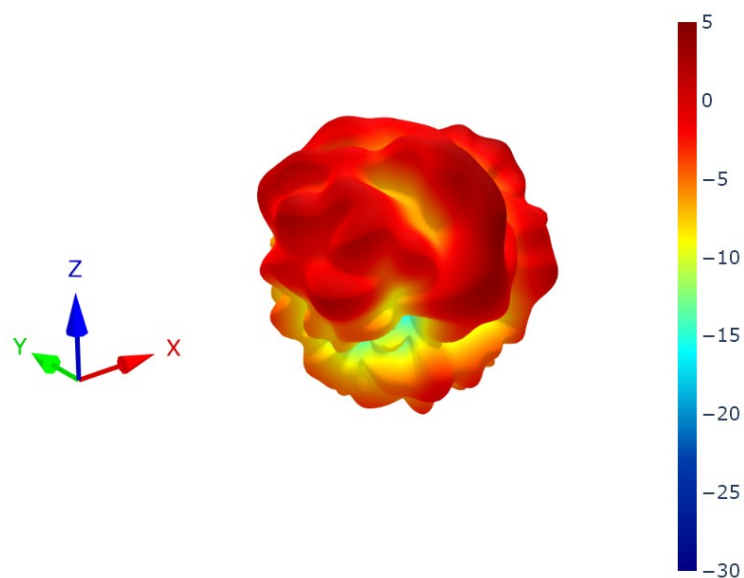


XZ Plane

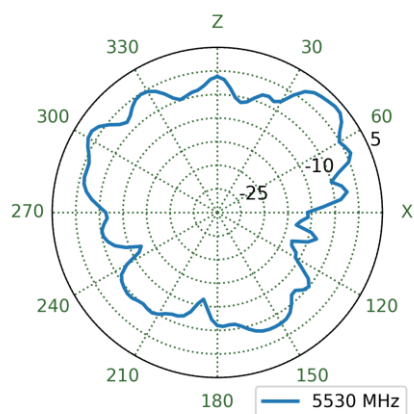


YZ Plane

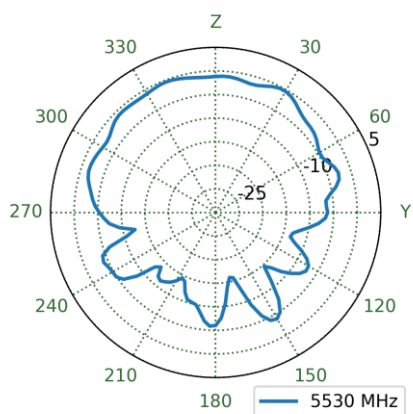


XY Plane

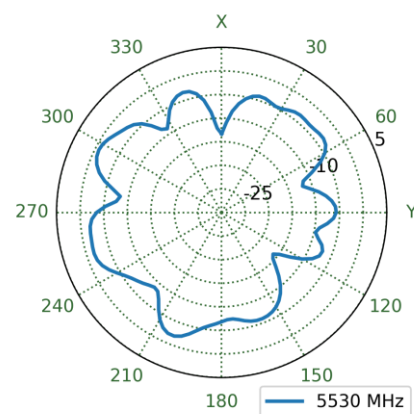


8.105 4G-5G 6 Patterns at 5530 MHz

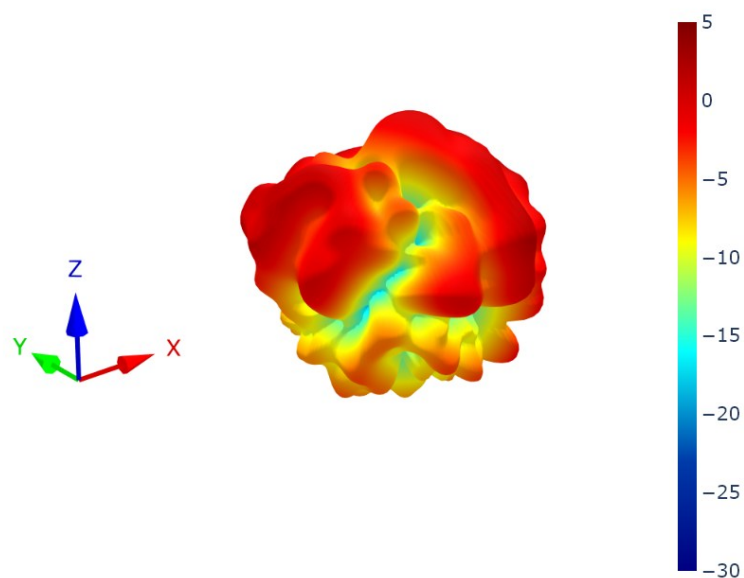


XZ Plane

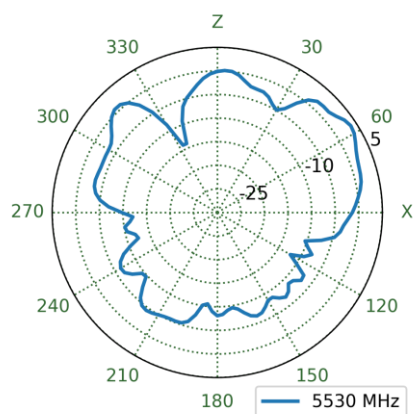


YZ Plane

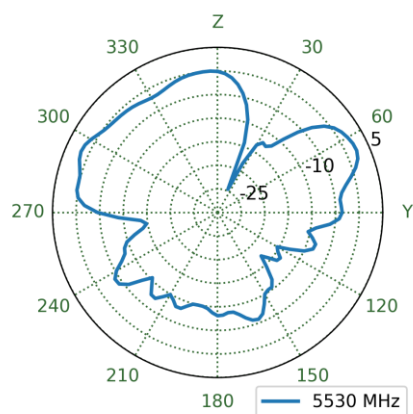


XY Plane

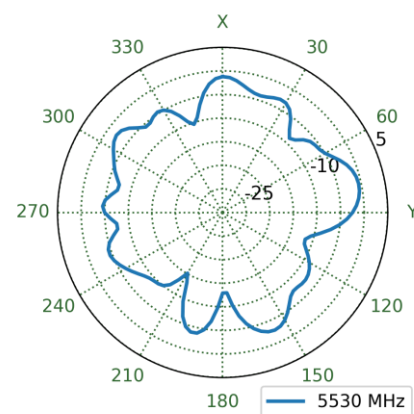


8.106 4G-5G 7 Patterns at 5530 MHz

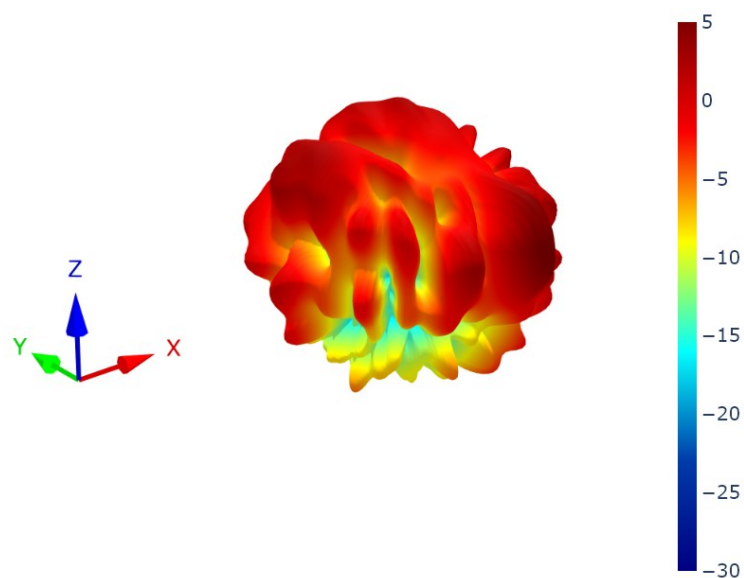


XZ Plane

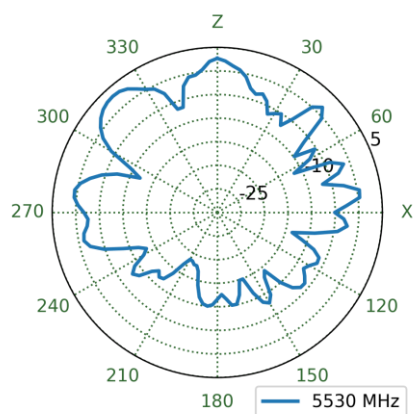


YZ Plane

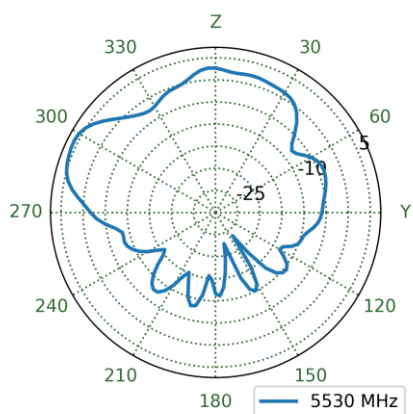


XY Plane

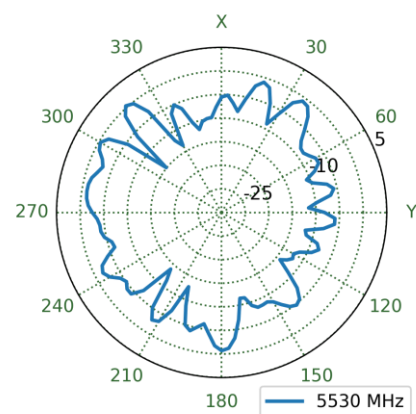


8.107 4G-5G 8 Patterns at 5530 MHz

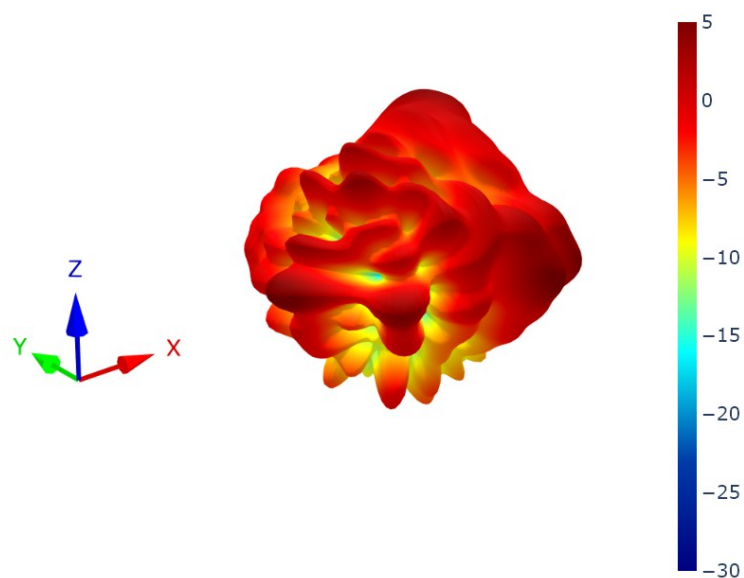


XZ Plane

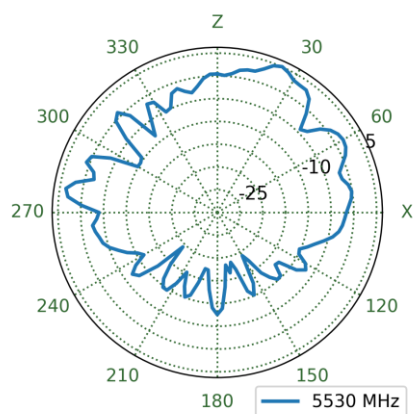


YZ Plane

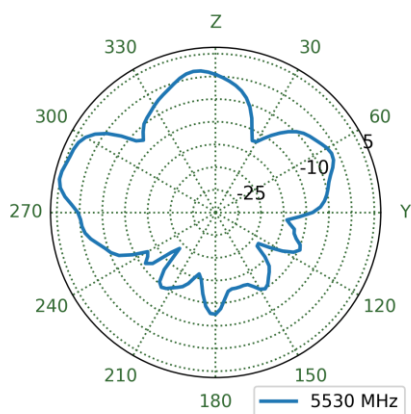


XY Plane

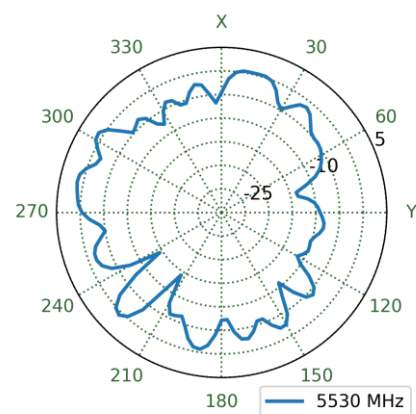


8.108 Wi-Fi1 Patterns at 2450 MHz

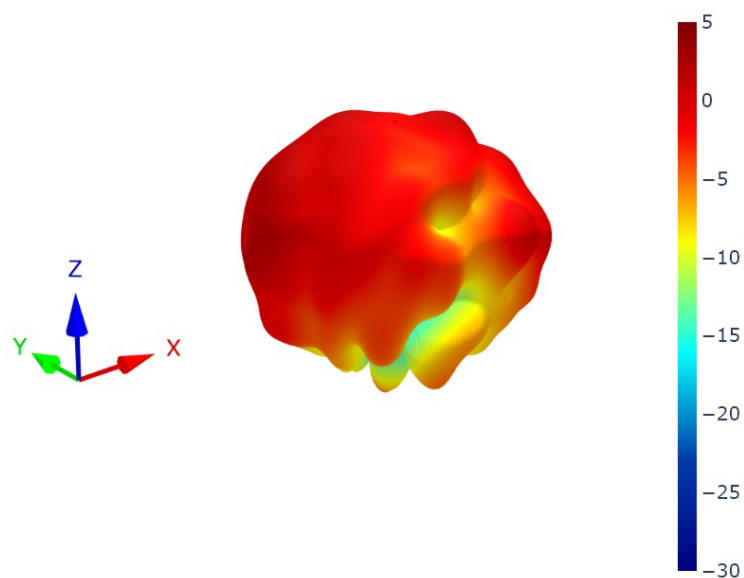


XZ Plane

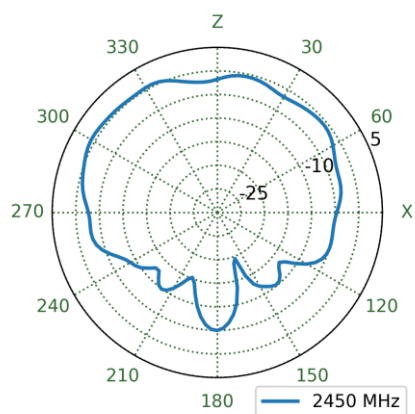


YZ Plane

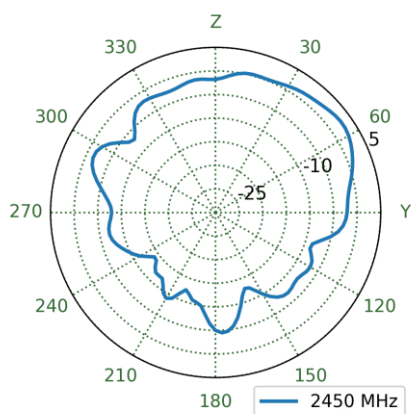


XY Plane

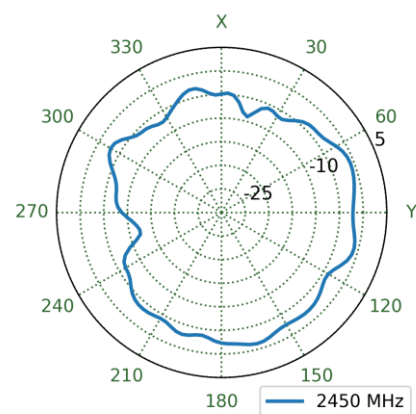


8.109 Wi-Fi2 Patterns at 2450 MHz

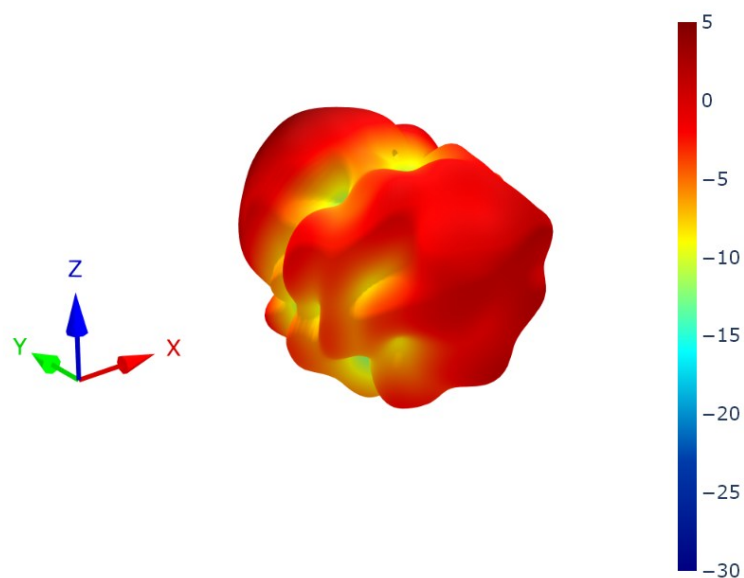


XZ Plane

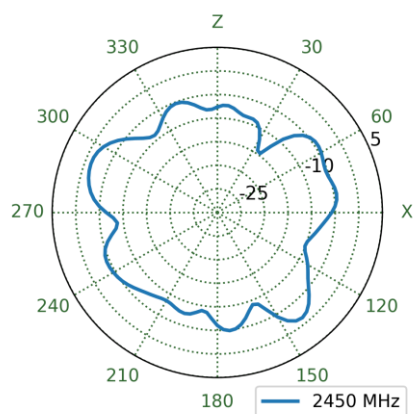


YZ Plane

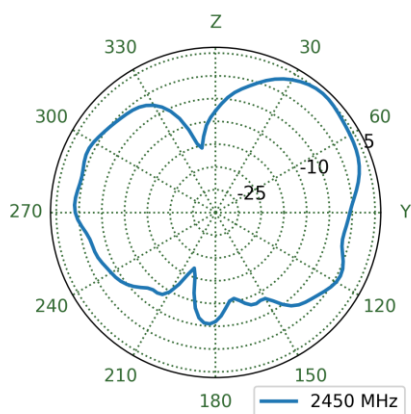


XY Plane

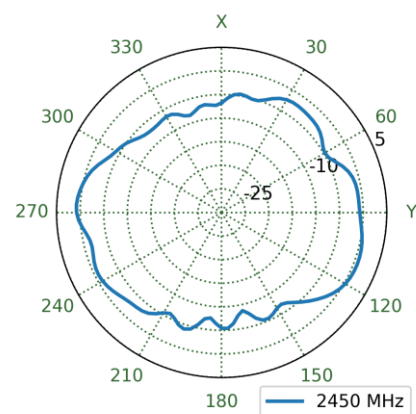


8.110 Wi-Fi3 Patterns at 2450 MHz

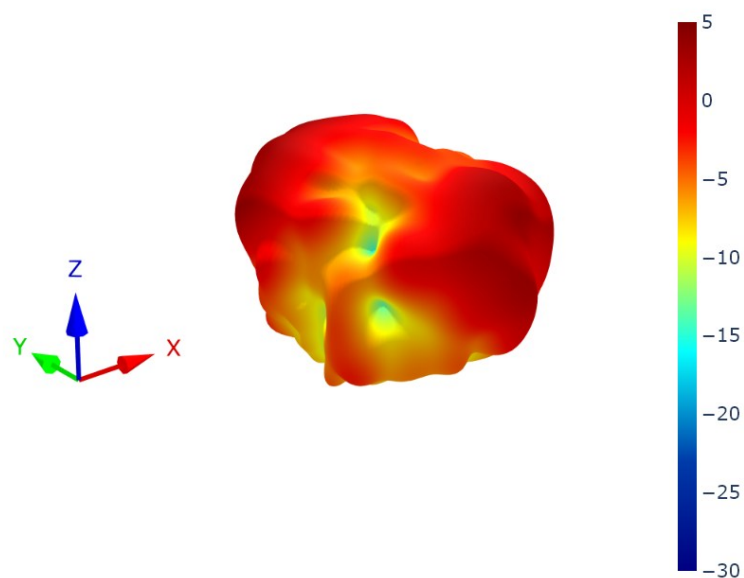


XZ Plane

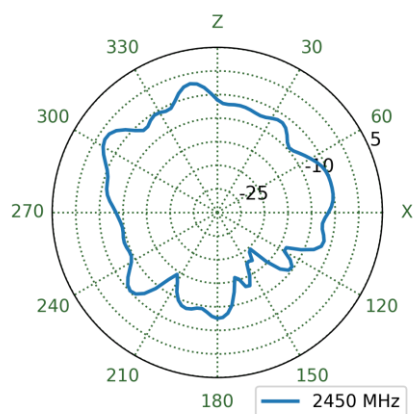


YZ Plane

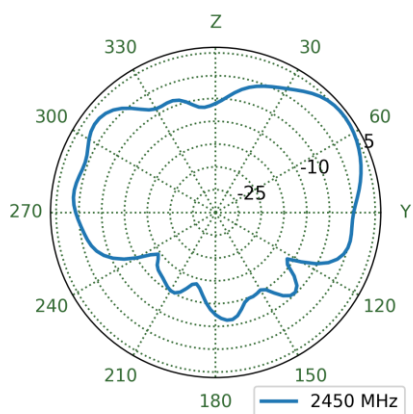


XY Plane

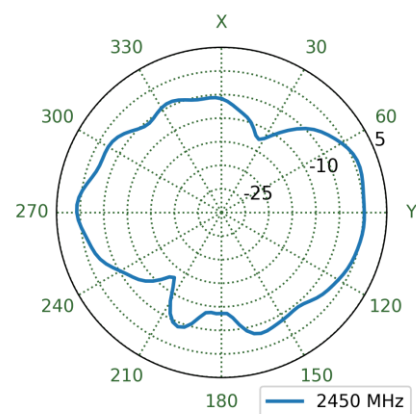


8.111 Wi-Fi Patterns at 2450 MHz

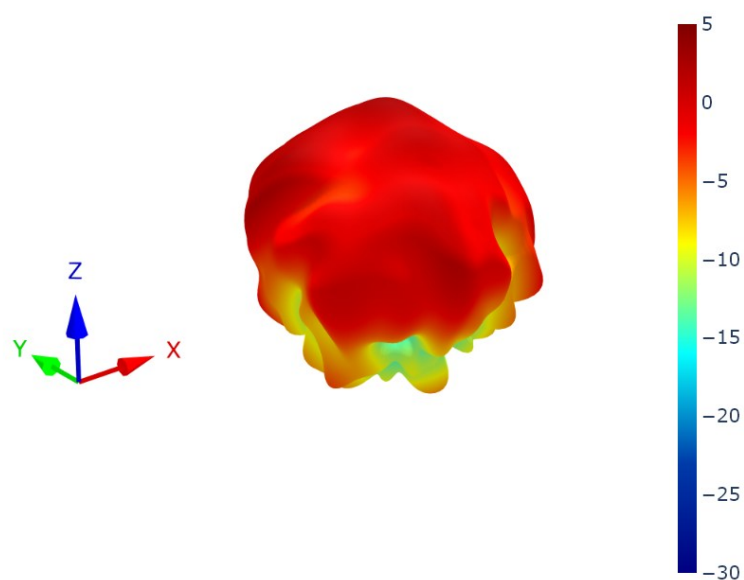


XZ Plane

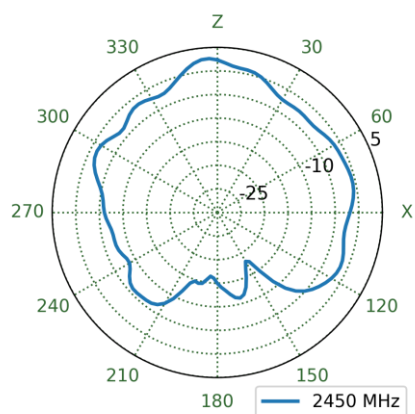


YZ Plane

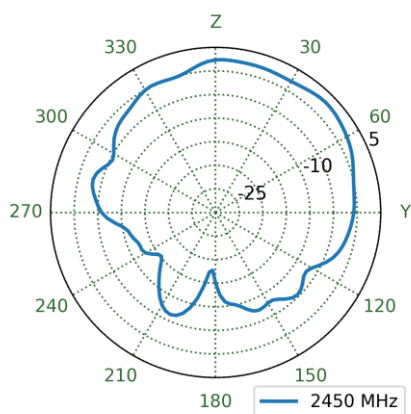


XY Plane

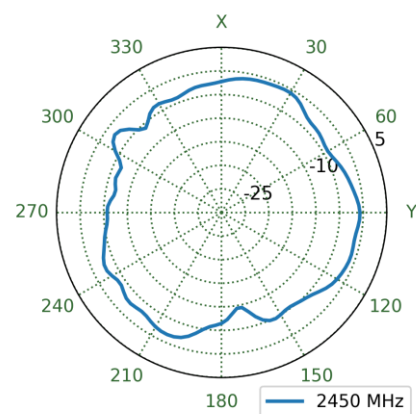


8.112 Wi-Fi5 Patterns at 2450 MHz

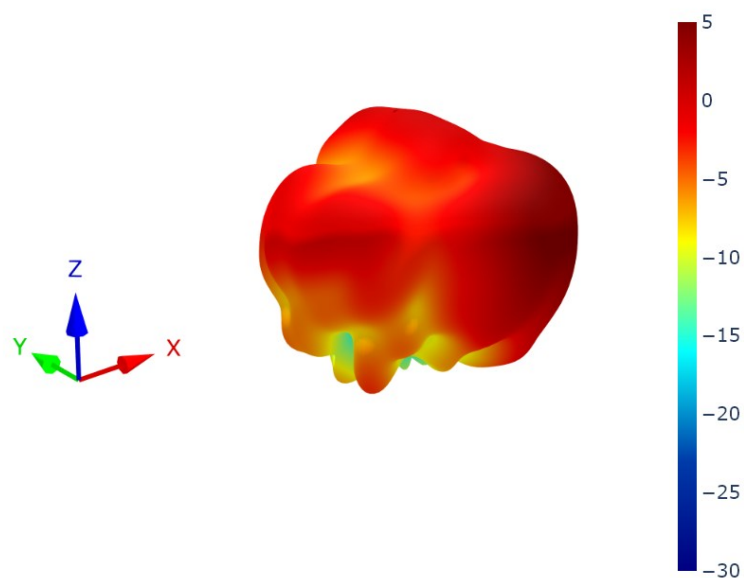


XZ Plane

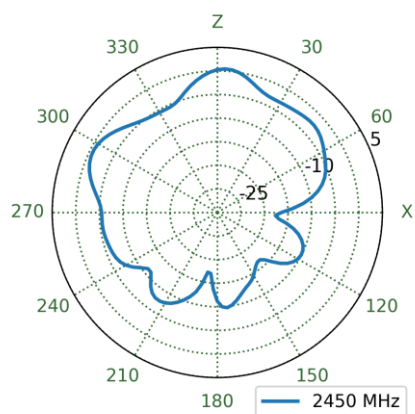


YZ Plane

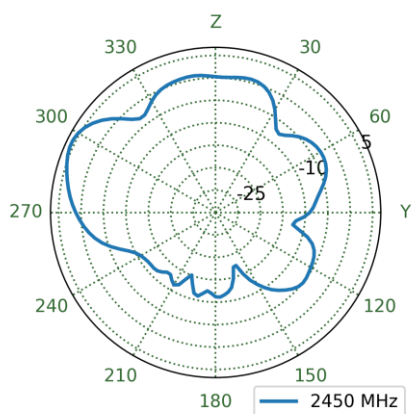


XY Plane

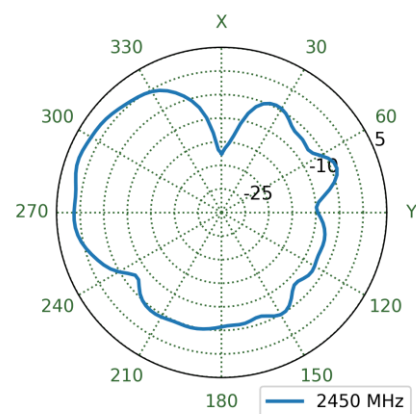


8.113 Wi-Fi6 Patterns at 2450 MHz

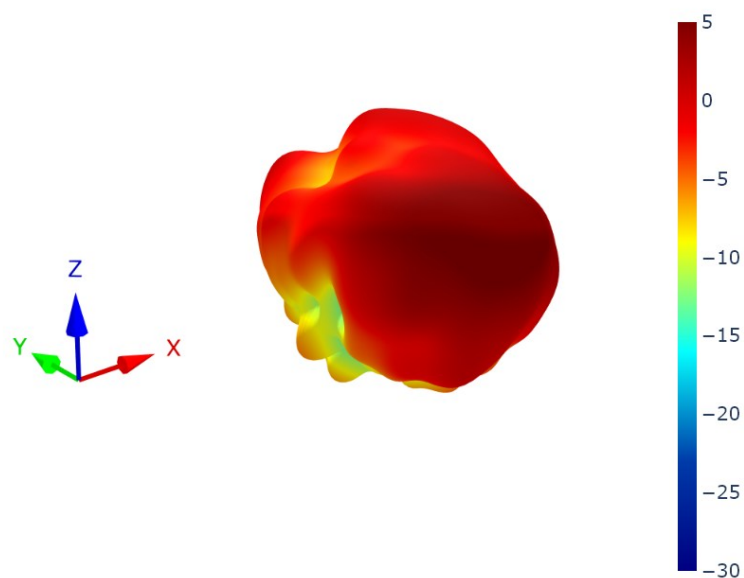


XZ Plane

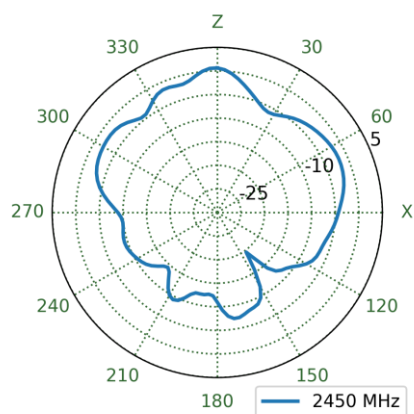


YZ Plane

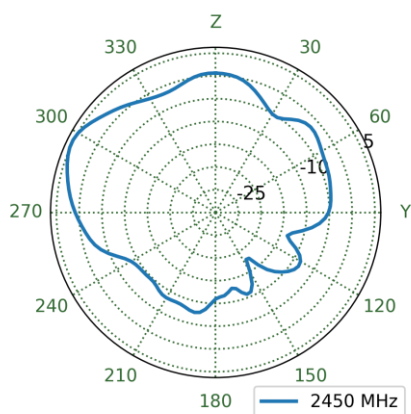


XY Plane

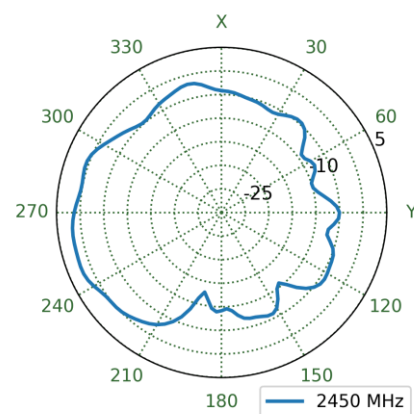


8.114 Wi-Fi1 Patterns at 5490 MHz

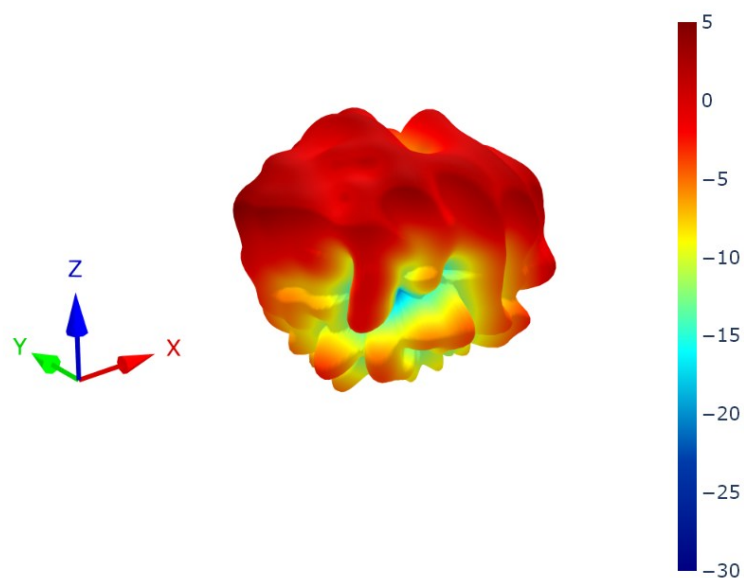


XZ Plane

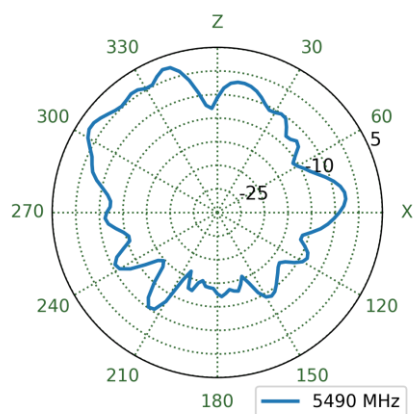


YZ Plane

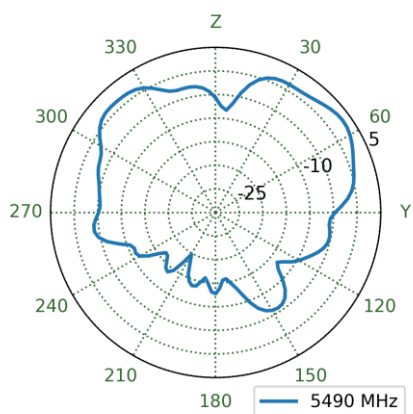


XY Plane

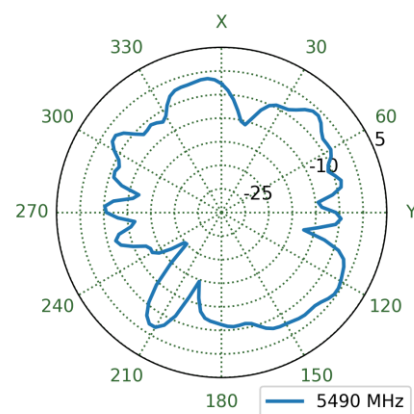


8.115 Wi-Fi2 Patterns at 5490 MHz

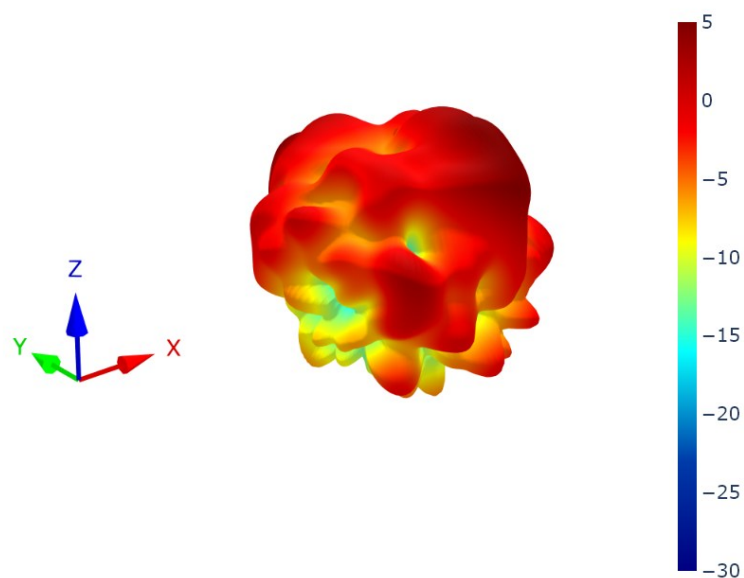


XZ Plane

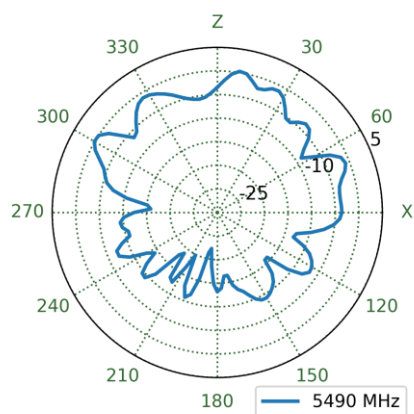


YZ Plane

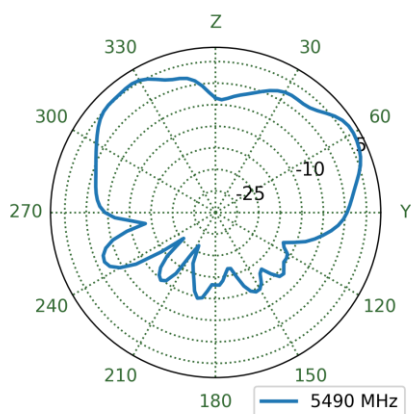


XY Plane

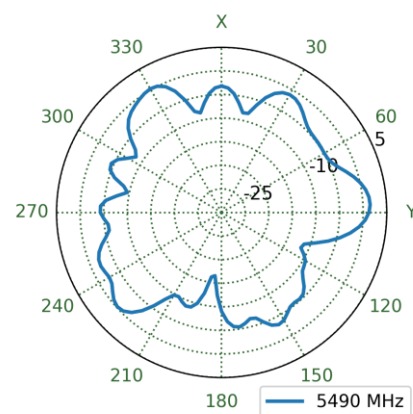


8.116 Wi-Fi3 Patterns at 5490 MHz

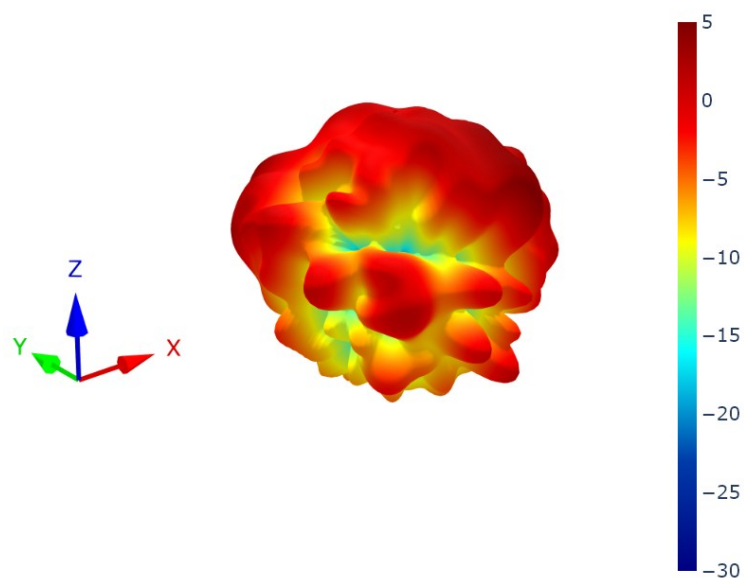


XZ Plane

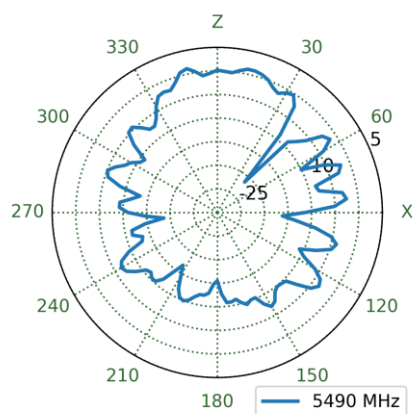


YZ Plane

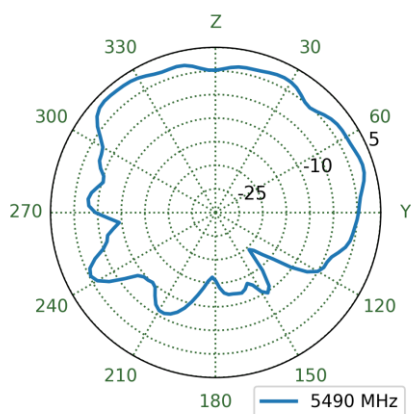


XY Plane

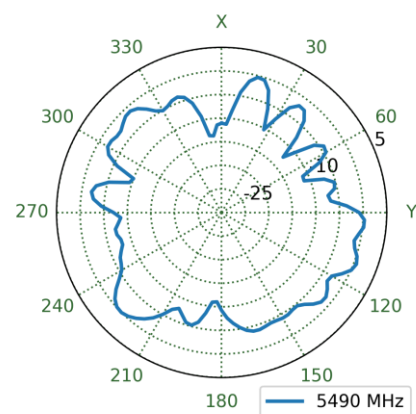


8.117 Wi-Fi Patterns at 5490 MHz

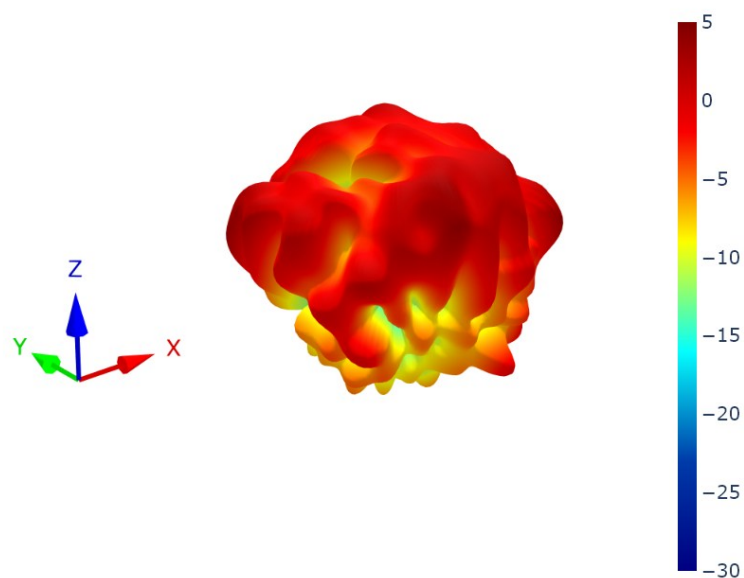


XZ Plane

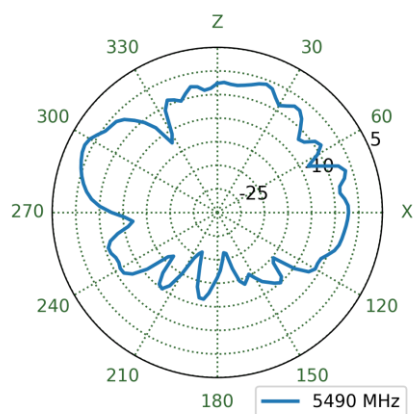


YZ Plane

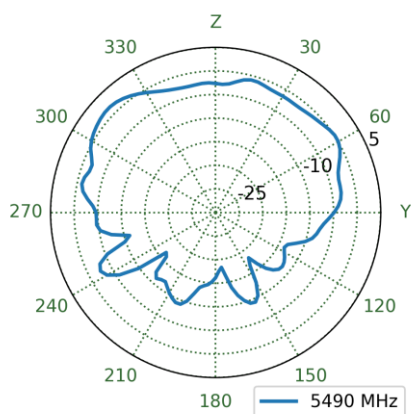


XY Plane

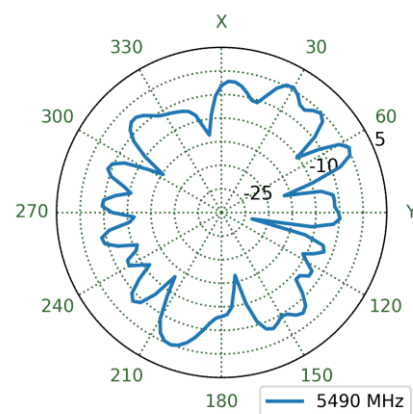


8.118 Wi-Fi5 Patterns at 5490 MHz

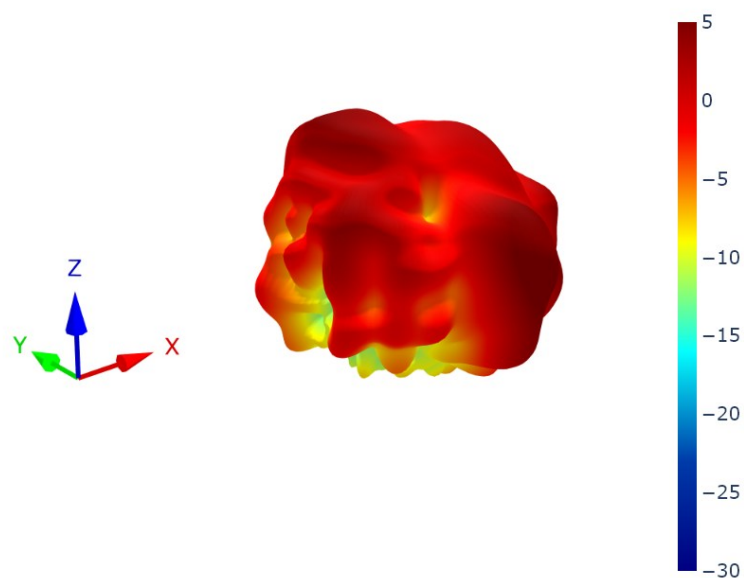


XZ Plane

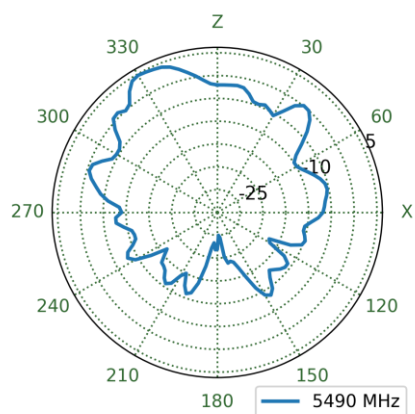


YZ Plane

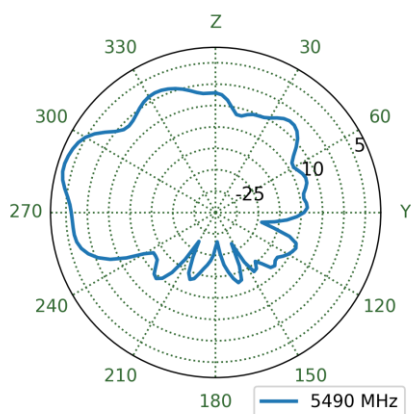


XY Plane

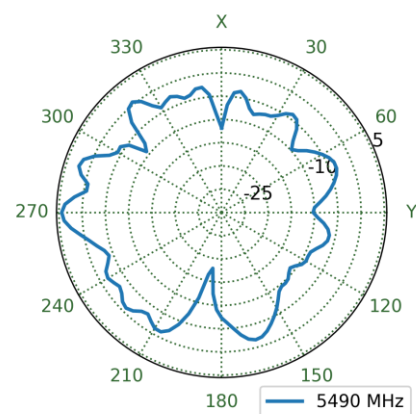


8.119 Wi-Fi6 Patterns at 5490 MHz

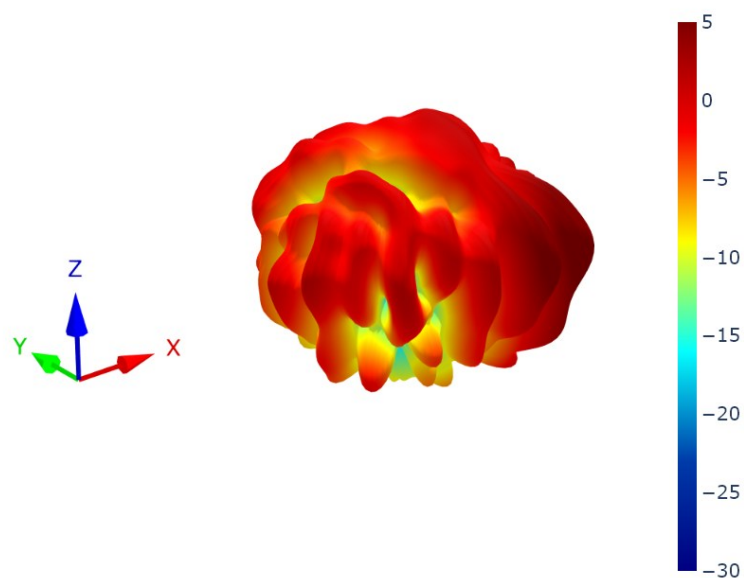


XZ Plane

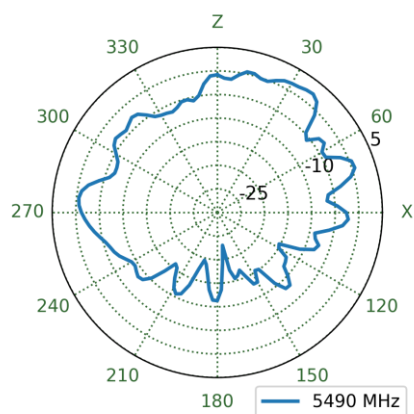


YZ Plane

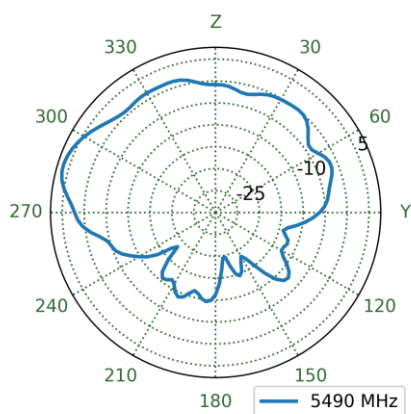


XY Plane

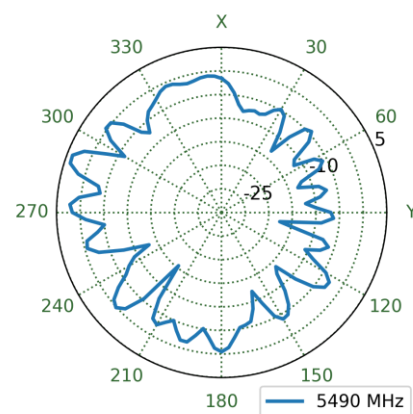


8.120 Wi-Fi1 Patterns at 6525 MHz

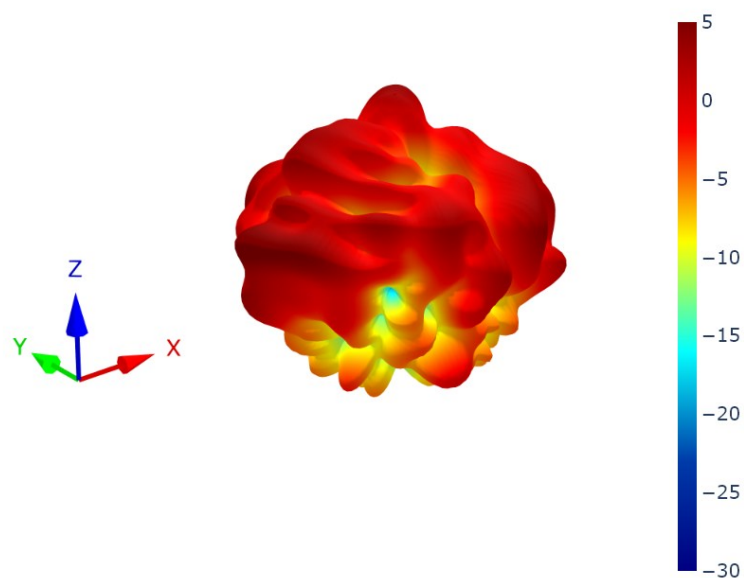


XZ Plane

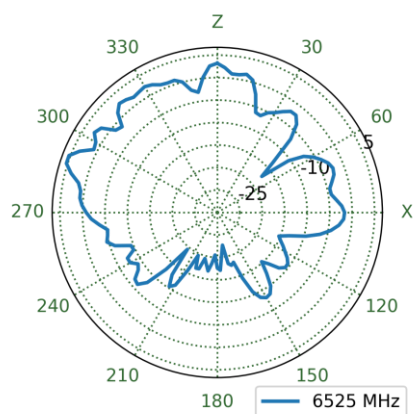


YZ Plane

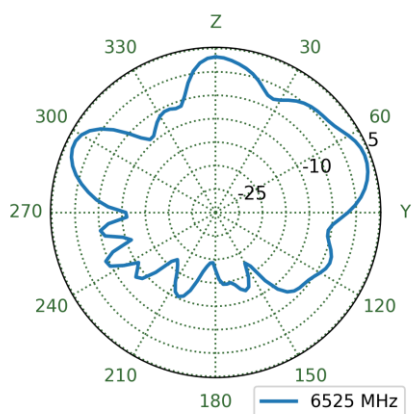


XY Plane

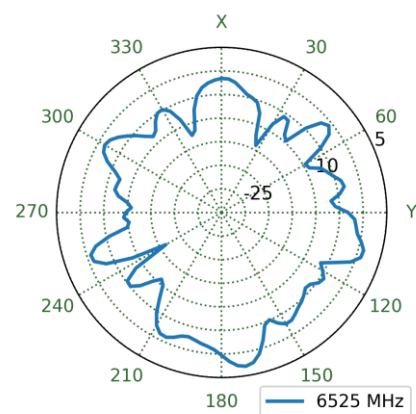


8.121 Wi-Fi2 Patterns at 6525 MHz

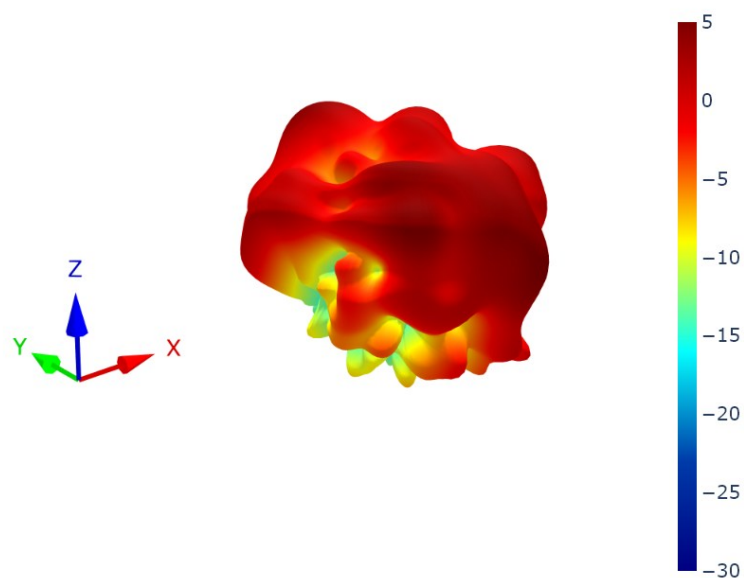


XZ Plane

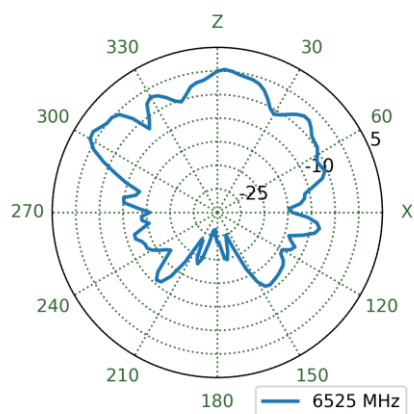


YZ Plane

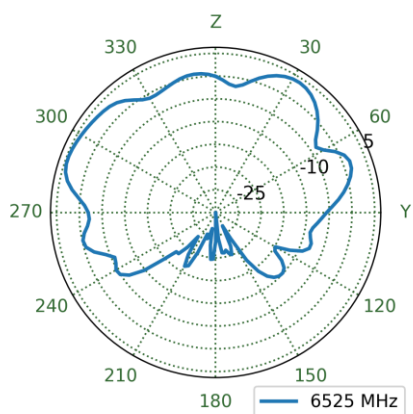


XY Plane

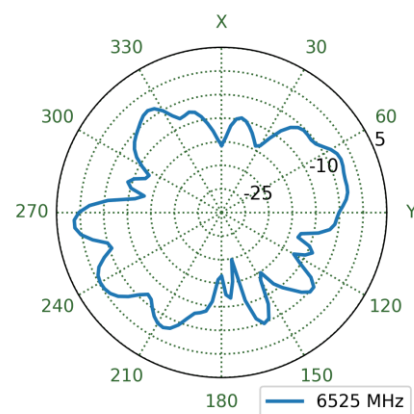


8.122 Wi-Fi3 Patterns at 6525 MHz

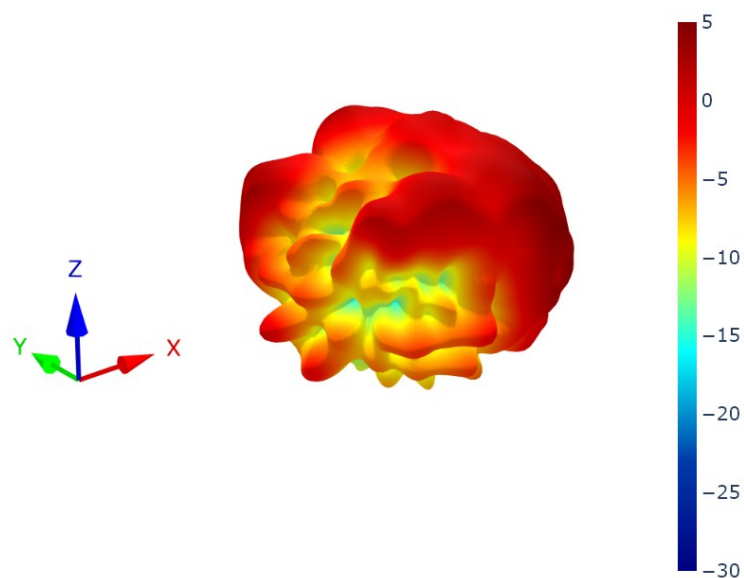


XZ Plane

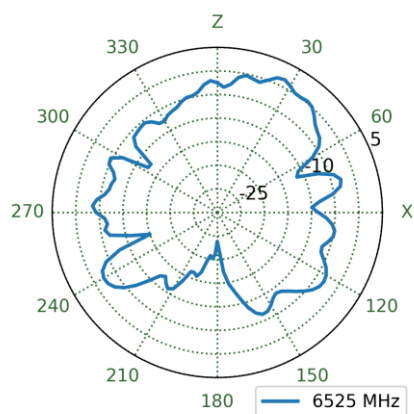


YZ Plane

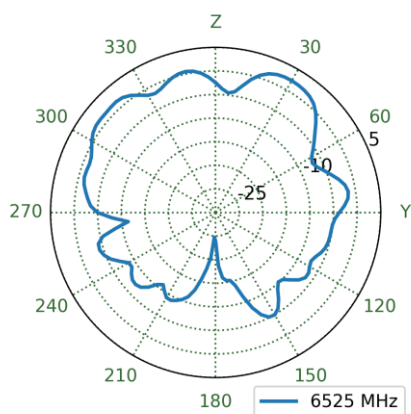


XY Plane

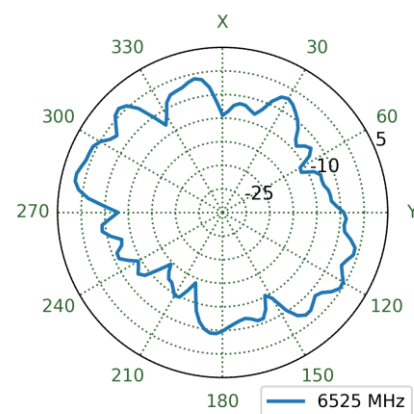


8.123 Wi-Fi 4 Patterns at 6525 MHz

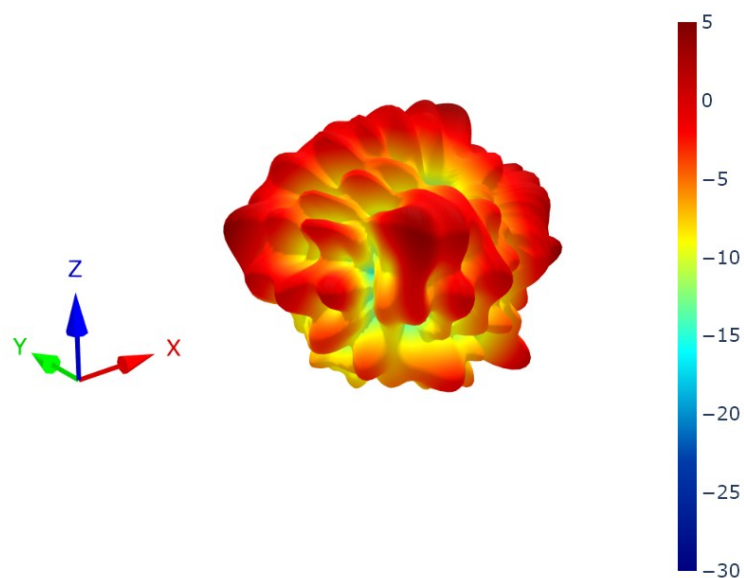


XZ Plane

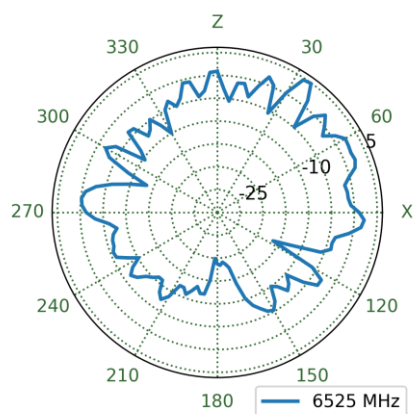


YZ Plane

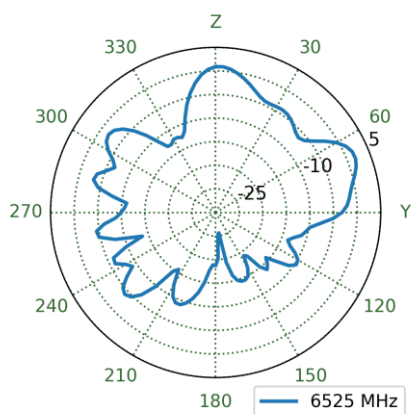


XY Plane

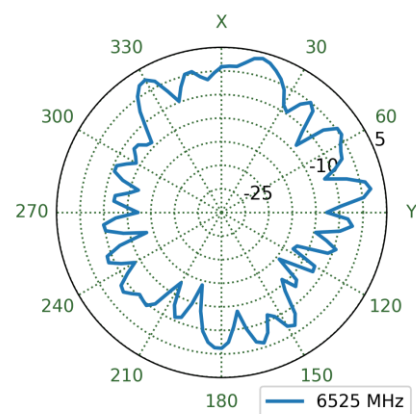


8.124 Wi-Fi5 Patterns at 6525 MHz

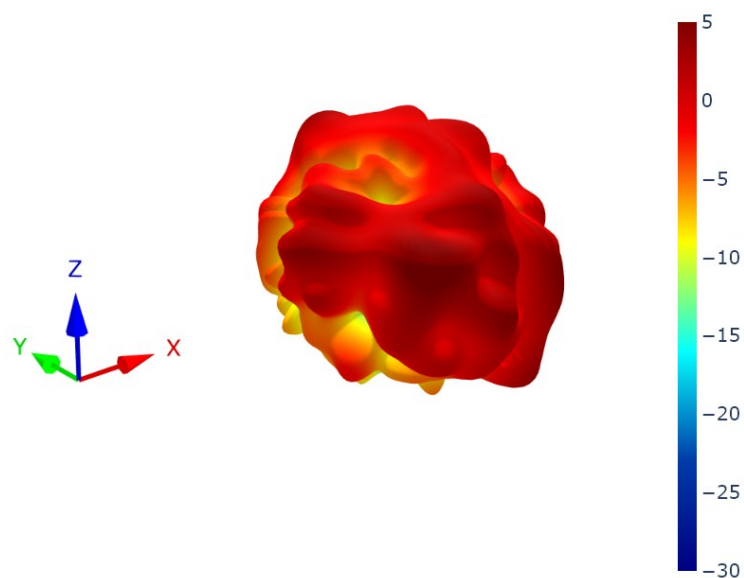


XZ Plane

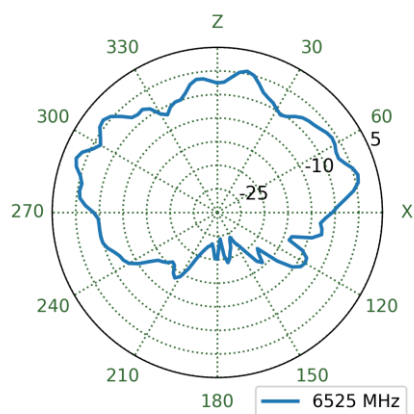


YZ Plane

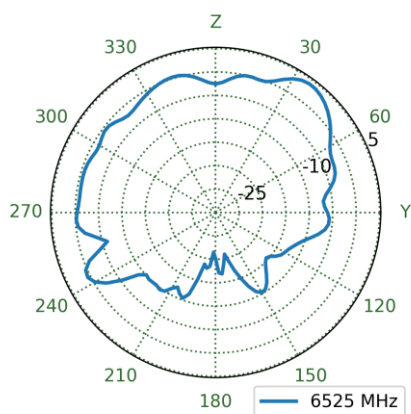


XY Plane

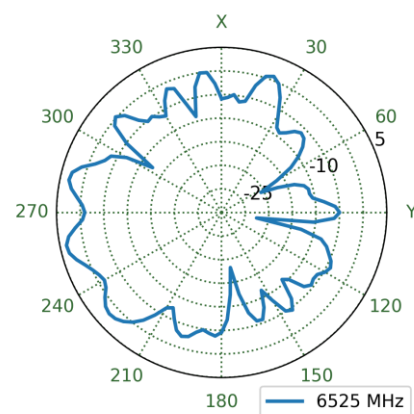


8.125 Wi-Fi6 Patterns at 6525 MHz

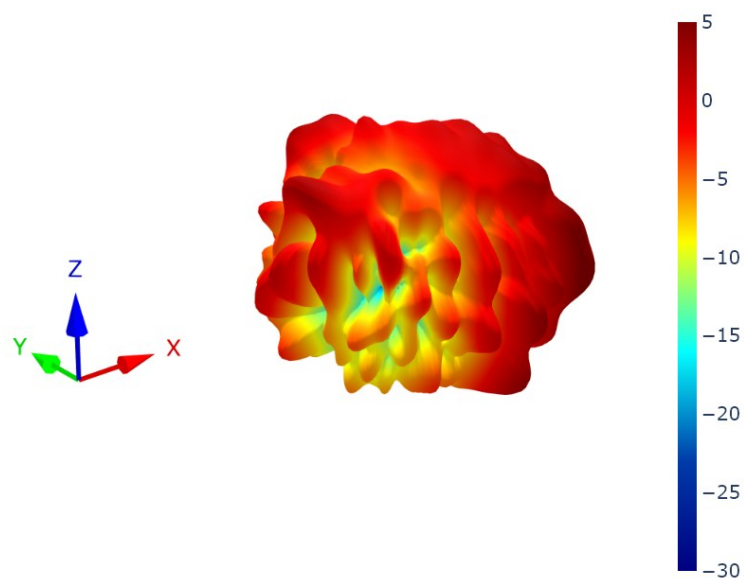


XZ Plane

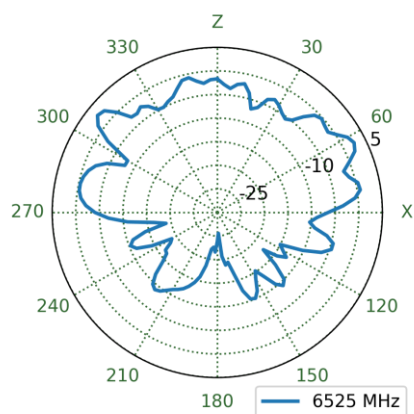

YZ Plane

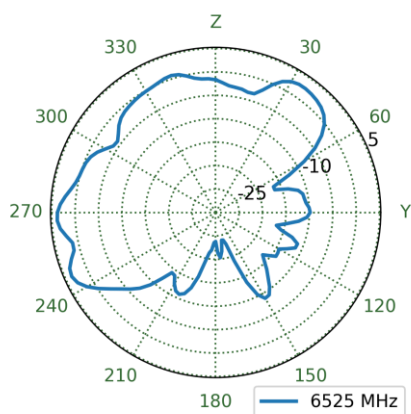

XY Plane

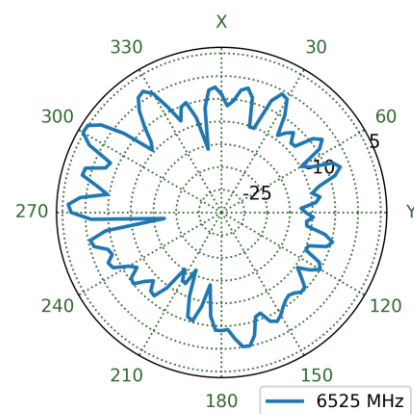

Changelog for the datasheet

SPE-25-8-240 - MAX1015.K.002

Revision: A (Original First Release)

Date:	2025-11-05
Notes:	Initial Release
Author:	Gary West

Previous Revisions



www.taoglas.com

