



# TAOGLAS®



# Datasheet

## Comet

Part No:  
AA.250.101111

## Description

All-Band GNSS Active Magnetic Mount Antenna

## Features:

Dual Stage LNA

Bands Covered:

- GPS (L1/L2/L5)
- IRNSS (L5)
- QZSS (L1/L2C/L5/L6)
- Galileo (E1/E5a/E5b/E6)
- GLONASS (G1/G2/G3)
- BeiDou (B1/B2a/B2b/B3)
- L-Band

Dimensions:  $\varnothing$ 86 x 26mm

Cable: 1m RG-174, Connector: SMA(M)

Magnetic Mount

IP67 Waterproof Rated Enclosure

RoHS & REACH Compliant

<b>1.</b>	<b>Introduction</b>	<b>2</b>
<b>2.</b>	<b>Specification</b>	<b>3</b>
<b>3.</b>	<b>Antenna Characteristics</b>	<b>5</b>
<b>4.</b>	<b>Radiation Patterns</b>	<b>11</b>
<b>5.</b>	<b>Active Circuitry Performance</b>	<b>20</b>
<b>6.</b>	<b>Field Test Results</b>	<b>24</b>
<b>7.</b>	<b>Mechanical Drawing</b>	<b>25</b>
<b>8.</b>	<b>Packaging</b>	<b>26</b>
<hr/>		
	Changelog	25

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



# 1. Introduction



The Taoglas Comet AA.250 is an active GNSS magnetic mount antenna for use across all major GNSS constellations, with the L-Band for correction services also added for optimizing GNSS systems. The antenna exhibits excellent gain and good radiation pattern stability leading to a reliable GPS fix in areas of weaker signal strength. These elements combine to ensure the best possible positional accuracy in both RTK and non-RTK systems.

Typical applications include:

- UAVs and Robotics
- Autonomous Vehicles
- High Accuracy Positioning
- RTK Systems
- Precision Agriculture


The AA.250 provides excellent positional accuracy, this is due to outstanding signal to noise ratio(C/N0) and a low axial ratio, ensuring the antenna maintains stable when a location is required. With great 2DRMS and Fast time to first fix the AA.250 is the ideal antenna solution for Multiband GNSS RTK Systems as it performs very well, with stable gains and low axial ratio values across all major GNSS bands.

The AA.250 includes dual stage LNA and front-end SAW filters to reduce out of band noise, such as from nearby cellular transceivers. It offers better protection from nearby radiated power surges and greatly reduces the probability of damaging your GNSS receiver from nearby transmissions. The AA.250 has 1 cable feed as the internal feeds are combined with a hybrid coupler and the antenna performance results are shown in the below sections.

The cable and connector are fully customizable, subject to NRE and MOQ. For further information please contact your regional Taoglas customer support team.

## 2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	■	■		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	■	■	■		
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	■	■	■	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	■	■	■	■
L-Band	L-Band 1542 MHz				
	■				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75 MHz	
	■	■	■	■	
IRNSS (Regional)	L5 1176.45 MHz				
	■				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	■	■	■	■

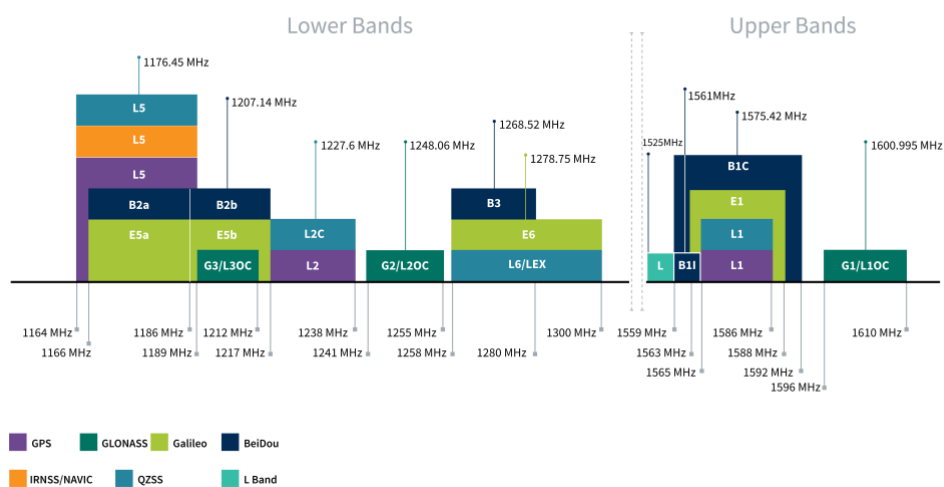

GNSS Bands and Constellations

GNSS Electrical										
Frequency (MHz)	1176.45	1201.55	1227.6	1248	1268.52	1278.75	1542	1561	1575.42	1602
VSWR (max.)	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1
Passive Antenna Efficiency (%)	20	32	40	35	26	20	37	53	50	38
Passive Antenna Gain at Zenith (dBic)	-1.5	1.0	1.8	1.5	-0.5	-1.5	3.5	4.2	4.0	2.7
Axial Ratio (dB)	1.1	0.35	0.61	0.68	0.43	1.52	1.7	0.88	0.74	0.9
PCO	2.03	1.83	1.51	1.67	1.98	2.15	0.9	0.73	0.65	0.60
PCV	0.74	0.47	0.25	0.12	0.08	0.16	0.47	0.55	0.59	0.99
Polarization	RHCP									
Impedance	50Ω									

For passive results please refer to GPDF6010.A



LNA and Filter Electrical Properties										
Frequency (MHz)	1176.45	1201.55	1227.6	1248	1268.52	1278.75	1542	1561	1575.42	1602
Gain (dB)	25.5	26.4	26.4	25.6	24.2	26.4	24.1	24.1	23.5	23.5
Noise Figure (dB)	3.4	3.3	3.3	3.3	3.2	3.3	3.4	3.5	3.9	3.9
Group Delay (ns)	14.1	10.1	10.0	9.9	10.5	10.1	8.3	8.3	9.1	9.1
P1dB (dBm)	-24.7	-	-24.2	-22.5	-	-21.2	-	-22.6	-22.4	-21.8
Current Draw (Typ.)	16-21 mA									
Voltage Range (Typ.)	+1.8 ~ +5.5V									

Mechanical	
Dimensions	Ø86.4 x 26mm
Weight	138g
Material	ABS
Connector	SMA(M)
Cable	RG-174

Environmental	
Operation Temperature	-40°C - 85°C
Storage Temperature	-40°C - 85°C
Waterproof	IP67
Humidity	Non-condensing 65°C 95% RH


### 3. Antenna Characteristics

#### 3.1 Test Setup

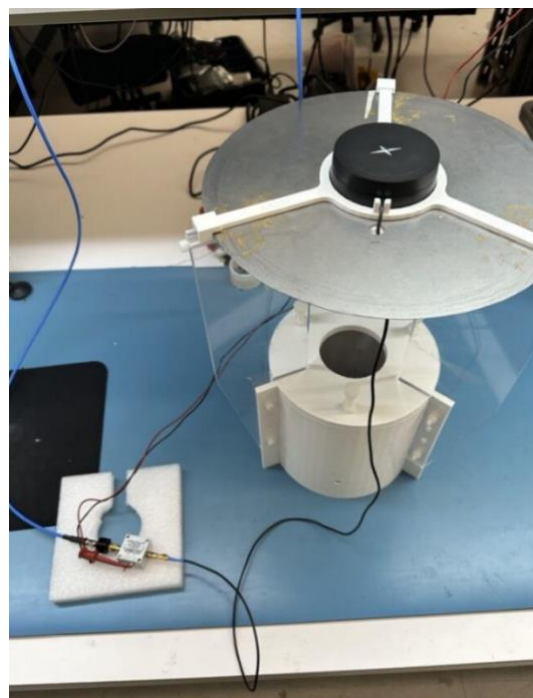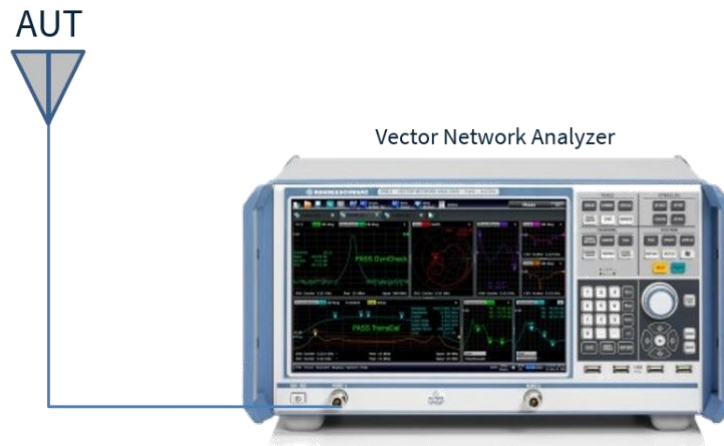


VNA Test Set-up


### 3.2 Return Loss

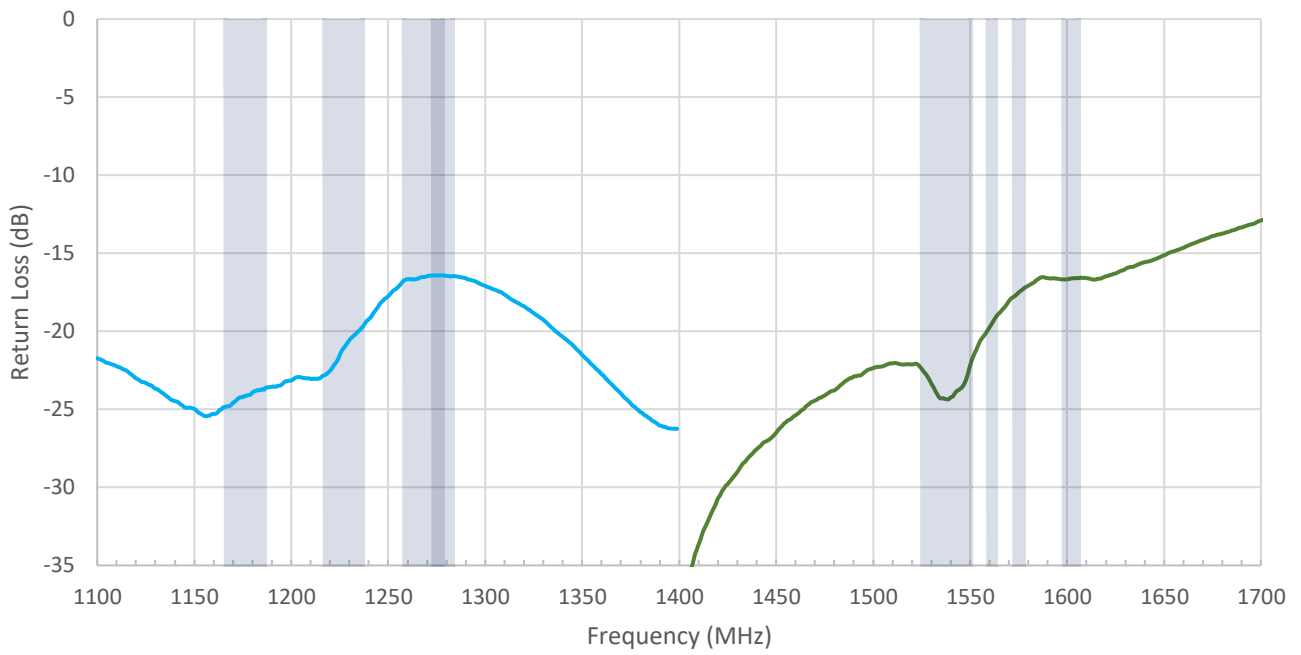


### 3.3 Efficiency

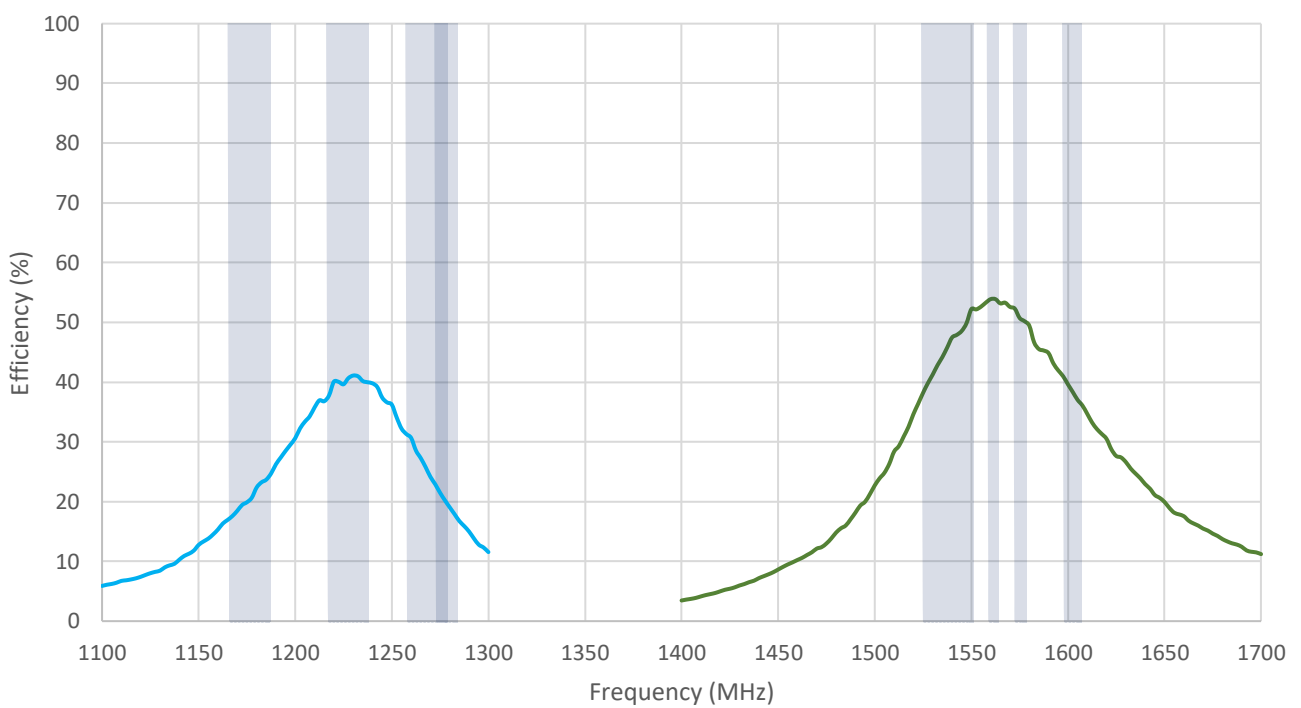

### 3.4 Average Gain

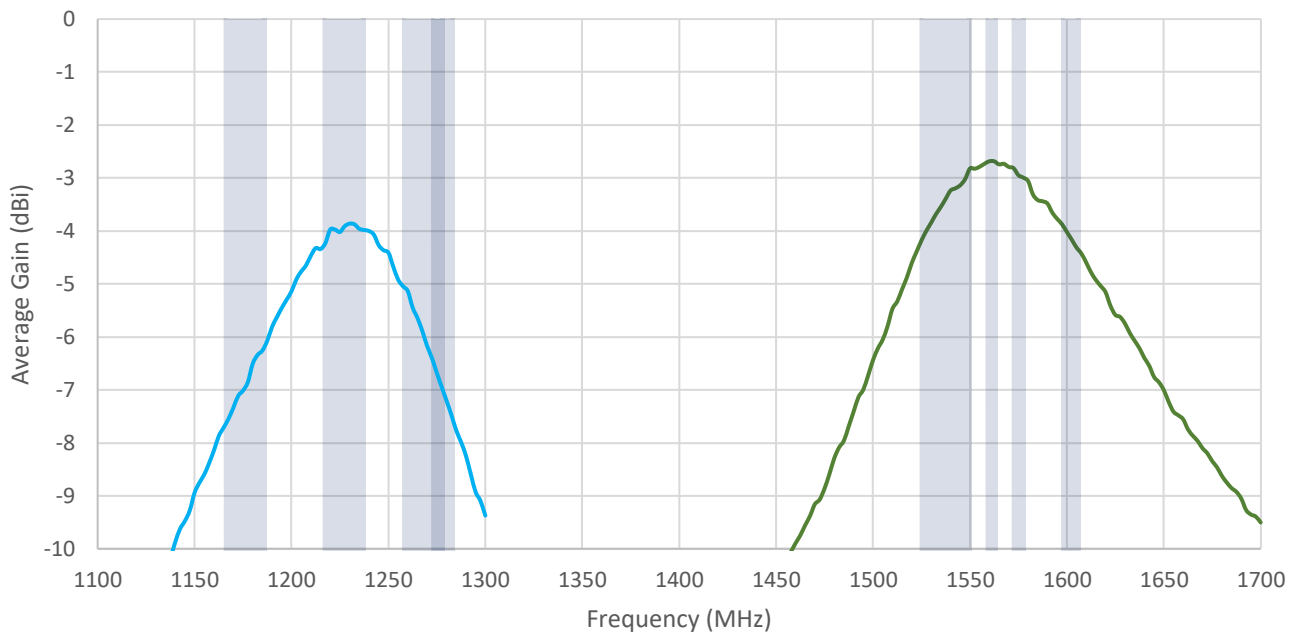


### 3.5 Peak Gain

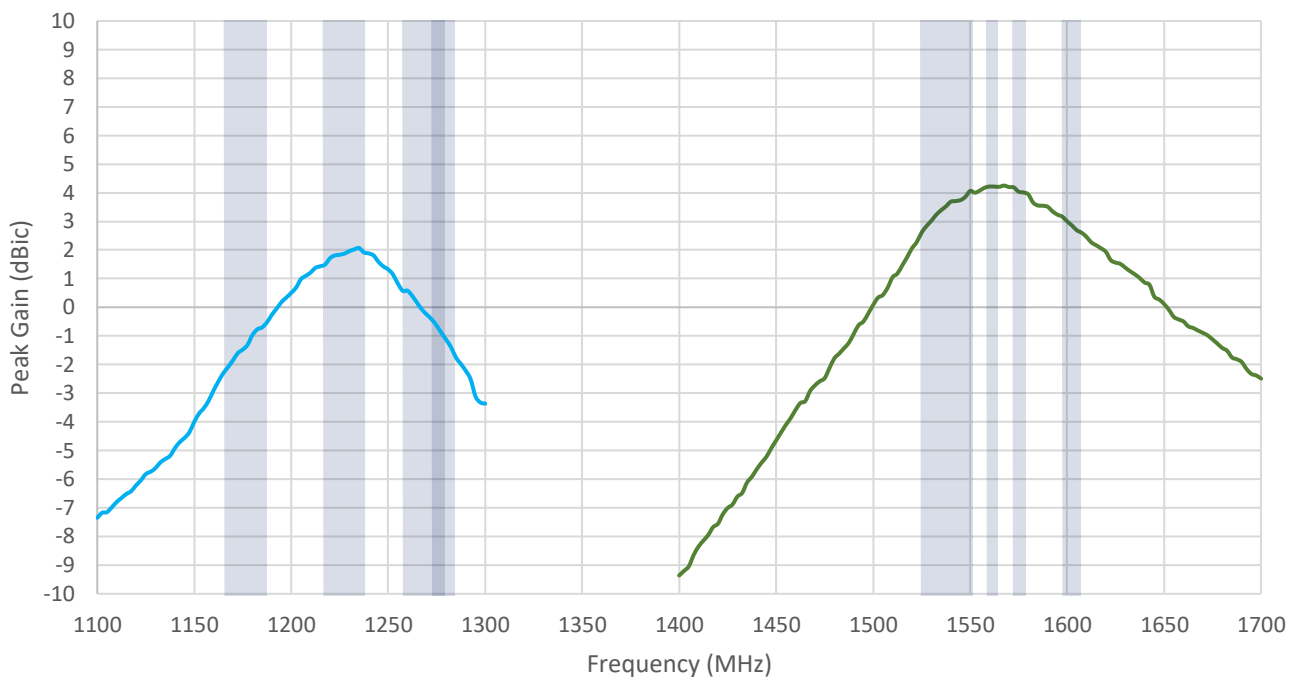





### 3.6 Axial Ratio

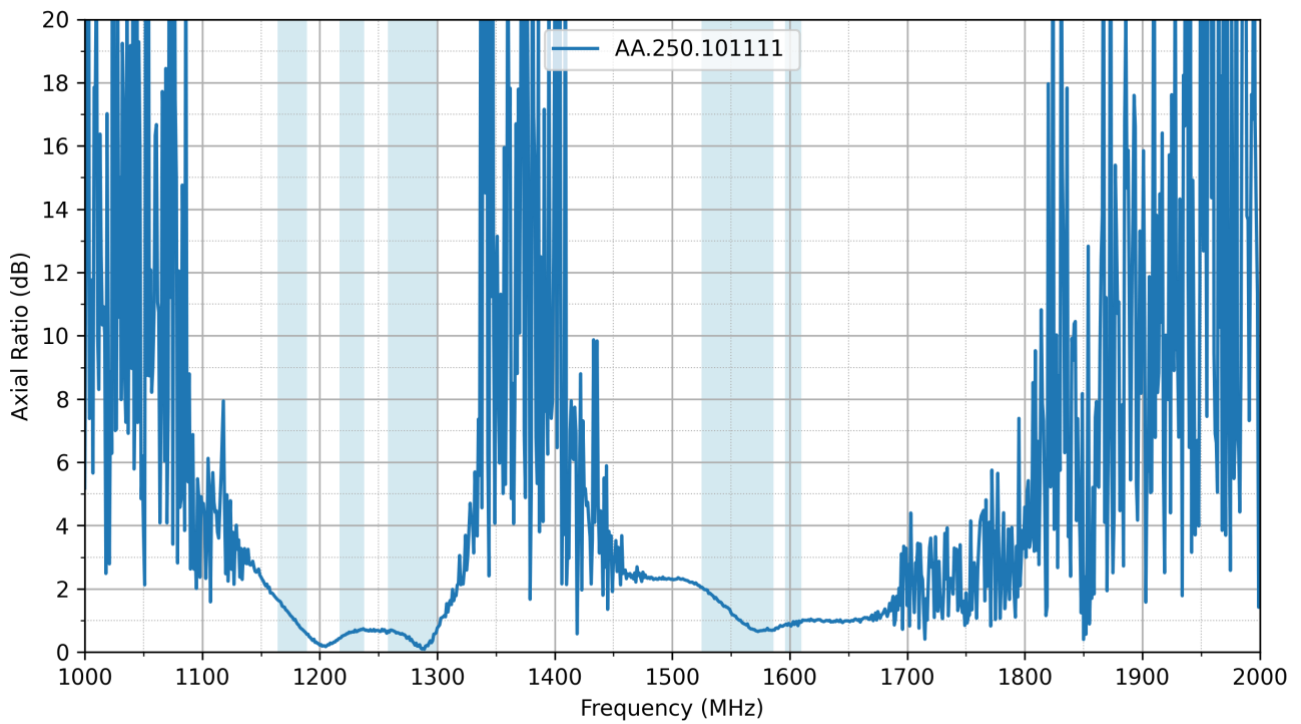


### 3.7 Axial Ratio vs Angle for Phi=0

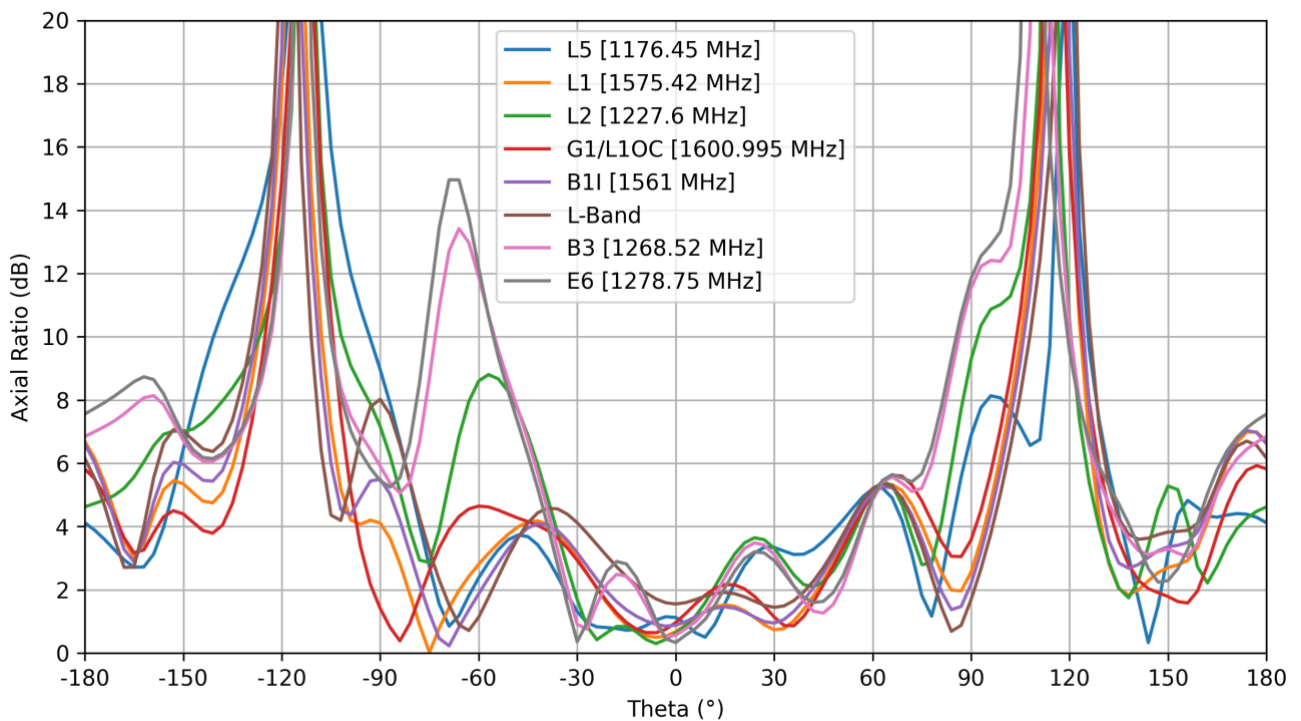


### 3.8 Axial Ratio vs Angle for Phi=90

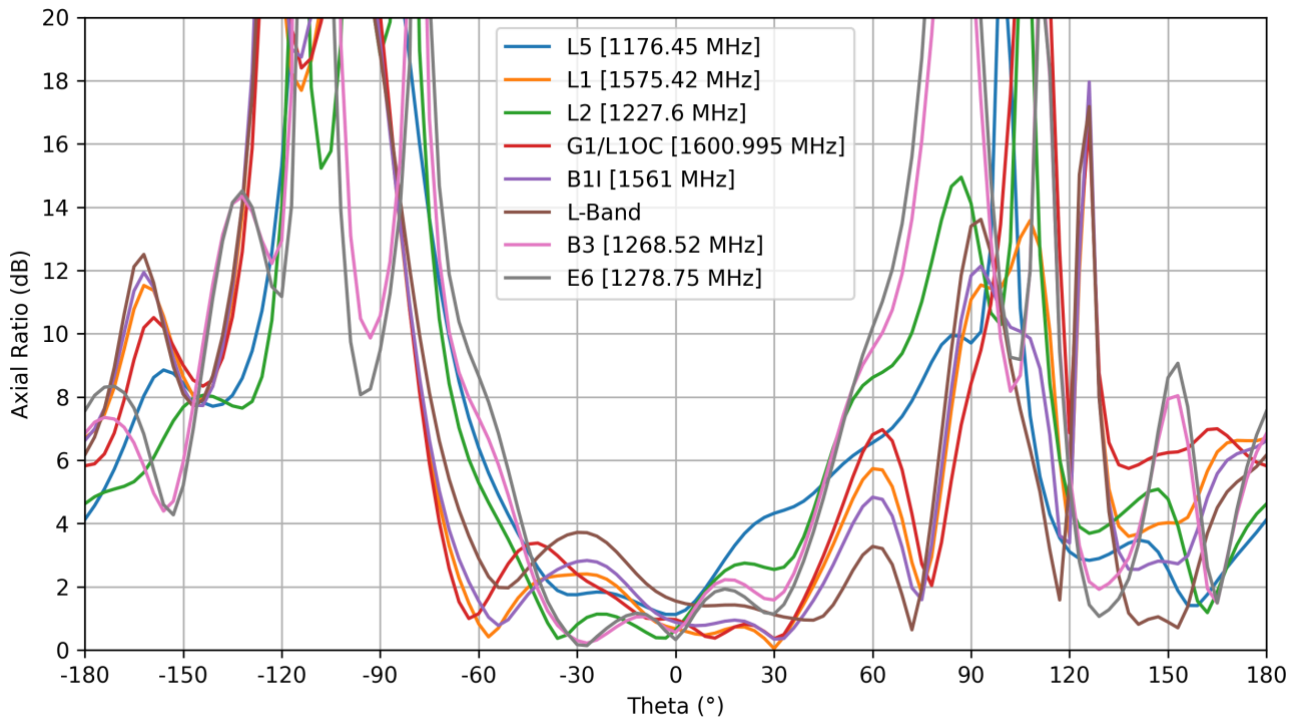

### 3.9 PCO


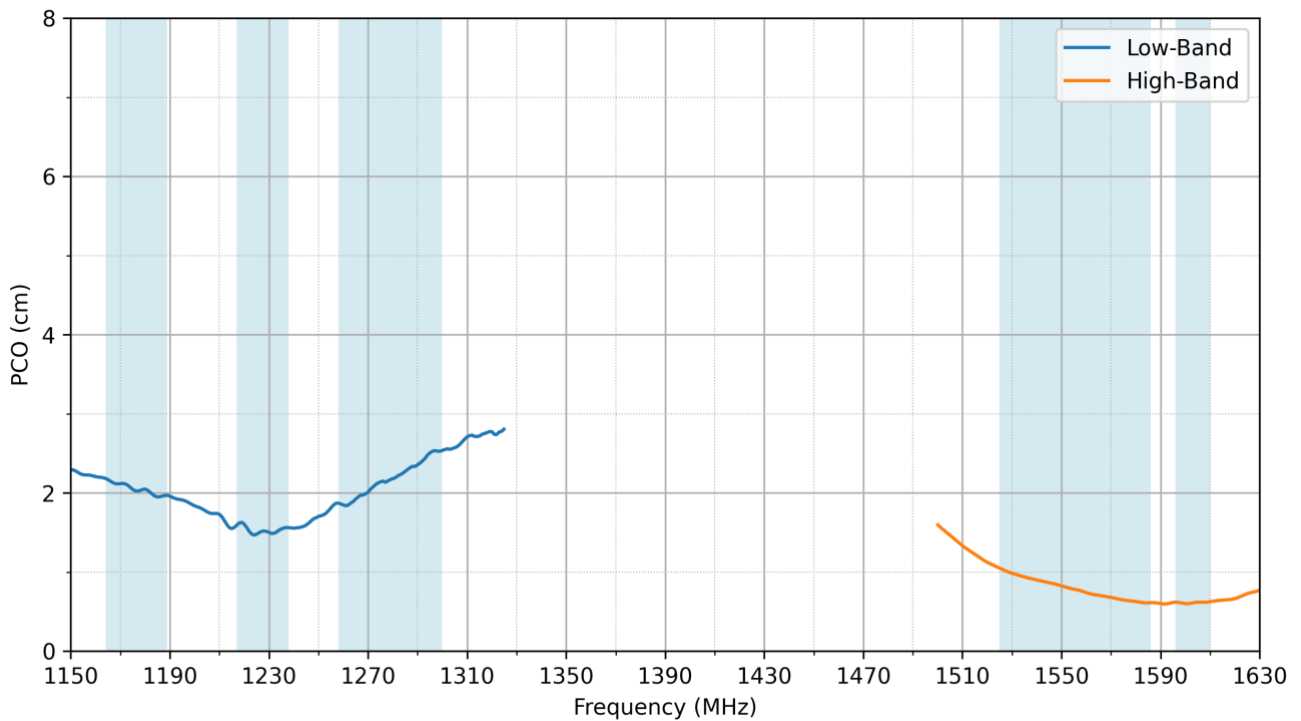


### 3.10 PCV

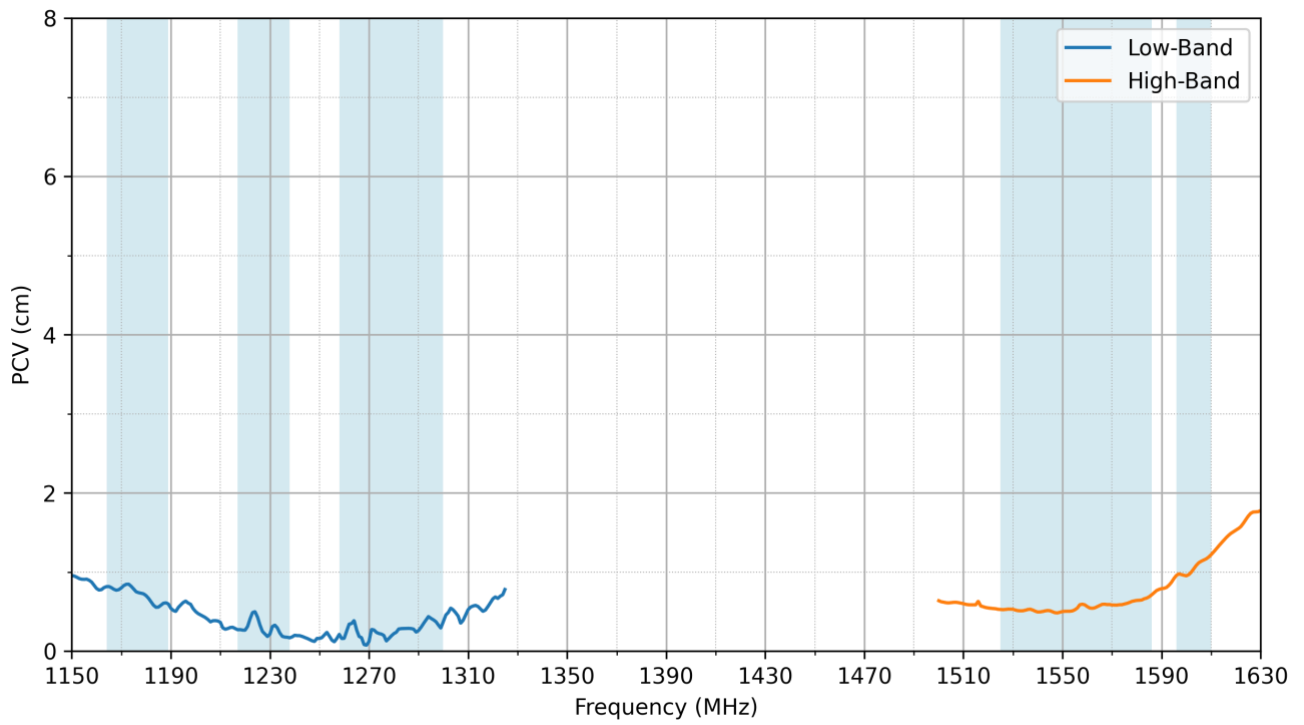



## 4. Radiation Patterns

### 4.1 Test Setup

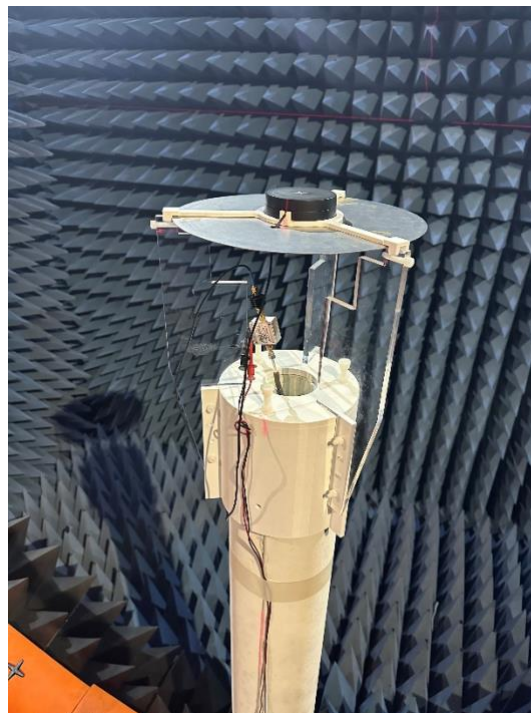
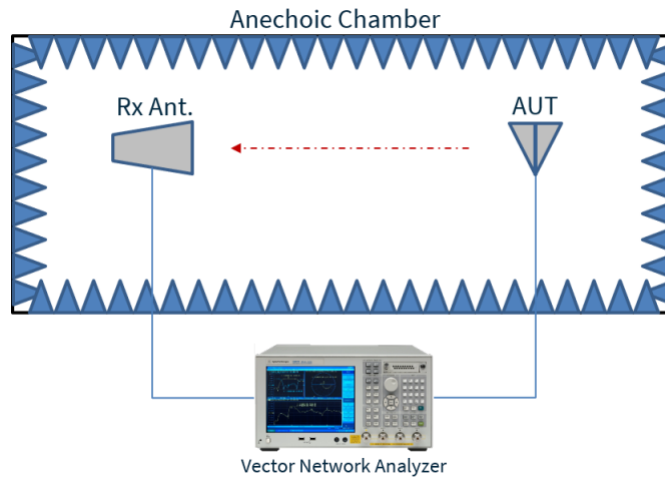


Chamber Test Set-up



4.2 Patterns at 1176 MHz

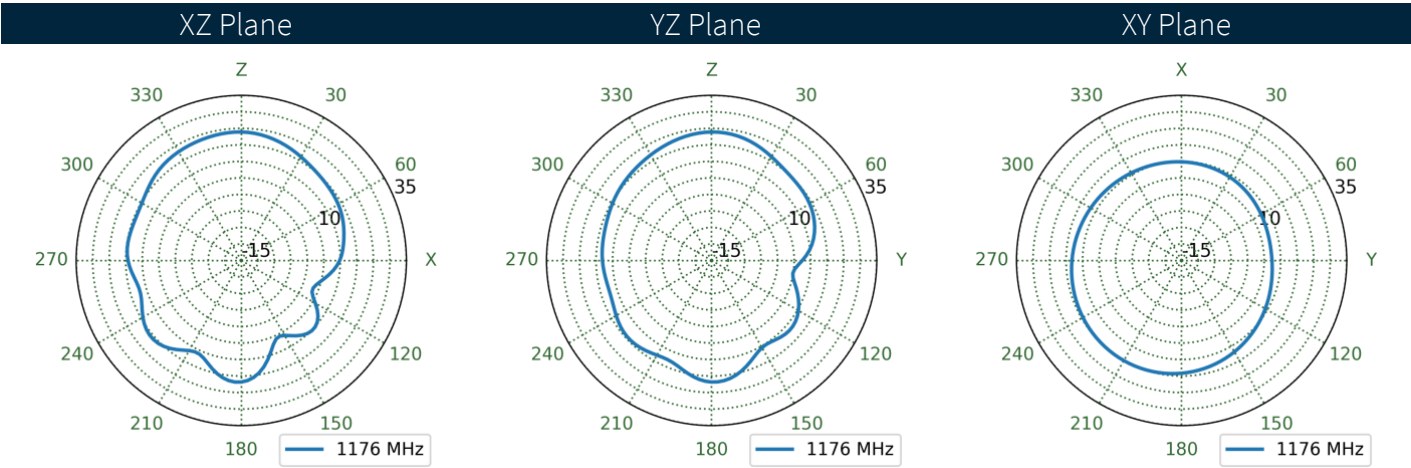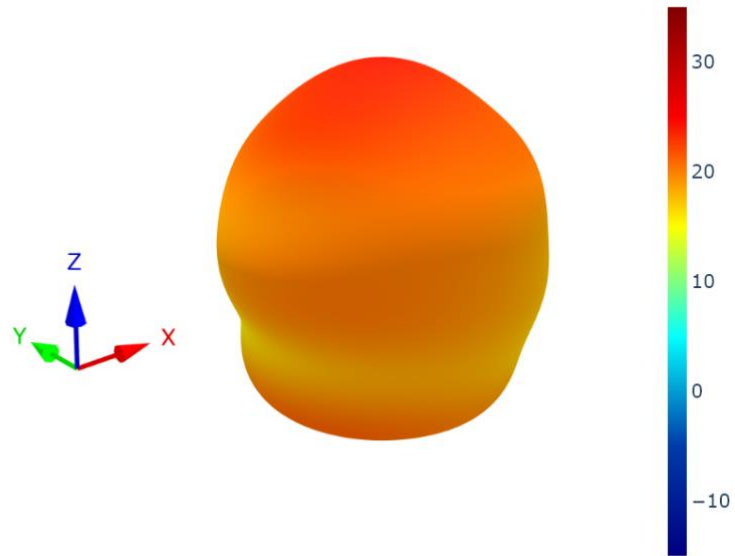



4.3 Patterns at 1227 MHz

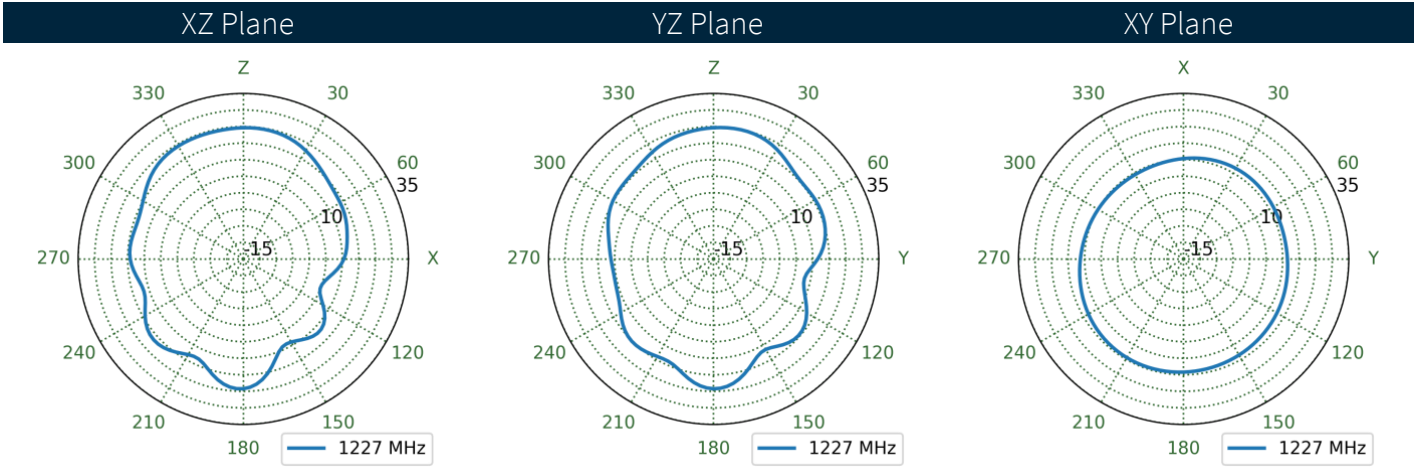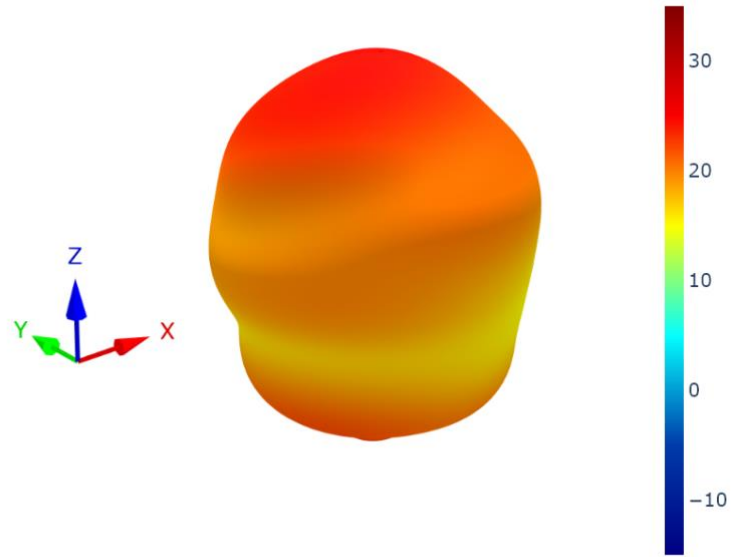

4.4 Patterns at 1269 MHz

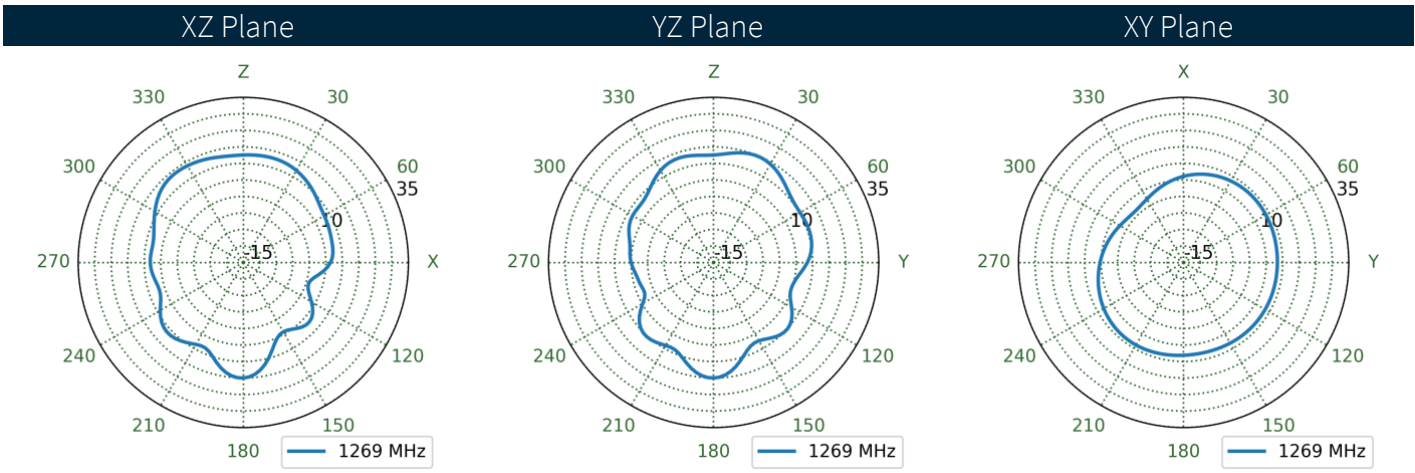
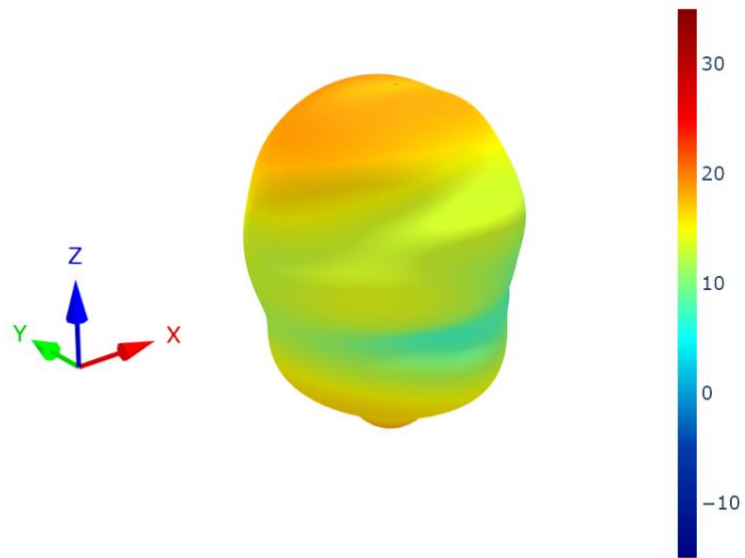


4.5 Patterns at 1279 MHz

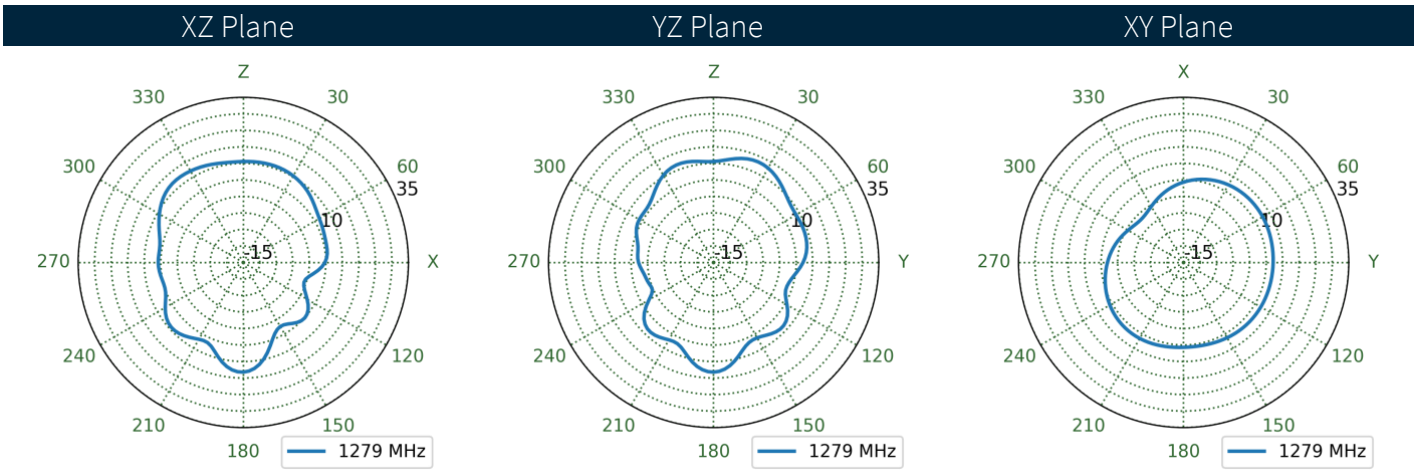
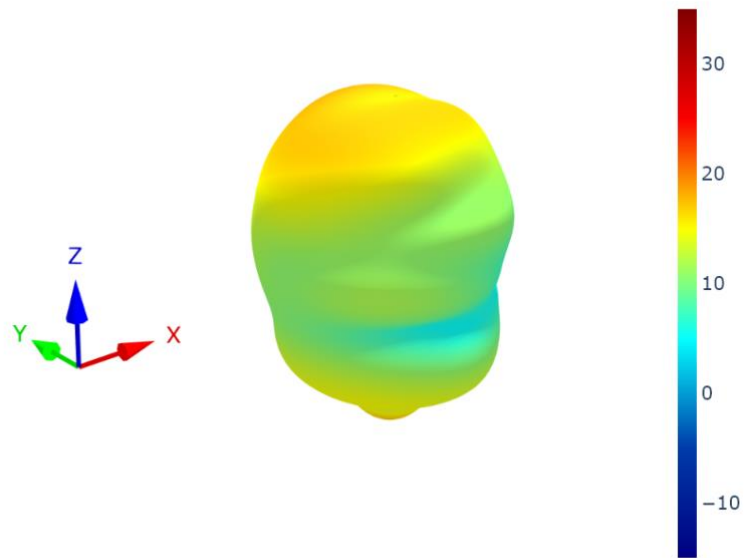






4.6 Patterns at 1542 MHz

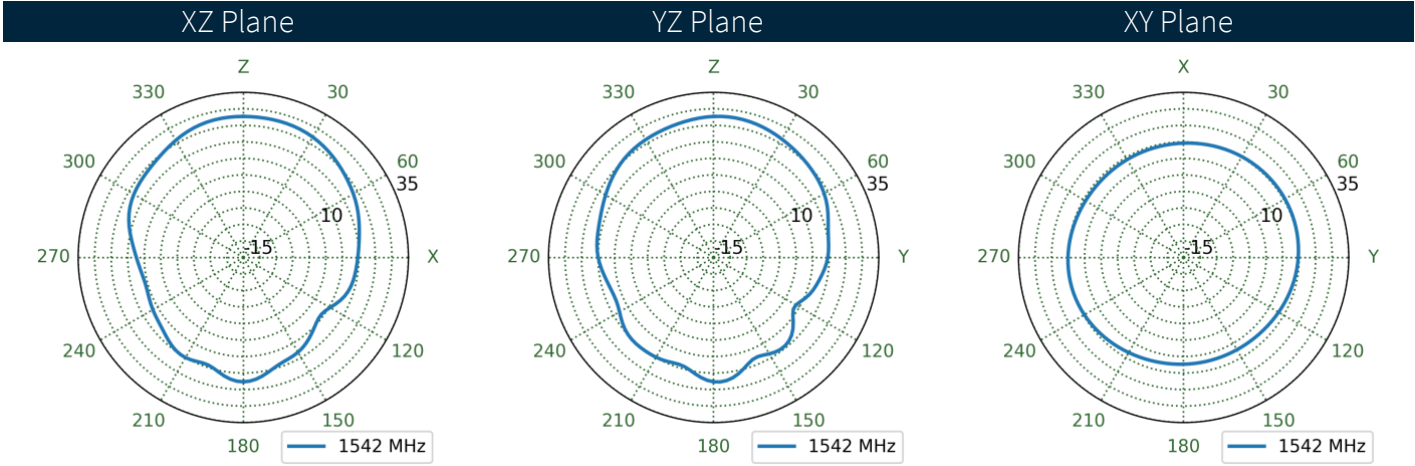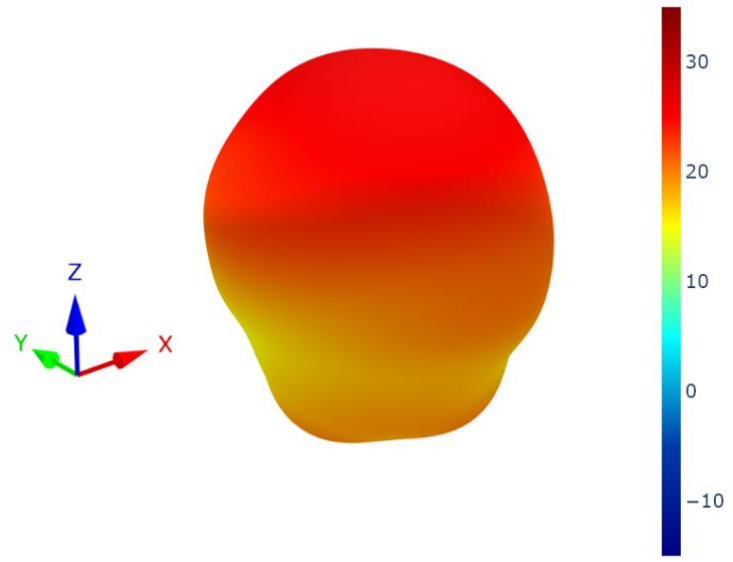



4.7 Patterns at 1562 MHz

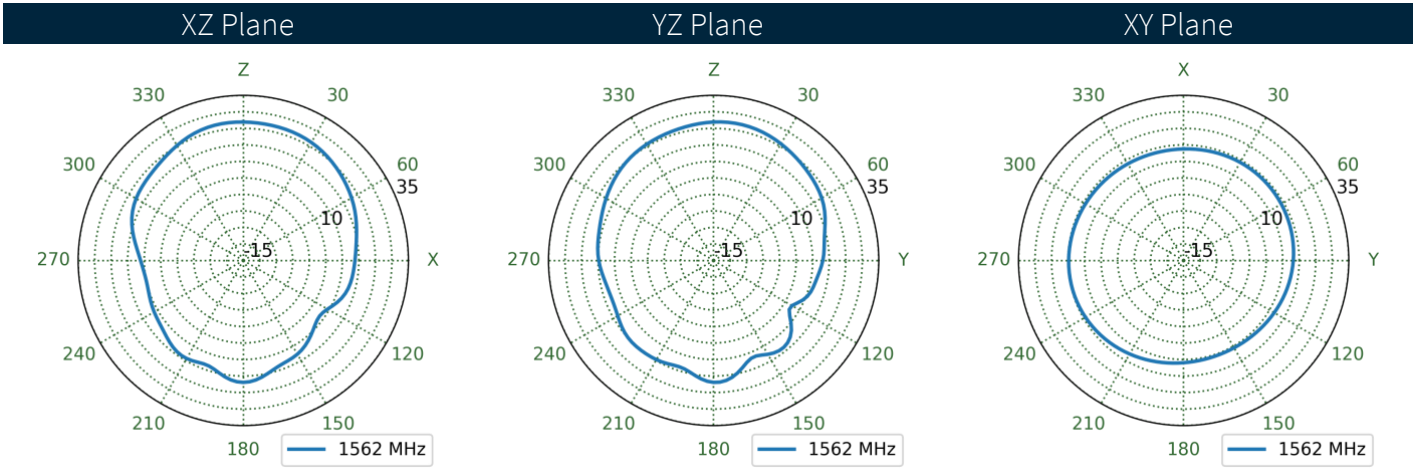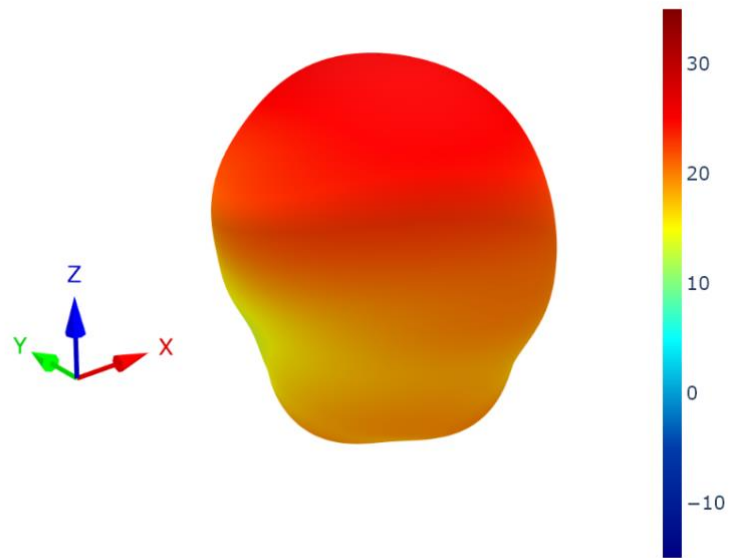

4.8 Patterns at 1575 MHz

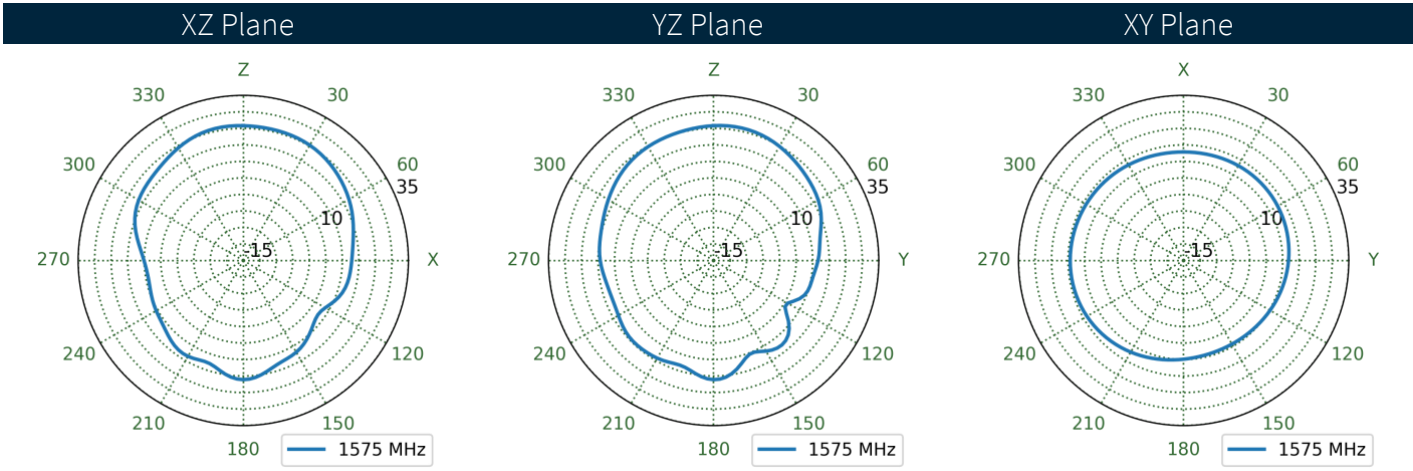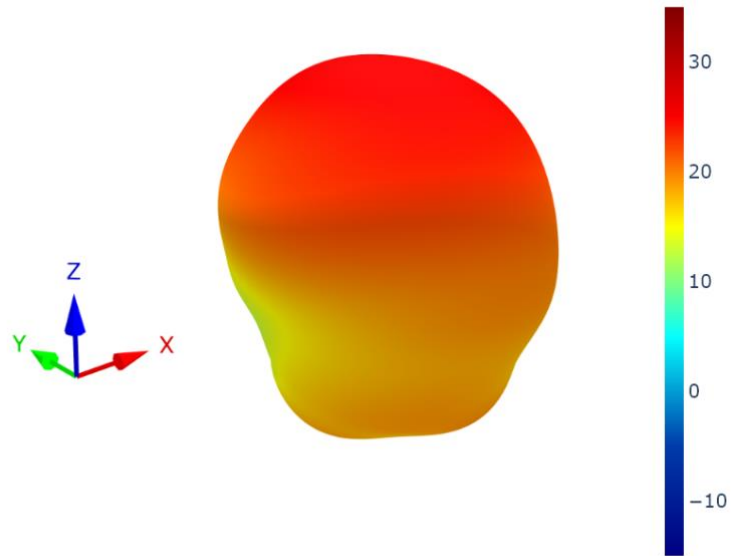


4.9 Patterns at 1603 MHz

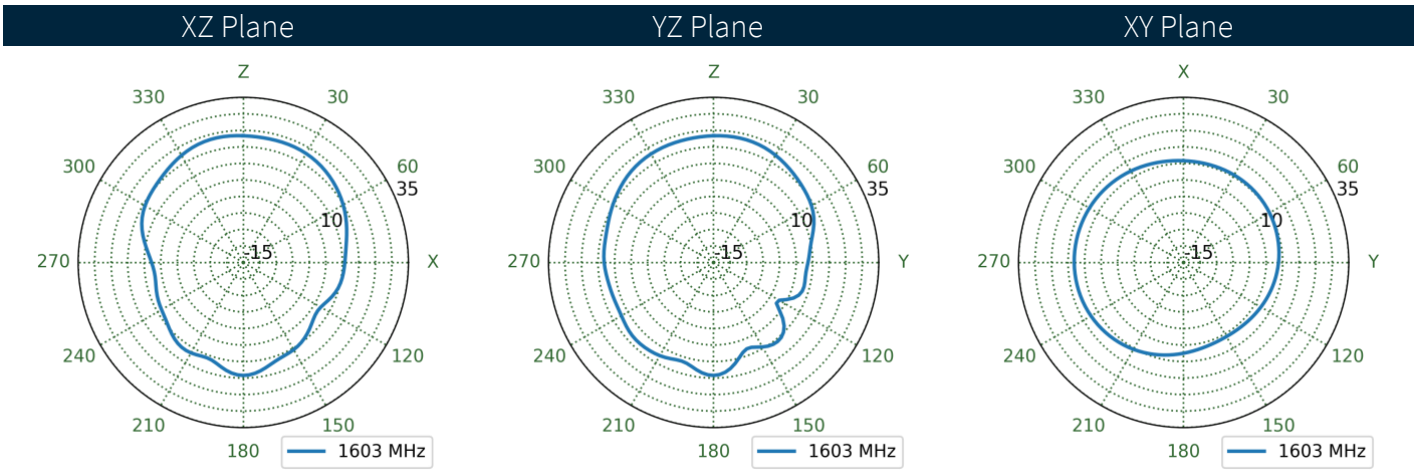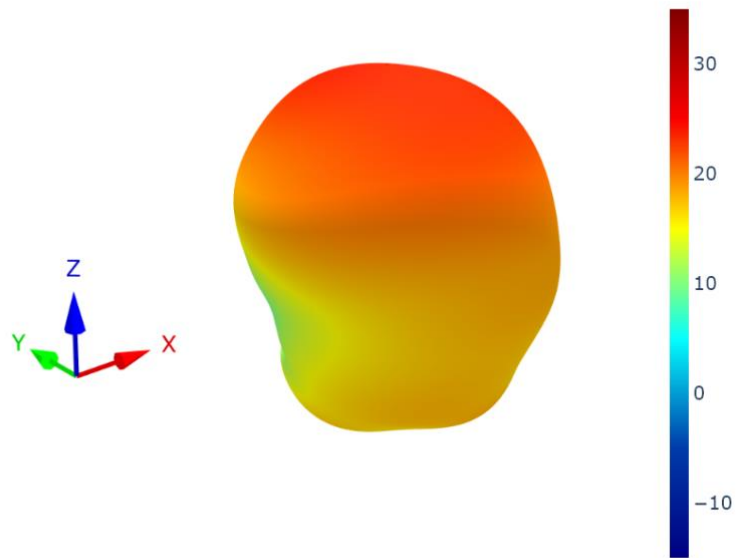


## 5. Active Circuitry Performance


### 5.1 Block Diagram

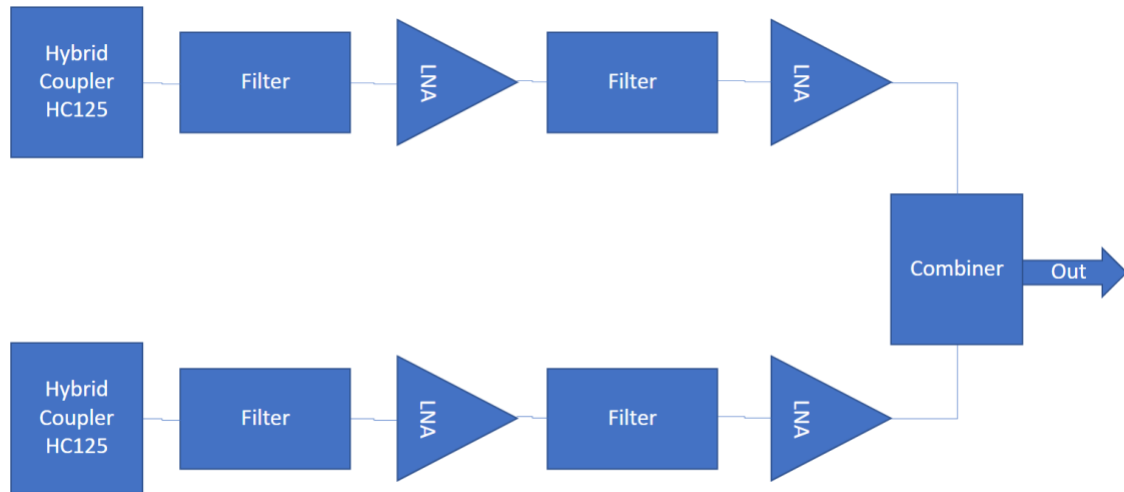


### 5.2 Front End Wideband Gain Plot

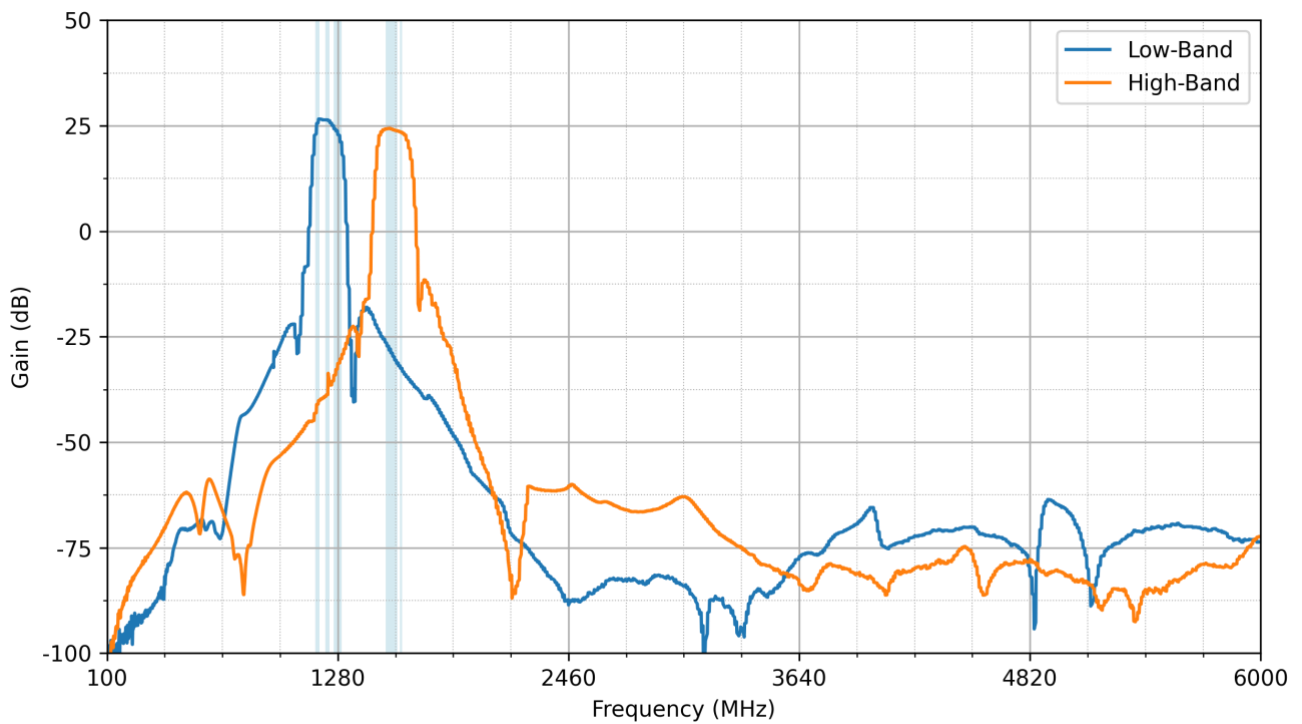


### 5.3 Narrowband Gain Plot – Low-Band

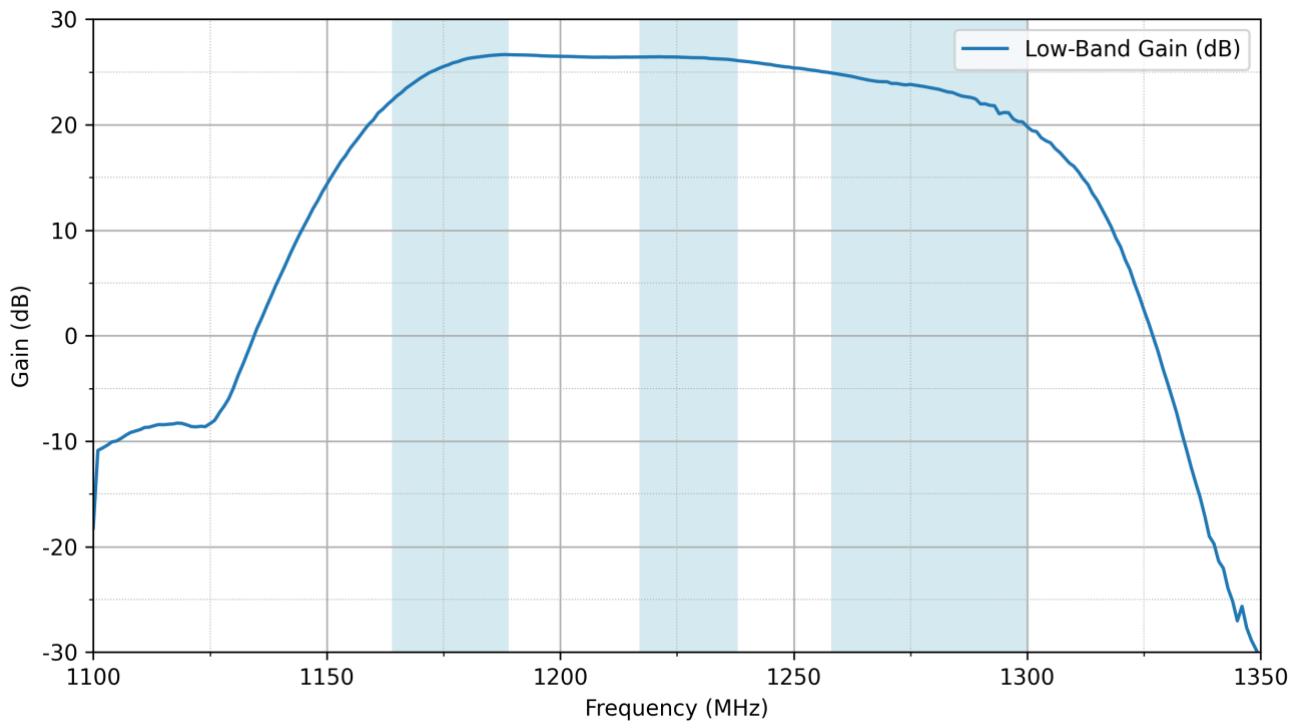


### 5.4 Narrowband Gain Plot – High-Band

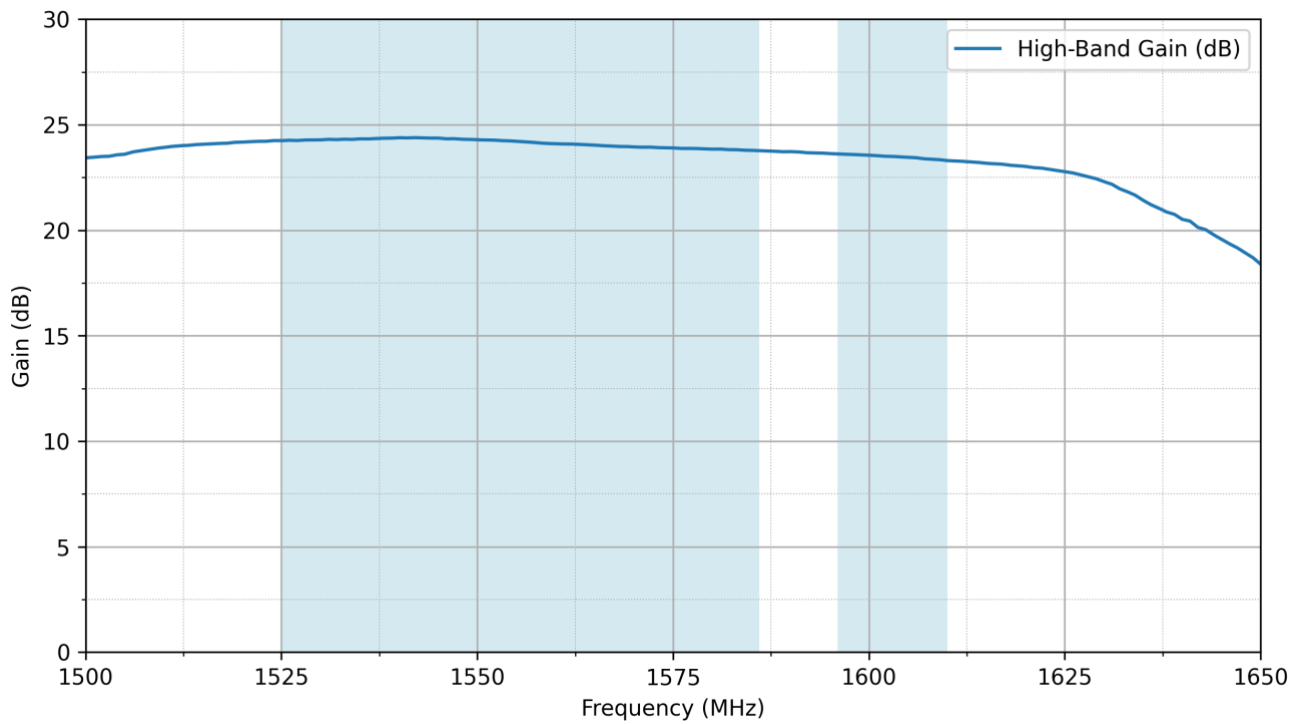


### 5.5 Noise Figure (Low-Band)

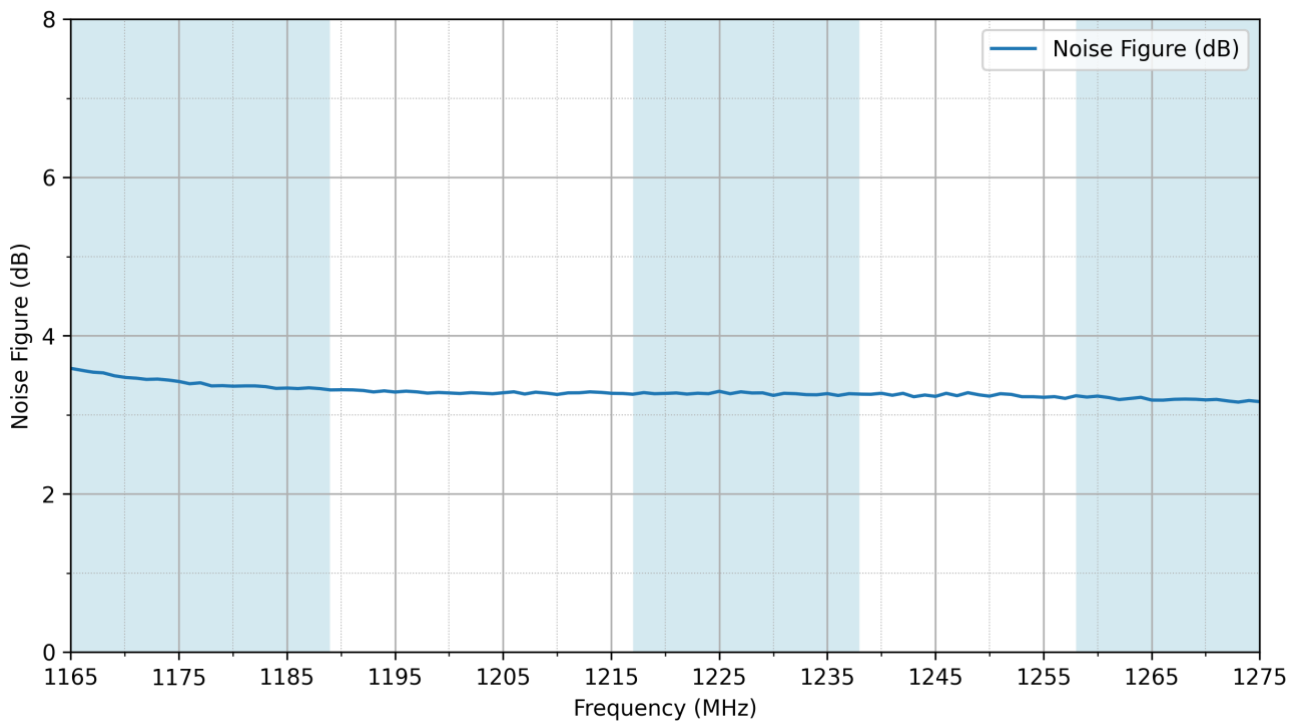


### 5.6 Noise Figure (High-Band)

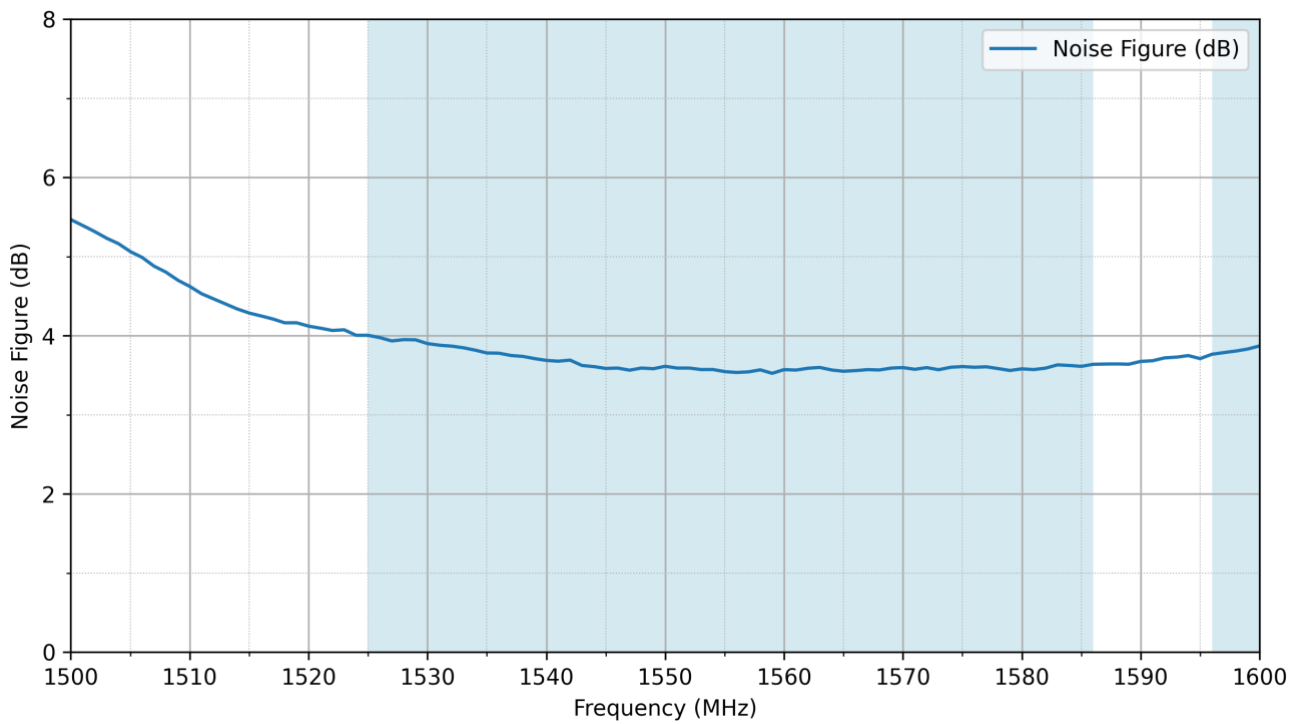

### 5.7 Group Delay (Low-Band)

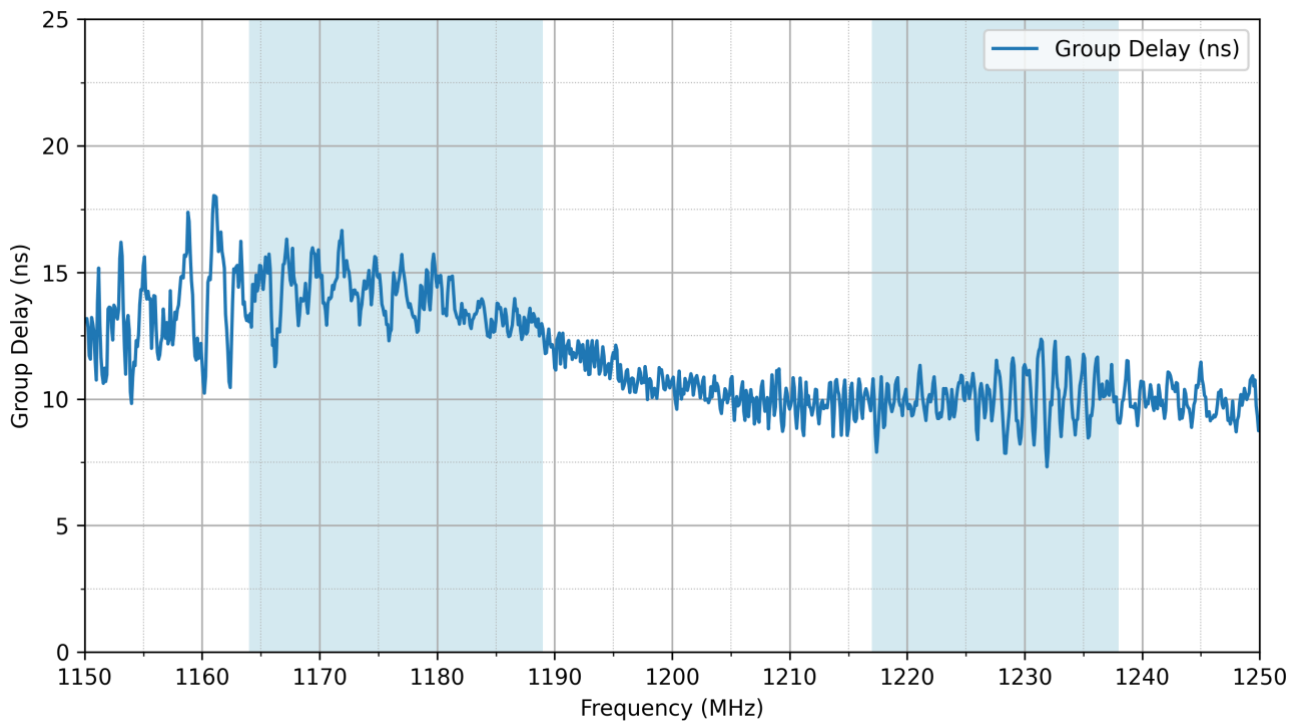

### 5.8 Group Delay (High-Band)

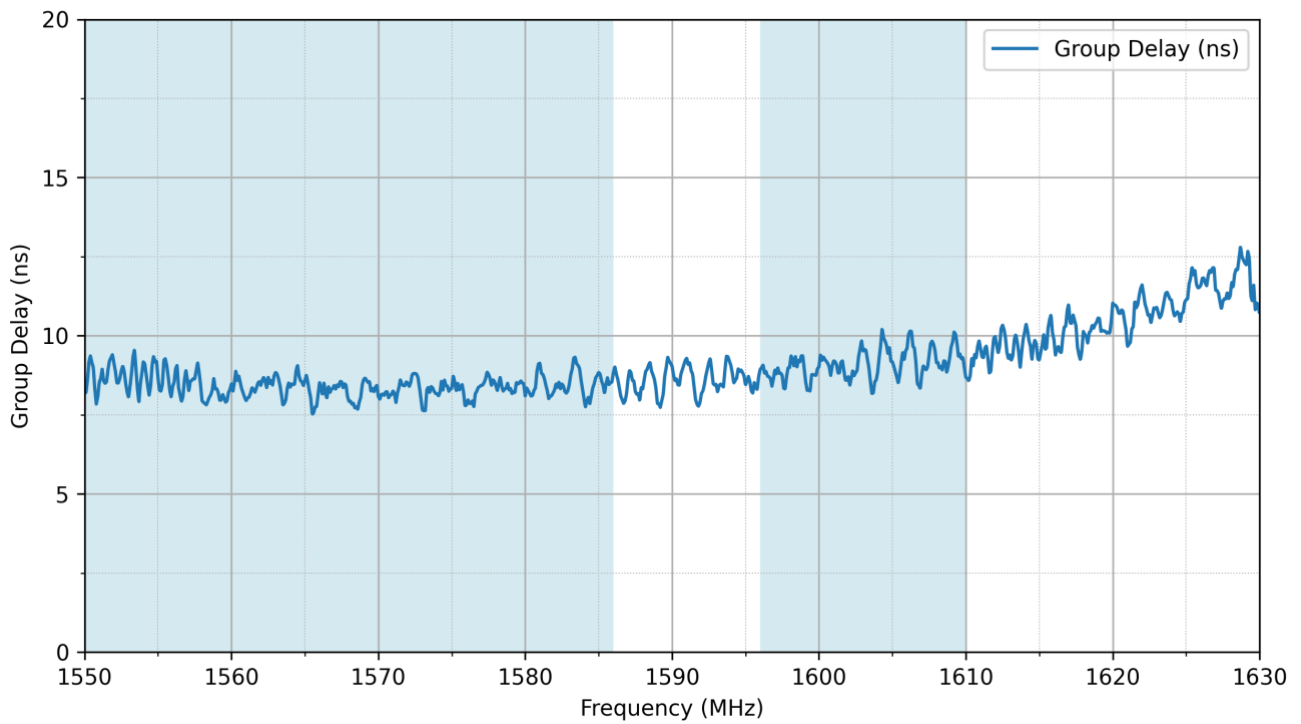



## 6. Field Test Results

In this section Taoglas will present the field test result for AA.250 antenna. The test was performed when the antenna was mounted on a static rooftop test set up in an open sky environment for at least 6 hours.

Taoglas will show the field test results using the following receiver:


### 6.1 Septentrio AsteRx-U S/N

#### Receiver features:


- Multi-band GNSS: 544 channels
- GPS: L1, L2, L5 GLONASS: L1, L2, L3 Galileo: E1, E5ab, AltBoc, E6 BeiDou: B1, B2, B3 NavIC: L51 QZSS: L1, L2, L5, L6
- SBAS: EGNOS, WAAS, GAGAN, MSAS, SDCM(L1, L5)
- RTK (base and rover), Integrated dual-channel L-band receiver, Support for PPP
- Nav. update rate up to 100 Hz
- Position accuracy = RTK 0.6 cm + 0.5 ppm

Positioning Accuracy Table (2D Accuracy)					
Test Condition	Correction Service	CEP (50%)	DRMS (68%)	2DRMS (95-98.2%)	TTF (sec)
Free Space	PPP-RTK DISABLED	36.04 cm	43.14 cm	86.28 cm	47s
	PPP-RTK ENABLED	7.75 cm	9.56 cm	19.11 cm	53s
30x30 cm Ground Plane	PPP-RTK DISABLED	22.93 cm	28.09 cm	56.19 cm	44s
	PPP-RTK ENABLED	4.45 cm	5.45 cm	10.89 cm	42s

SwiftNav Correction (Free Space)

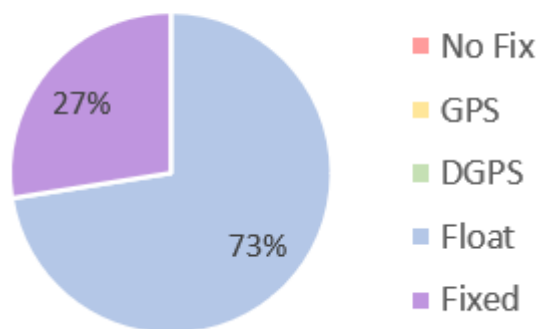


SwiftNav Correction 30x30cm Ground Plane

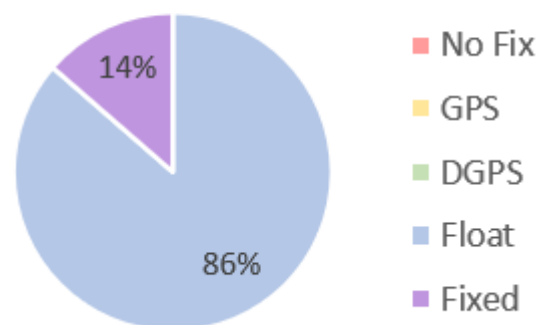

# 7. Mechanical Drawing

ISO NO.: EDW-22-8-1204  
 STATE: RELEASED  
 NOTES: 1. ALL MATERIAL ROHS COMPLIANT.

REV	ZONE	DESCRIPTION	ENG	APPROVED	DATE
D01	All	Initial design	G. Samson	L. Mendez	11/8/2022
D02	All	Updated part number and cover views	G. Samson	L. Mendez	12/2/2022
D03	All	Updated views showing new label artwork	G. Samson	L. Mendez	2/16/2023

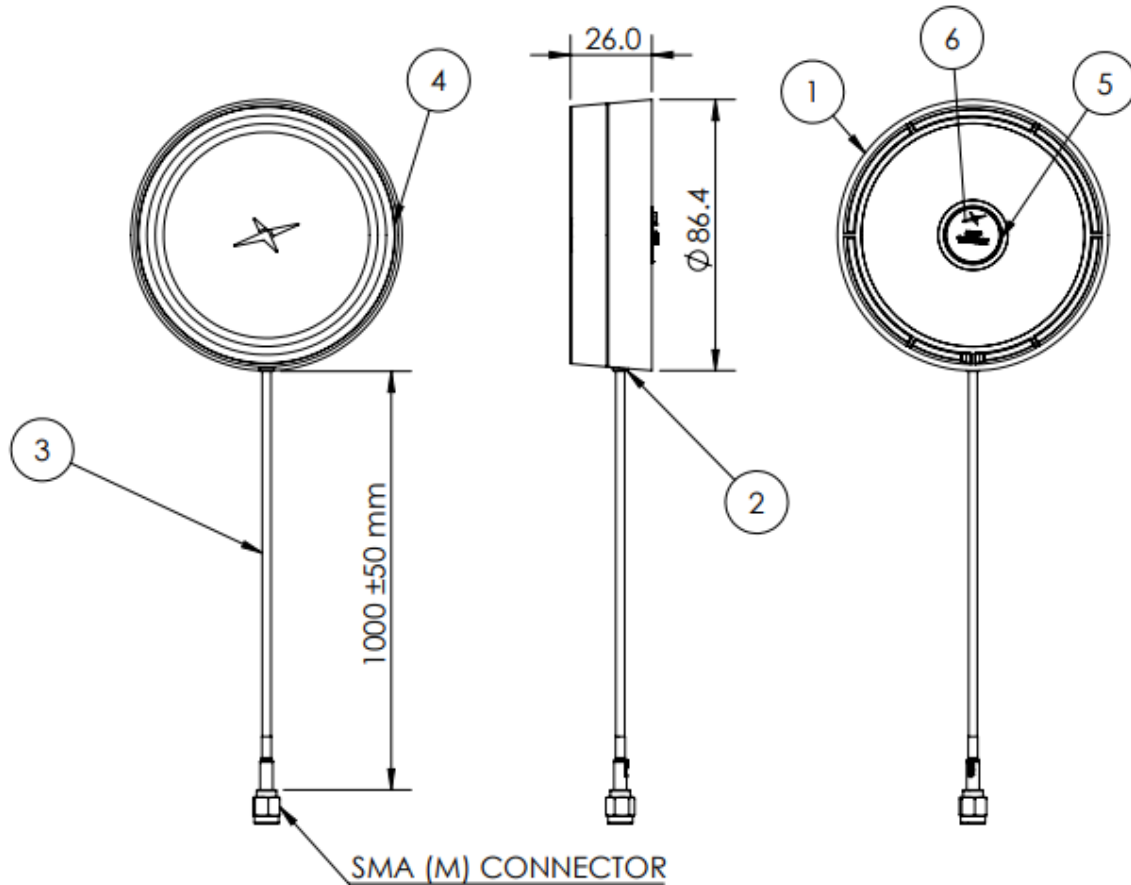

Name	Material	Finish	QTY
1 Bottom Housing, AA.250	ABS	Textured	1
2 Cable Grommet, RG-174, AA.250	Silicone	NA	1
3 Cable Assy, AA.250, RG-174 1 M Lg SMA (M)	NA	NA	1
4 Top Housing, AA.250	ABS	Textured	1
5 Magnet	N48	Ni Plated	1
6 Label, Product, AA.250	Polyester	NA	1

APPROVED BY: P. Frank	 <small>This drawing is Taoglas confidential information and is the design property of Taoglas. This is not to be copied or shared with third parties without the prior written consent of Taoglas.</small>
CHECK BY: I. Mendez	
DRAWN BY: G. Samson	
DATE: 11-8-2022	
<small>UNLESS OTHERWISE SPECIFIED TOLERANCES ON:</small> 01.453 01.452 01.451 01.450	TITLE: AA.250 All Band GNSS Active Patch Magnetic Mount Antenna PART NO.: AA.250.101111
THIRD ANGLE PROJECTION	UNIT: mm    SCALE: 1:5    PAGES: 1/1    REV: D03

## 8. Packaging


AA.250.101111  
1 pcs / Small PE Bag



10 PCS / PE Bag



90 PCS / Carton  
Carton(mm): 370x370x300mm  
Carton Label

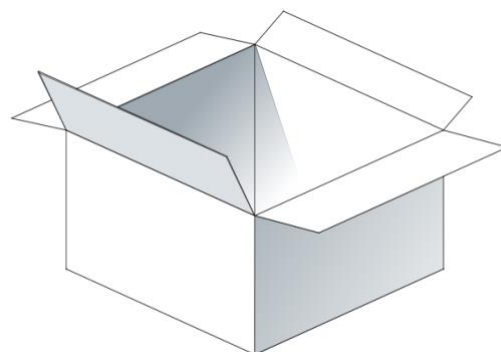

Changelog for the datasheet

**SPE-23-8-241 – AA.250.101111**

**Revision: B (Current Release)**

Date:	2024-03-25
Notes:	Updated spec table
Author:	Gary West

**Previous Revisions**

**Revision: A (Original First Release)**

Date:	2023-08-29
Notes:	Initial Release
Author:	Gary West



[www.taoglas.com](http://www.taoglas.com)

