



Part No: CGGBP254.07.0100A

Description

25 x 25 x 4mm GPS/GLONASS/BeiDou Passive Patch on PCB with 100mm 1.13 and I-PEX™ MHFI Connector

Features:

High-performance Ceramic Patch Antenna Covering Bands GPS(L1), GLONASS(G1) and BeiDou(B1I) Covering Frequencies 1561, 1575 and 1602MHz Customizable Cable & Connector Dimensions: 25 x 25 x 4mm



1.	Introduction	3
2.	Specification	4
3.	Mechanical Drawing	6
4.	Packaging	7
5.	Antenna Characteristics	8
6.	Radiation Patterns	15
	Changelog	22

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

















1. Introduction



At just 25mm squared the embedded CGGBP254 ceramic GPS/GLONASS/Galileo/BeiDou patch antenna is a compact, high-performance solution covering the 1561/1575/1602MHz frequencies. It is supplied on a 35x35mm PCB making it easy to mechanically integrate into devices requiring a reliable GPS/GLONASS/GALILEO Patch antenna.

Supplied with 100mm of 1.13 micro-coaxial cable with an I-PEX™ MHFI connector, both of which can be customized to suit your application.

The CGGBP254 offers improved positioning accuracy with low power consumption. The antenna's compatibility with multiple satellite systems provides reliable location accuracy making it suitable for a wide range of applications including:


- Vehicle Positioning Systems
- Asset Tracking
- Geospatial Surveying and Mapping
- Drones and UAVs
- Logistics and Supply Chain Monitoring

For more information on how to integrate the CGGBP254 into your device, or for a sample, reach out to your local Taoglas customer service team.



2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	•				
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	•				
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
L-Band	L-Band 1542 MHz				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
IRNSS (Regional)	L5 1176.45 MHz				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	•		•		

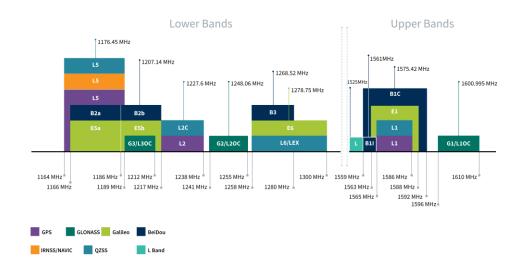

GNSS Bands and Constellations



5

GNSS Electrical				
Frequency (MHz)	1561	1575.42	1603	
VSWR (max.)	2:1	2:1	2:1	
Antenna Efficiency (%)	57.77	63.98	63.58	
Antenna Gain at Zenith (dBi)	1.12	1.74	0.89	
Axial Ratio (dB)	20.36	17.3	3.94	
PCO_x (cm)	2.15	2.15	1.5	
PCO_y (cm)	0.93	0.4	0.68	
PCV (cm)	0.0	0.0	0.02	
Group Delay Mean (ns)	14.93	14.97	16.06	
Group Delay Variation (ns)	4	4	3	
Polarization		RHCP		
Impedance		50 Ω		

Mechanical Mechanical		
Dimensions	25x25x4mm	
Weight	15g	
Material	Ceramic + PCB	
Connector	IPEX MHF I	
Cable	100mm 1.13 Coaxial Cable	


Environmental		
Operation Temperature	-40°C to 85°C	
Storage Temperature	-40°C to 85°C	
Relative Humidity	Non-condensing 65°C 95% RH	





Mechanical Drawing

ISO NO.:EDW.002232 STATE: Release

	ZONE	DESCRIPTION	ENG	APPROVED	
	All	Initial design	Aron Yan	Agron	2024/4/10
D02	All	Modify the drawing	Aron Yan	Aaron	2024/5/29
D0.3	All	Modify the drawing	Aron Yan	Agron	2024/6/20
D0.4	All	Modify the drawing	Aron Yan	Agron	2024/7/8

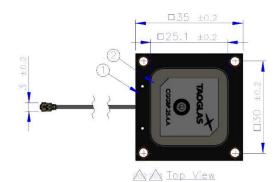

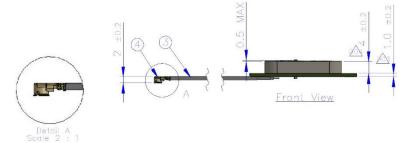




	Name	Material	Finish	Qty
1	PCB	FR4	Black	1
2	Patch	Ceramic	Clean	1
3	1.13 Coaxial cable	FEP	Gray	1
4	IPEX.MHFHT	Composite	Au Plated	1

TAOGLAS. TW Design Centre
This drowing in Toughts Confidential information and its inherent design concepts are property of Touglas. This is not to be copied or ribated with third parties without the prior written consent of Toughts.
TITLE GPS/GLONASS/GALILEO/BeiDou Passive Patch
with 100mm 1.13 IPEX MHFI
PART NO.: CGGBP254.07.0100A
UNIT: mm SCALE: 1:1 PAGES: 1/1 REV. DO4



4. Packaging


12 PCS CGGBP254.07.0100A per Tray 12 PCS/Protective case Weight: 0.18Kg



48 PCS CGGBP254.07.0100A per vacuum package 2 PCS 3g Desiccant Weight – 0.77Kg




576 PCS CGGBP254.07.0100A per carton Dimensions 540 x 370 x 300mm Weight — 10.85Kg

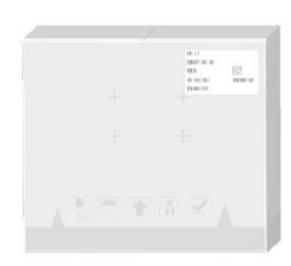





5. Antenna Characteristics

5.1 Test Setup

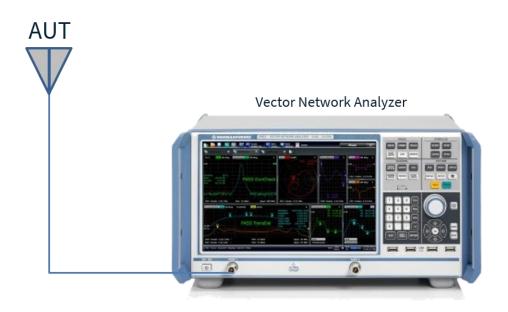

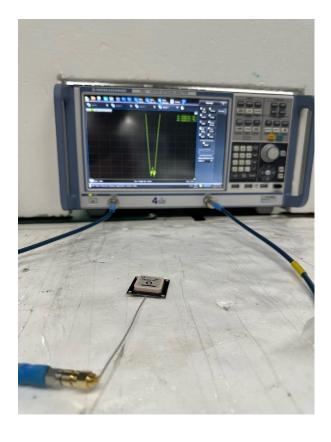




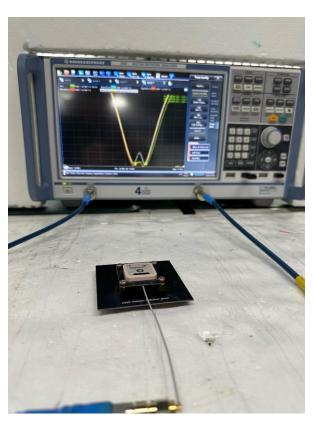


70x70mm Ground Plane VNA Set-up



5.2 Return Loss

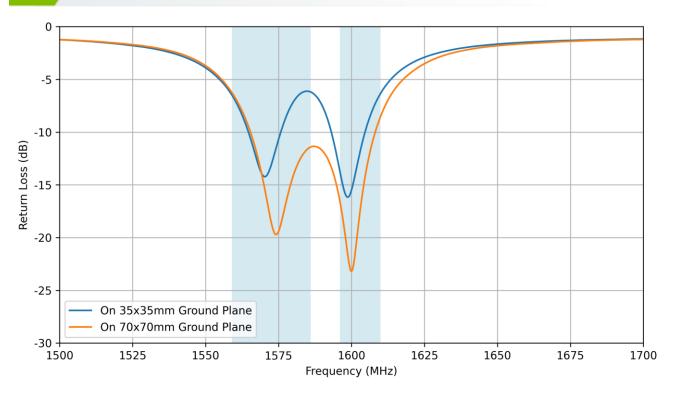


5.3 VSWR

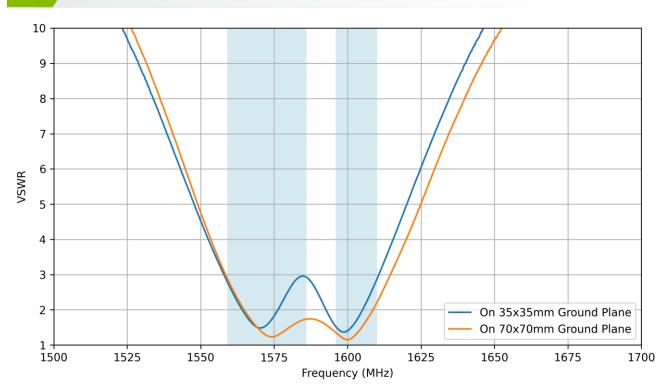




5.4 Efficiency

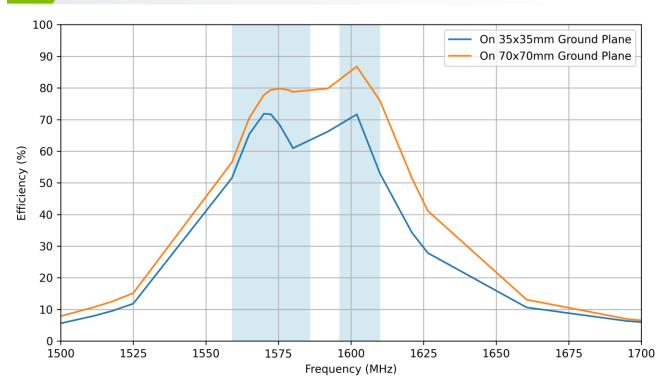


5.5 Average Gain

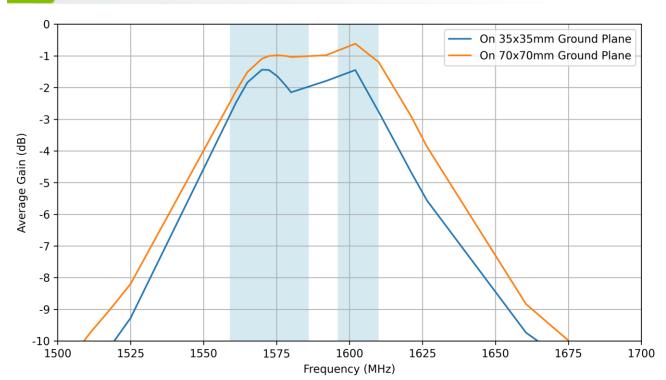




5.6 Peak Gain (Gtotal)

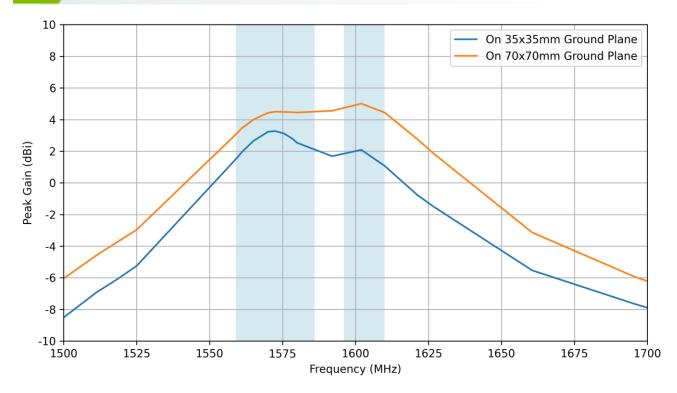


5.7 Axial Ratio

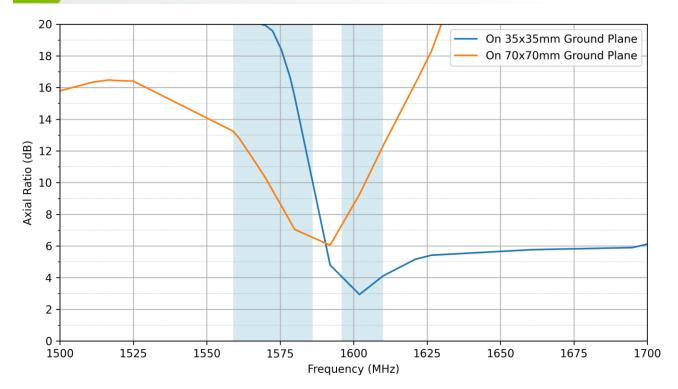




5.8 AR vs Angle for Phi=0

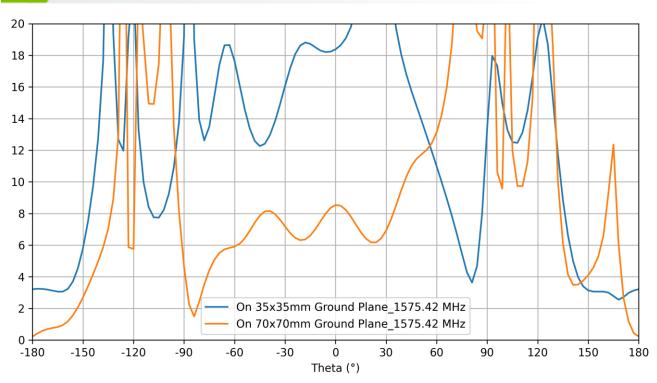


5.9 AR vs Angle for Phi=90

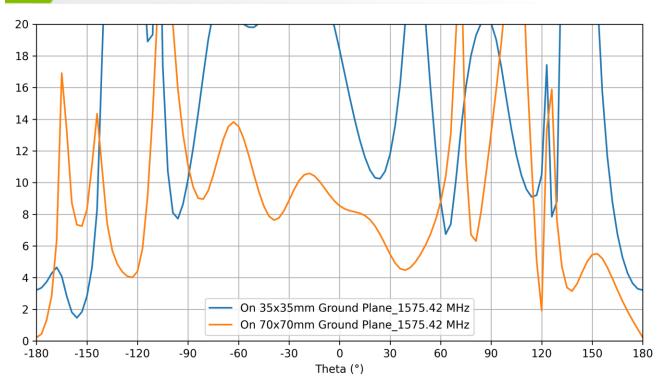




AR vs Angle for Theta=90 5.10

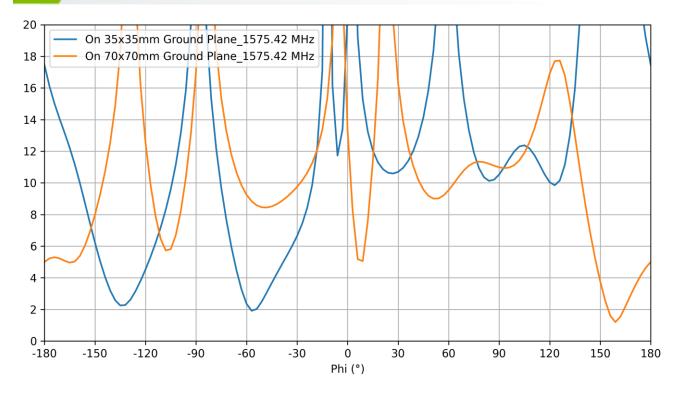


PCO 5.11

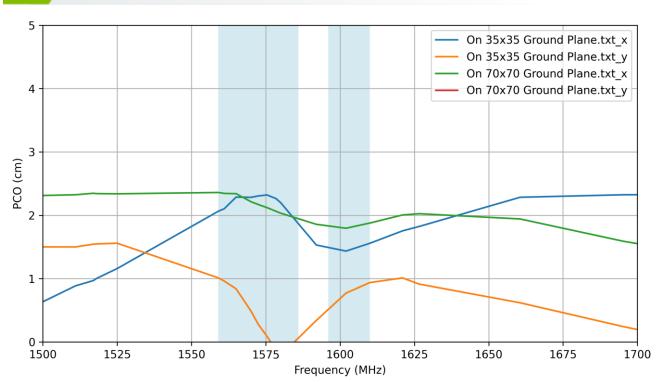

13






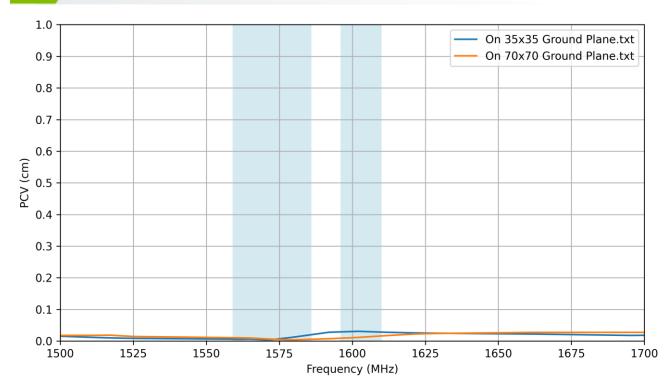





6. Radiation Patterns

6.1 Test Setup

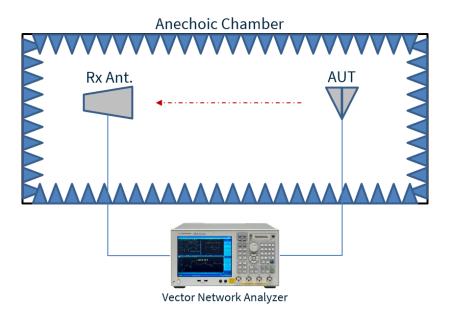

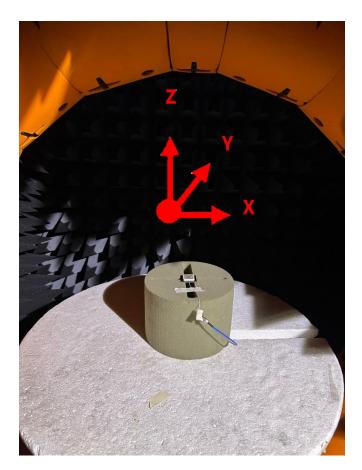




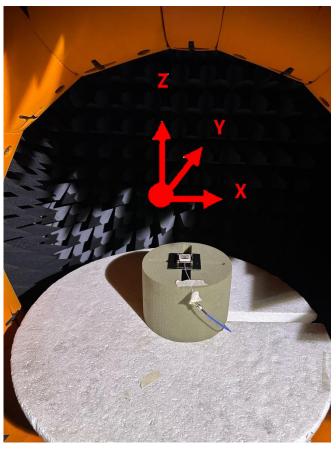


70x70mm Ground Plane Chamber Set-up




2 On 35x35mm Ground Plane Patterns at 1561 MHz

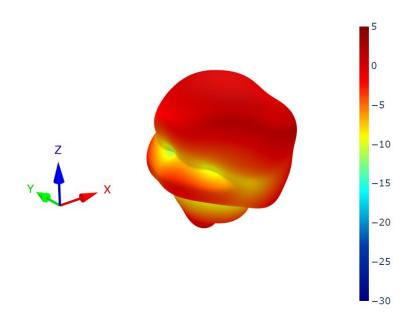


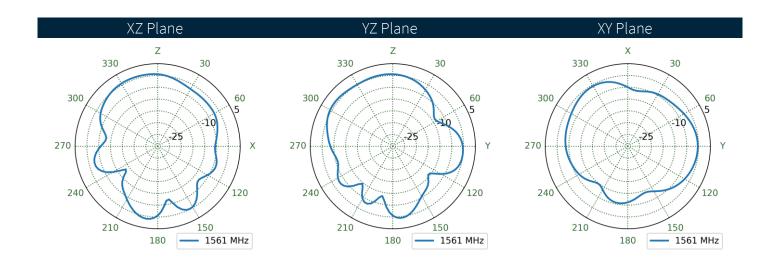




On 70x70mm Ground Plane Patterns at 1561 MHz

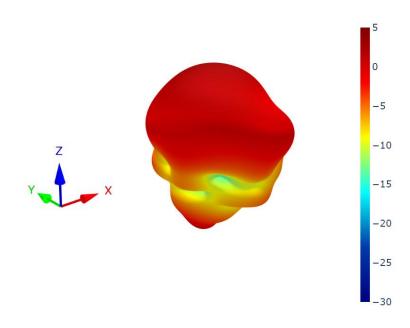


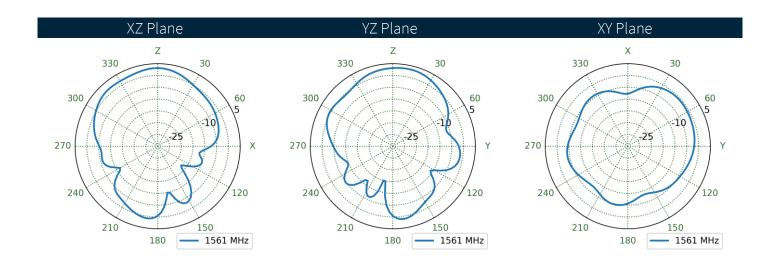




6.4 On 35x35mm Ground Plane Patterns at 1575 MHz

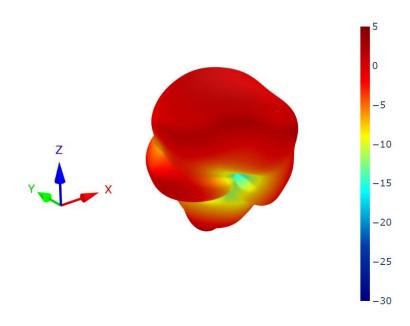


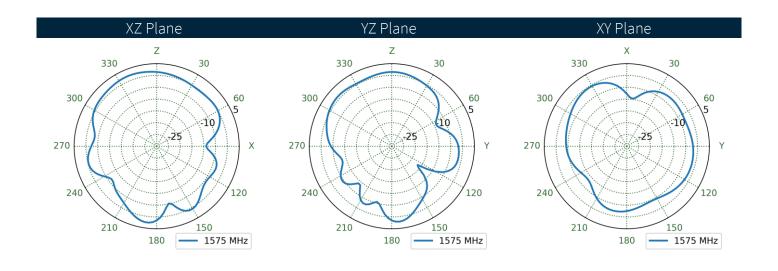




On 70x70mm Ground Plane Patterns at 1575 MHz

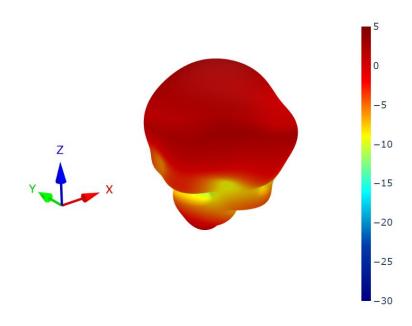


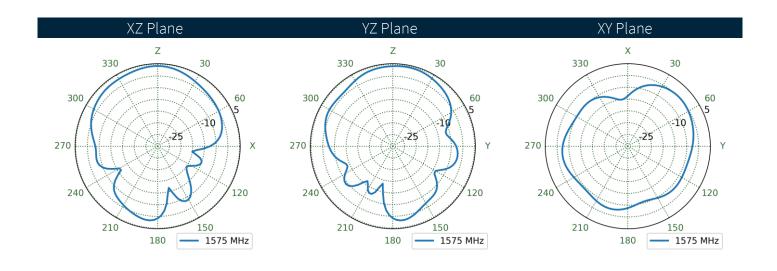




On 35x35mm Ground Plane Patterns at 1602 MHz

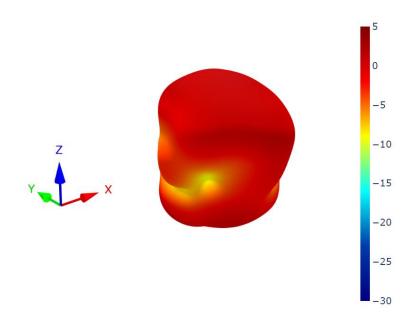


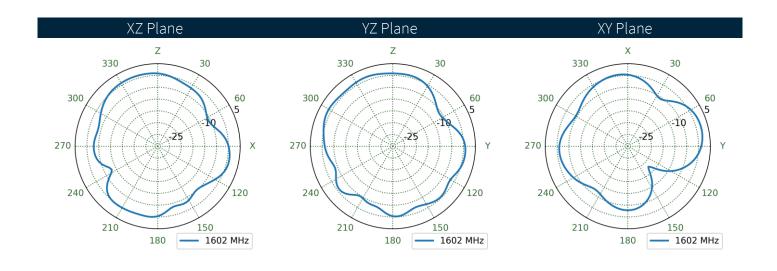



7 On 70x70mm Ground Plane Patterns at 1602 MHz

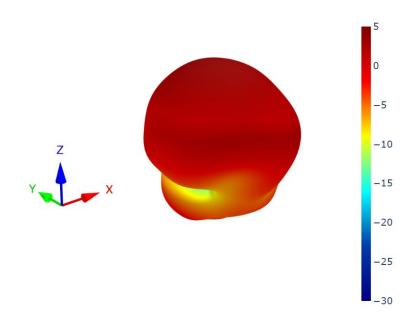

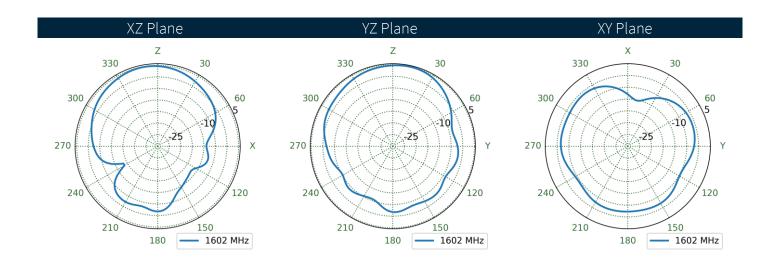



Changelog for the datasheet

SPE-24-8-223 - CGGBP254.07.0100A

Revision: A (Original First Release)			
Date:	2024-09-11		
Notes:	Initial Release		
Author:	Gary West		

Previous Revisions	





www.taoglas.com

