

# Datasheet



**Part No:**  
**CGSP457.A**

**Description**

GNSS and SatCom Patch Antenna 45 x 45 x 7mm

**Features:**

GNSS and SatCom Patch Antenna  
Covering Iridium L1, NTN n255 (UpLink and DownLink)  
Dims: 45 x 45 x 7mm  
RoHS & Reach Compliant

1. Introduction	3
2. Specification	4
3. Mechanical Drawing	6
4. Packaging	7
5. Soldering Recommendations	9
6. Antenna Characteristics	10
7. Radiation Patterns	14

---

Changelog	20
-----------	----

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

## 1. Introduction



The Taoglas **CGSP457.A** is a high-performance ceramic patch antenna designed to deliver robust and accurate positioning across a wide range of GNSS constellations while also supporting SatCom operation. Engineered with a  $45 \times 45 \times 7$  mm form factor, it provides an optimal balance of compact size, mechanical durability, and excellent RF performance, making it suitable for advanced navigation, timing, and communication systems.

This antenna is capable of receiving signals from GPS, GLONASS, Galileo, BeiDou, QZSS, IRNSS, and SBAS, ensuring truly global coverage. It also supports Iridium, L-band and NTN n255 (uplink and downlink), allowing it to perform reliably in satellite communication and emerging non-terrestrial network applications. With high efficiency, consistent gain across supported bands, and RHCP polarization, the CGSP457.A delivers strong signal acquisition and stable operation even in challenging environments.


### Typical Applications Include:

- GNSS Positioning & Navigation
- Asset Tracking & Fleet Management
- Aerospace, UAV, and Robotics
- Satellite Communication & NTN (n255)
- Public Safety & Mission-Critical Systems
- Transportation & Telematics
- Industrial & Infrastructure Applications
- Research & Field Instrumentation

Manufactured using high-quality ceramic materials and tested on a  $70 \times 70$  mm ground plane, the antenna offers dependable performance for integration into professional GNSS receivers, asset tracking systems, SatCom terminals, and other precision-driven applications.

## 2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	□	□		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	■	□	□		
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	□	□	□	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	■	□	□	□
L-Band	L-Band 1542 MHz				
	■				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	■	□	□	□	
IRNSS (Regional)	L5 1176.45 MHz				
	□				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	□	■	□	□

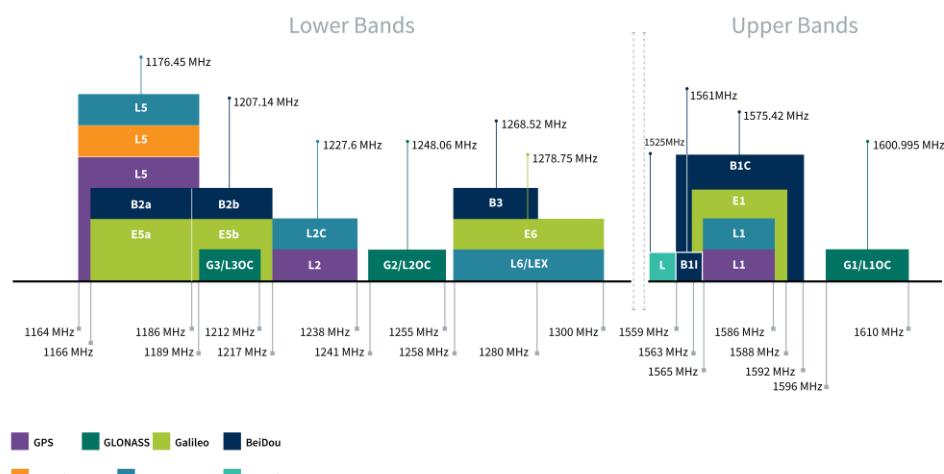

## GNSS Bands and Constellations


Electrical						
Band	Frequency (MHz)	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization
L-Band [1542 MHz]	1525-1559	90.5	-0.44	5.93	50 Ω	RHCP
L1 [1575.42 MHz]	1565-1586	96.0	-0.18	5.92		
B1I [1561 MHz]	1559-1565	94.5	-0.25	5.97		
G1/L1OC [1602 MHz]	1596-1610	97.3	-0.12	5.93		
Iridium	1616-1626	96.2	-0.17	5.93		

Tested on a 70x70mm Ground Plane


Mechanical	
Dimensions	45 x 45 x 7mm
Weight	32g
Material	Ceramic
Mounting type	Pin type with PCB

Environmental	
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
Relative Humidity	Non-condensing 65°C 95% RH


### 3. Mechanical Drawing

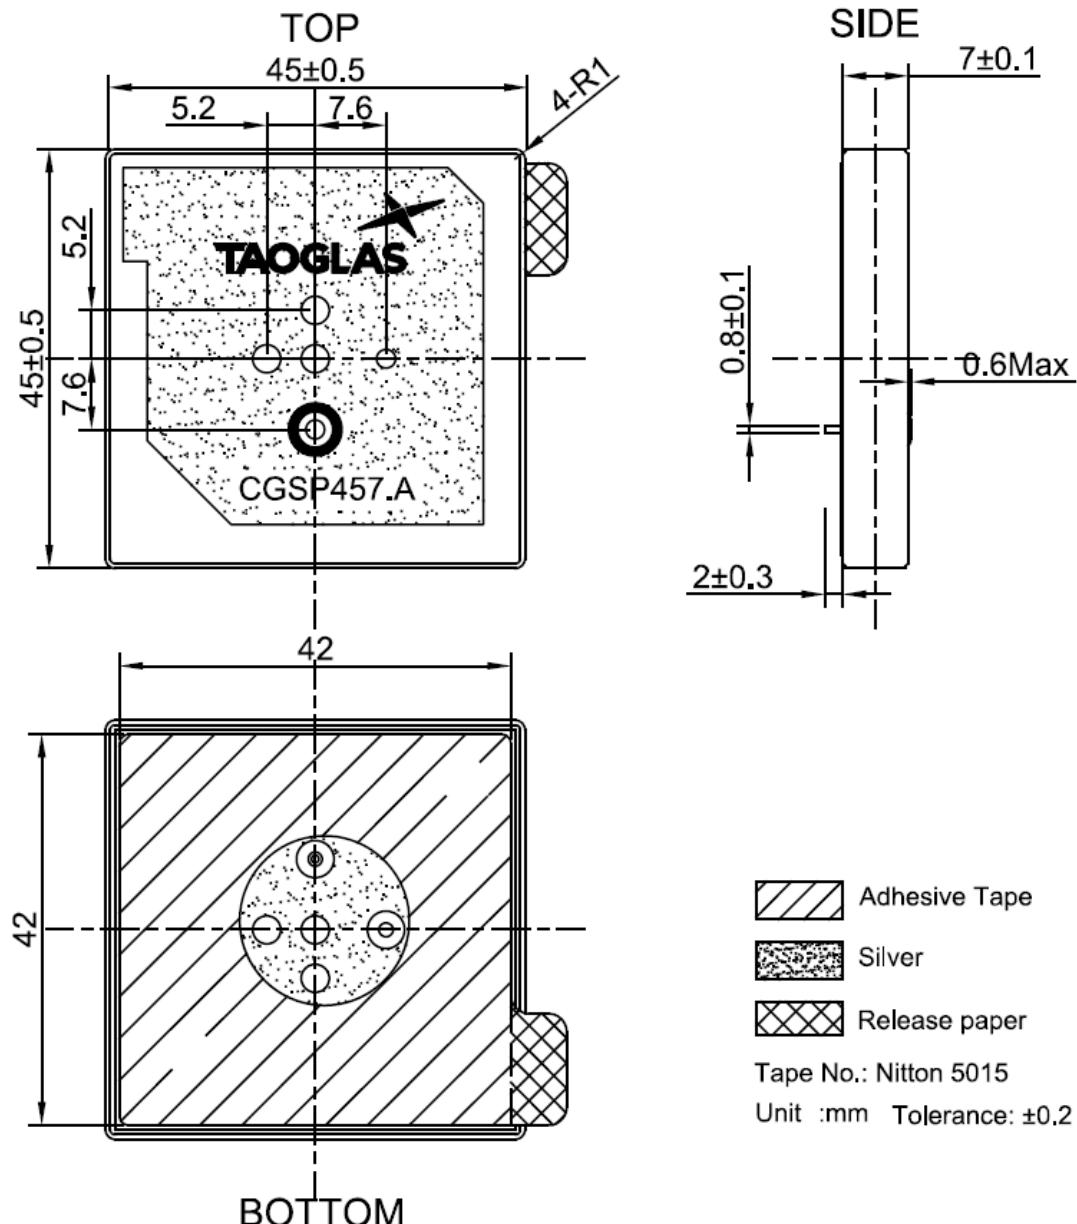

## 4. Packaging

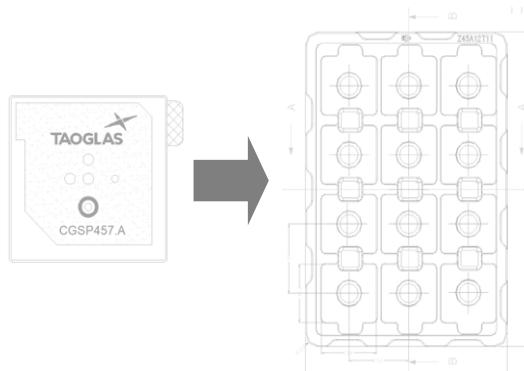

- 12 PCS / Tray
- Tray (mm): 250x170x19.8

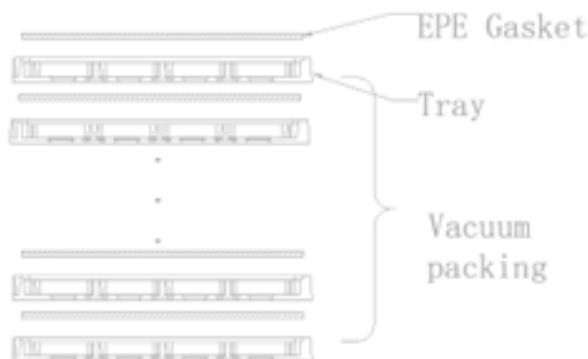

- 96 PCS / Vacuum package



- 96 PCS / Box
- Box (mm): 280x187x70
- Weight (Kg): 3.7 ±3%
- SPQ Label



- 192 PCS / Carton
- Carton(mm): 405x293x185
- Weight (Kg): 8.2 ±3%
- Carton Label

## 5. Soldering Recommendations

### 5.1 Manual Soldering Machine

Soldering Temperature: 360-380°C


Soldering Duration: 3~4 seconds



### 5.2 Automated Ferrochrome Soldering Machine

Soldering Temperature: 360-380°C


Soldering Duration: 3~4 seconds

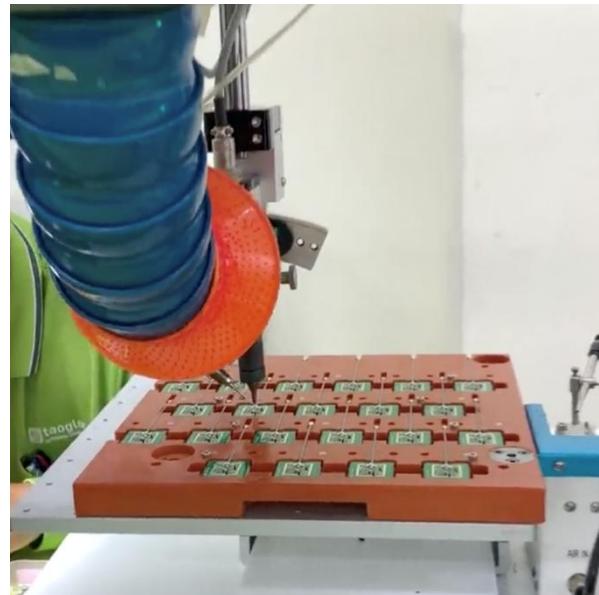

Please note that this process will require a one-time fixture to be made for each PCB design.


## 6. Antenna Characteristics

### 6.1 Test Setup

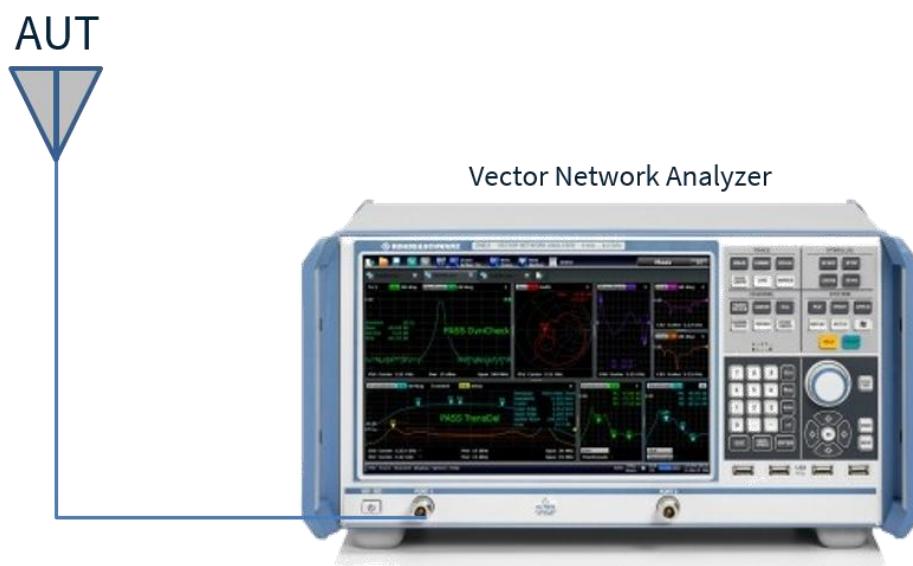


VNA Test Setup


## 6.2 Return Loss

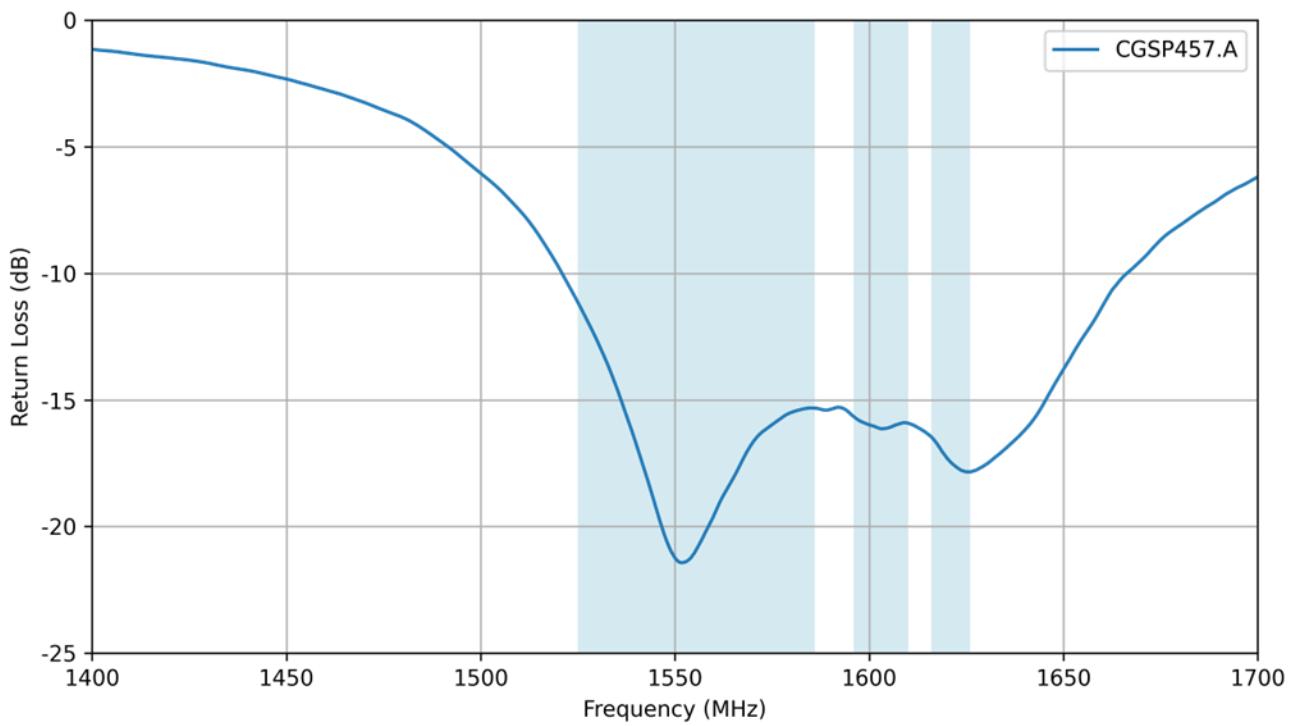


## 6.3 VSWR

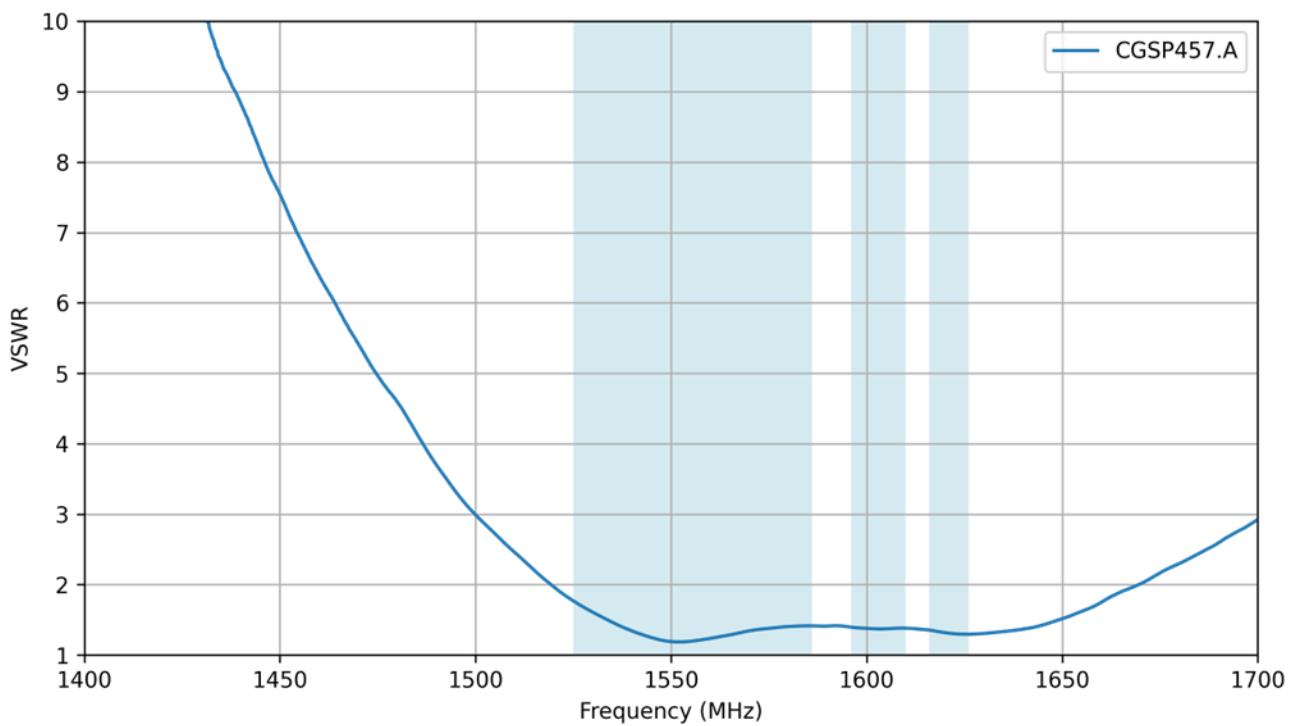


## 6.4 Efficiency

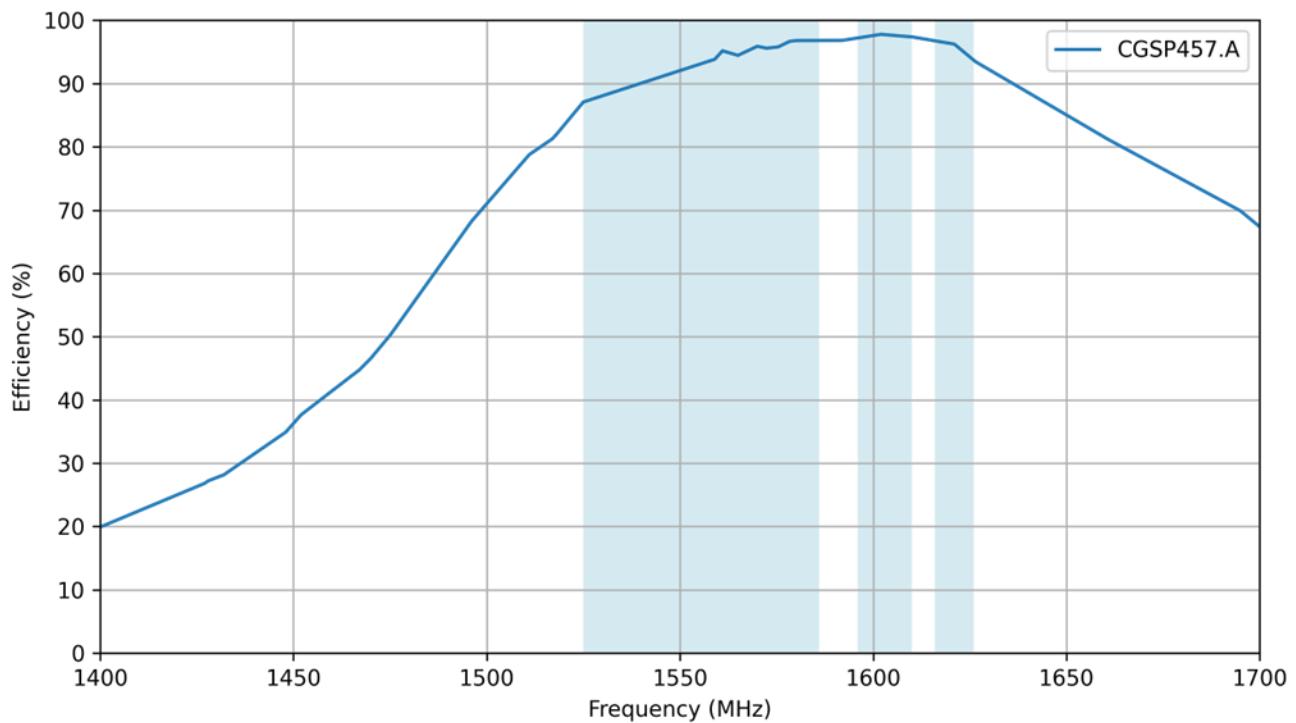


## 6.5 Average Gain

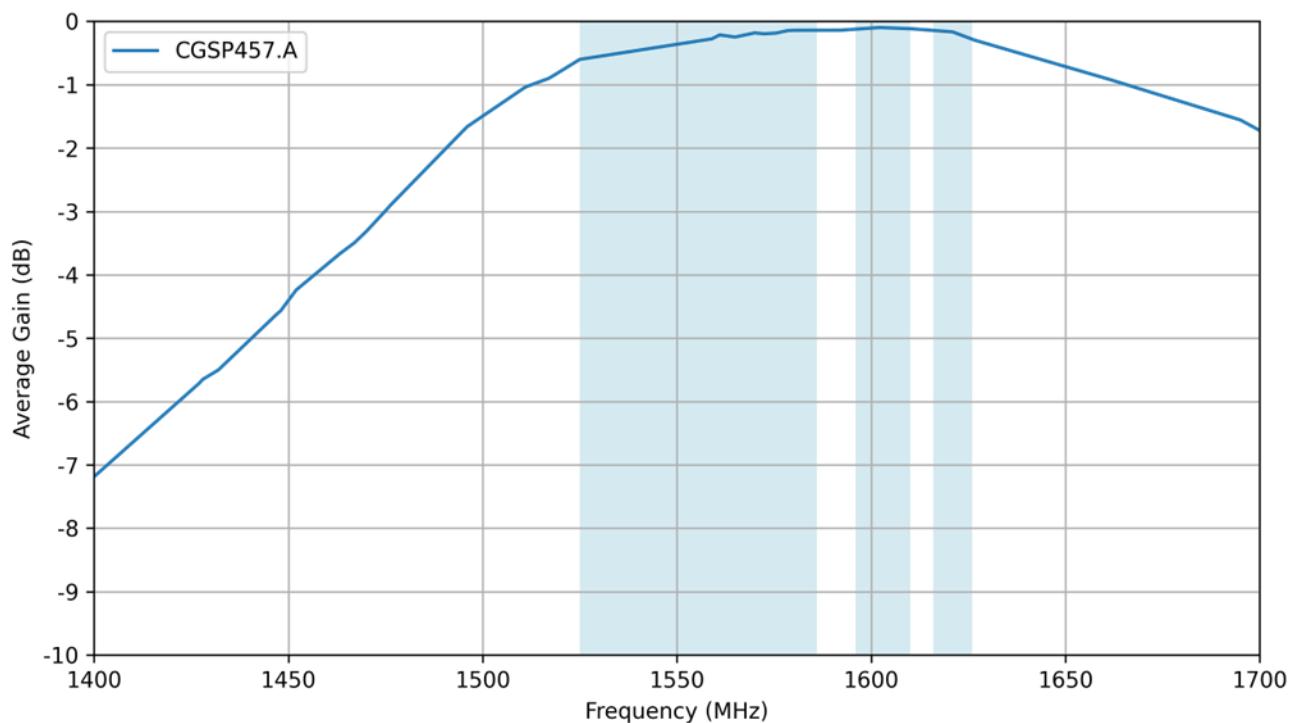

## 6.6 Peak Gain


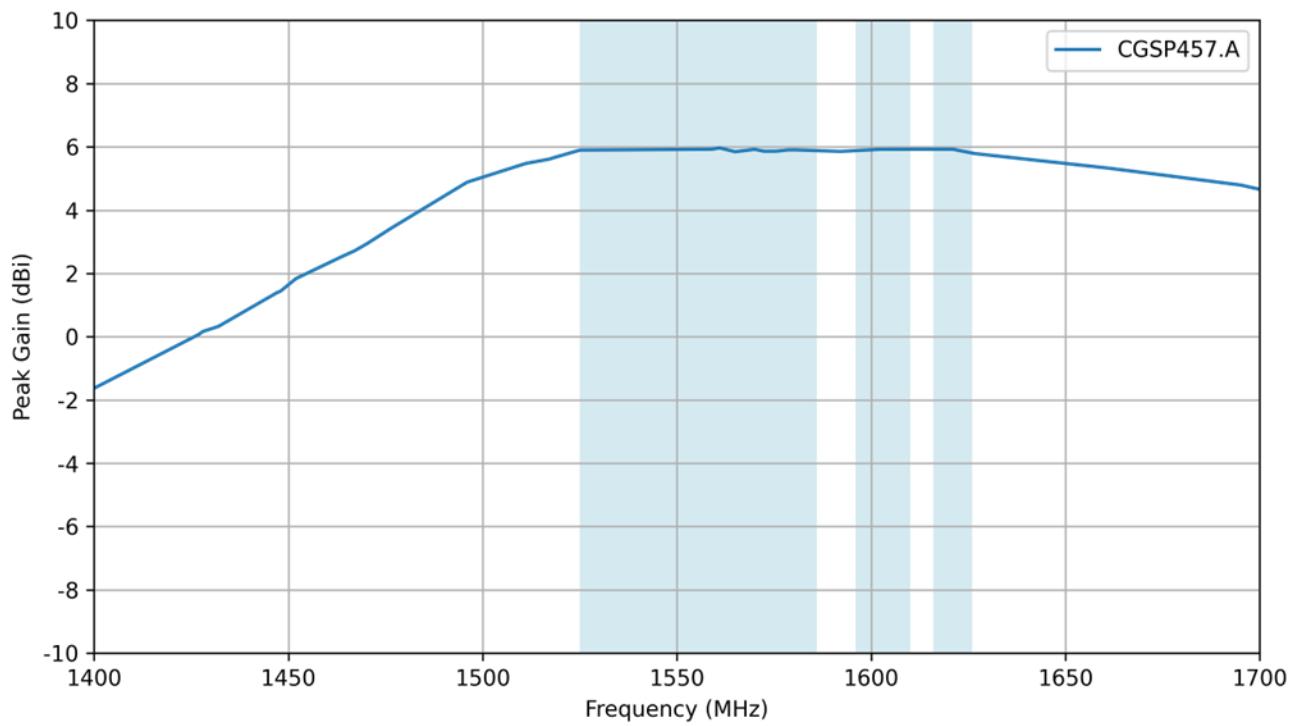


## 6.7 Axial Ratio

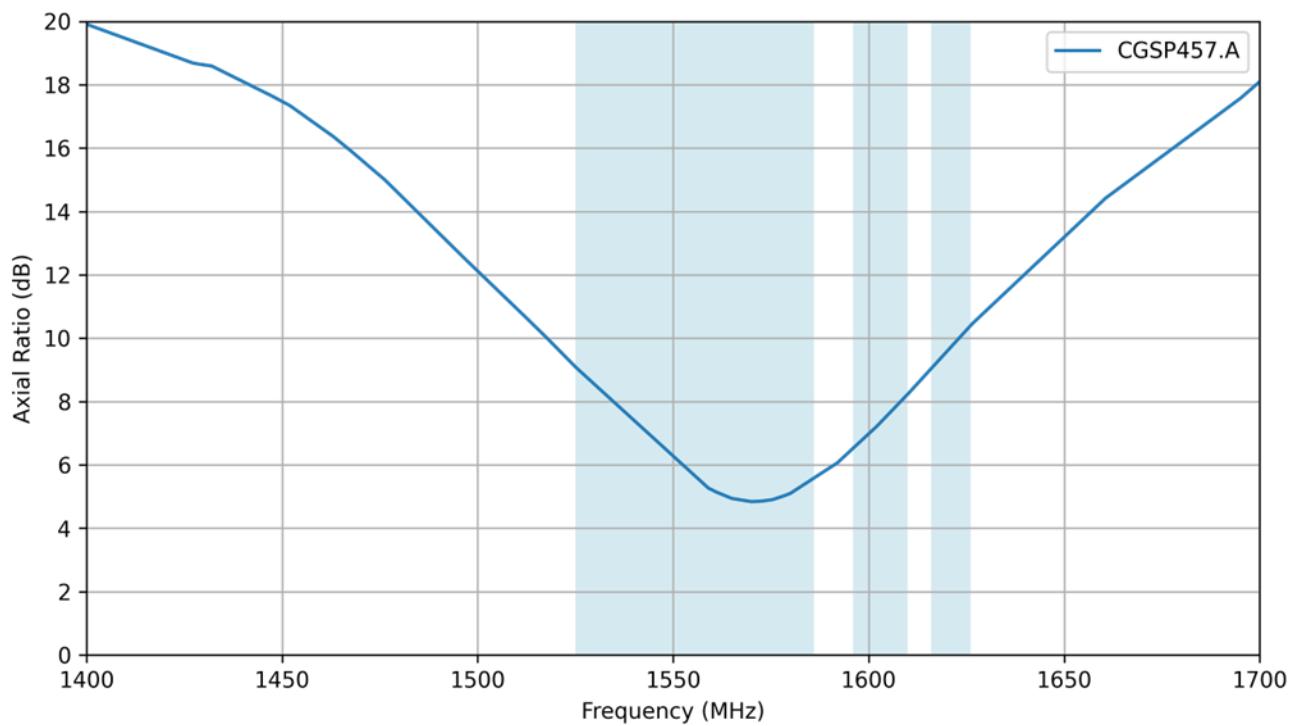



## 7. Radiation Patterns

### 7.1 Test Setup

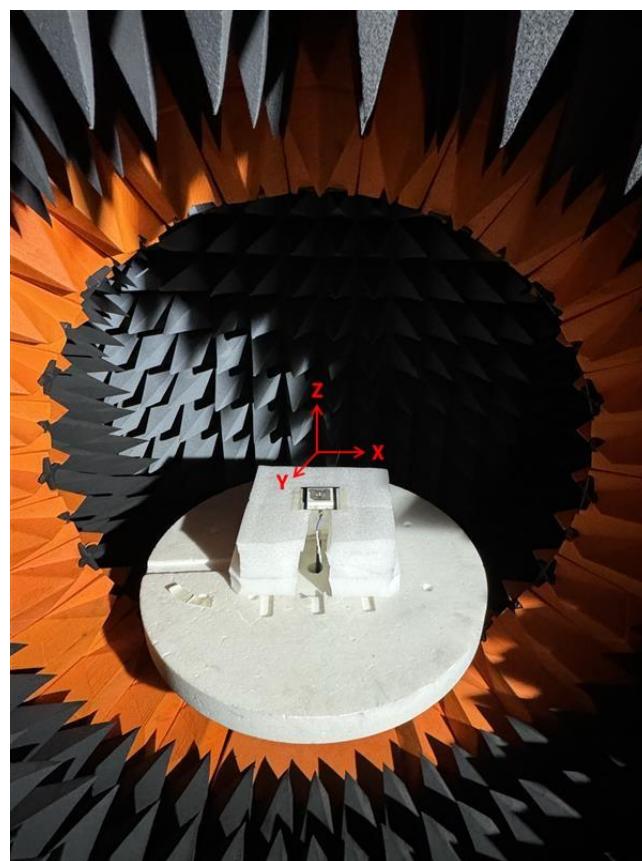
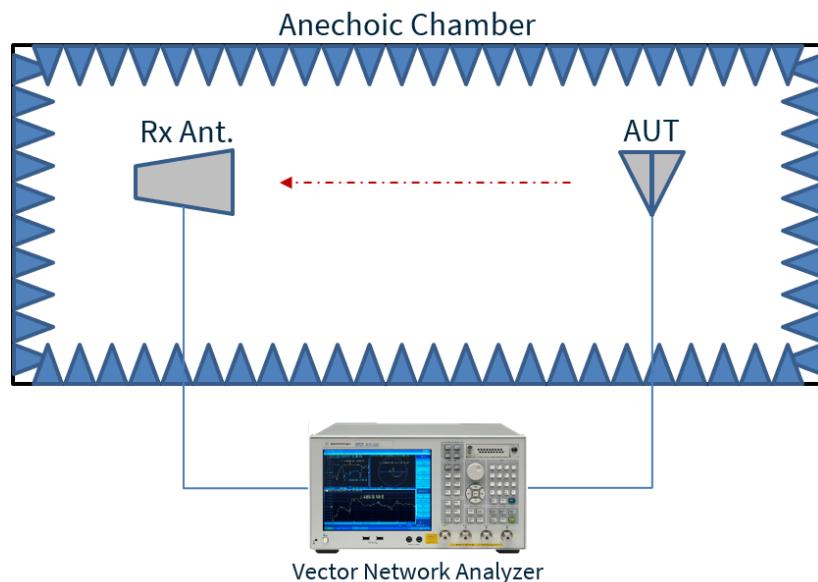


Chamber Test Setup



## 7.2 Patterns at 1575 MHz

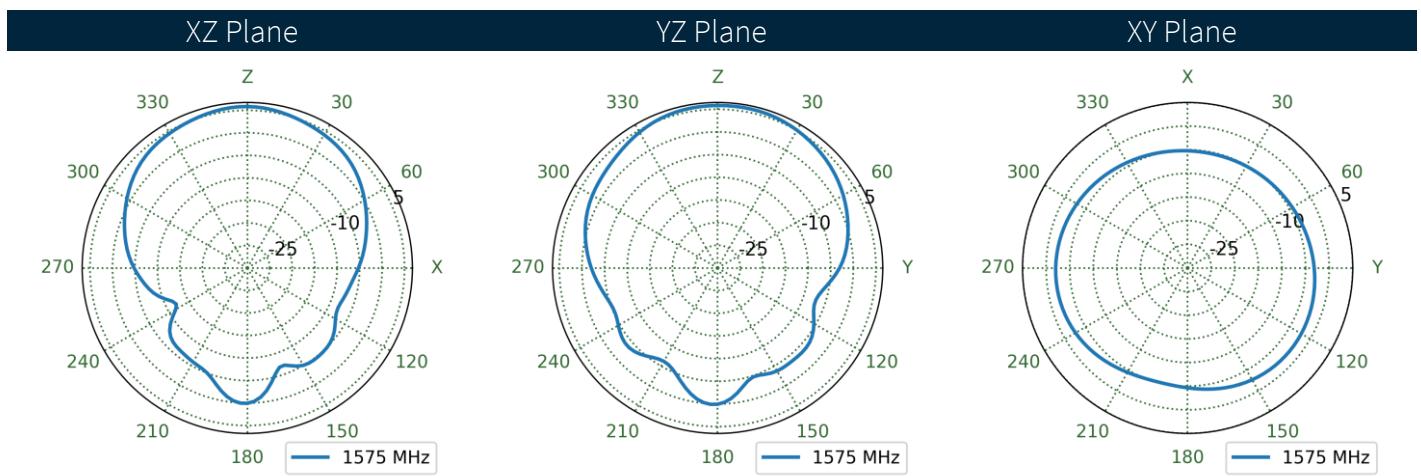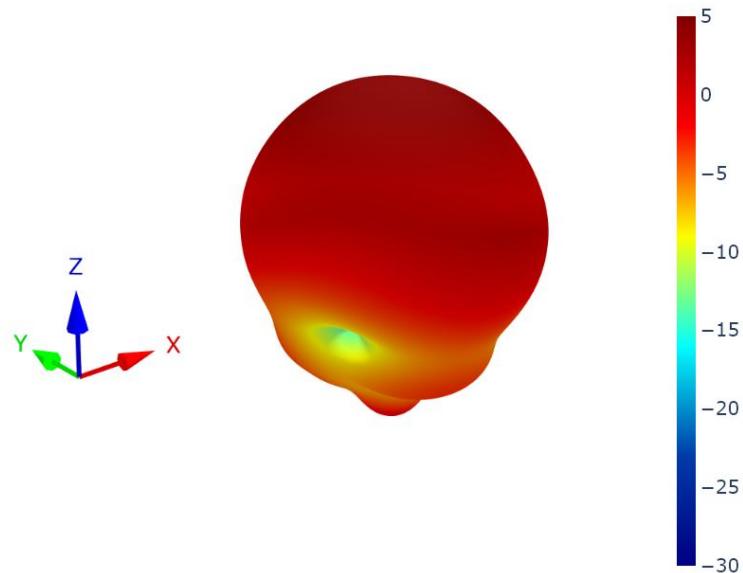



### 7.3 Patterns at 1561 MHz

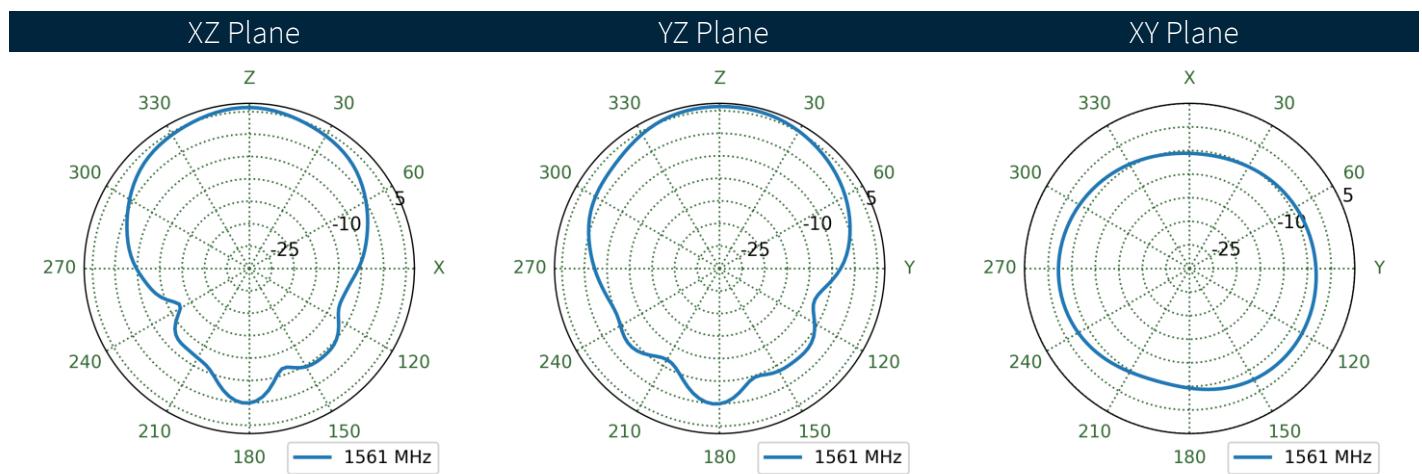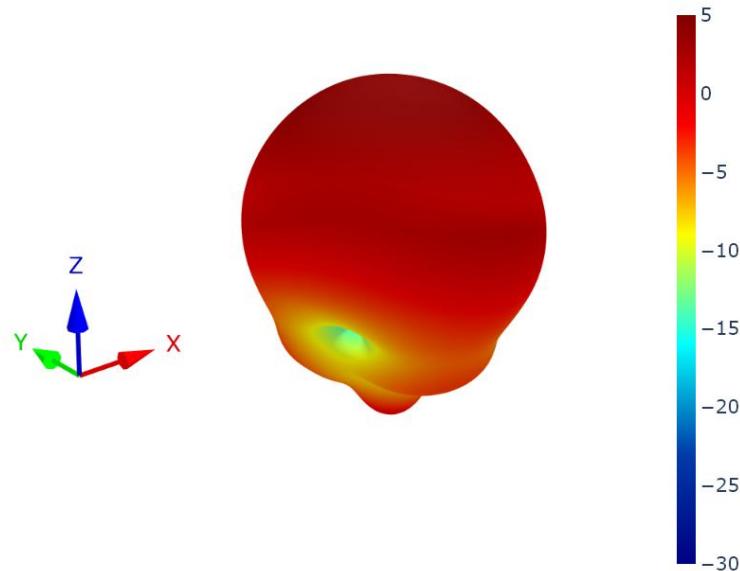



## 7.4 Patterns at 1602 MHz

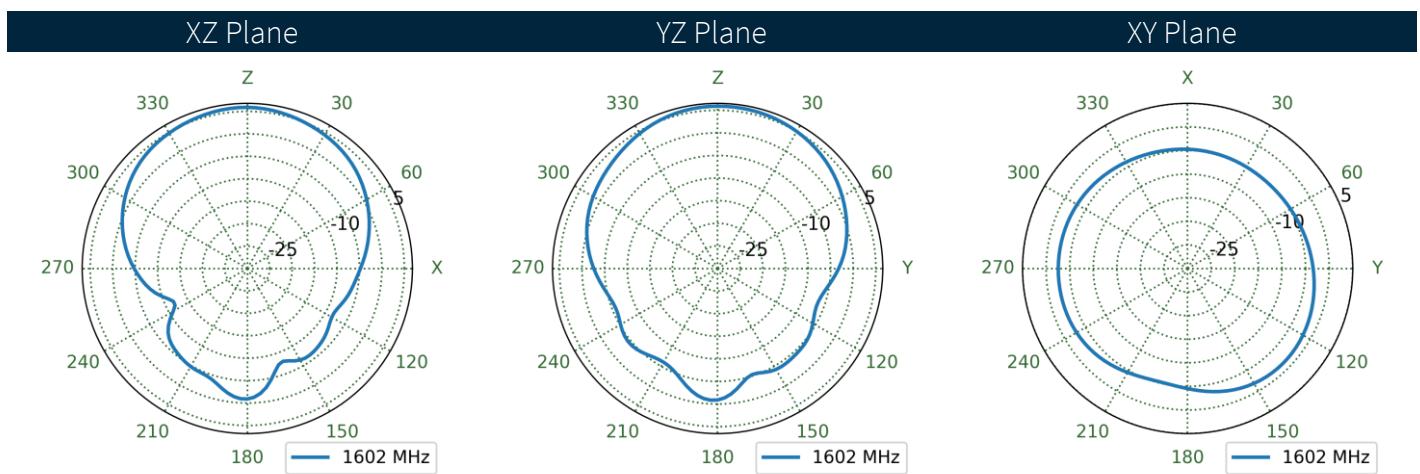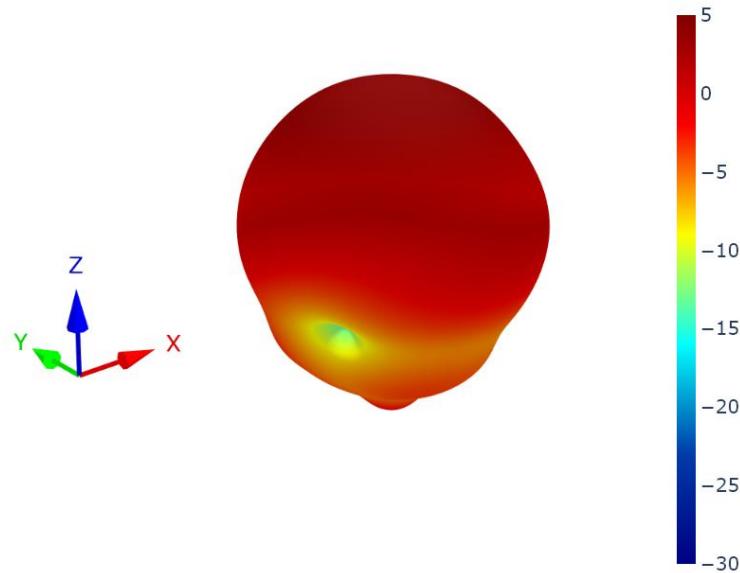

## 7.5 Patterns at 1525 MHz

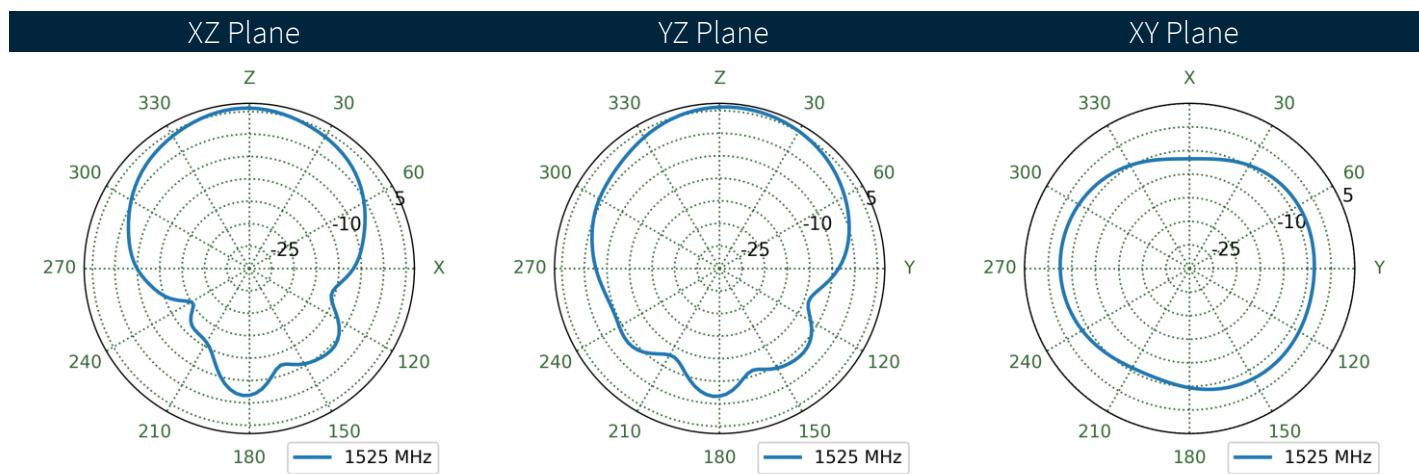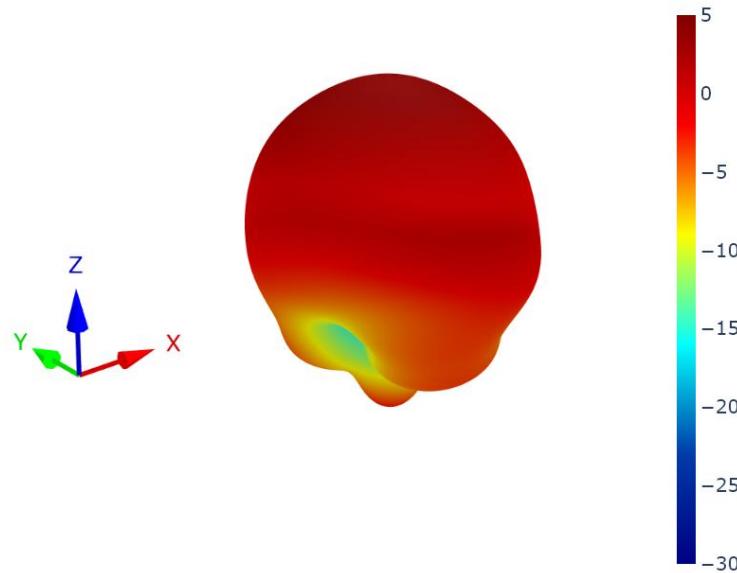

## 7.6 Patterns at 1626 MHz

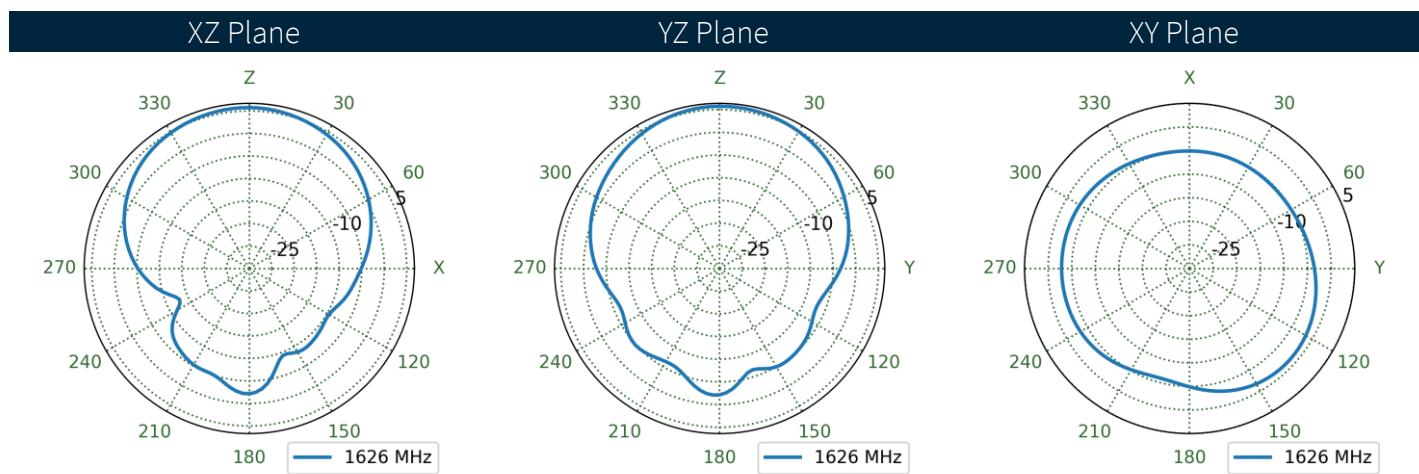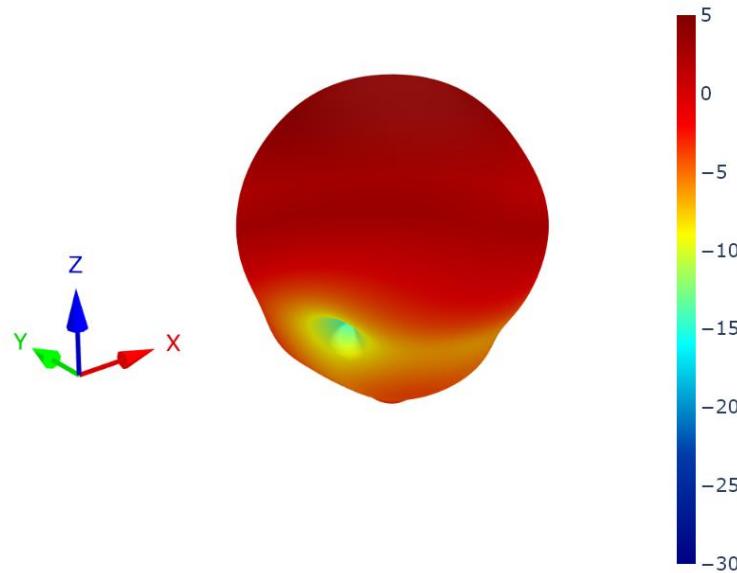

## Changelog for the datasheet

**SPE-25-8-319– CGSP457.A****Revision: A (Original First Release)**

Date:	2025-11-21
Notes:	Initial Release
Author:	Gary West

**Previous Revisions**




**TAOGLAS**<sup>®</sup>

[www.taoglas.com](http://www.taoglas.com)

