



# Datasheet



## *Part No:*

*Black - FW.79.M6.F*

*White - FW.79.M6.F.W*

## *Description*

700-900MHz Flexible Whip Antenna with M6 Female Connector

## *Features:*

Flexible Whip Antenna

Covering: 700-900MHz

IP67 Waterproof Rated Enclosure

Dims: Ø14 x 65.8mm

Connector: M6 Female

RoHS & Reach Compliant

1. Introduction	3
2. Specification	4
3. Mechanical Drawing	5
4. Packaging	6
5. Antenna Characteristics	7
6. Radiation Patterns	11

---

Changelog	13
-----------	----

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

## 1. Introduction



The FW.79 is a compact, flexible whip antenna designed for reliable performance within the 700–900MHz frequency band. Engineered with an M6 female connector, this antenna is ideal for mission-critical applications requiring durable and secure RF connectivity in demanding environments.

Its robust POM housing and wide operating temperature range ensure consistent performance across various industrial and commercial use cases. With optimized return loss and VSWR characteristics, the FW.79 offers an efficient solution for devices requiring compact form factor antennas without compromising RF performance.

### Typical Applications:

- Private Mobile Radio (PMR) systems
- Land Mobile Radio (LMR) equipment
- Emergency services communications (police, fire, ambulance)
- Military and defense communication gear
- Transportation and logistics communication systems

The FW.79 connector can be customized subject to NRE, for further information please contact your regional Taoglas customer support team


## 2. Specification

Electrical								
Band	Frequency (MHz)	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
High-UHF	700-900	40.6	-3.91	1.72	50 Ω	Linear	Omni directional	10W

Mechanical	
Dimensions	Ø14 x 65.8mm
Weight	10.57 g
Material	POM
Connector	M6 Female


Environmental	
Waterproof Rating	IP67
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
Relative Humidity	Non-condensing 65°C 95% RH

### 3. Mechanical Drawing

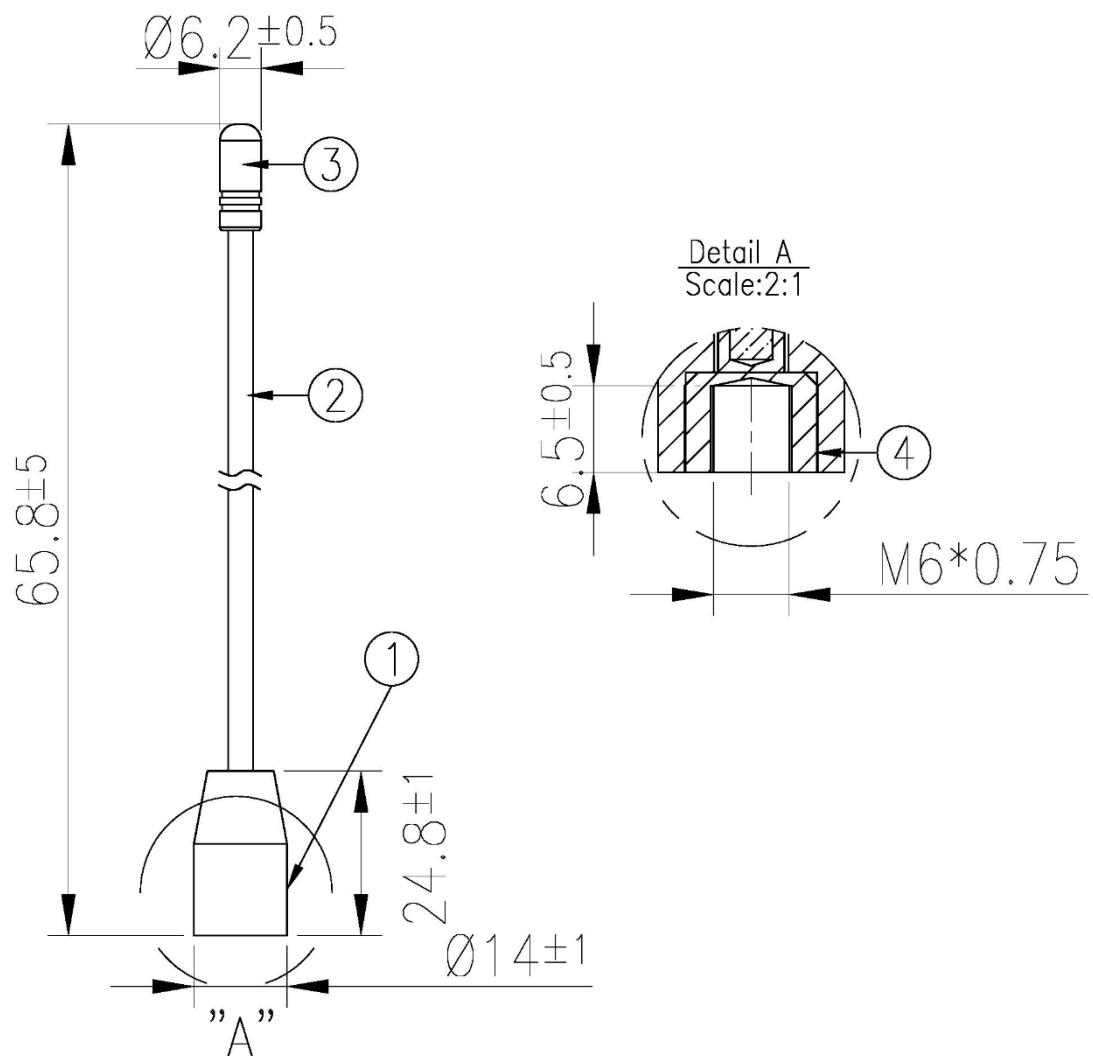

	Name	Material	Finish	QTY
1	Housing	POM	White	1
2	Wrip	Steel+PE Jacket	White	1
3	Cap	POM	White	1
4	M6 Connector	Bronze	Ni Plated	1

## 4. Packaging

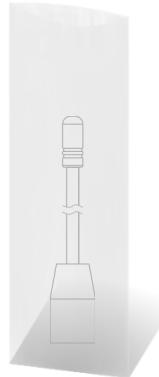

- 1 PCS / Small PE bag
- Weight (g): 15.57 ±3%




- 100 PCS / PE bag
- Weight (g): 155.7 ±3%
- SPQ Label




- 600 PCS / Carton
- Carton(mm): 360x310x160
- Weight (Kg): 9.7 ±3%
- Carton Label

## 5. Antenna Characteristics


### 5.1 Test Setup

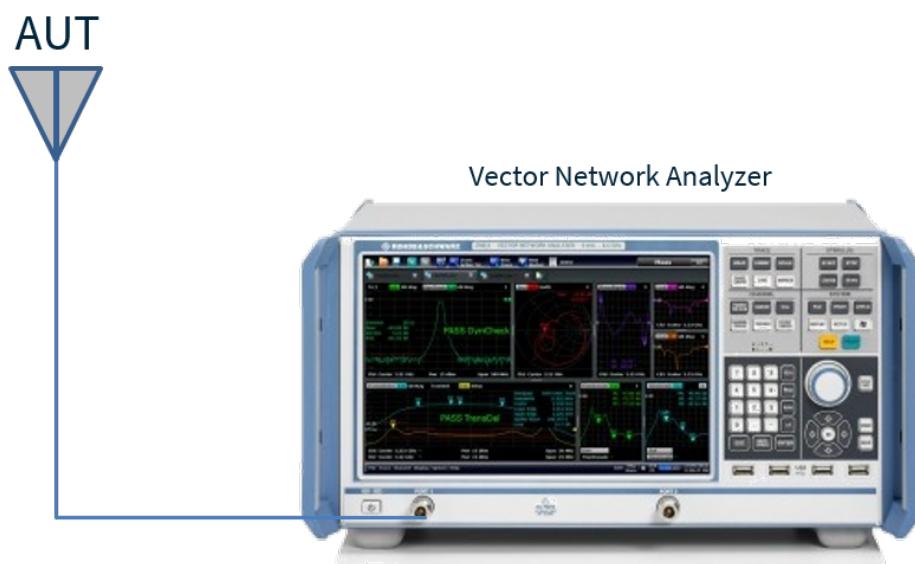


## 5.2 Return Loss

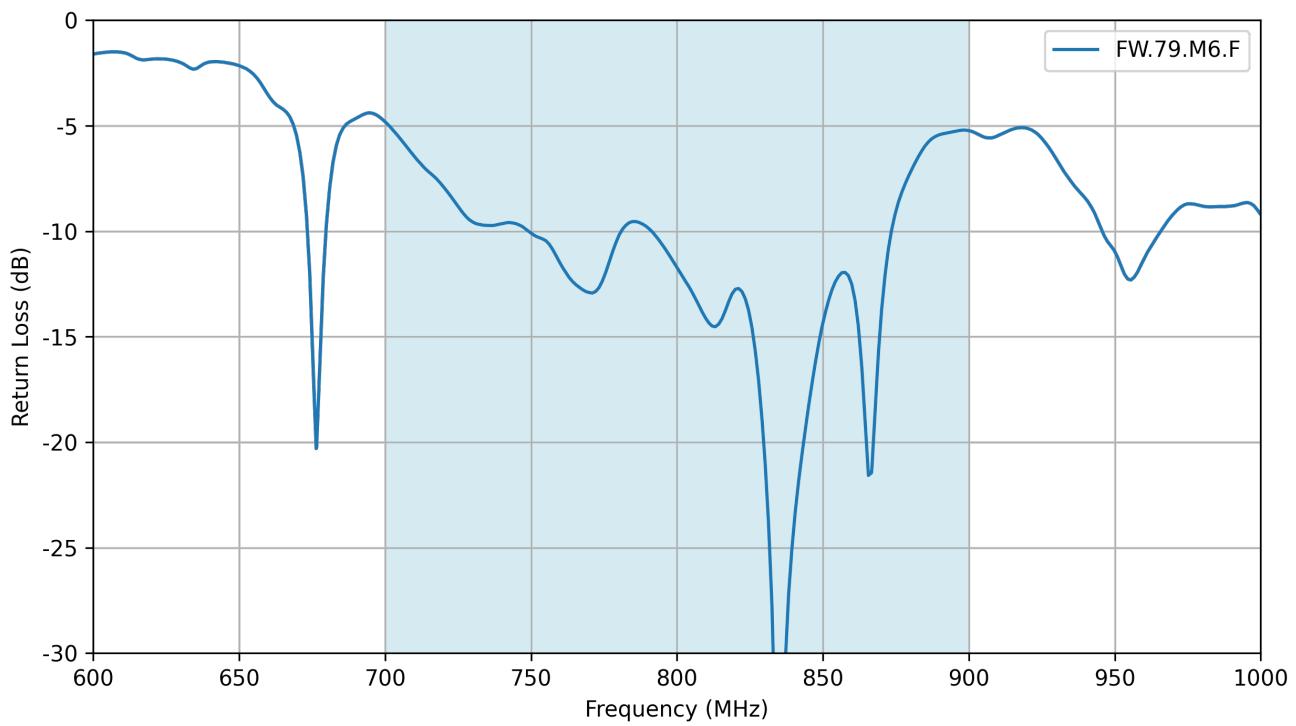


## 5.3 VSWR

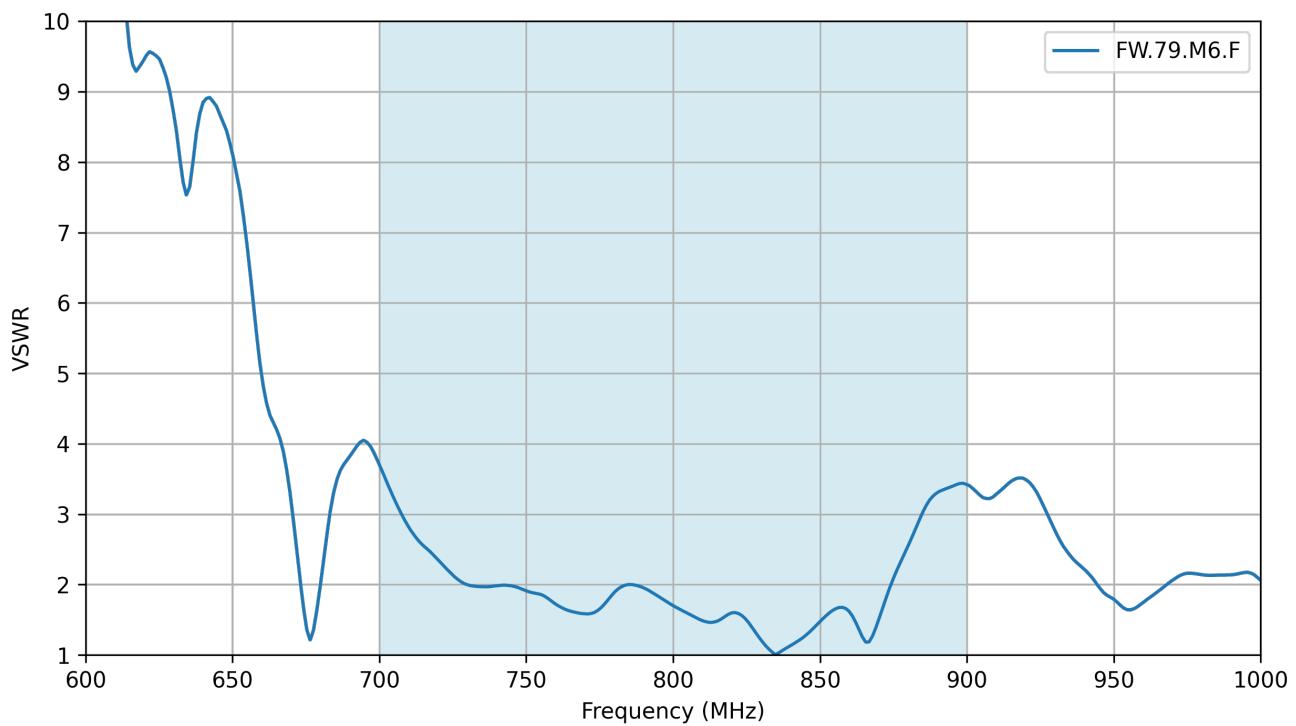


## 5.4 Efficiency

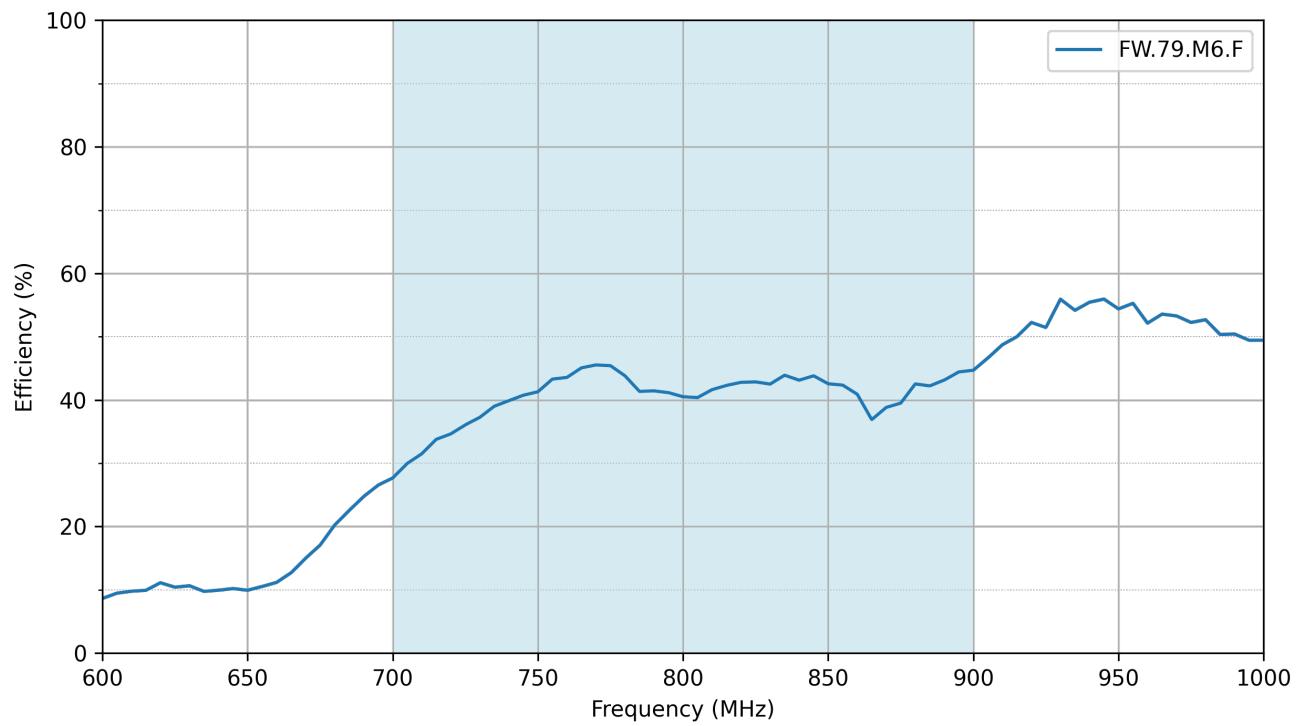

## 5.5 Average Gain

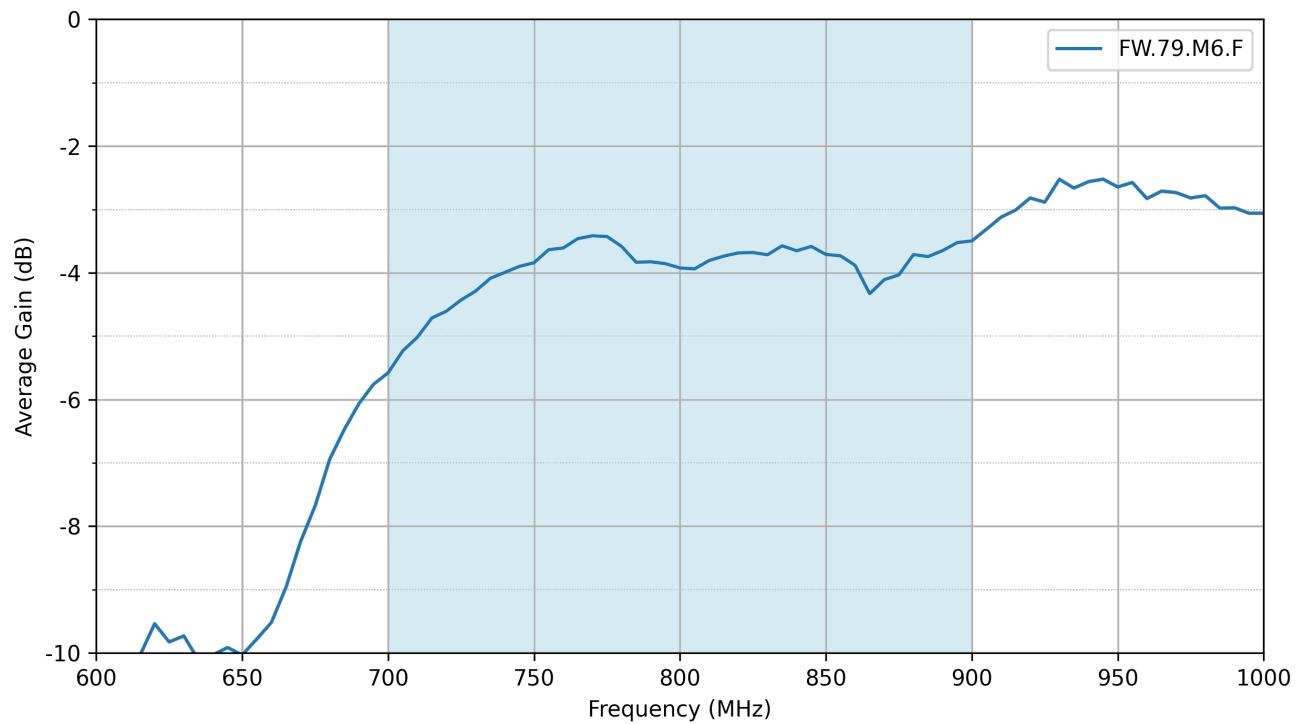


## 5.6 Peak Gain

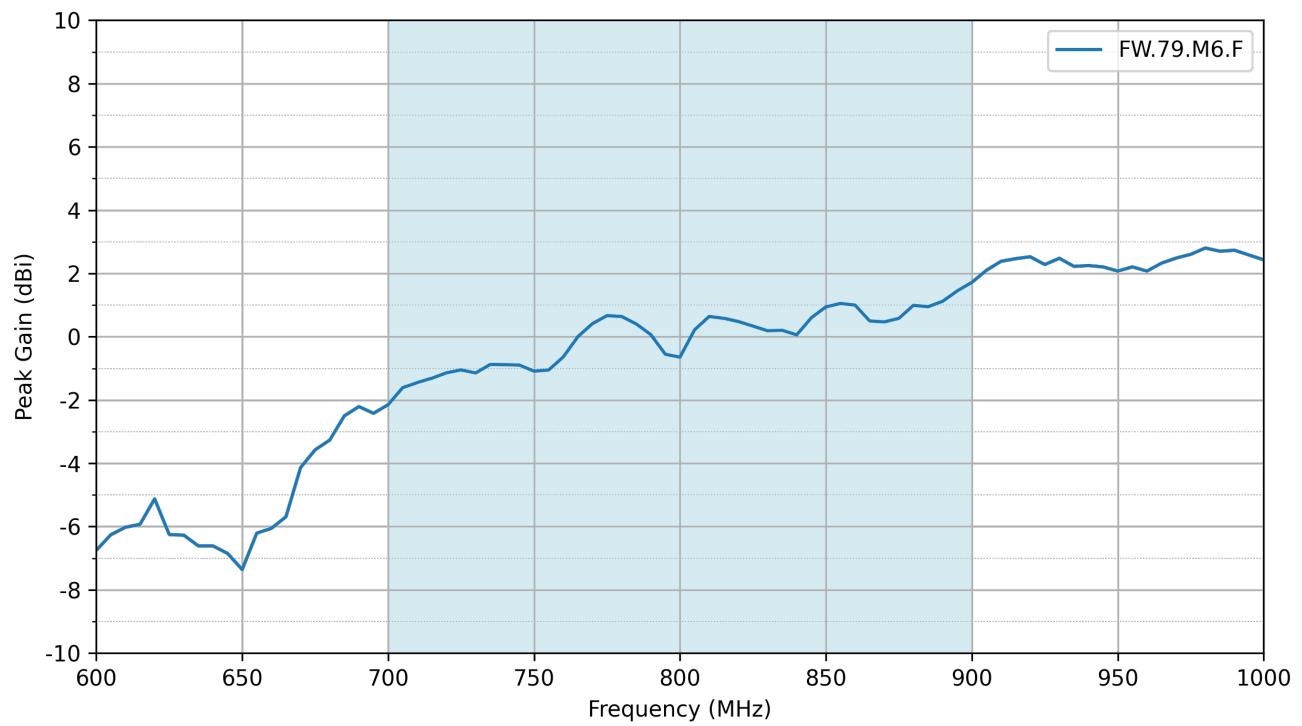



## 6. Radiation Patterns

### 6.1 Test Setup

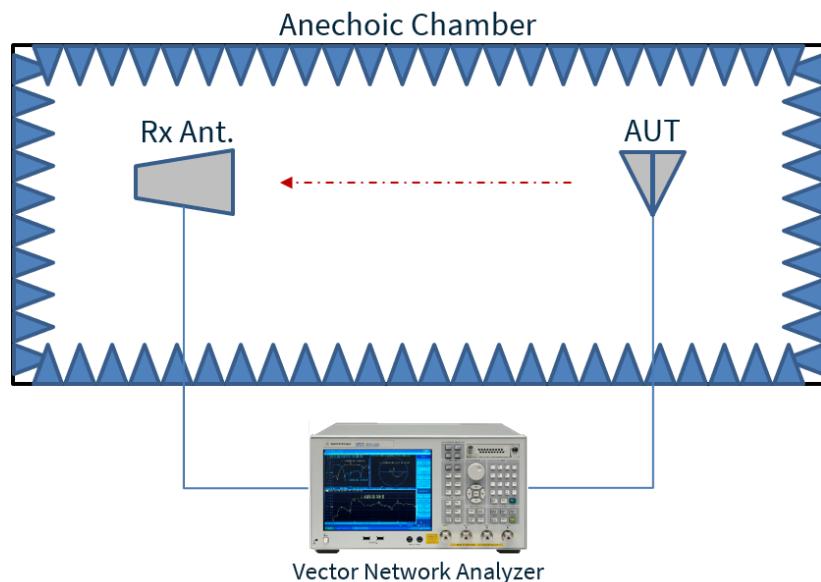

Chamber Test Set-up

## 6.2 Patterns at 800 MHz

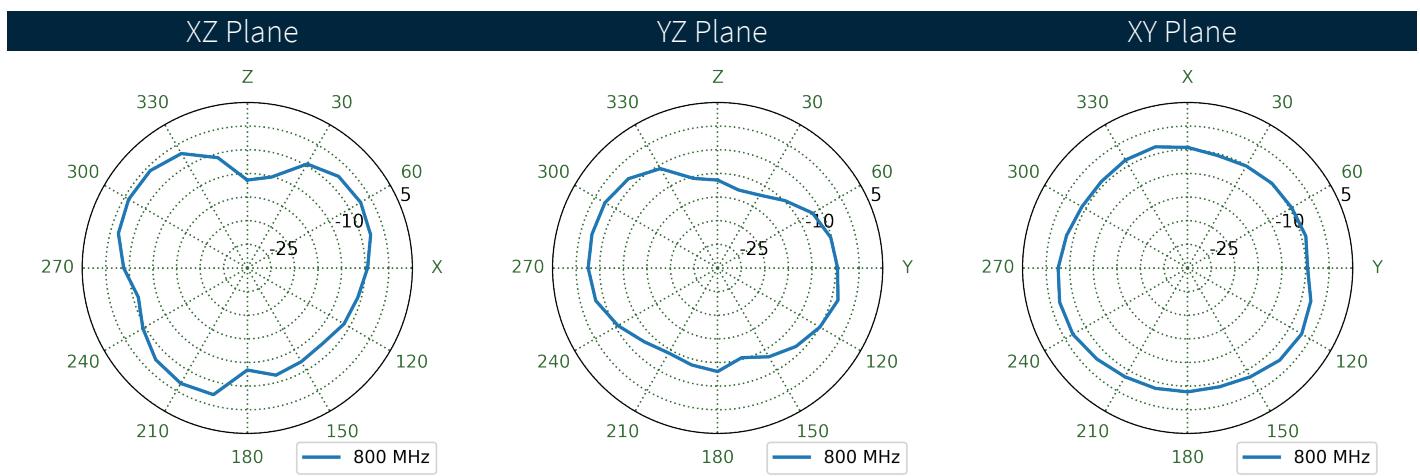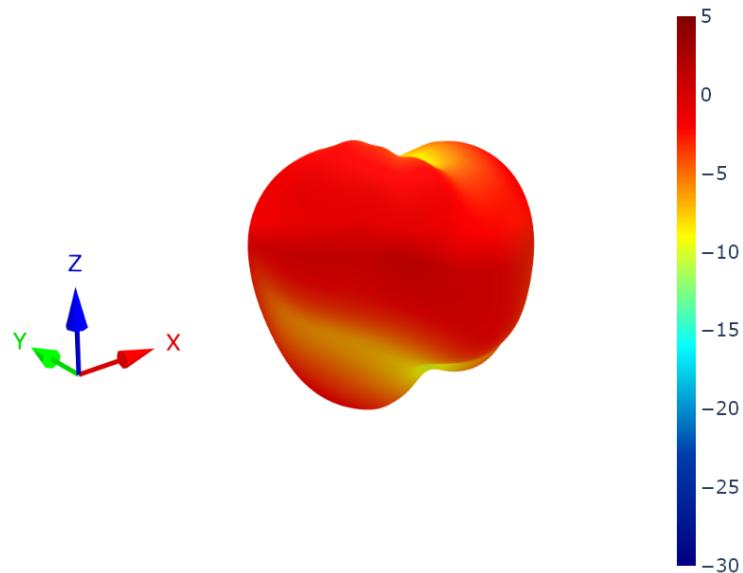

**Changelog for the datasheet****SPE-25-8-323- FW.79.M6.F\_ FW.79.M6.F.W****Revision: A (Original First Release)**

Date:	2025-11-27
Notes:	Initial Release
Author:	Gary West

**Previous Revisions**




**TAOGLAS.**<sup>®</sup>

[www.taoglas.com](http://www.taoglas.com)

