



### Meteor

Part No: FW.86.B.NTY.M

#### **Description:**

Meteor-868MHz Flexible Whip Monopole Antenna

#### **Features:**

External 868MHz Monopole Antenna

Rugged Design for Outdoor Use

Robust Inner Steel Core

Antenna Height 243mm

N Type(M) Straight Connector

IP65 dust and water-resistant

\*Tested on 30\*30cm Ground Plane

RoHS Compliant



1.	Introduction	3
2.	Specifications	4
3.	Antenna Characteristics	5
4.	Radiation Patterns	7
5.	Mechanical Drawing	9
6.	Packaging	10
	Changelog	11

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Ireland & USA ISO 9001:2015 Certified



Taiwan ISO 9001:2015 Certified













The FW.86 is a flexible 868MHz whip antenna with an N type(M) connector for outdoor use. It features excellent efficiency and high peak gain at 868MHz on a 30\*30cm ground plane.

The antenna was specifically developed for applications such as weather monitoring systems, motion/vibration sensors, pollution monitoring, and border guard monitoring systems.

The FW.86 works at 868MHz with high efficiency, meaning that it allows your radio to consume less power than with a lower efficiency antenna when transferring data.

The whip is made of a flexible inner steel core covered by PE so it is extremely resistant to abrasion and maintains its original shape and RF performance. This rugged design and IP65 rating has been tested by our customers to withstand environmental stress and moderate physical shock in the field.

The FW.86.B.NTY.M 868MHz whip antenna, with an N type male connector, provides a simple solution to any outdoor devices where the FW.86 antenna's rugged design and high efficiency can provide the best value to the application.




# 2. Specifications

	FW.86.B.N	TY.M	
Center Frequency	850MHz	868MHz	890MHz
Efficiency	67.52%	70.60%	67.54%
Peak Gain	1.82dBi	2.82dBi	3.58dBi
Average Gain	-1.71dB	-1.51dB	-1.70dB
Impedance		50Ω	
Polarization		Linear	
Radiation Pattern		Omnidirectional	
Input Power		2 W	
Tested Power		10 W	
	Mechani	cal	
Dimensions		243 ± 5.3mm	
Base Diameter		20 ± 0.6mm	
Whip Diameter		6.2 ± 0.6mm	
Casing		ABS	
Connector		N Type(M) Straight	
Weight		48.5g	
Dust and Water Resistance		IP65	
	Environmo	ental	
Temperature Range		-40°C to 80°C	
Humidity		Non-condensing 65°C 95% RH	




## 3. Antenna Characteristics

## 3.1 Return Loss

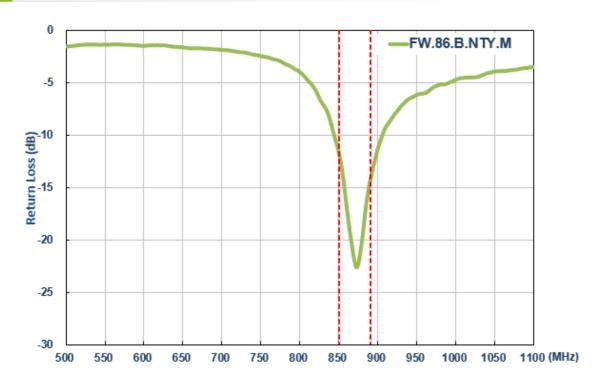


## 3.2 Efficiency

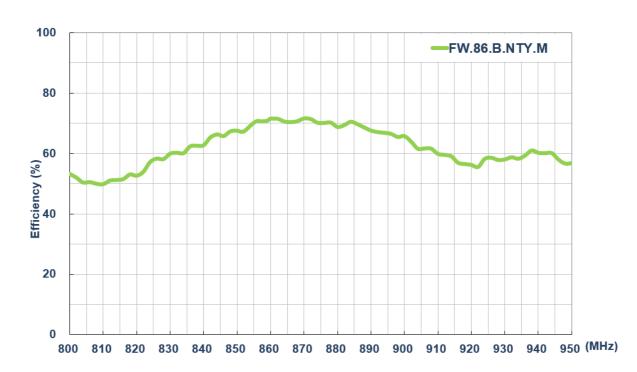



## 3.3 Peak Gain

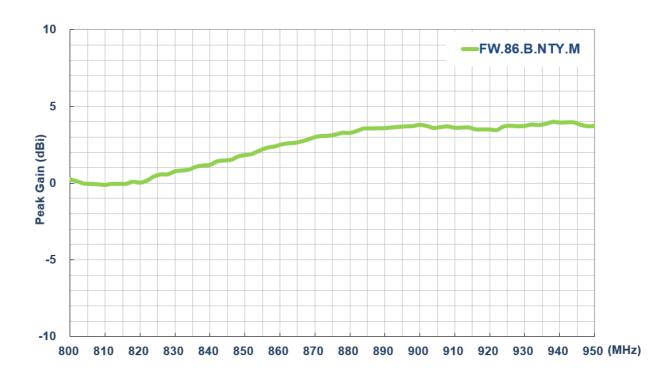


## 3.4 Average Gain





# 4. Radiation Patterns


## 4.1 Test Setup

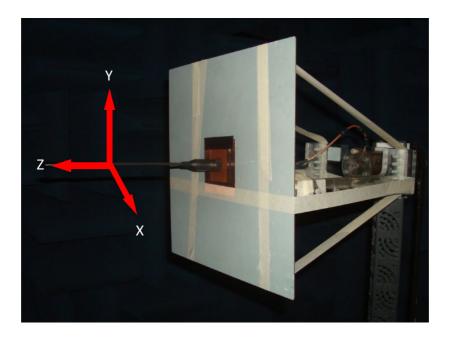

On 30x30 cm ground plane




## 4.2 3D and 2D Radiation Patterns (On 30cm\*30cm Ground Plane)

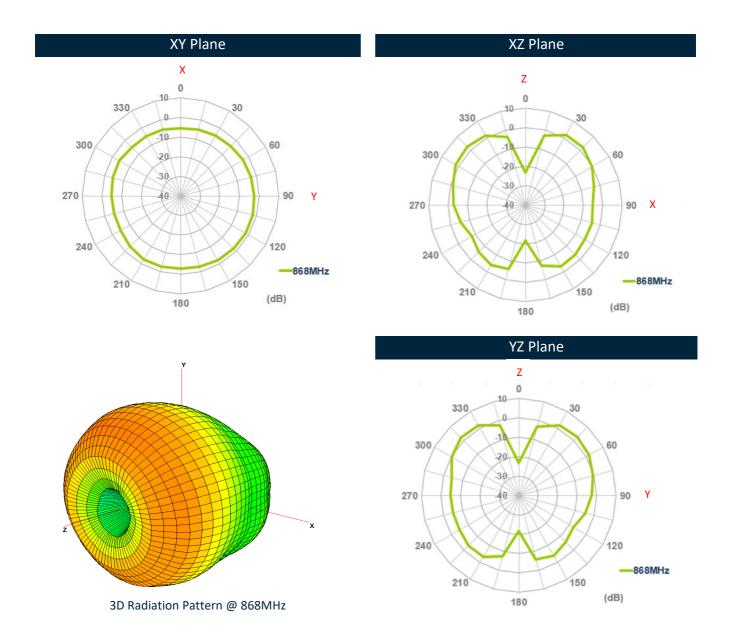



# 5. Mechanical Drawing (Units: mm)

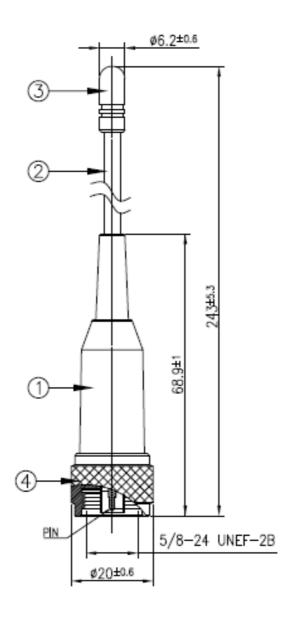

	Name	P/N	Material	Finish	QTY
1	Housing	000113A000002A	ABS	Black	1
2	Flexible Whip	001113A000002A	Steel+PE Jacket	Black	1
3	Cap	000713A000002A	POM	Black	1
4	N Type (M)ST	211014A000002A	Brass	Black	1




# 6. Packaging


1pcs FW.86.B.NTY.M per PE Bag Bag Dimensions - 50\*370mm Weight - 40g


50 PE Bags per Large PE Bag 50 pcs FW.86.B.NTY.M per Large PE Bag Large PE Bag Dimensions - 360\*520mm Weight - 2.5Kg


150 pcs FW.86.B.NTY.M per Carton Carton Dimensions - 360\*310\*160mm Weight - 7.5Kg

Pallet Dimensions: 120\*100\*148cm 72 Cartons Per Pallet 12 Cartons Per Layer 6 Layers





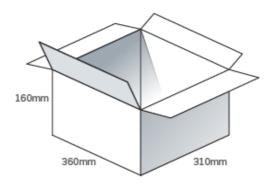

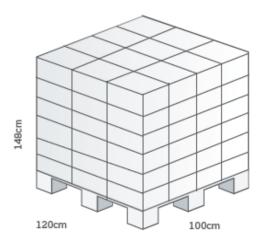



11

#### Changelog for the datasheet

#### SPE-16-8-080 - FW.86.B.NTY.M

Revision: C (Current	Version)
Date:	2025-03-24
Changes:	Updated max operation temperature to 80°
Changes Made by:	Conor McGrath

#### **Previous Revisions**

Revision: B	
Date:	2019-08-16
Changes:	Updated to new format
Changes Made by:	Dan Cantwell
Revision: A (Origina	l First Release)
Date:	2016-12-20
Notes:	
Author:	Andy Mahoney



www.taoglas.com

