

# **SPECIFICATION**

Part No.	:	GW.26.0112.HT
Product Name	:	2.4GHz Miniature Terminal Mount Monopole Antenna HIGH TEMPERATURE
Feature	:	SMA(M) Fixed Right Angle Connector, 50 Ohm Dupont <sup>®</sup> Hytrel <sup>®</sup> High Temperature Resistant TPEE Housing (up to 150°C) ROHS Compliant





#### **1** Introduction

The GW.26 HT series 2.4GHz Monopole SMA (M) RA terminal mount antenna is ideal for 2.4GHz wireless applications such as Wi-Fi<sup>®</sup>, Zigbee<sup>®</sup> and Bluetooth<sup>®</sup>.

Antenna housing is made of highly resistant Dupont<sup>®</sup> Hytrel<sup>®</sup> TPEE material which is durable in high temperature application environments up to 150°C and is fully IP65 waterproof rated. This material is often applied in automotive or industrial applications, where the antenna is placed near the engine or heat generating components.

Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.

For example, a module manufacturer may state that the antenna must have less than 2dBi peak gain, but you don't need to select an embedded antenna that has a peak gain of less than 2dBi in free-space. This will give you a less optimized solution. It is better to go for a slightly higher free-space peak gain of 3dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2dBi peak gain due to the effects of GND plane, surrounding components, and device housing. If you want to be absolutely sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.

Connection is made via fixed right angle SMA(M) connector with a hardened TPEE casing, this antenna is the ideal Wi-Fi<sup>®</sup>/Bluetooth<sup>®</sup>/ZigBee<sup>®</sup> antenna for M2M devices where the antenna must be placed in harsh high temperature environments.



## **2** Specification


Wi-Fi 2.4GHz					
Frequency	2400~2500MHz				
Bandwidth	100MHz				
Peak Gain	1.8dBi				
Radiation Efficiency	> 40%				
Radiation	Omni-directional				
Polarization	Vertical				
Power Handling 1W Max	Power Handling 1W Max				
Electrical Wave	Monopole				
Impedance	50Ω				
Operating Temperature	-40°C ~ +150°C				
Storage Temperature	-40°C ~ +85°C				



#### **3** Mechanical Properties


No	Parameter	Specification		
1	Temperature	-40°c to +150°c		
2	Radome Colour	Black		
3	Radome Material	Dupont <sup>®</sup> Hytrel <sup>®</sup> TPEE		

#### 4 Antenna Characteristics 4.1 Antenna S11

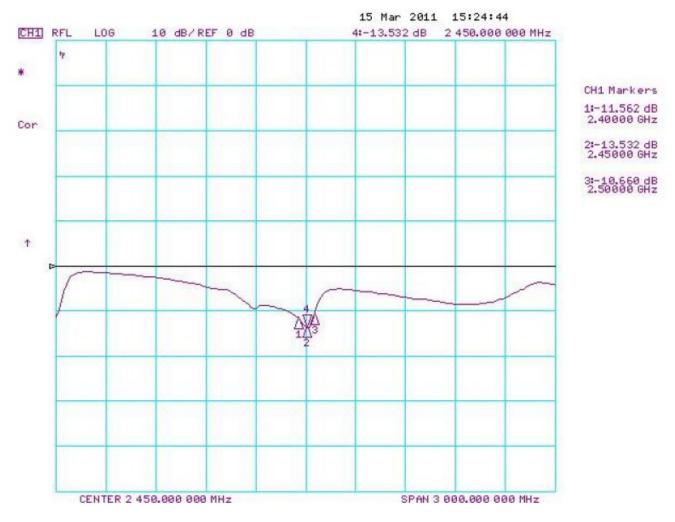




#### 4.2 Antenna Peak Gain

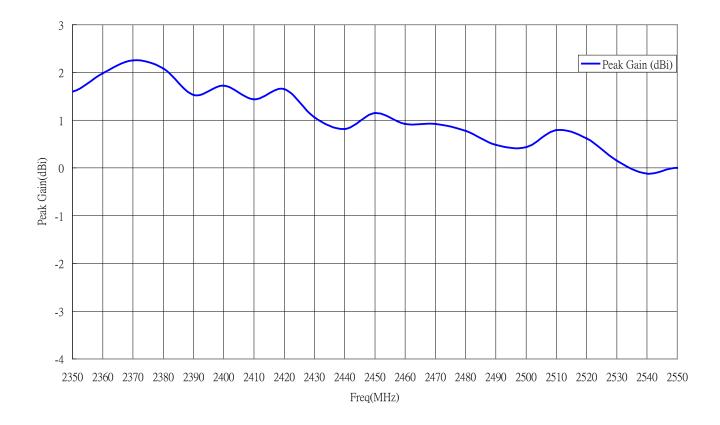




#### 4.3 Antenna Efficiency

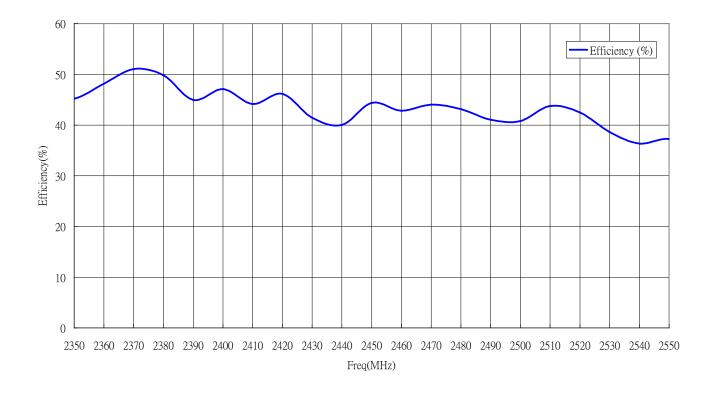




## 4.4 Antenna pattern (XY plane)

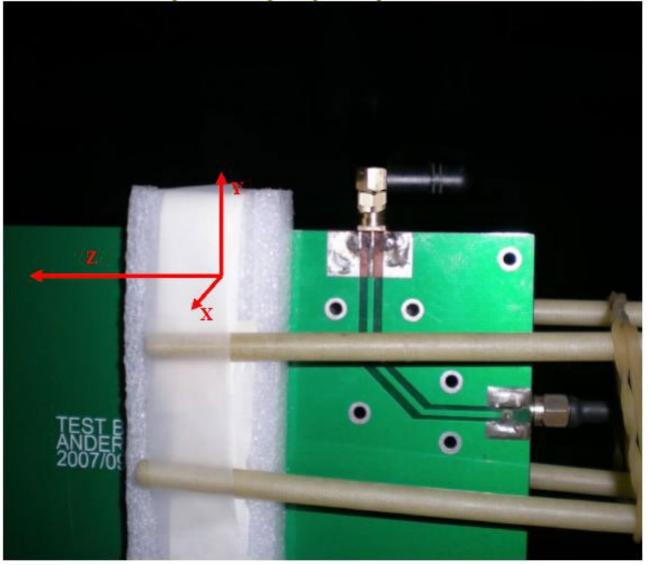




#### 4.5 Antenna pattern (XY plane)

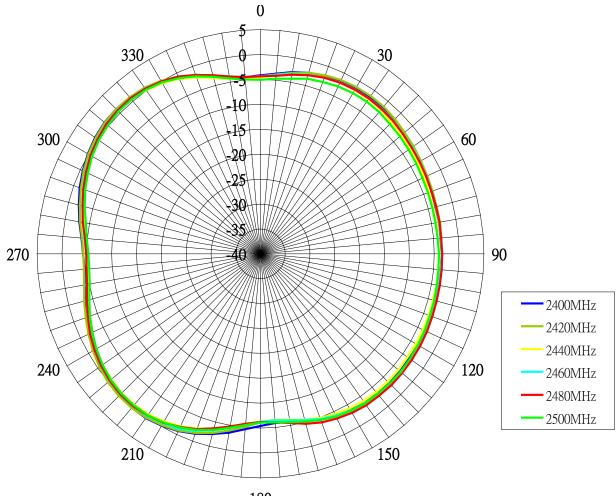


180



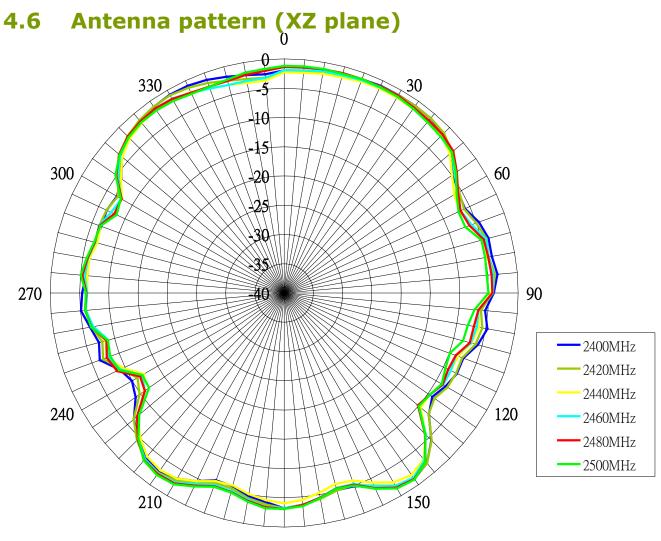


180



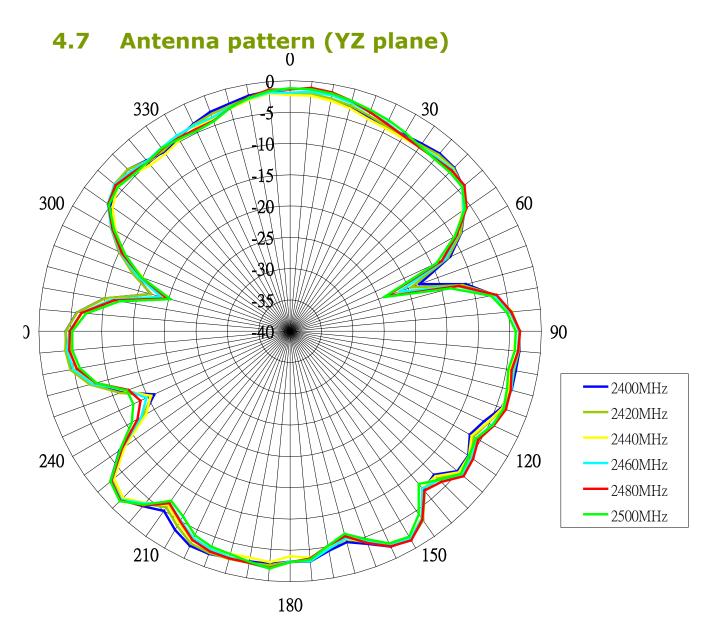



#### 5. Outline Drawings and Structure

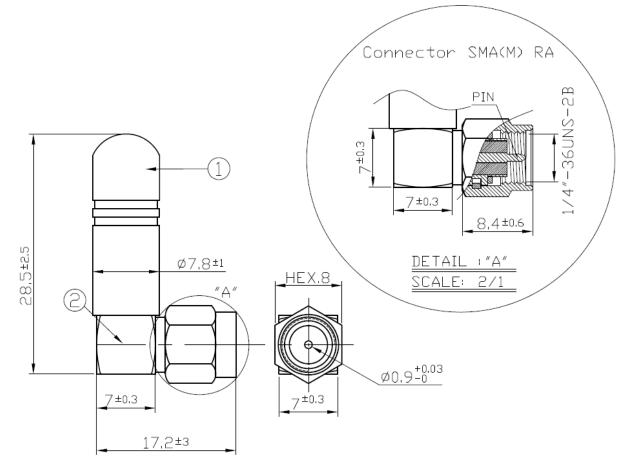

	Name	P/N	Material	Finish	QTY
(1)	Antenna Housing	000111G040002A	TPEE	Black	1
$\bigcirc$	SMA(M) RA	210211G000002A	Brass	Ni Plated	1


#### 6. Packaging




#### GW.26.0112.HT Packaging Specifications

1 pcs GW.26.0112.HT per PE Bag Bag Dimensions - 74 x 42 mm Weight - 6.5g


100 pcs GW.26.0112.HT per PE Large Bag Bag Dimensions - 280x 180mm Weight - 663kg






280 mm





Pallet Dimensions 120x 100 x 143cm 72 Cartons per Pallet 12 Cartons per layer 6 Layers





Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice.

Taoglas reserves the rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

© Taoglas