

Apex White Right Angle TG.30 Part No: TG.30.8112W

Features:

600-6000MHz Covers 5G/4G Bands Typical 50%+ Efficiency and 3dBi+ Peak Gain Dipole Terminal Antenna IP65 Rated Enclosure 90° termination with SMA(M) Connector RoHS and REACH Compliant

www.taoglas.com



1.	Introduction	2
2.	Specification	3
3.	Antenna Characteristics	6
4.	Radiation Patterns	9
5.	Mechanical Drawing	43
6.	Packaging	44
	Changelog	45

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.





Introduction

1.





The Apex TG.30 is a Wideband Dipole 5G/4G Antenna – is primarily designed for use with 5G/4G modules, routers and devices that require the highest possible efficiency and peak gain to deliver best in class throughput on all major cellular bands worldwide between 600MHz and 6GHz.

This fixed 90-degree, connector mount, IP65 enclosure, dipole antenna is primarily designed for use with 5G/4G modules and devices that require the highest possible efficiency and peak gain in order to deliver best-in-class throughput.

Typical Applications include:

- Routers and Gateways
- Access Points
- Remote Monitoring

With very high efficiency on every cellular band globally it is an ideal solution for any device requiring high, reliable performance. It is also guaranteed to meet any type of approval or carrier certification requirements from an RF standpoint.

This patented antenna is available in Black (<u>TG.30.8112</u>). It is also available with swivel 90 degrees (<u>TG.30.8113W</u>) and straight connectors (<u>TG.30.8111W</u>).

For further information please contact your regional Taoglas customer support team.



Specification

2.

Electrical									
Band	Frequency (MHz)	Measurement	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
5GNR/4G	(10112)	30X30cm Ground plane (Centre)	18.8	-7.26	1.40			Fattern	power
Band 5,8,12,13,14,17,	617-960	In Free Space	58.5	-2.33	2.58				
18,20,26,27,28, 29,71		30X30cm Ground plane (Edge)	54.5	-2.64	2.77				
5GNR/4G		30X30cm Ground plane (Centre)	66.3	-1.79	7.25				
Band	1427-1518	In Free Space	50.4	-2.98	5.64				
21,32,74,75,76		30X30cm Ground plane (Edge)	67.0	-1.74	2.49				
4G/3G		30X30cm Ground plane (Centre)	62.8	-2.02	7.79				2W
Band 1,2,3,4,9,23,25,	1710-2200	In Free Space	82.7	-0.82	4.29				
35,39,66		30X30cm Ground plane (Edge)	68.7	-1.63	2.99				
	2300-2400	30X30cm Ground plane (Centre)	42.3	-3.73	4.59				
4G/3G Band 40		In Free Space	81.7	-0.88	4.41	50 Ω		Omni	
		30X30cm Ground plane (Edge)	68.1	-1.67	3.50		Linear		
	2400-2500	30X30cm Ground plane (Centre)	30.9	-5.10	3.10		Linear		
Wi-Fi 2400		In Free Space	70.9	-1.49	4.18				
		30X30cm Ground plane (Edge)	64.0	-1.94	3.94				
	2490-2690	30X30cm Ground plane (Centre)	55.4	-2.56	7.06				
4G/3G Band 7,38,41		In Free Space	68.1	-1.67	4.41				
		30X30cm Ground plane (Edge)	49.8	-3.03	4.55				
5GNR/4G Band 22,42,43,48,77,	3300-3800	30X30cm Ground plane (Centre)	42.1	-3.76	6.60				
		In Free Space	42.1	-3.76	3.94				
78		30X30cm Ground plane (Edge)	33.7	-4.72	4.06				
	5150-5925	30X30cm Ground plane (Centre)	34.5	-4.62	7.09				
LTE5200/ Wi-Fi 5800		In Free Space	67.1	-1.73	5.69				
		30X30cm Ground plane (Edge)	43.2	-3.65	4.69				



		5G/4G	i Bands				
Band Number							
	Uplink	Downlink	30X30cm Ground plane (Centre)	In Free space	30X30cm Ground plane (Edge)		
B1	1920 to 1980	2110 to 2170	4	1	4		
B2	1850 to 1910	1930 to 1990	4	4	4		
B3	1710 to 1785	1805 to 1880	4	4	4		
B4	1710 to 1755	2110 to 2155	4	1	4		
B5	824 to 849	869 to 894	4	1	1		
B7	2500 to 2570	2620 to 2690	4	4	4		
B8	880 to 915	925 to 960	4	4	4		
B9*	1749.9 to 1784.9	1844.9 to 1879.9 1475.9 to 1495.9	4	1	4		
B11 B12	1427.9 to 1447.9		*	4	×		
B12 B13	699 to 716 777 to 787	729 to 746 746 to 756	↓	1	1		
B13 B14	788 to 798	758 to 768	1	1	1		
B17	704 to 716	734 to 746	*	1	1		
B18	815 to 830	860 to 875	1	1	1		
B19	830 to 845	875 to 890	1	1	1		
B20	832 to 862	791 to 821	1	1	1		
B21	1447.9 to 1462.9	1495.9 to 1510.9	1	1	1		
B22*	3410 to 3490	3510 to 3590	1	1	*		
B23*	2000 to 2020	2180 to 2200	1	1	1		
B24	1626.5 to 1660.5	1525 to 1559	✓	1	1		
B25	1850 to 1915	1930 to 1995	4	1	1		
B26	814 to 849	859 to 894	<	✓	1		
B27*	807 to 824	852 to 869	✓	✓	4		
B28	703 to 748	758 to 803	*	1	1		
B29	717 to	728	*	1	1		
B30	2305 to 2315	2350 to 2360	4	1	1		
B31	452.5 to 457.5	462.5 to 467.5	*	*	*		
B32	1452 to	1496	4	1	1		
B34	2010 to	2025	4	1	1		
B35	1850 to	1910	4	4	1		
B36	1930 to	1990	4	1	1		
B37	1910 to 1930		4	4	4		
B38	2570 to 2620		4	1	1		
B39	1880 to 1920		4	1	4		
B40	2300 to		4	1	1		
B41	2496 to		4	4	•		
B42	3400 to		*	4	1		
B43 B45	3600 to 1447 to		4	4	4		
B45 B46	5150 to		1	1	1		
B40 B47	5855 to		1		1		
B48	3550 to		1	1	1		
B49	3550 to		1	1	1		
B50	1432 to		4	1	1		
B51	1427 to		*	1	1		
B52	3300 to		*	1	*		
B53	2483.5 to		✓	4	1		
B65	1920 to 2010	2110 to 2200	✓	1	1		
B66	1710 to 1780	2110 to 2200	4	1	1		
B68	698 to 728	753 to 783	*	4	1		
B69	2570 to	2620	⊀	4	1		
B70	1695 to 1710	1995 to 2020	✓	1	1		
B71	663 to 698	617 to 652	4	1	1		
B72	451 to 456	461 to 466	*	*	*		
B73	450 to 455	460 to 465	*	*	*		
B74	1427 to 1470	1475 to 1518	4	4	4		
B75	1432 to		4	1	4		
B76	1427 to 1432		4	4	4		
B77	3300 to 4200		4	4	4		
B78	3300 to		4	4	4		
B79	4400 to		✓ •	4	4		
B85	698 to 716	728 to 746	*	•	*		
B87 B88	410 to 415 412 to 417	420 to 425 422 to 427	*	*	*		
000	412 (0 417	422 10 427	•	•	*		




Mechanical				
Dimensions	142 x 49mm			
Casing	UV Resistant PC/ABS			
Flammability Rating	UL-94			
Connector	SMA Male			
IP Rating	IP65			


Environmental				
Temperature Range	-40°C to 85°C			
Humidity	Non-condensing 65°C 95% RH			









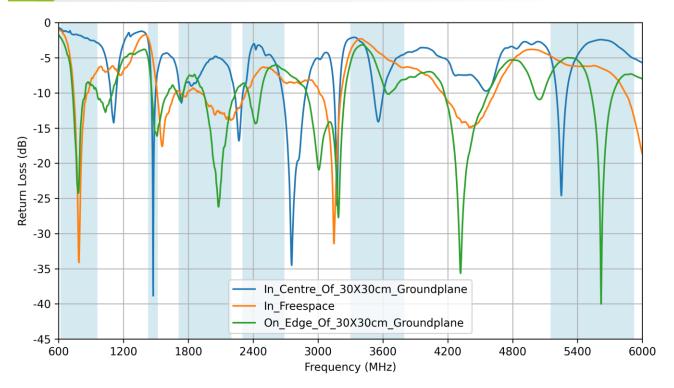

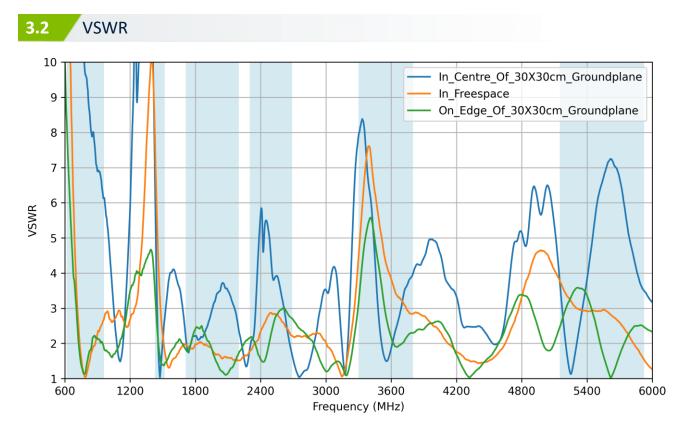




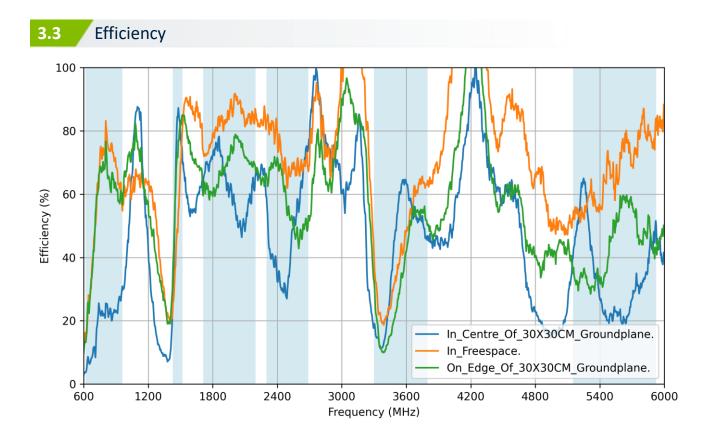

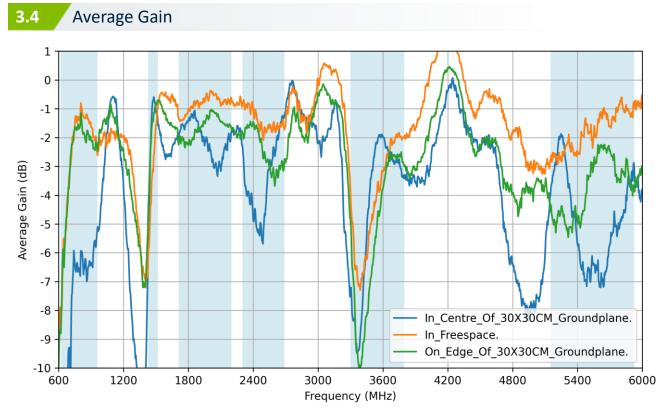



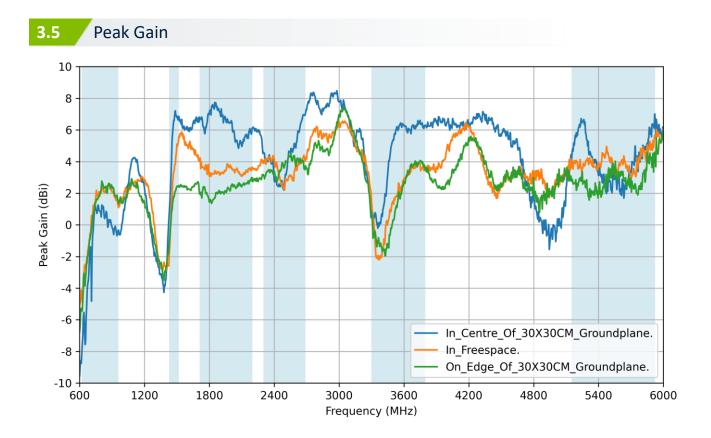









4.

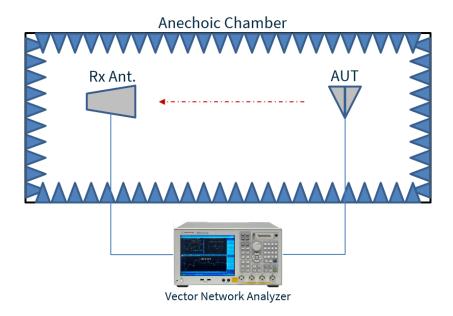

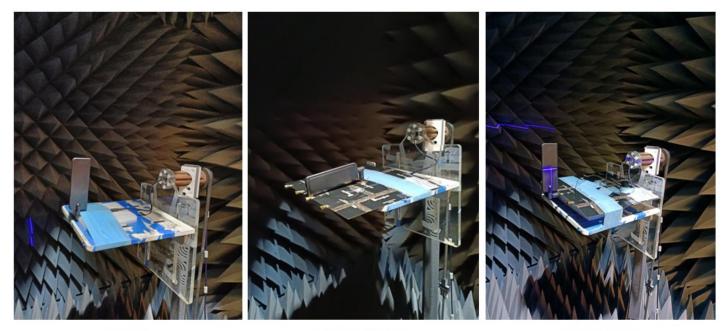


Free space


Ground plane (Centre)

Ground plane (Edge)




4.2 30x30cm Ground Plane (Centre) - Patterns at 650 MHz

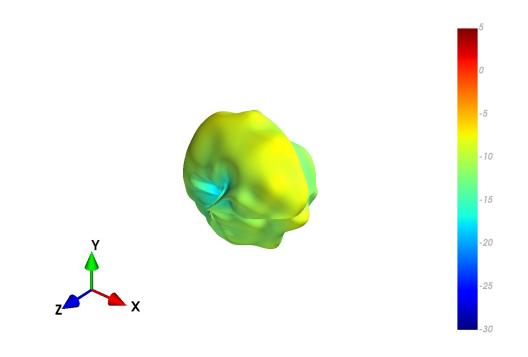


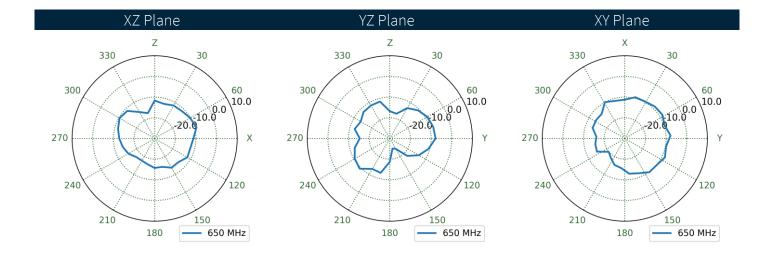






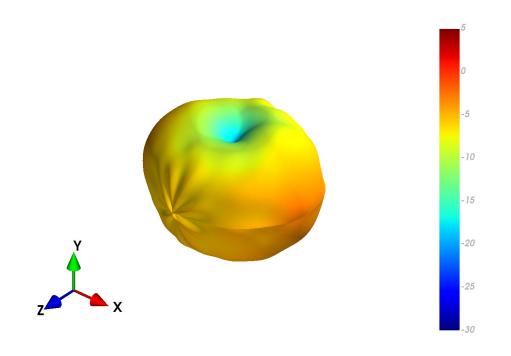


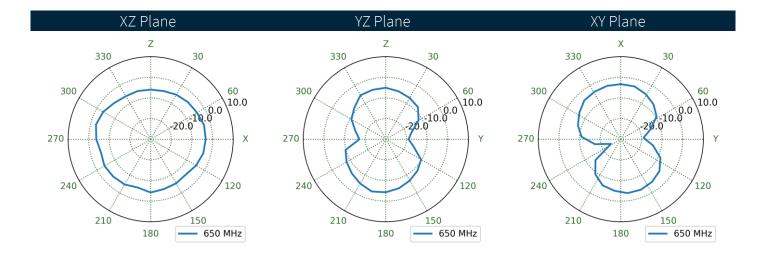




4.4 30x30cm Ground Plane (Edge) - Patterns at 650 MHz

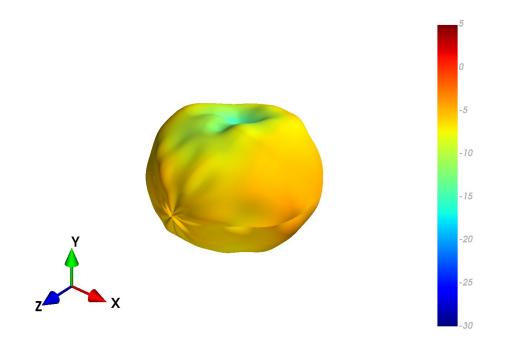


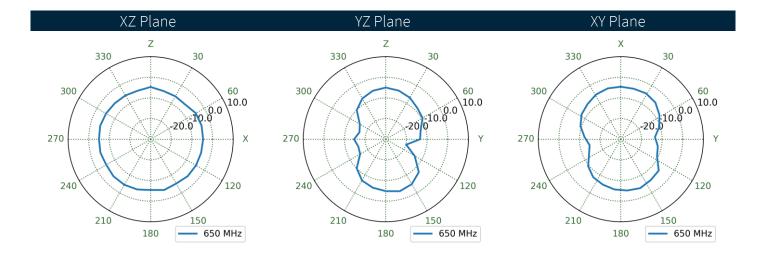




4.5 30x30cm Ground Plane (Centre) - Patterns at 750 MHz

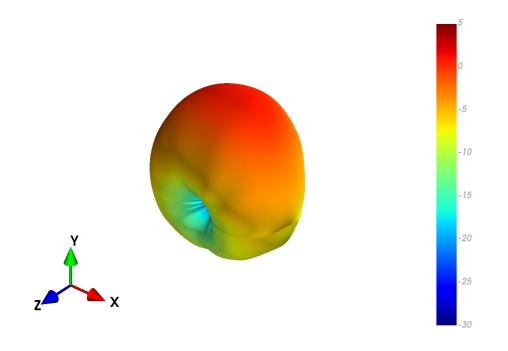


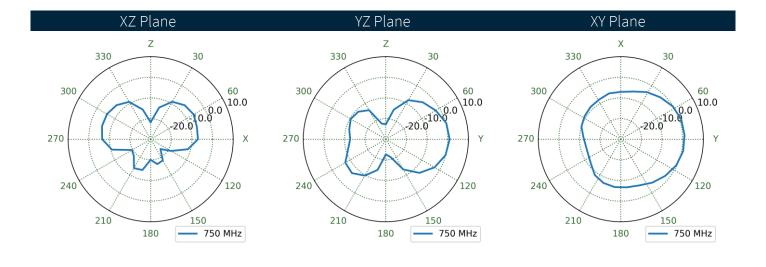






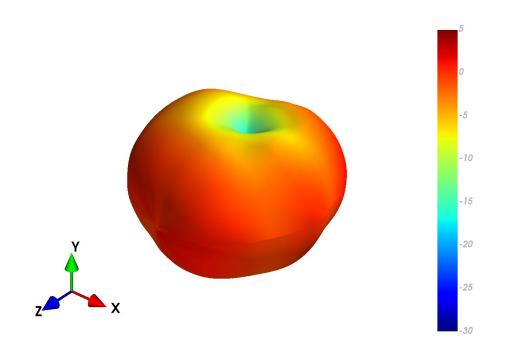


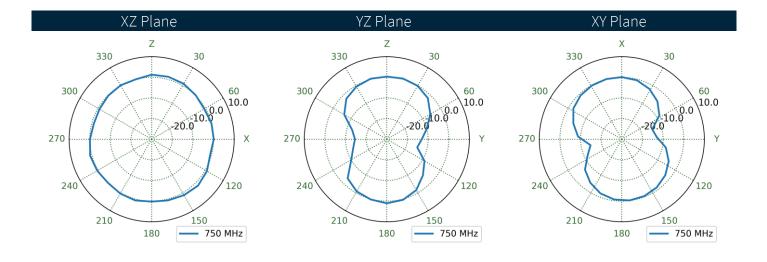




4.7 30x30cm Ground Plane (Edge) - Patterns at 750 MHz

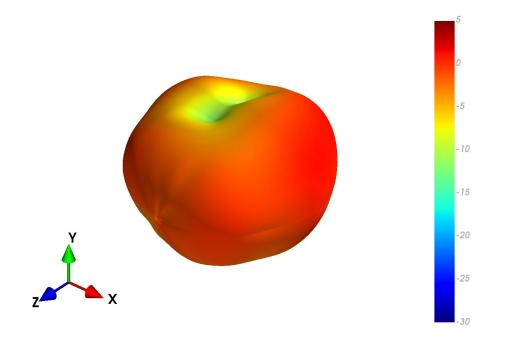


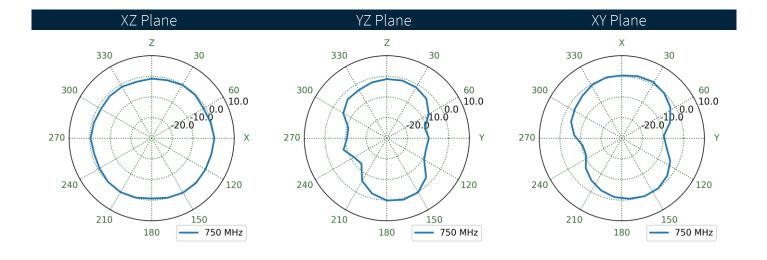




4.8 30x30cm Ground Plane (Centre) - Patterns at 890 MHz

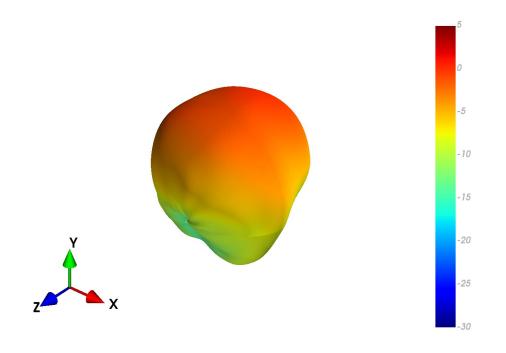


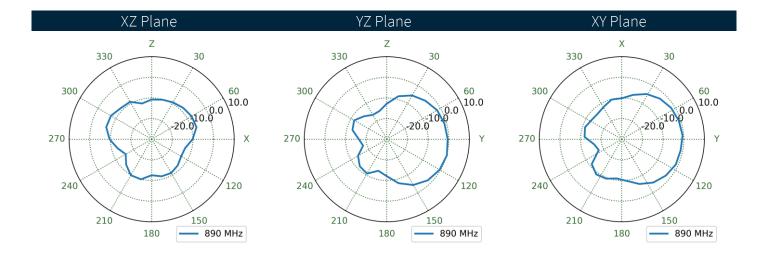






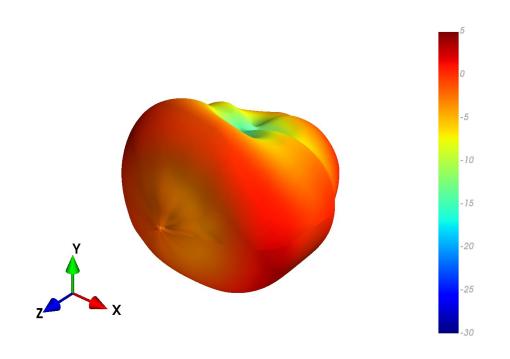


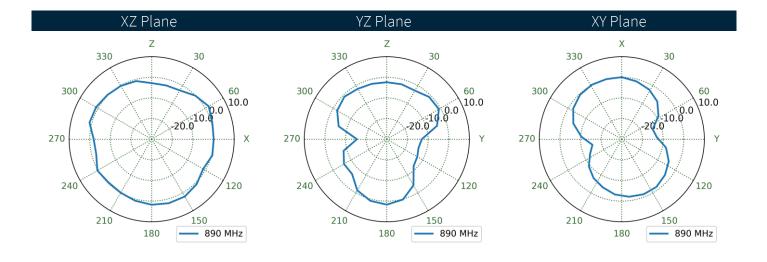




4.10 30x30cm Ground Plane (Edge) - Patterns at 890 MHz

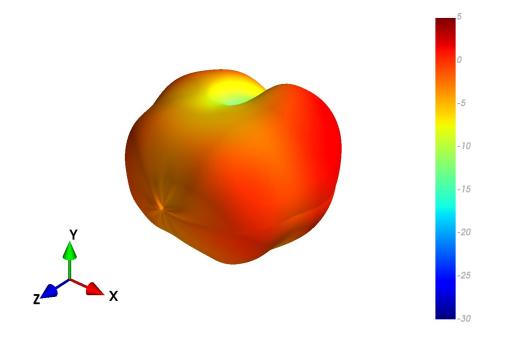


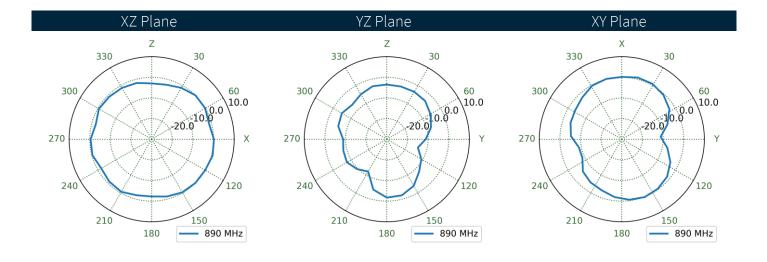




4.11 30x30cm Ground Plane (Centre) - Patterns at 960 MHz

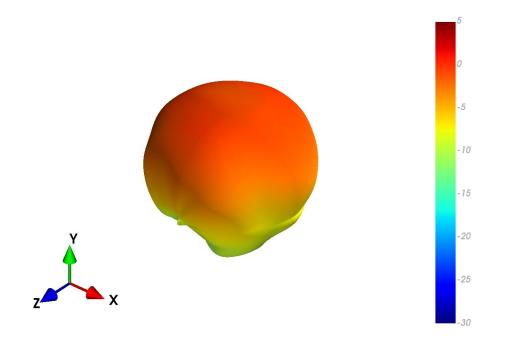


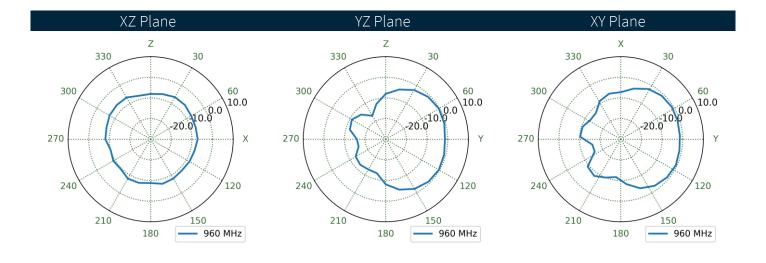






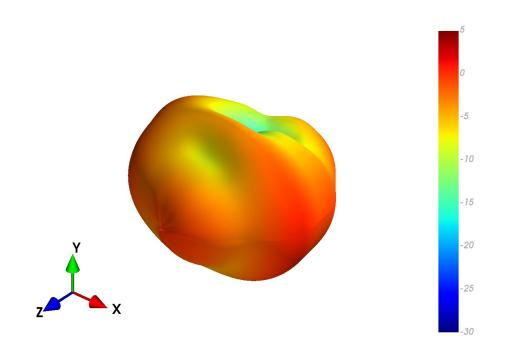


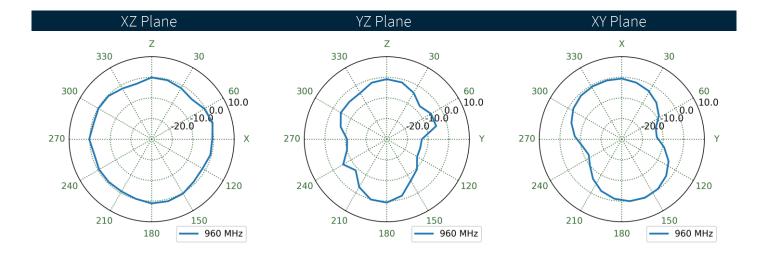




4.13 30x30cm Ground Plane (Edge) - Patterns at 960 MHz

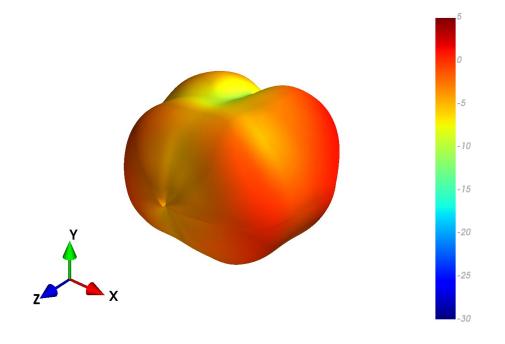


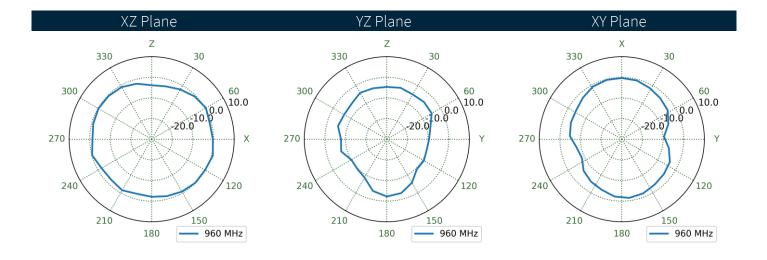




4.14 30x30cm Ground Plane (Centre) - Patterns at 1470 MHz

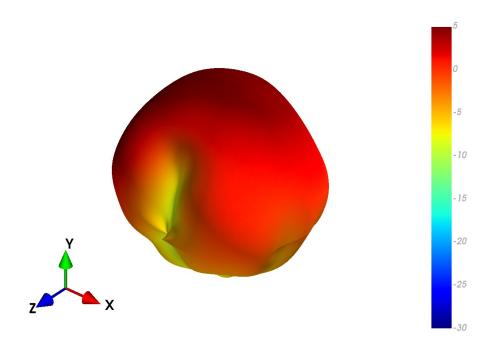


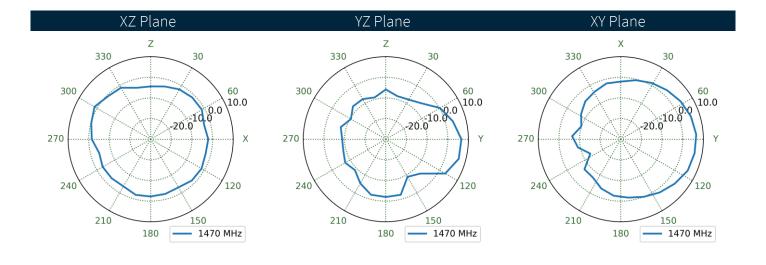






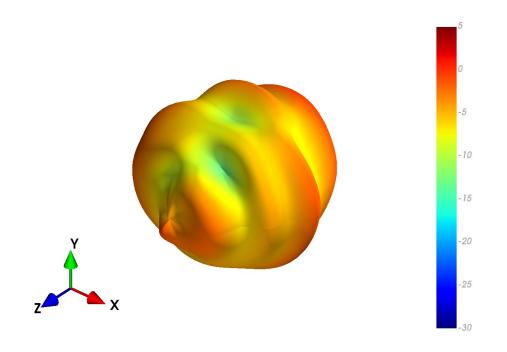


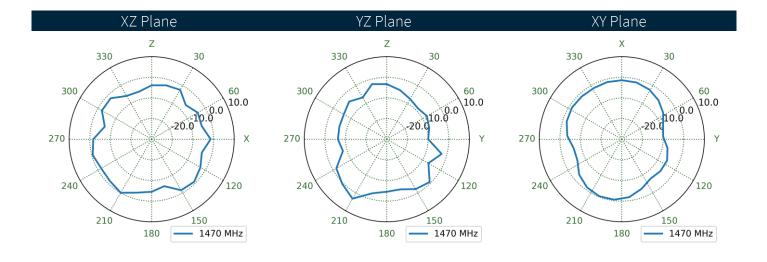




4.16 30x30cm Ground Plane (Edge) - Patterns at 1470 MHz

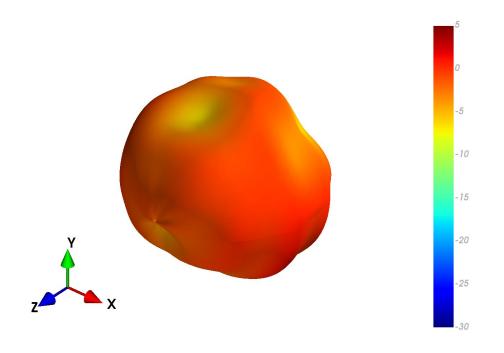


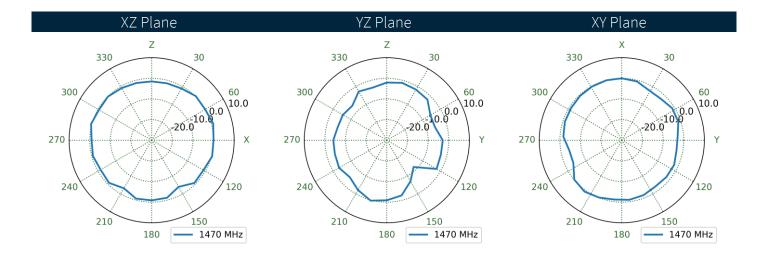




4.17 30x30cm Ground Plane (Centre) - Patterns at 1805 MHz

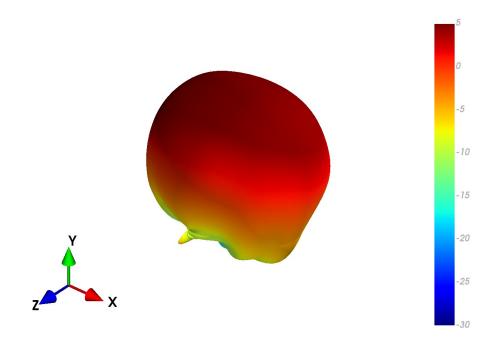


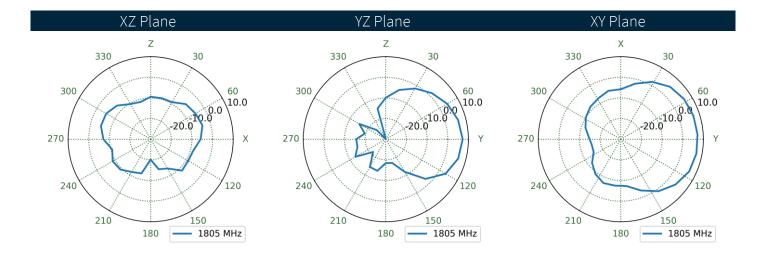






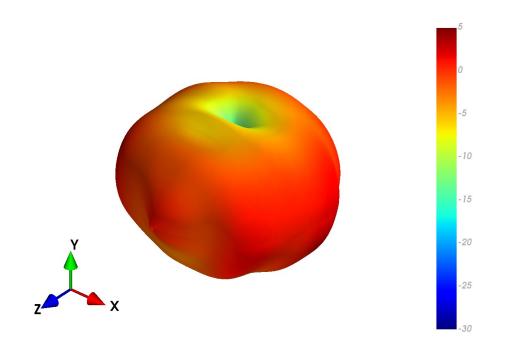


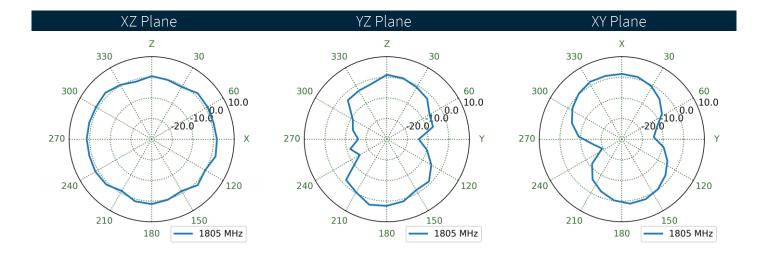




4.19 30x30cm Ground Plane (Edge) - Patterns at 1805 MHz

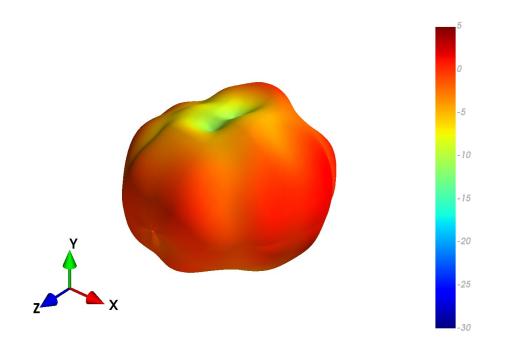


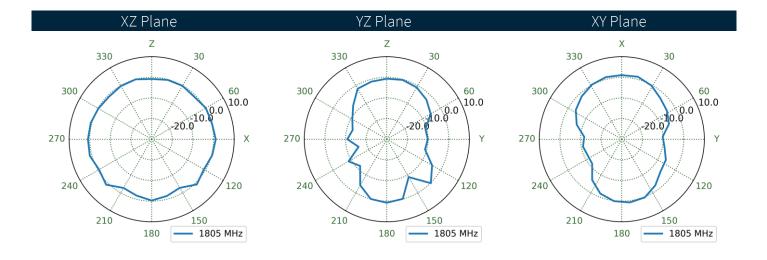




4.20 30x30cm Ground Plane (Centre) - Patterns at 1920 MHz

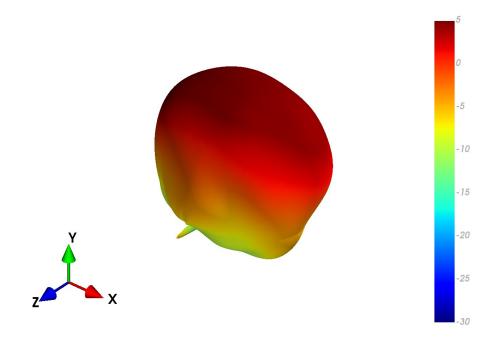


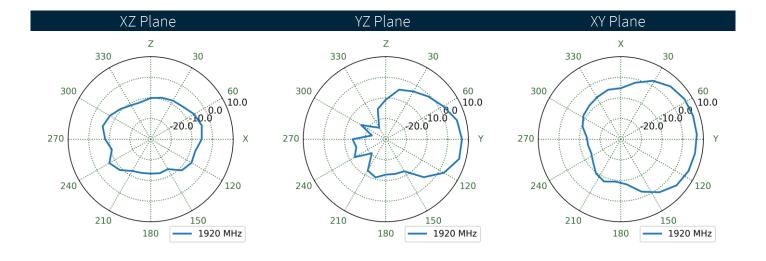






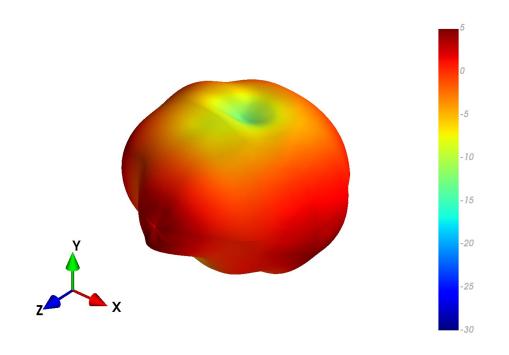


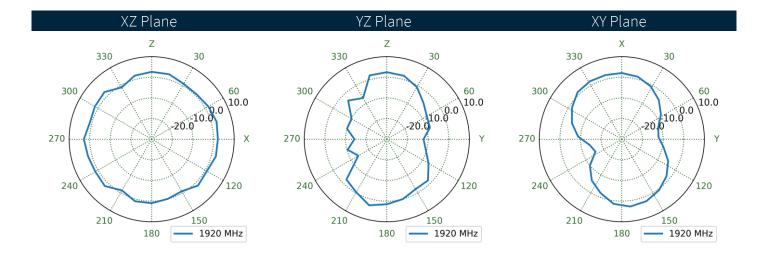




4.22 30x30cm Ground Plane (Edge) - Patterns at 1920 MHz

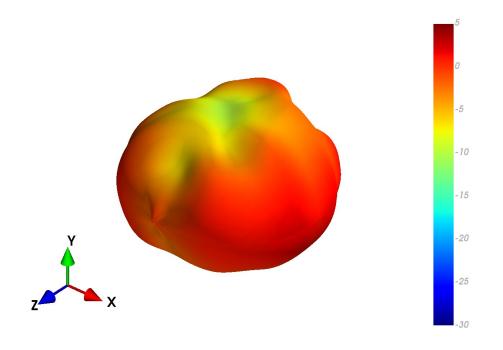


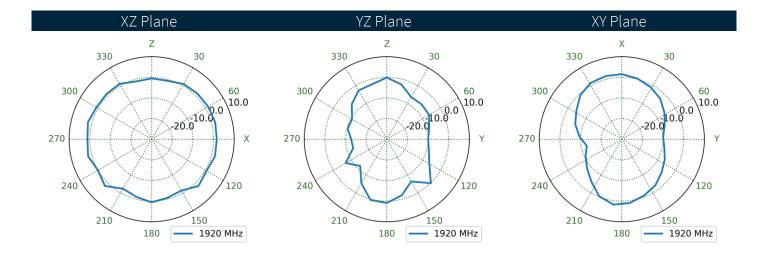




4.23 30x30cm Ground Plane (Centre) - Patterns at 2595 MHz

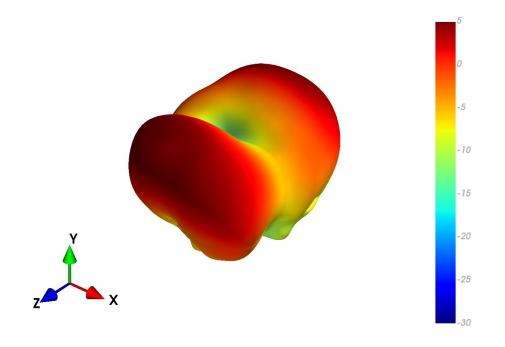


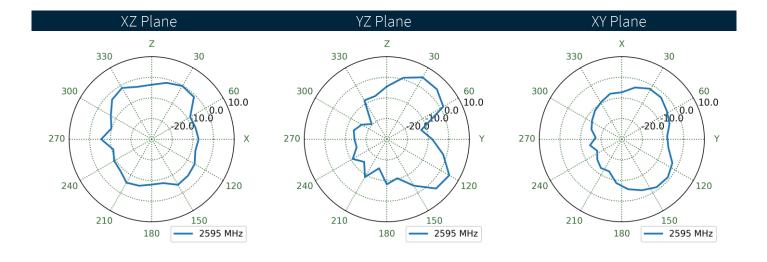






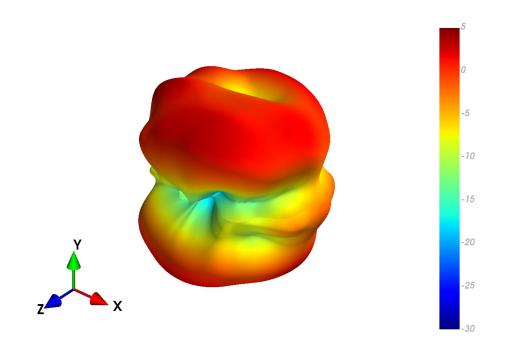


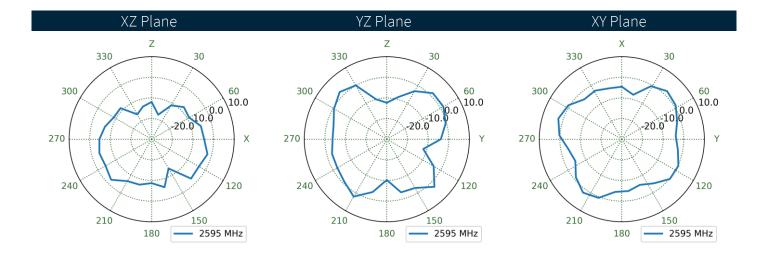




4.25 30x30cm Ground Plane (Edge) - Patterns at 2595 MHz

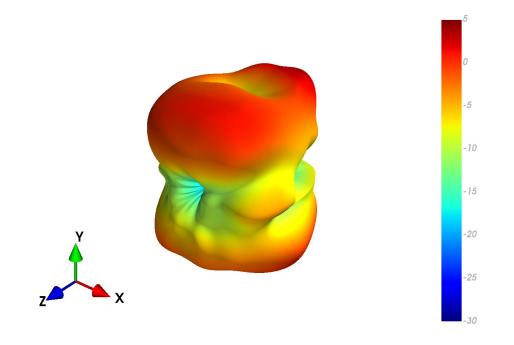


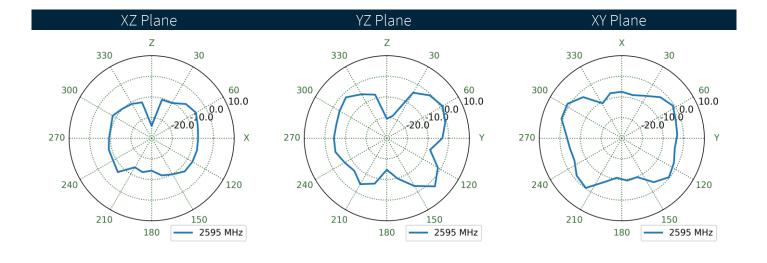




4.26 30x30cm Ground Plane (Centre) - Patterns at 3500 MHz

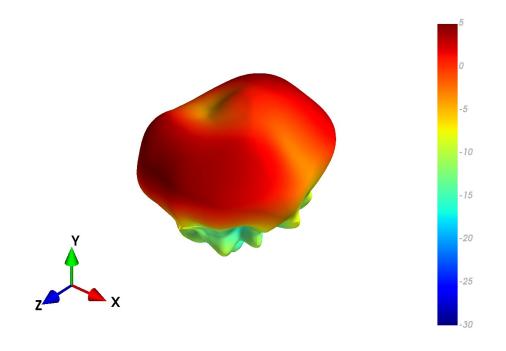


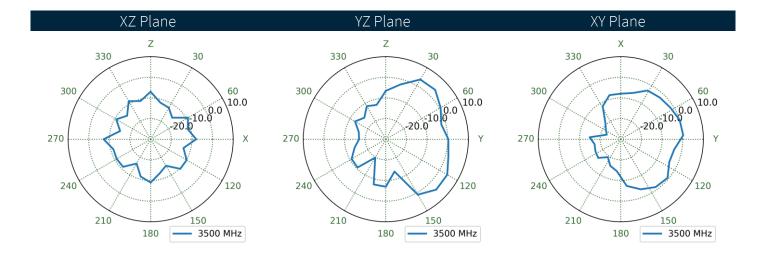






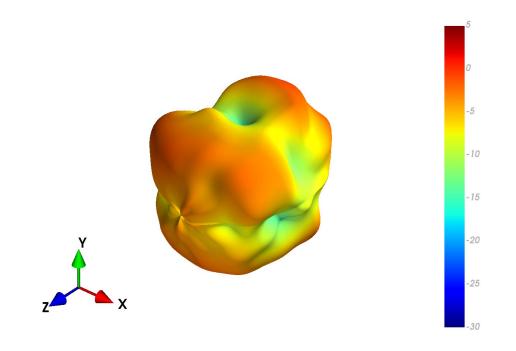


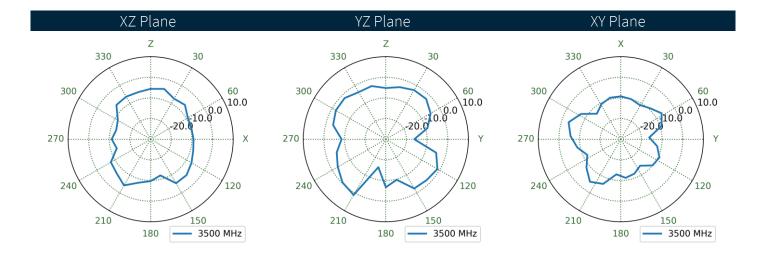




4.28 30x30cm Ground Plane (Edge) - Patterns at 3500 MHz

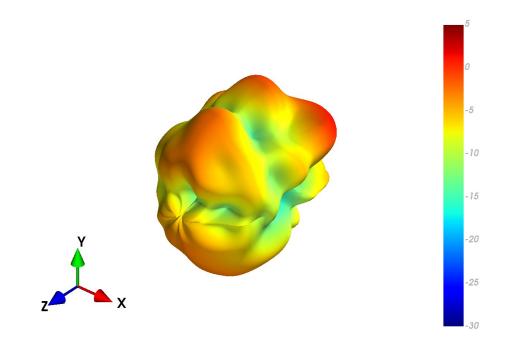


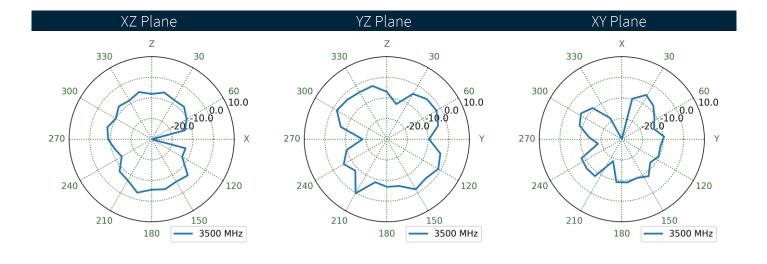




4.29 30x30cm Ground Plane (Centre) - Patterns at 5150 MHz

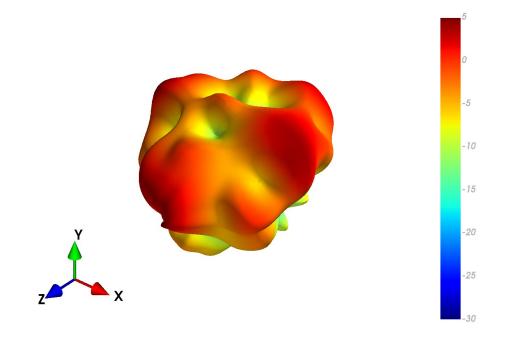


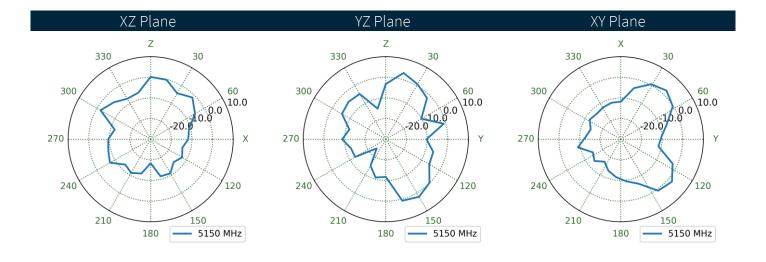






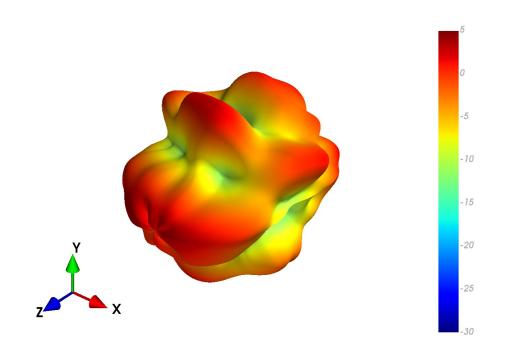


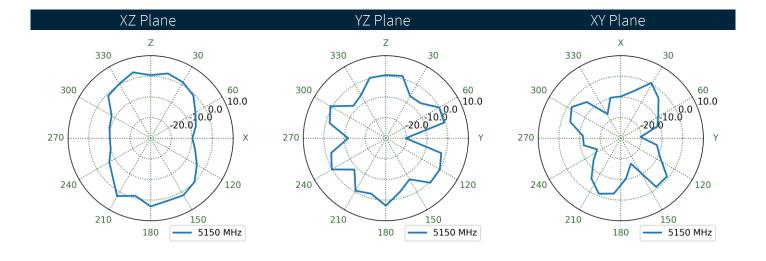




4.31 30x30cm Ground Plane (Edge) - Patterns at 5150 MHz

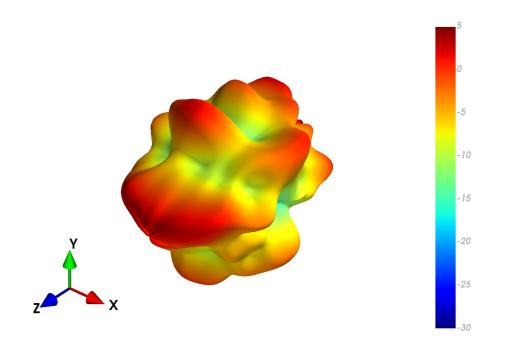


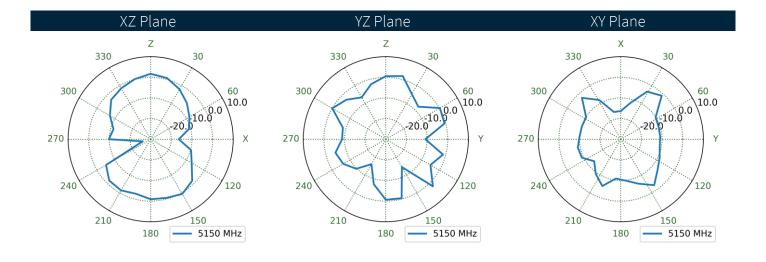




4.32 30x30cm Ground Plane (Centre) - Patterns at 5550 MHz

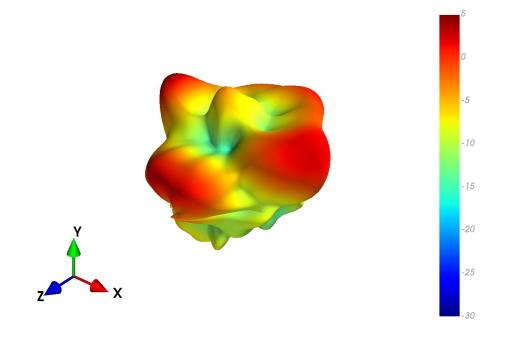


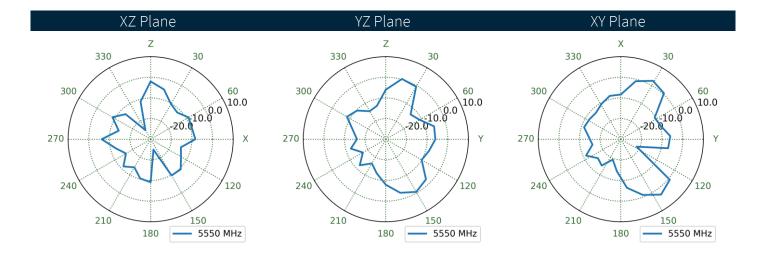






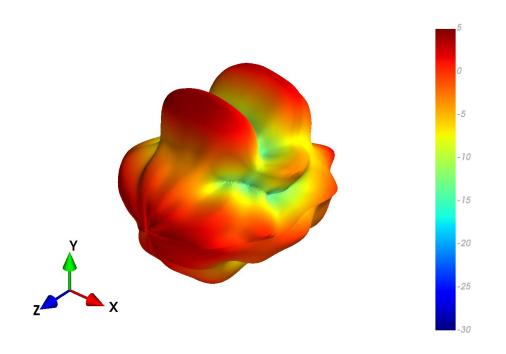


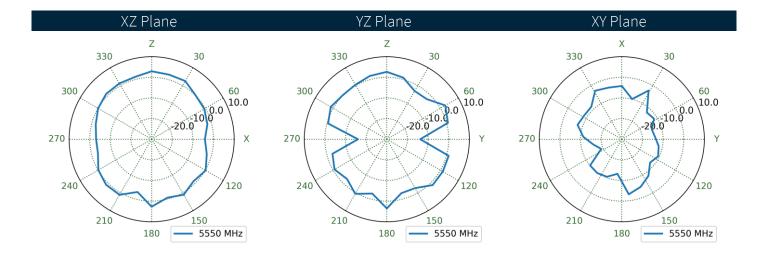




4.34 30x30cm Ground Plane (Edge) - Patterns at 5550 MHz

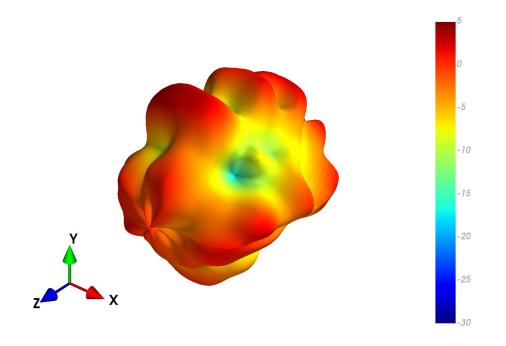

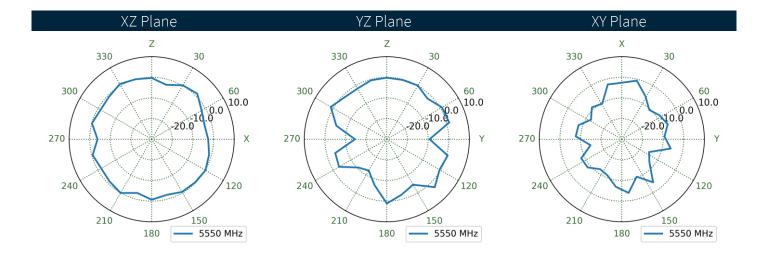




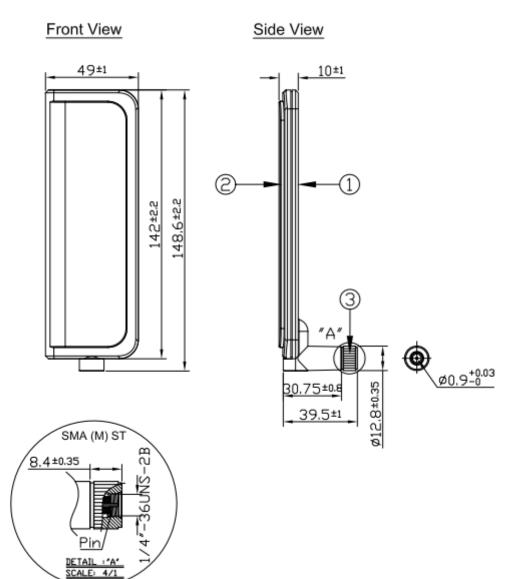



6. Packaging

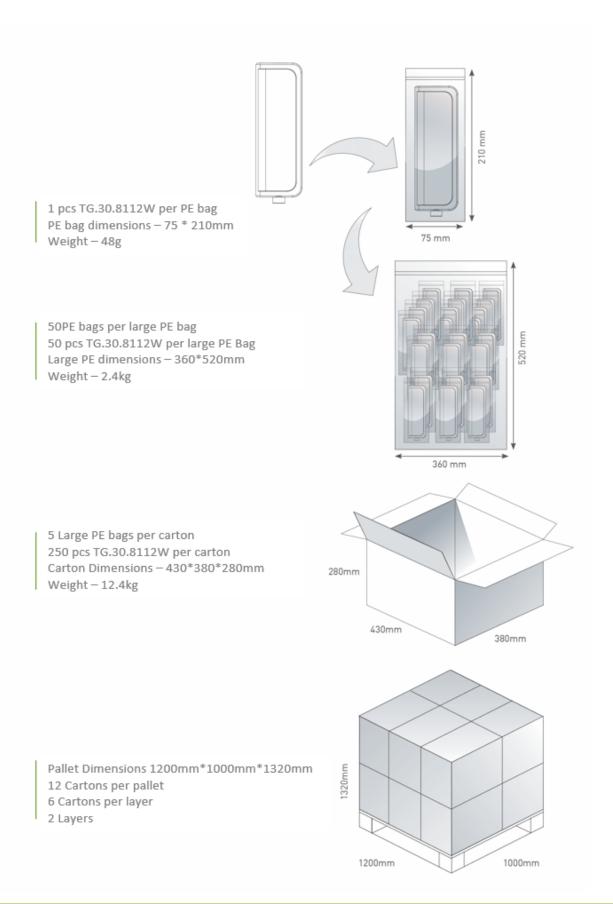



Changelog for the datasheet

SPE-12-8-121 - TG.30.8112W

Revision: K (Current Version)				
Date:	2024-06-25			
Changes:	Added IP65 IP Rating			
Changes Made by:	Cesar Sousa			

Previous Revisions

Revision: J	
Date:	2023-11-15
Changes:	Updated 5G/4G Bands table
Changes Made by:	Cesar Sousa

Revision: I					
Date:	2023-01-17				
Changes:	Adding band 40 to spec table (full datasheet update).				
Changes Made by:	Gary West				

Date: 2017-04-04 Changes: Updated spec with LTE Bands	Revision: D				
Changes: Updated spec with LTE Bands	Date: 20	17-04-04			
	Changes: Up	dated spec with LTE Bands			
Changes Made by: Andy Mahoney	Changes Made by: An	dy Mahoney			

Revision: H				
Date:	2022-09-26			
Changes:	Updated specifications			
Changes Made by:	Cesar Sousa			

Revision: C				
Date:	2017-01-13			
Changes:				
Changes Made by:	Technical Writer			

Revision: G					
Date:	2022-05-05				
Changes:	Full datasheet template update and show data 600-6000.				
Changes Made by:	Gary West				

Revision: B		
Date:	2012-09-27	
Changes:		
Changes Made by:	Technical Writer	

Revision: F		Revision:
Date:	2021-07-09	
Changes:	Added IP Rating	
Changes Made by:	Gary West	

Revision: A (Original First Release)		
Date:	2012-09-19	
Notes:		
Author:	Technical Writer	





www.taoglas.com