



THOR92PP

Thunder Series

Integrated 5G/LTE Omnidirectional Antenna
for Ericsson R920

- Integrated Multi-band 5G Omnidirectional Antenna
- Omni Wi-Fi Antenna
- Bluetooth Antenna
- GNSS Antenna
- Cavity to install Ericsson R920 Router
- Robust, IP67 Rated Enclosure

Contents

Page:	Section:
3	Introduction
4	Specifications
5	Mechanical Specifications
6	Plots
15	Dimensions



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

© Taoglas 2025



Thunder Series THOR92PP

Integrated Omnidirectional Antennas for Ericsson R920

INTEGRATED MULTI-BAND 5G OMNI ANTENNA + WI-FI OMNI ANTENNA + BLUETOOTH ANTENNA + GNSS ANTENNA + PLACE TO INSTALL ERICSSON R920 (ALL-IN-ONE)

The Taoglas THOR92 all-in-one antenna for Ericsson (Cradlepoint) R920 routers is a perfect outdoor device for mobile and fixed installations like industrial, public, CCTV, hotspots, yachts, boats, campers, and RVs. It has embedded omnidirectional 5G, Wi-Fi®, Bluetooth®, and GNSS antennas. If you use the Ericsson (Cradlepoint) R920 with the THOR92 Thunder Omnidirectional antenna, you get an integrated complete solution with embedded router and multi-band antennas in one enclosure.

The set contains a Passive PoE splitter, allowing you to split data and power from a single Ethernet cable and maintain gigabit transfer speeds while protecting the LAN port from damage caused by overvoltage, short circuit or improper connection.



OUTDOOR ANTENNA WORKS IN ANY WEATHER CONDITIONS, IP67



ANTENNA PERFECTLY MATCHED WITH THE ERICSSON R920



ALL ANTENNAS AND CRADLEPOINT ROUTER INTEGRATED IN ONE ENCLOSURE



MADE IN EUROPE





5G / LTE SPECIFICATION

FREQUENCY	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.7 GHz 5.2 - 6.0 GHz
GAIN	617 - 960 MHz : 3 dBi 1.7 - 2.7 GHz : 4 dBi 3.3 - 4.7 GHz : 4.5 dBi 5.2 - 6.0 : 2.5dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n47, n48, n53, n65, n66, n67, n71, n77, n78, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
VSWR	<1.80, max <2.00
BEAMWIDTH	360°/35° +/- 5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
CONNECTOR	2x SMA
CABLE TYPE	RG316



WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.2 GHz
GAIN	2.4 - 2.5 GHz: 6 dBi 5.0 - 6.0 GHz: 7.5 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° +/- 5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
CONNECTOR	2x RPSMA
CABLE TYPE	RG316


MECHANICAL SPECIFICATION

MATERIAL	ABS, aluminum, PTFE, Fiberglass
INGRESS PROTECTION	IP67
CONNECTOR TYPE	RJ45
DIMENSIONS	272 x 276 x 100 mm 10.7 x 10.9 x 3.93 inch
WEIGHT	1.8 kg 3.97lbs
OPERATING TEMPERATURE	From -40°C to 75°C From -40°F to 167°F




PLOTS

5G/LTE VSWR

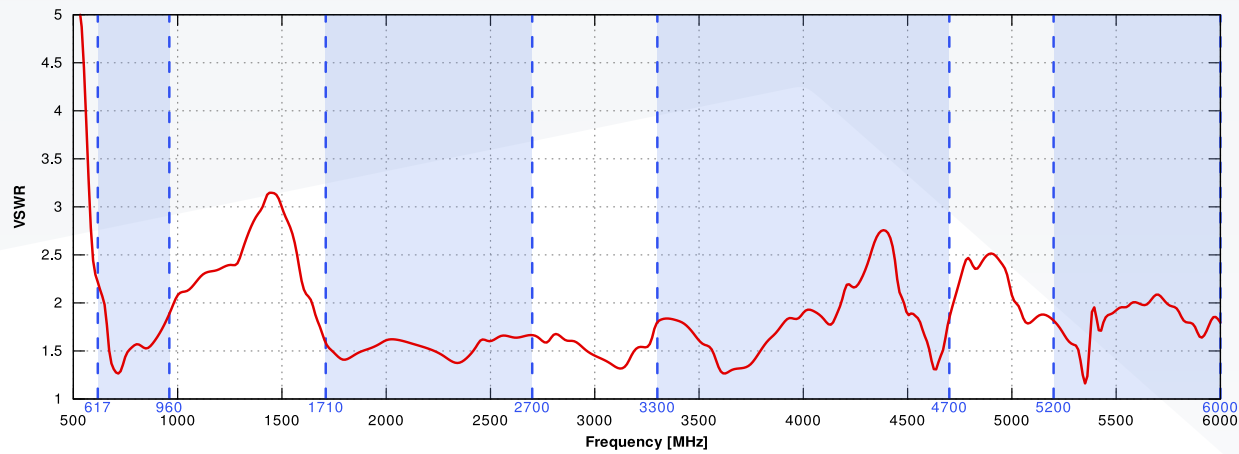


WI-FI VSWR

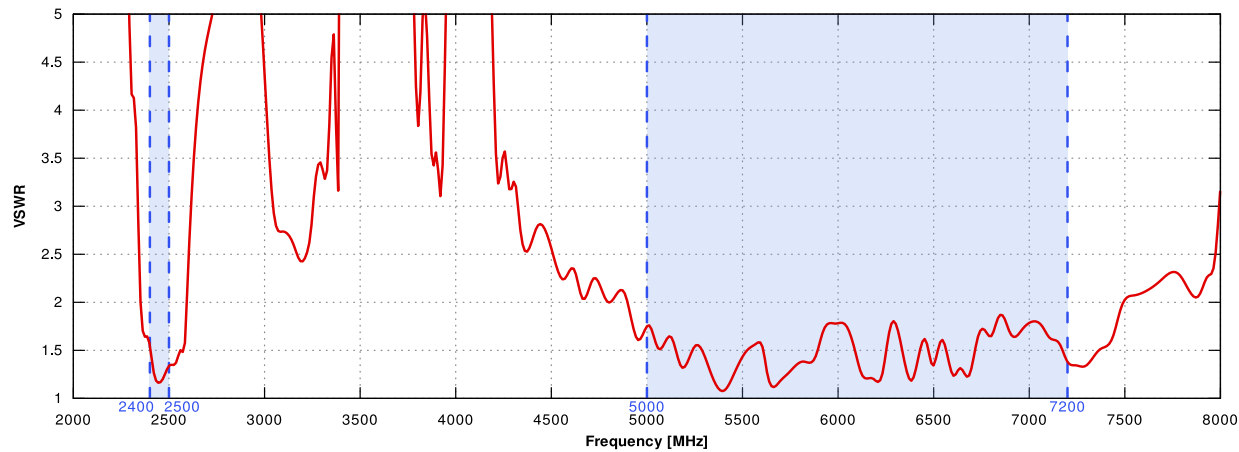




5G/LTE Gain

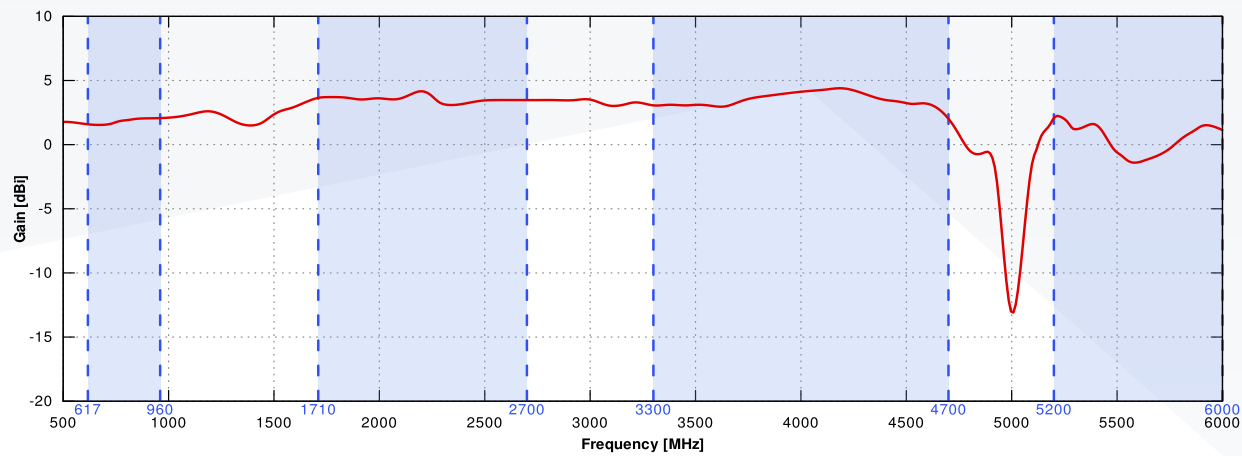


Wi-Fi Gain

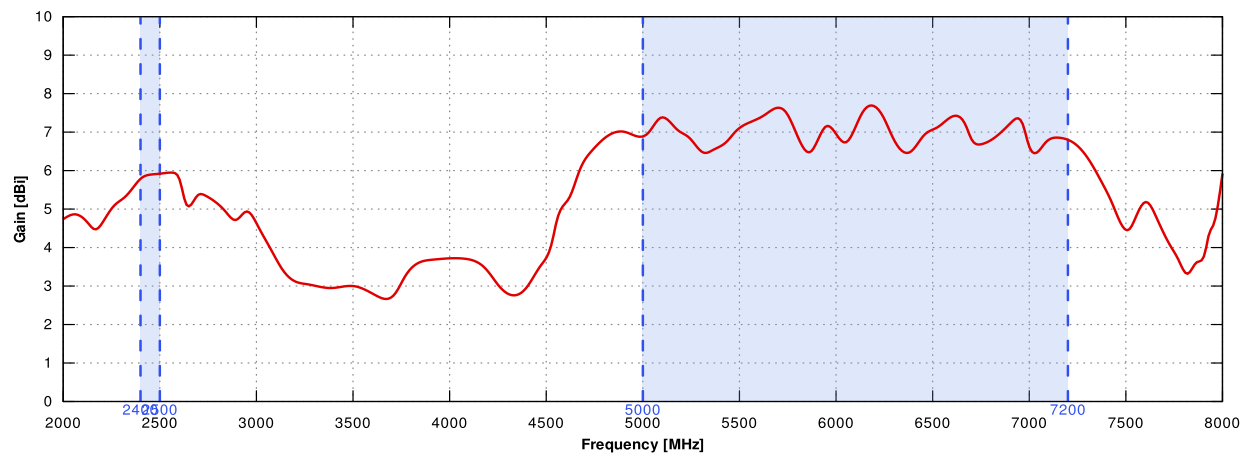




5G/LTE from 617MHz to 950MHz

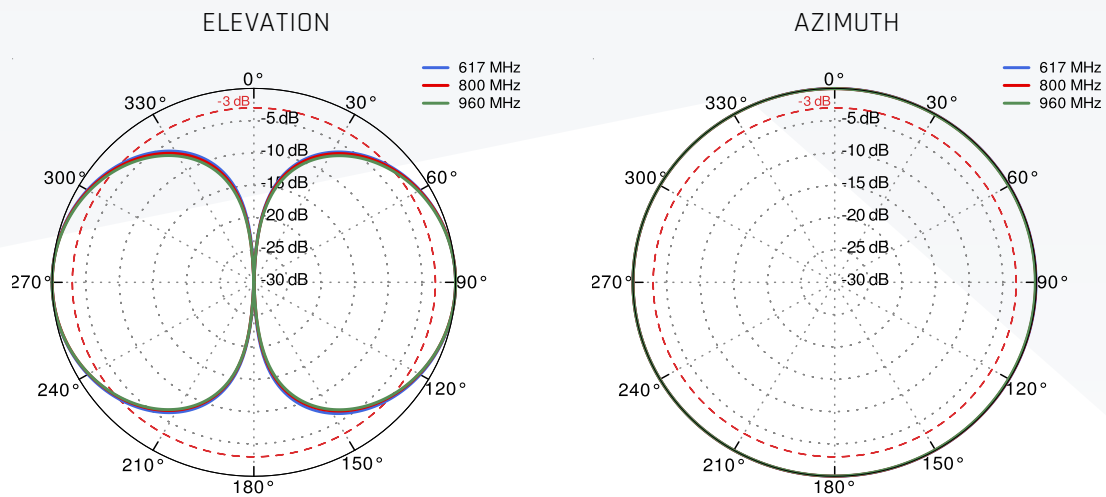


5G/LTE from 1.71GHz to 2.5GHz

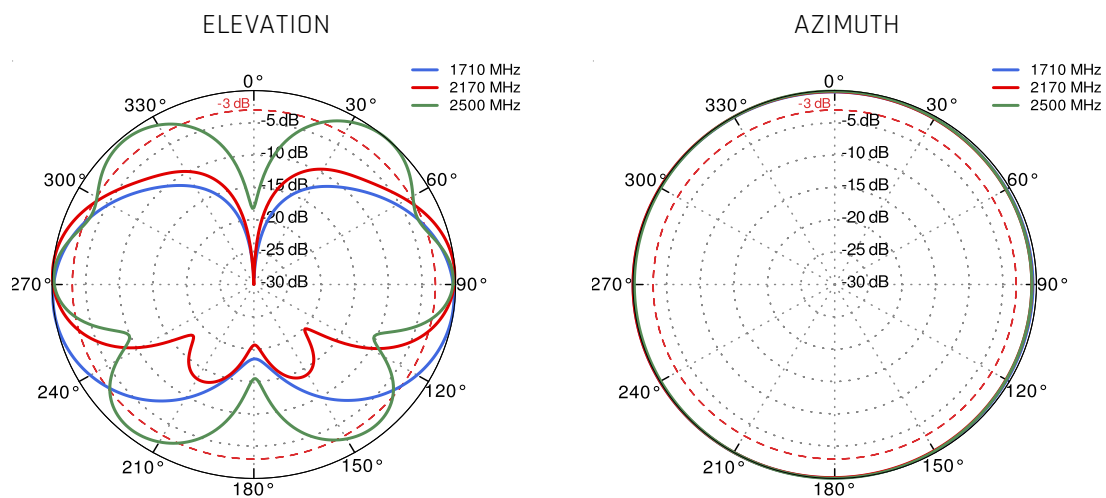




5G/LTE from 3.3GHz to 4.2GHz

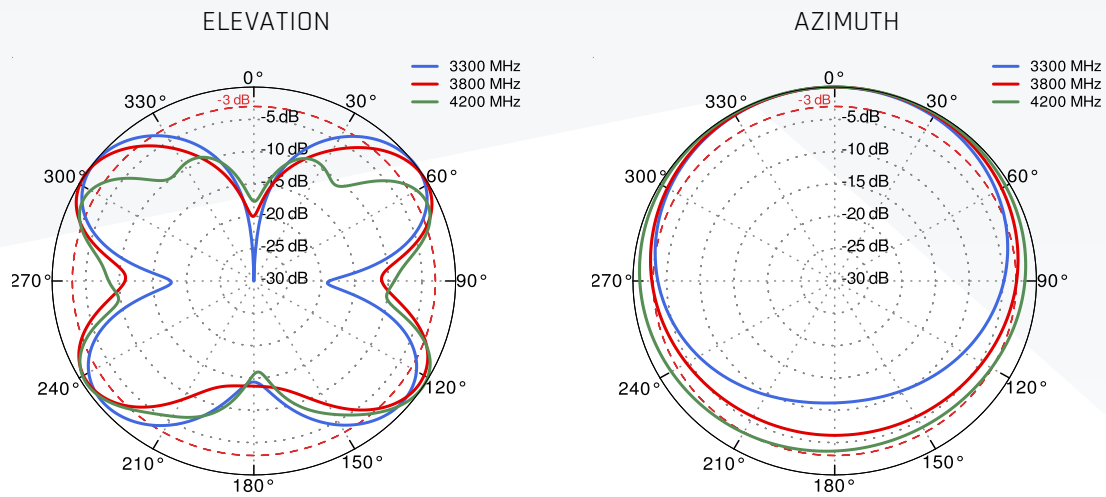


5G/LTE from 4.6GHz to 5.5GHz

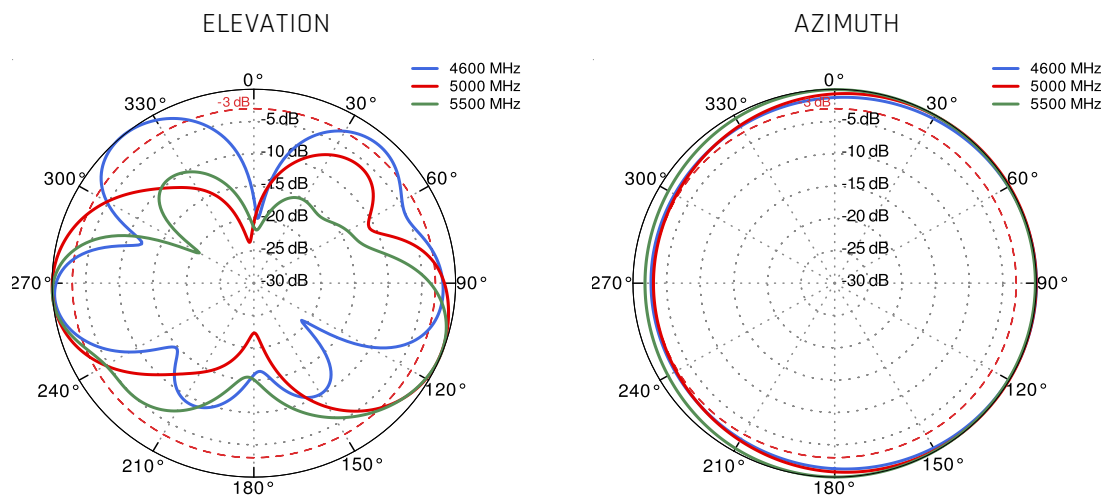



Wi-Fi 2.4GHz and 5GHz and 6GHz

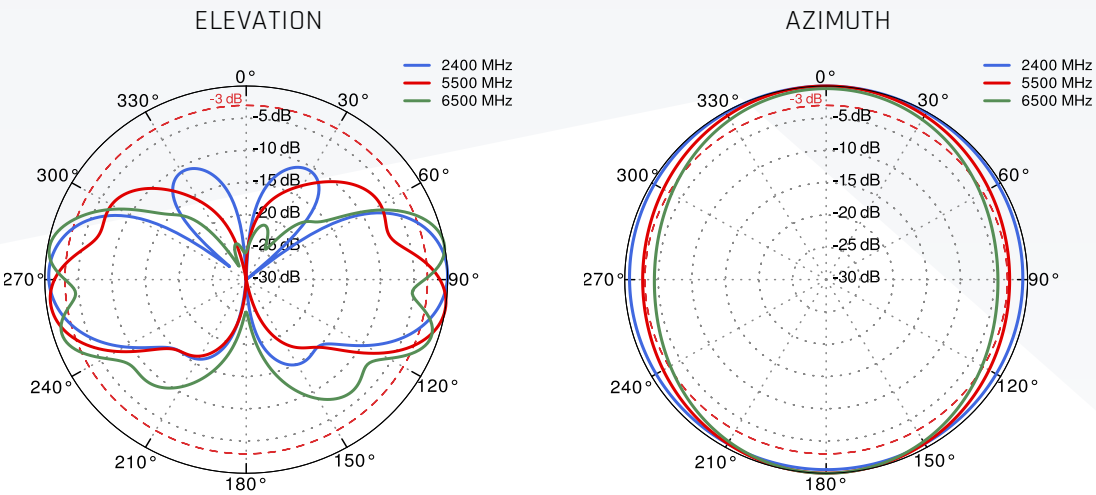



GNSS Specifications

GNSS Frequency Band							
GPS/QZSS	L1 1575.42MHz	L2 1227.6MHz	L5 1176.45MHz	L6 1278.75MHz			
	☒	☐	☐	☐			
GLONASS	L5R 1176.45MHz	L3PT 1201.5MHz	L2PT 1246MHz	L1CR 1575.42MHz	L1PT 1602MHz		
	☐	☐	☐	☒	☒		
Galileo	E5a 1176.45MHz	E5b 1201.5MHz	E4 1215MHz	E3 1256MHz	E6 1278.75MHz	E2 1561MHz	E1 1575.42MHz
	☐	☐	☐	☐	☐	☐	☒
BeiDou	B1 1561MHz	B2 1207.14MHz	B3 1268.52MHz				
	☒	☐	☐				
Compass	E5B(B2)/ E6(B3) 1268.56MHz	E2(B1) 1561MHz					
	☐	☒					
SBAS	Omnistar 1542.5MHz	WAAS/EGN OS 1575.42MHz					
	☐	☒					


Electrical			
Frequency	BeiDou	GPS/GALILEO	GLONASS
	1561MHz	1575.42MHz	1602MHz
Efficiency (%)	49.8	46.5	60.1
Average Gain (dBi)	-3.03	-3.33	-2.21
Peak Gain (dBi)	2.44	1.72	1.67
Impedance	50Ω		
Polarization	RHCP		



LNA Specification			
Gain (dB)	14.8 ± 1	15.0 ± 1	15.0 ± 1
NF (dB)	2.4 ± 0.2	1.9 ± 0.2	2.2 ± 0.2
Input Voltage	+1.8 to +5 VDC		
Power Consumption	3 to 24.5mA typical		
Out-Of-Band Attenuation (dB)	10-500MHz	> 60	
	500-850MHz	> 40	
	850-1000MHz	> 35	
	1000-1500MHz	> 25	
	1700-2300MHz	> 19	
	2300-5000MHz	> 30	
	5000-6000MHz	> 25	


PLOTS

VSWR

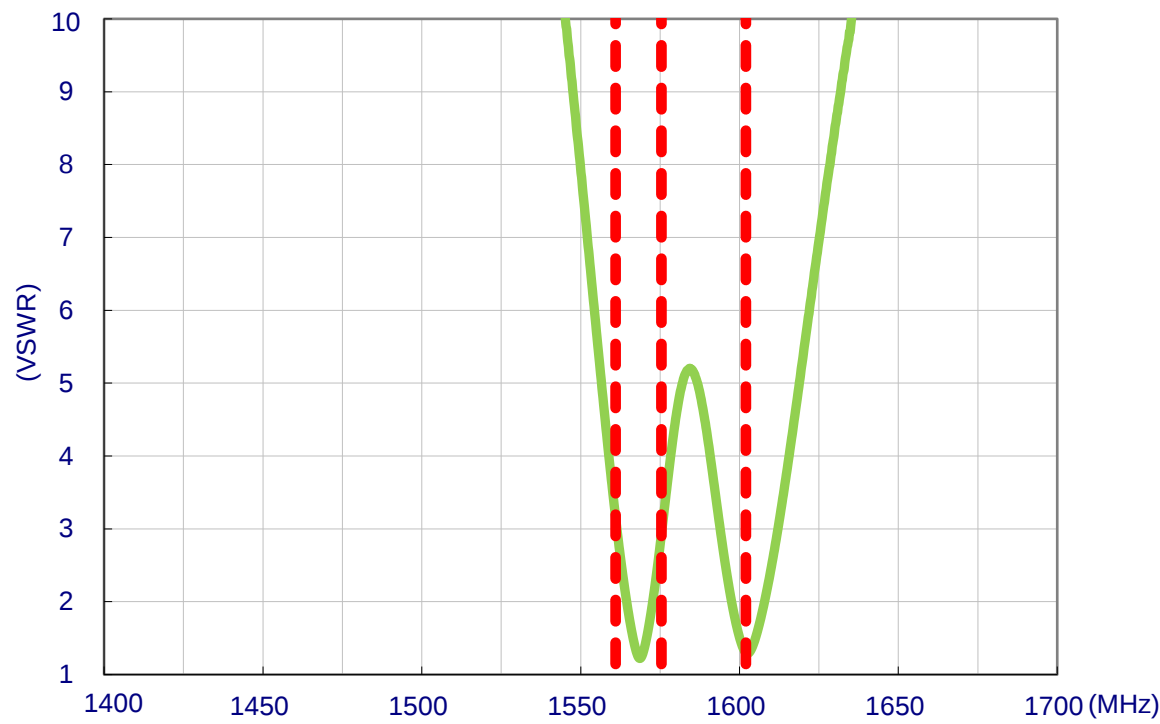




Efficiency

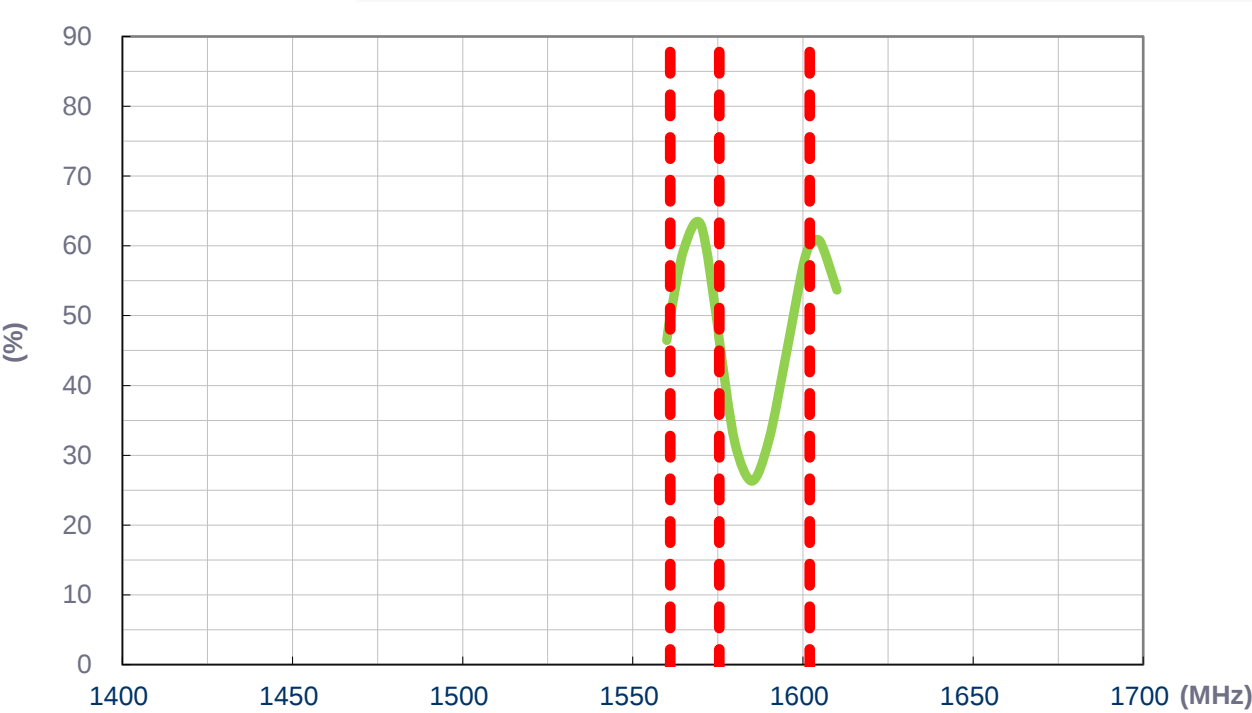




Average Gain

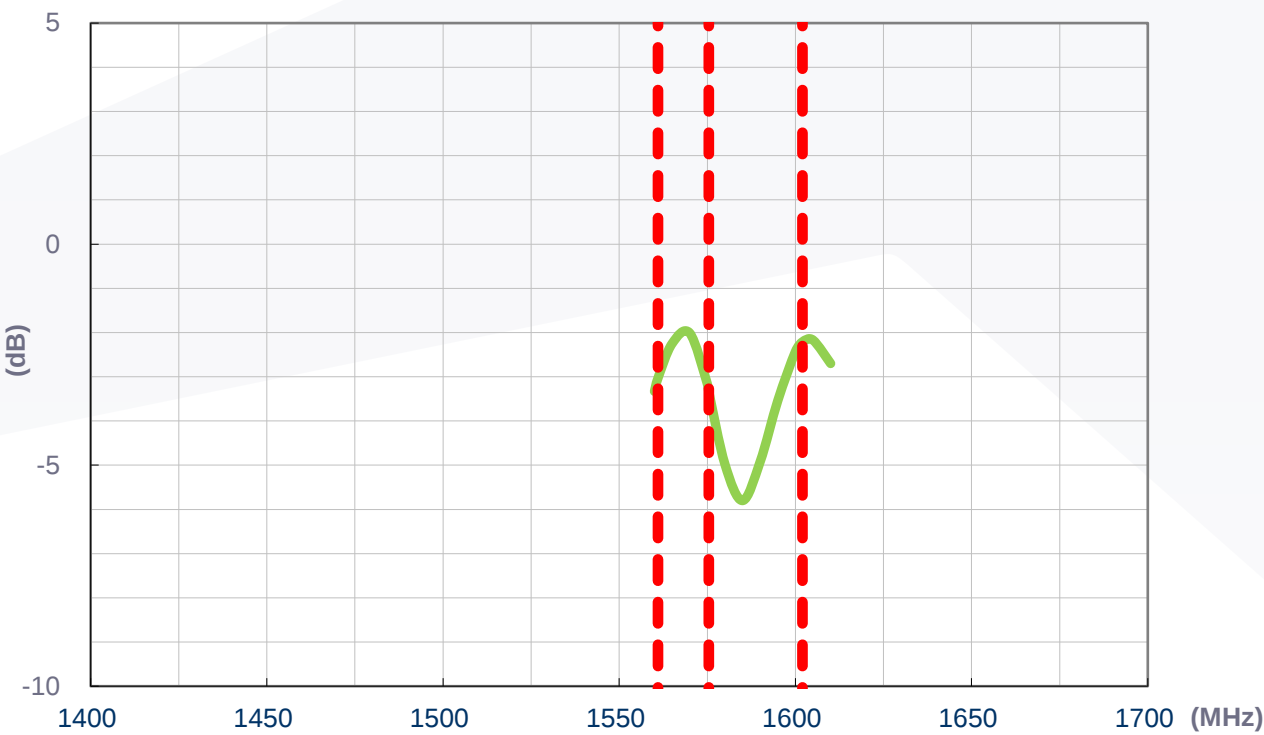

Peak Gain

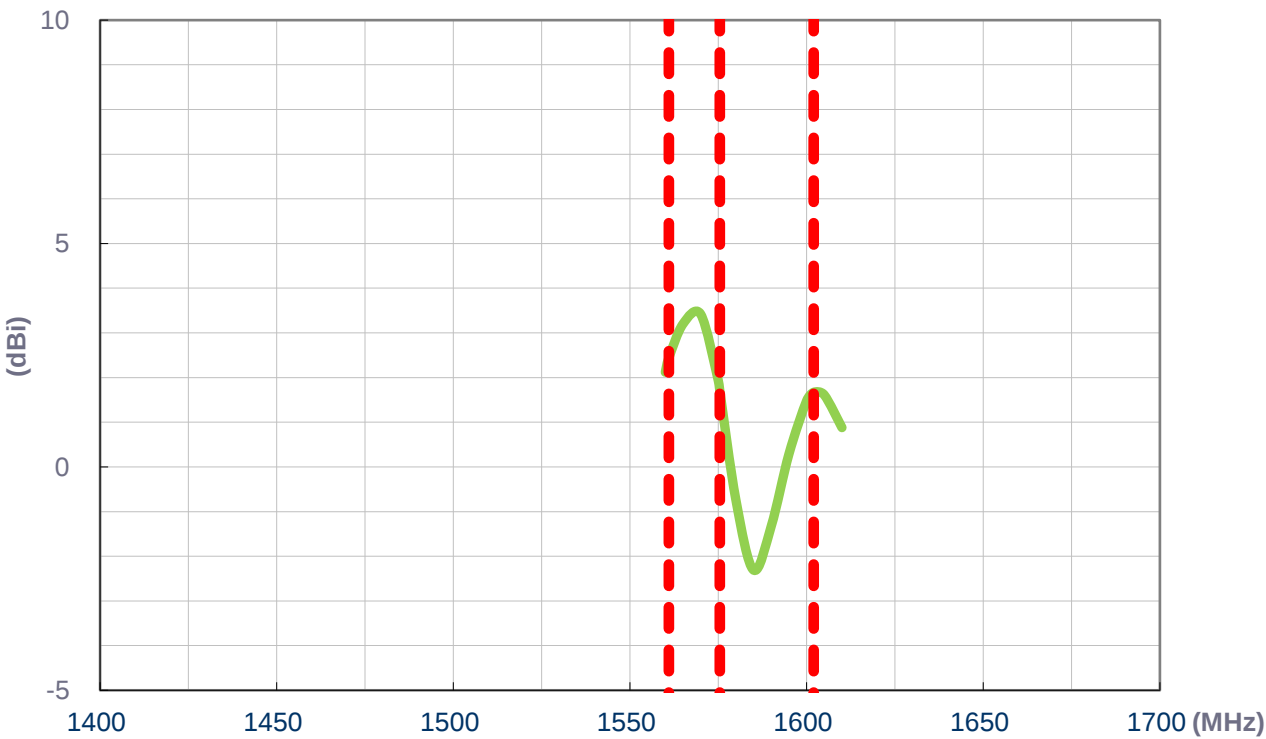



DIMENSIONS

