



Part No: TI.08.C.0111

Description

868MHz and 915MHz ISM Band Terminal Antenna

Features:

868MHz and 915MHz ISM/LoRA Band Omni-Directional Radiation Pattern Robust, Lightweight TPEE Enclosure Dimensions: Ø7x 54mm Connector: SMA Male



1.	Introduction	3
2.	Specification	4
3.	Antenna Characteristics	5
4.	Radiation Patterns	8
5.	Mechanical Drawing	13
6.	Packaging	14
	Changelog	15

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

















1. Introduction



The TI.08.C.0111 is a powerful ISM band terminal mount antenna for emerging 868MHz and 915MHz LPWA technologies including LoRa and Helium. It has 25% efficiency in free space but performs best, with an efficiency of up to 78%, when mounted on a ground plane.

It easily attaches externally to a user device via an SMA male straight connector and is therefore a quick and easy solution, ready for immediate deployment. The robust and ruggedized TPEE housing makes it ideal in even the most demanding of applications.

Typical applications include:

- Remote Monitoring
- Smart Metering
- Mesh Networks
- Helium Networks
- Smart Home

For further information or support with integrating this antenna into your device, please contact your regional Taoglas customer support team.



2. Specification

Electrical									
Band	Frequency (MHz)	Measurement	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
868MHz	862-874	Edge 30x30cm Groundplane	615	-2.11	1.87	50 Ω Linear	Linear	ear Omni	2W
000141112		Free Space	29.9	-5.24	0.90				
915MHz		Edge 30x30cm Groundplane	59.3	-2.27	1.67				
		Free Space	38.7	-4.12	1.42				


Mechanical Mechanical		
Height	54 mm	
Diameter	7 mm	
Casing	TPEE	
Connector	SMA Male	
Colour	Black	
Weight	7g	

Environmental		
Operation Temperature -40°C to 85°C		
Storage Temperature	-40°C to 85°C	
Relative Humidity	Non-condensing 65°C 95% RH	




3. Antenna Characteristics

3.1 Return Loss

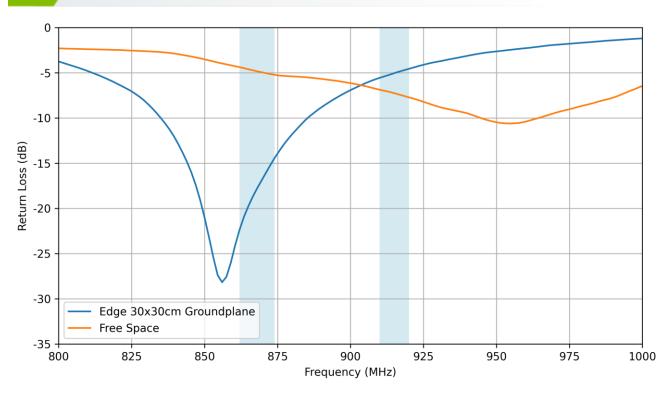


3.2 VSWR

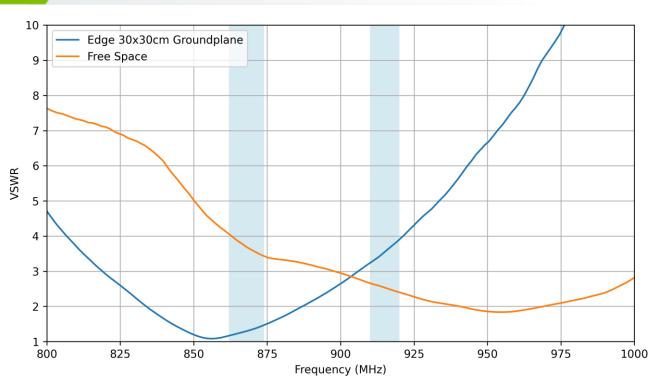




3.3 Efficiency

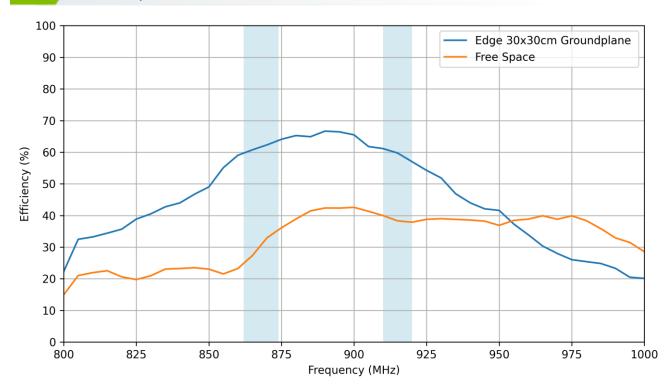


3.4 Average Gain

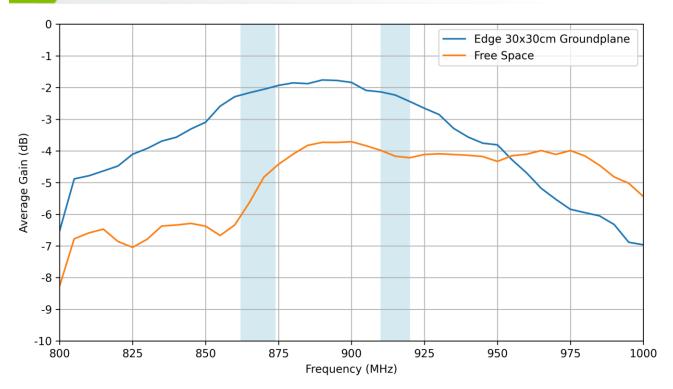




3.5 Peak Gain

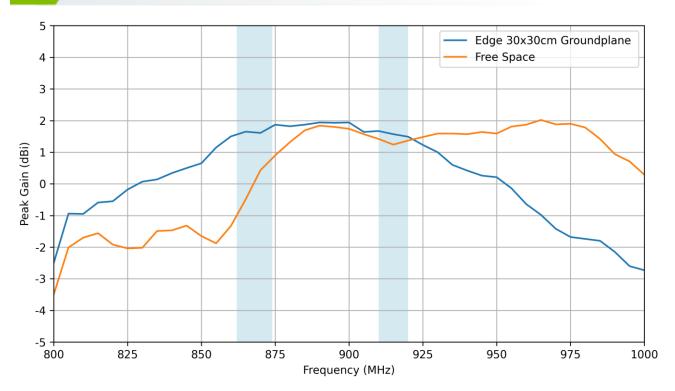




4. Radiation Patterns

4.1 Test Setup

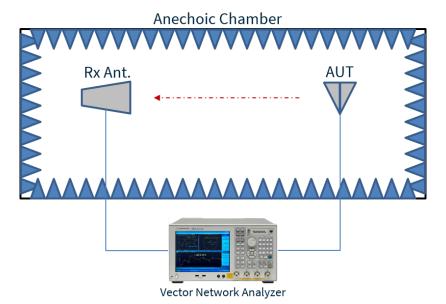

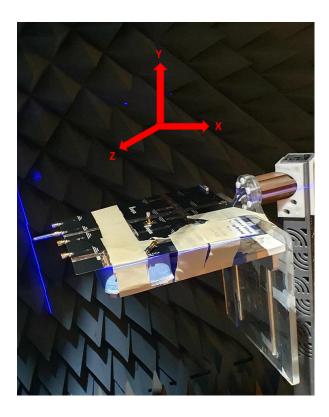





Edge of 30x30cm Ground Plane

Free Space




4.2 Edge 30x30cm Groundplane - Patterns at 870 MHz

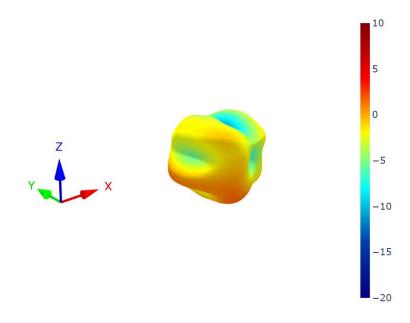


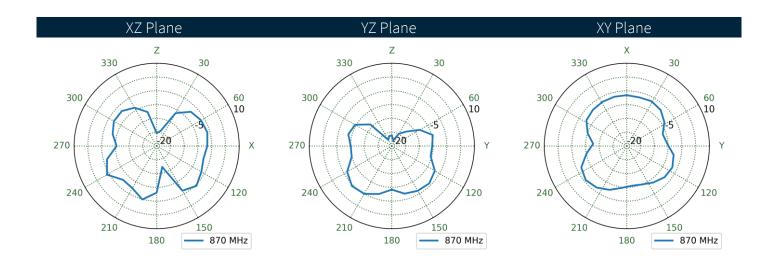




4.3 Free Space - Patterns at 868 MHz

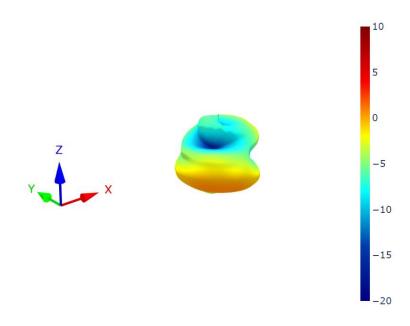


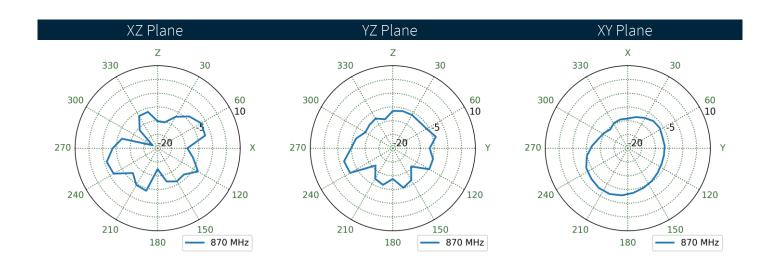




4.4 Edge 30x30cm Groundplane - Patterns at 915 MHz

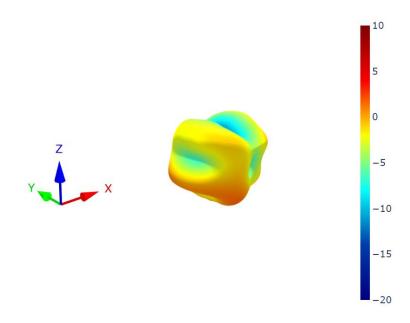


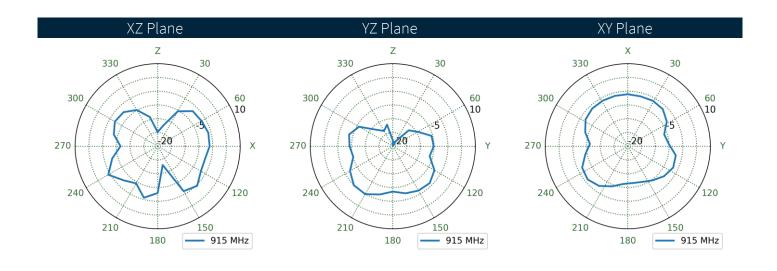




4.5 Free Space - Patterns at 915 MHz

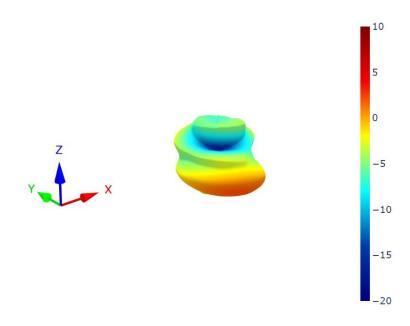

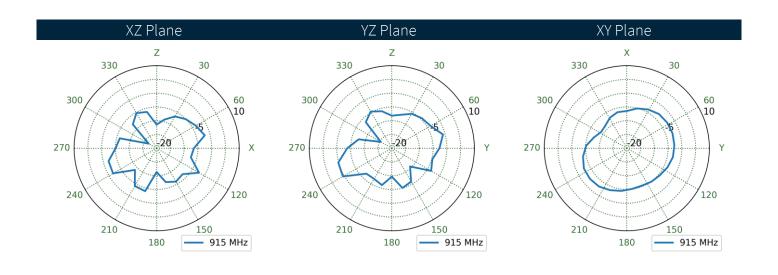



5. Mechanical Drawing

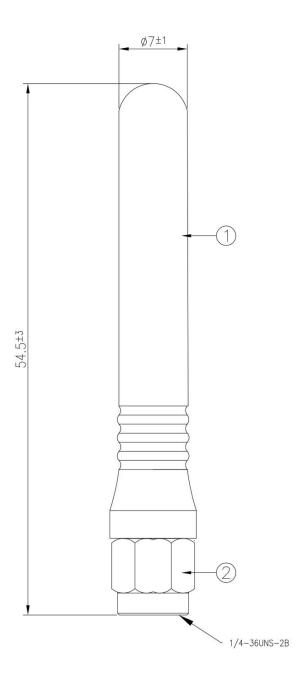

	Name	Material	Finish	QTY
1	Antenna Cover	TPEE	Black	1
2	SMA(M)ST	Brass	Au Plated	1




6. Packaging

1 pcs TI.08.C.0111 per PE Bag PE Bag Dimensions - 42*74mm Weight - 7g

100 PE Bags per Large PE Bag 100 pcs TI.08.C.0111 per Large PE Bag Large PE Dimensions - 180*280mm Weight - 0.761kg

15 Large PE bags per carton 1500 pcs Tl.08.C.0111 per carton Carton Dimensions - 360*310*160mm Weight - 12kg

Pallet Dimensions 1200mm*1000mm*1480mm 72 Cartons per Pallet 9 Cartons per layer 8 Layers

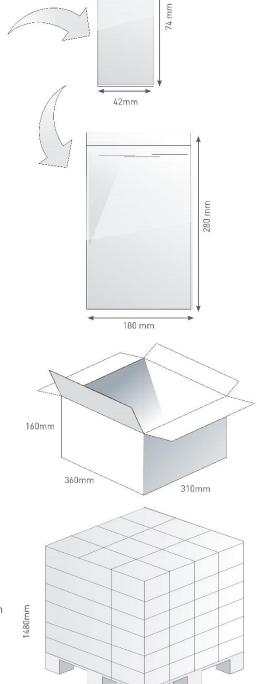

1200mm

1000mm



Changelog for the datasheet

SPE-18-8-056 - TI.08.C.0111

Revision: E (Current Version)		
Date:	2025-01-31	
Notes:	Updated data	
Author:	Gary West	

Previous Revisions

Revision: D		
Date:	2024-11-04	
Notes:	Frequency coverage update	
Author:	Cesar Sousa	

Revision: C		
Date:	2022-12-14	
Notes:	Full datasheet update	
Author:	Evan Murphy	

Revision: B	
Date:	2022-05-05
Notes:	
Author:	Technical Writer

Revision: A (Original First Release)		
Date:	2018-12-06	
Notes:		
Author:	Jack Conroy	





www.taoglas.com

