



TAOGLAS®



Datasheet

863-873MHz ISM Band Terminal Antenna

Part No:
TI.83.A111

Description

863-873MHz Terminal Antenna SMA Male Straight

Features:

863-873MHz Band Operation
IP67 Waterproof Rated
Low-profile Terminal Antenna
SMA(M) Straight Connector
Dimensions: \varnothing 8.9mm x 21mm
RoHS & Reach Compliant

1.	Introduction	2
2.	Specification	3
3.	Antenna Characteristics	4
4.	Radiation Patterns	7
5.	Mechanical Drawing	11
6.	Packaging	12
<hr/>		
	Changelog	13

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The TI.83 is one of a range of super small form factor, lightweight, IP67 rated terminal mount antennas from Taoglas. It is ideal for wireless applications operating on ISM or LoRa bands covering 863-873MHz. Its robust silicone enclosure is engineered to perform in the most challenging of external environments when connecting IoT devices to smart grid and smart monitoring applications.

With its IP67 rating, the TI.83 can withstand dust, dirt, and even complete submersion in water, making it the perfect choice for any IoT application that demands both reliable connectivity and extreme durability. Whether you're connecting sensors for remote agricultural, monitoring equipment in industrial settings, or building the infrastructure for smart cities, the TI.83 is a great solution.

If you are looking for an antenna that's small, tough, and versatile, look no further than the TI.83. Contact your regional Taoglas Customer Services Team for more information or to discuss your project.

2. Specification

ISM Electrical							
Band		Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern
ISM 863-873MHz	In Free space	19.9	-7.02	-1.87	50 Ω	Linear	Omni
	On 15x9cm Ground plane (Long side)	59.2	-2.28	0.74			
	On 9x15cm Ground plane (Short side)	57.7	-2.38	2.05			

Mechanical	
Dimensions	ø8.9mm x 21mm
Weight	3.3g
Material	Silicone
Connector	SMA(M)

Environmental	
Operating Temperature	-40°C ~ +85°C
Waterproof Rating	IP67


3. Antenna Characteristics

3.1 Test Setup


AUT



Vector Network Analyzer

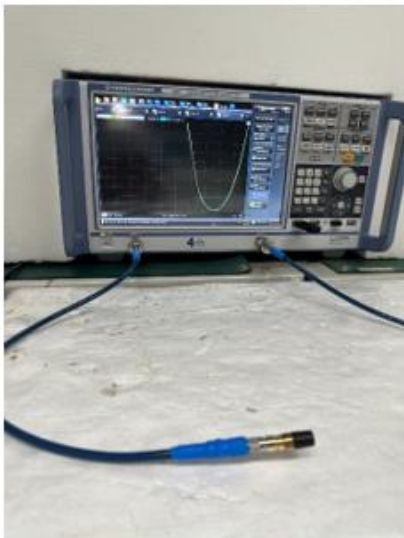


In Free Space

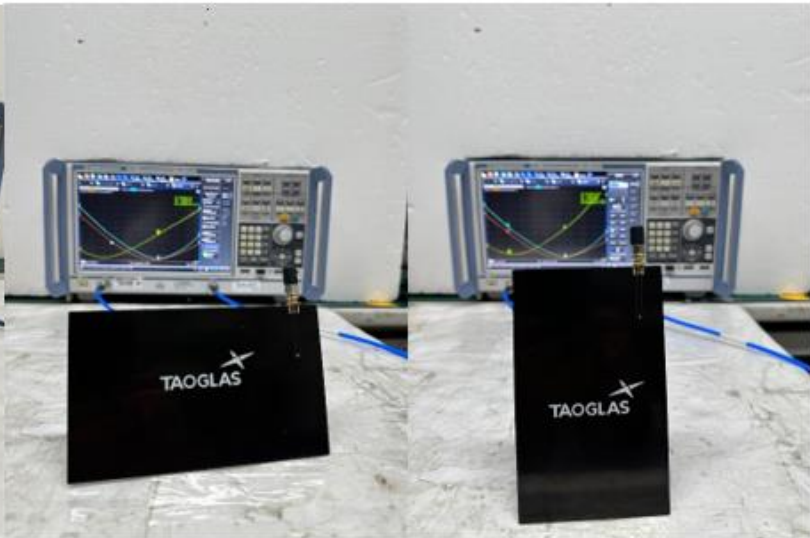


On 15x9cm Ground plane

On 9x15cm Ground plane


3.2 Return Loss

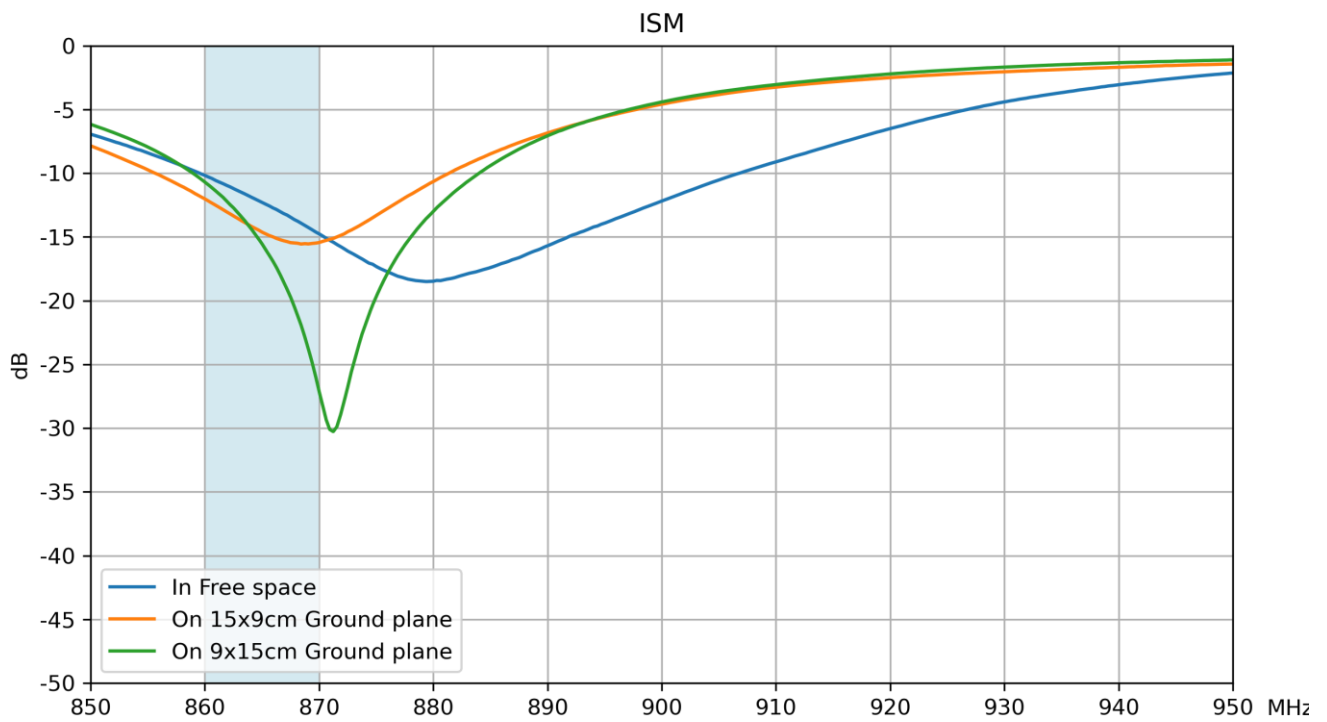


3.3 Efficiency

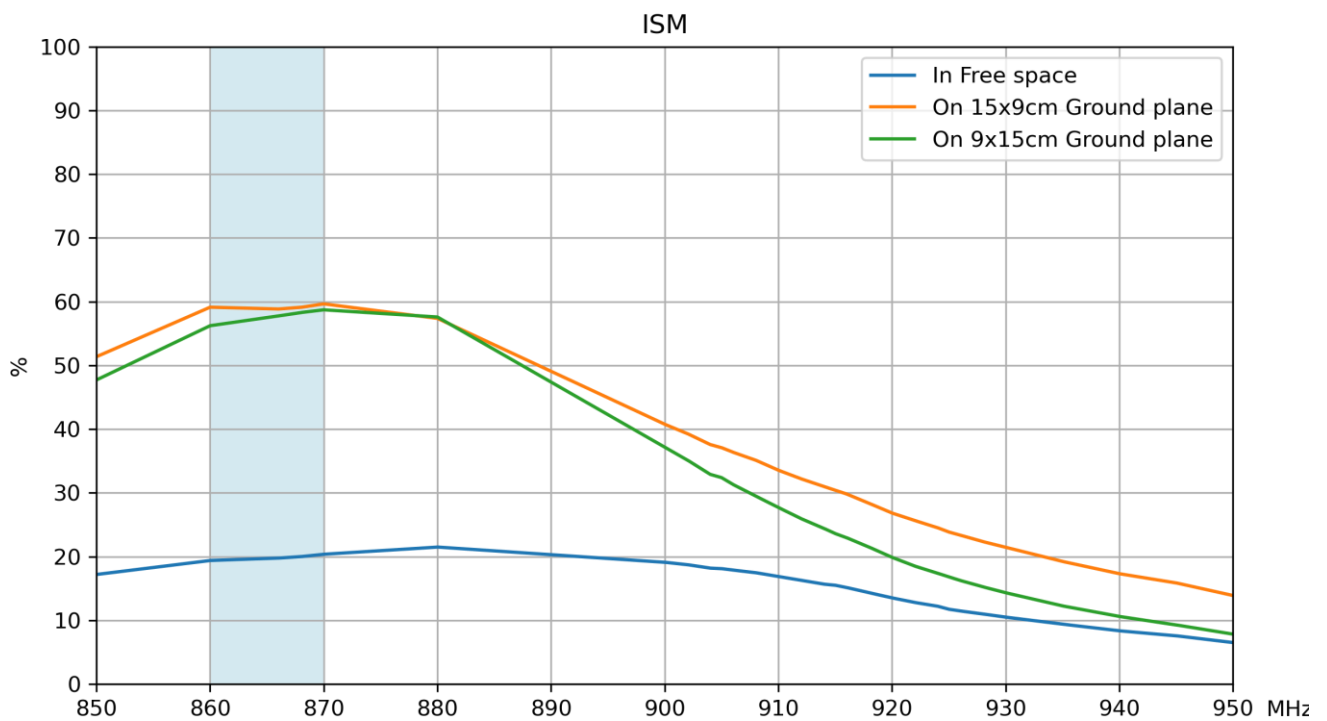

3.4 Average Gain


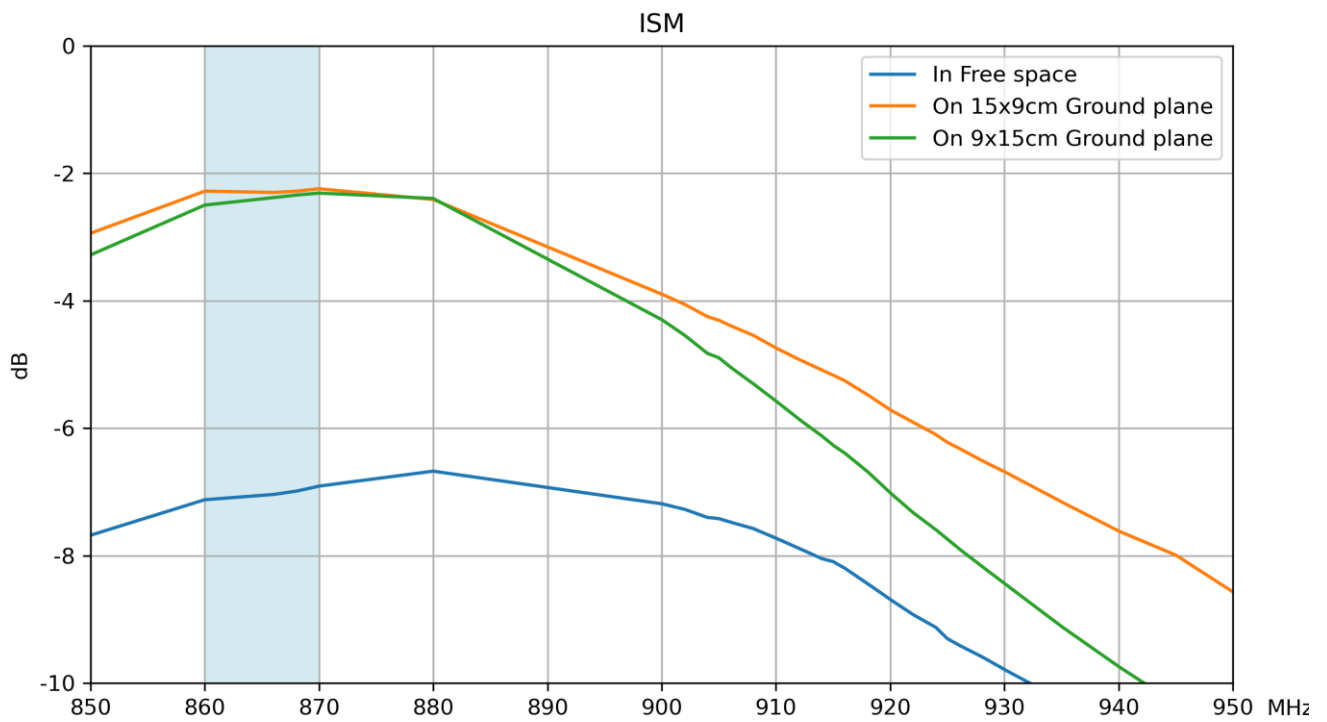


3.5 Peak Gain

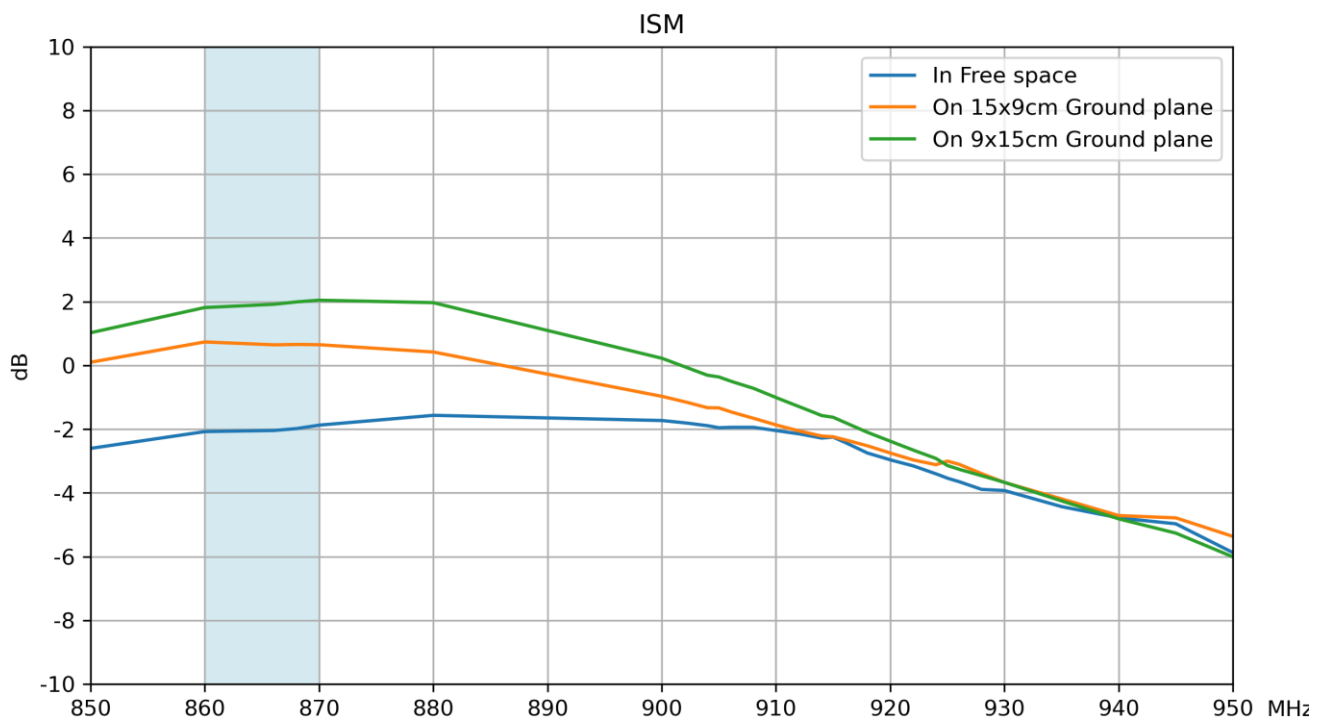

4. Radiation Patterns

4.1 Test Setup

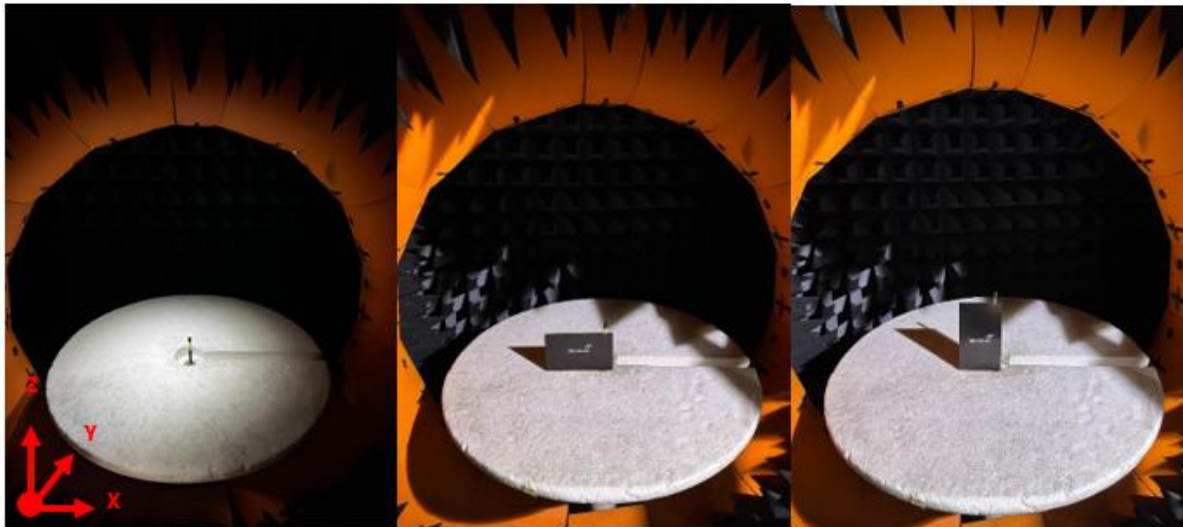
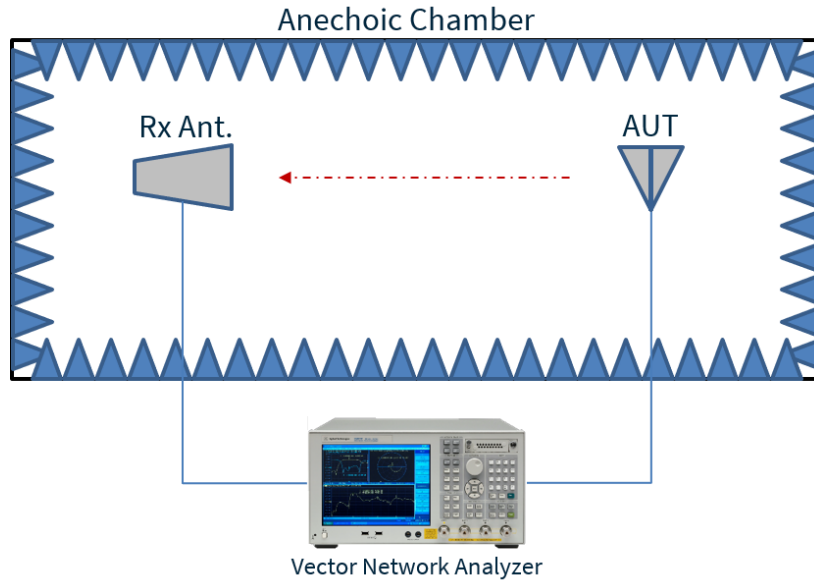


In Free Space


On 15x9cm Ground plane

On 9x15cm Ground plane




4.2 TI.83.A.111 - Patterns at 868 MHz in Free Space

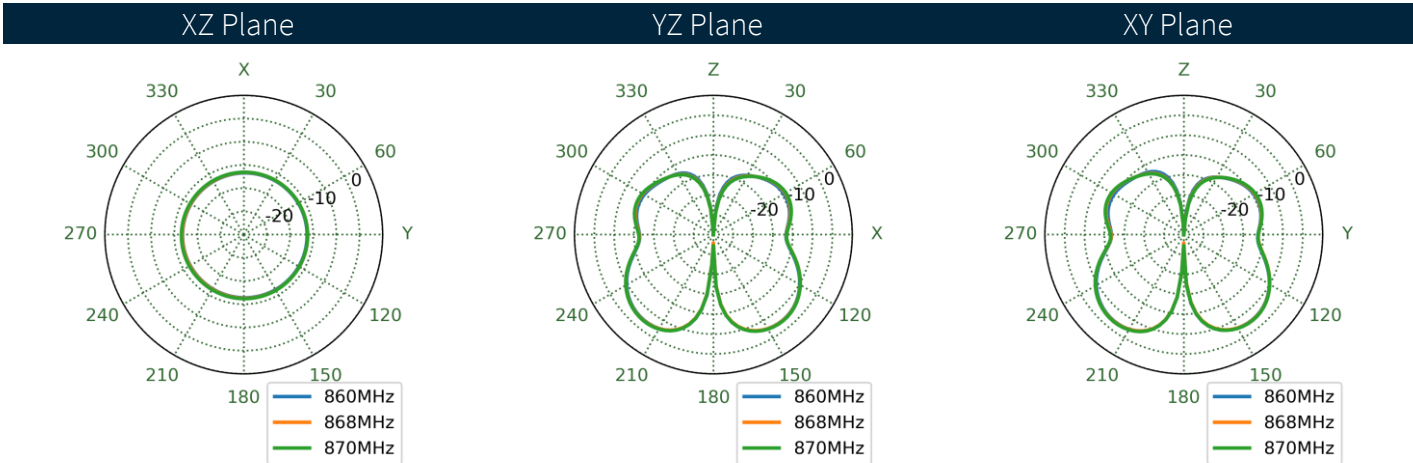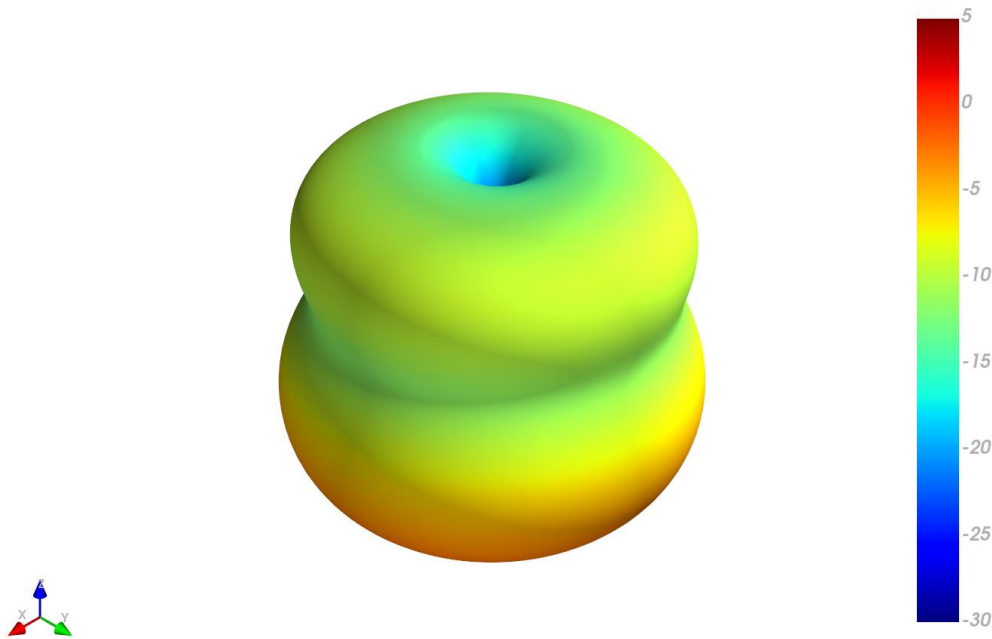


4.3 TI.83.A111 - Patterns at 868 MHz on 15x9cm ground plane

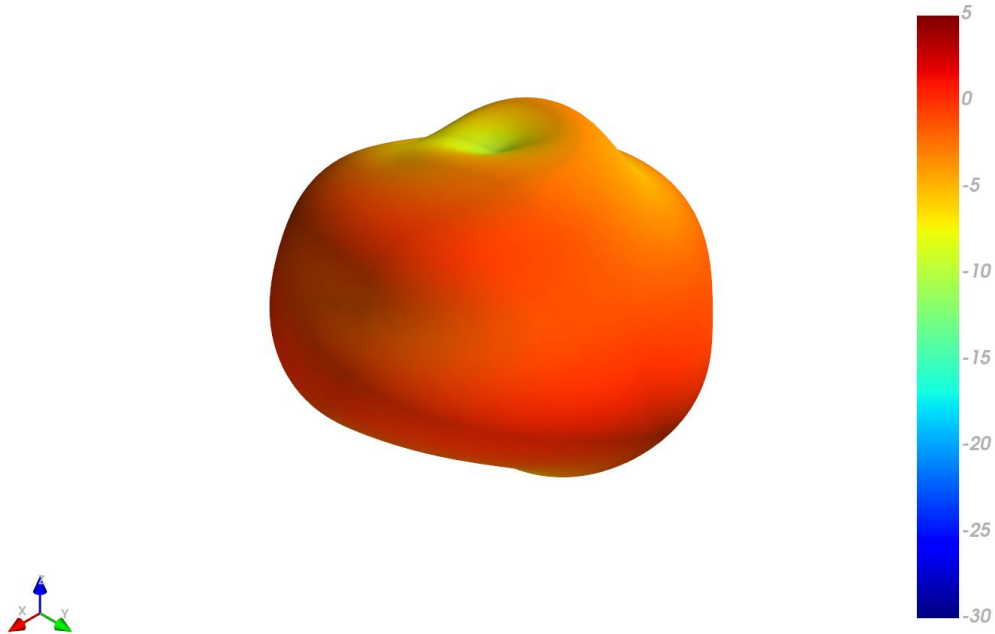




XZ Plane YZ Plane XY Plane

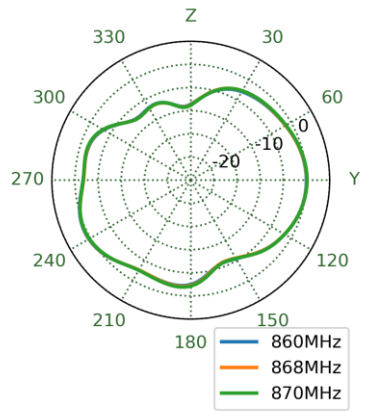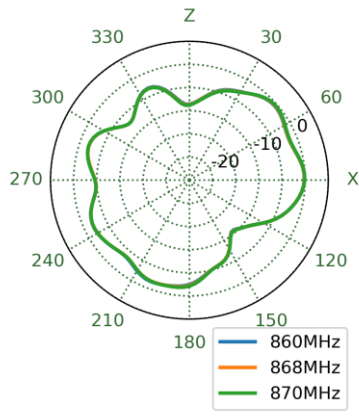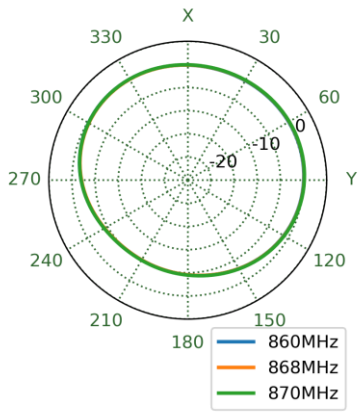


4.4 TI.83.A111 - Patterns at 868 MHz on 9x15cm ground plane

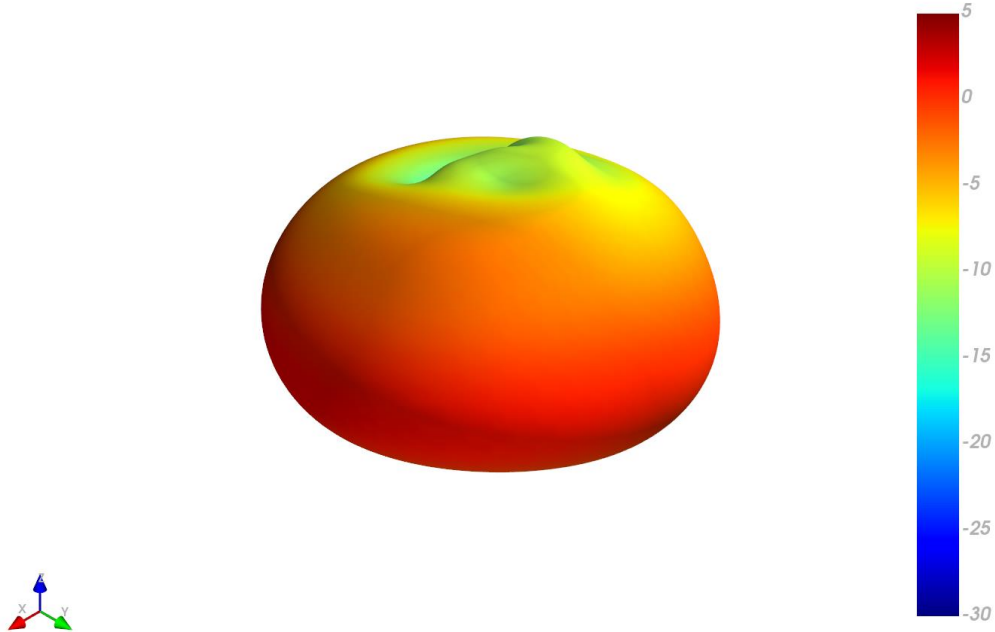

XZ Plane YZ Plane XY Plane

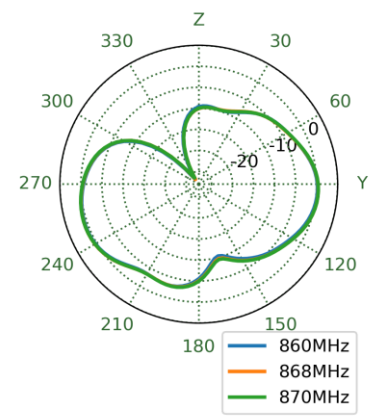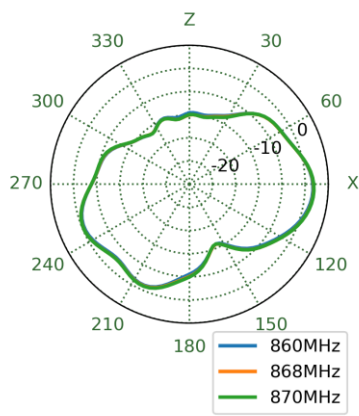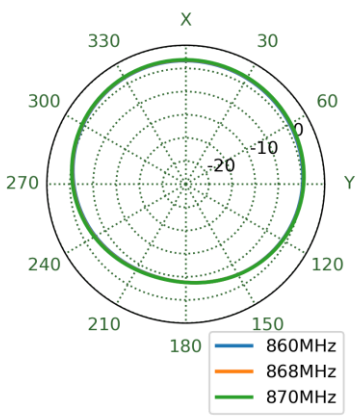


5. Mechanical Drawing


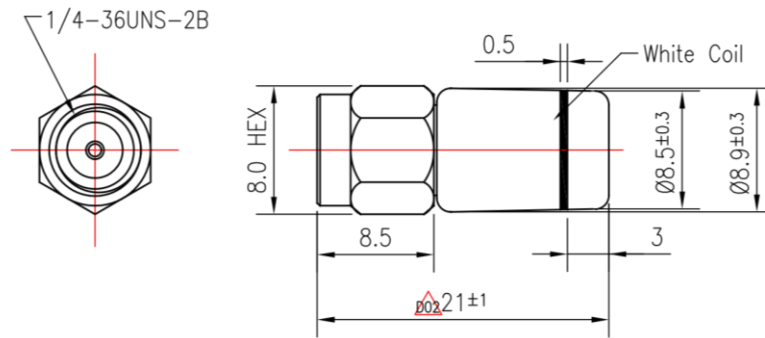


6. Packaging


140pcs TI.83.A111 per Tray
Weight: 0.52Kg

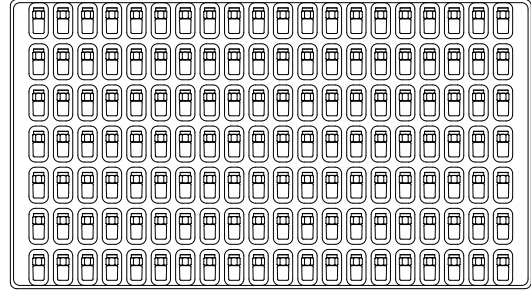

8 SET per Tray
Weight: 4.2Kg

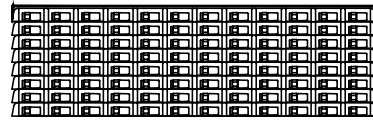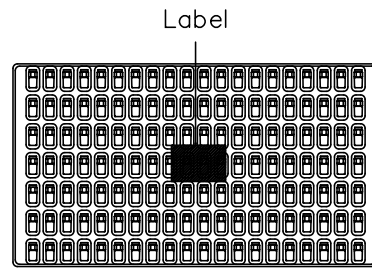

1120pcs per Carton
Dimensions: 425x240x130mm
Weight: 4.65Kg

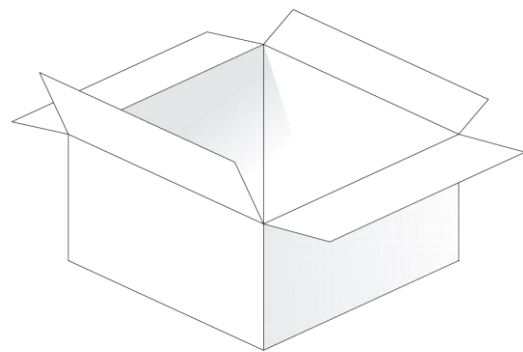

Changelog for the datasheet

SPE-24-8-025– TI.83.A111

Revision: A (First Release)	
Date:	2024-02-12
Notes:	
Author:	Cesar Sousa

Previous Revisions

Revision:	
Date:	
Notes:	
Author:	



www.taoglas.com

