



TAOGLAS®



Datasheet

Terminal Antenna

Part No:
TI.84.A113

Description

860-870MHz IP67 Terminal Antenna SMA(M) Hinged

Features:

Covering 868MHz

IP67 Waterproof Enclosure

Dimensions: Ø12.7 x 203mm

Connector: SMA(M)

RoHS & Reach Compliant

1.	Introduction	2
2.	Specification	3
3.	Antenna Characteristics	4
4.	Radiation Patterns	7
5.	Mechanical Drawing	11
6.	Packaging	12
<hr/>		
	Changelog	13

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Ireland & USA
ISO 9001:2015
Certified



Taiwan
ISO 9001:2015
Certified



1. Introduction



The TI.84.A113 is a high performance 868MHz Terminal mount dipole antenna, it is 198mm tall and 13mm in diameter and can be mounted straight or right angled due to its hinged SMA(M) connector which comes as standard. This antenna performs very well in free space, making it an ideal solution in areas where there may be no ground plane.

The TI.84's IP67 Rating allows it to be used in areas where conventional Terminal mount antennas can't be used, it can be used outdoors or indoors without the fear of water ingress.

Typical Applications include:

- Smart Metering
- Remote Monitoring
- Industrial IoT
- Connected Enterprise

The TI.84 is manufactured using TPEE which makes it very lightweight at just 22.5g. The swivel and hinge mechanism allows the antenna to be orientated in different directions which helps to avoid other antennas or objects. The antenna connector type can be customizable, please contact your regional Taoglas customer support team for installation guidelines or additional support to integrate and test this antenna's performance in your device.

2. Specification

LTE Electrical							
Frequency (MHz)	Test Set-up	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern
868MHz (860-870MHz)	Free space	65.8	-1.82	1.06	50 Ω	Linear	Omni directional
	on 15x9 Ground	90.5	-0.43	3.50			
	on 9x15 Ground	90.0	-0.46	3.28			

Mechanical	
Dimensions	Ø12.7 x 203
Material	PC+PBT
IP Rating	IP67
Connector	SMA(M)


Environmental	
Operation Temperature	-40°C - +85°C
Storage Temperature	-40°C - +85°C

3. Antenna Characteristics

3.1 Test Set-up

AUT

Vector Network Analyzer

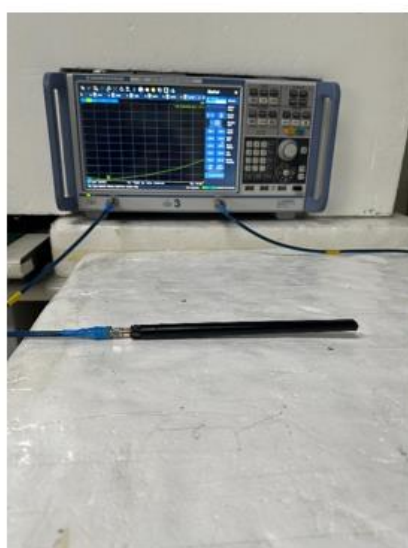

Free space




On 15x9cm Ground




On 9x15cm Ground


3.2 Return Loss

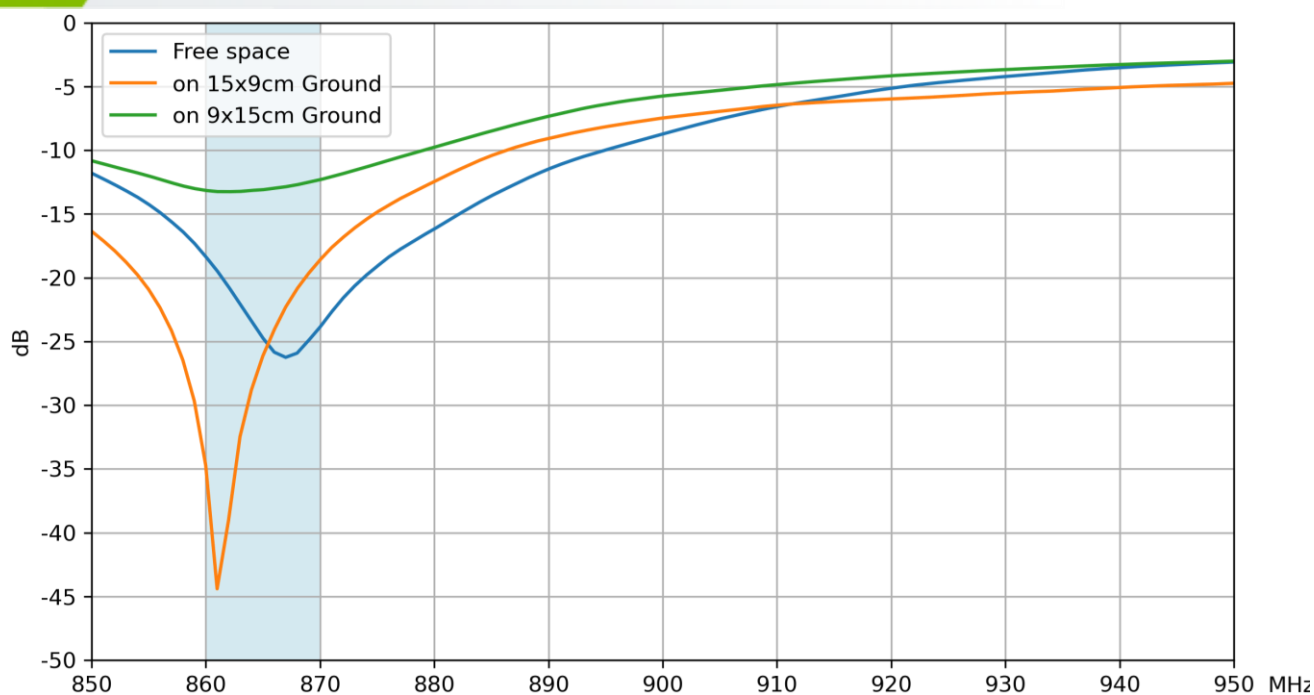


3.3 Efficiency

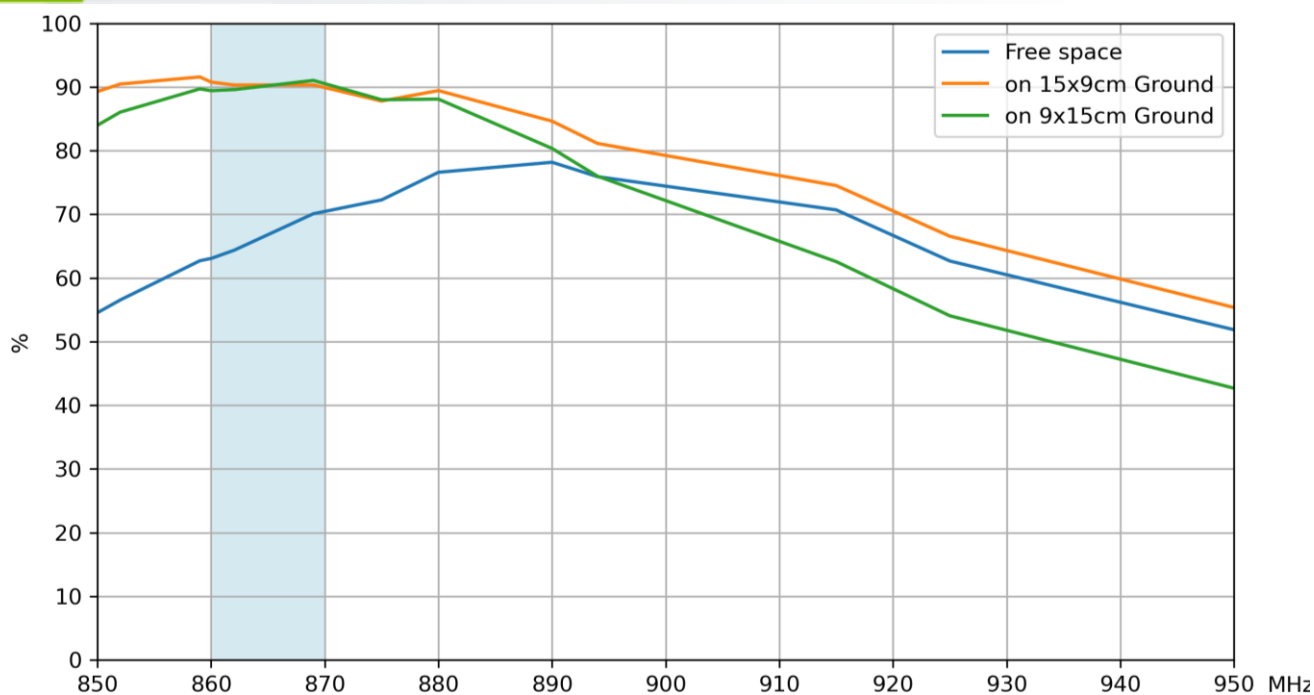

3.4 Average Gain


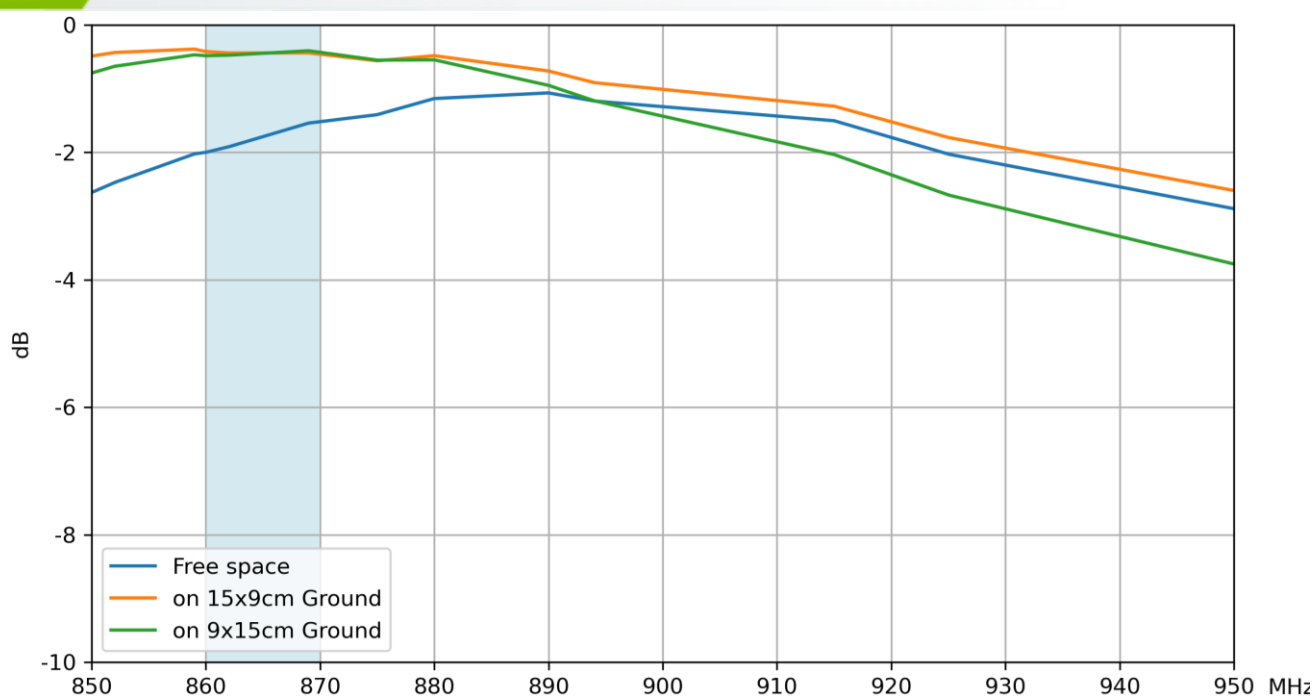


3.5 Peak Gain

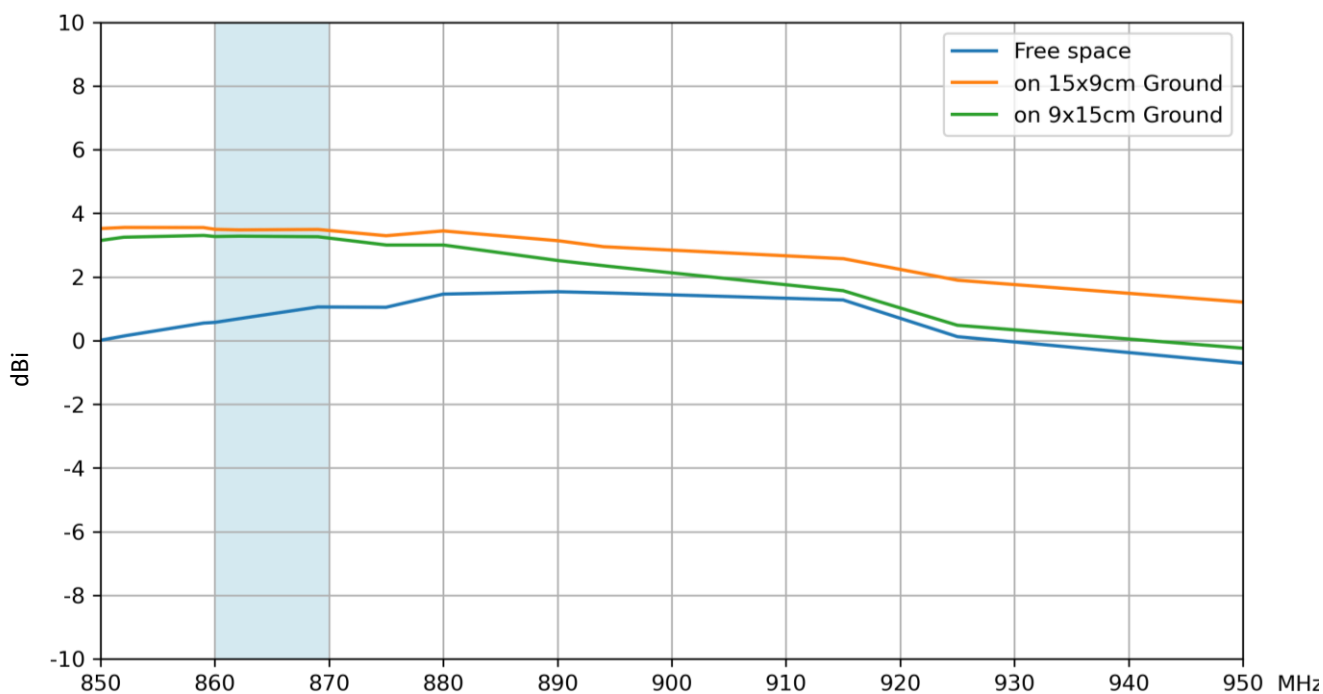


4. Radiation Patterns


4.1 Test Setup

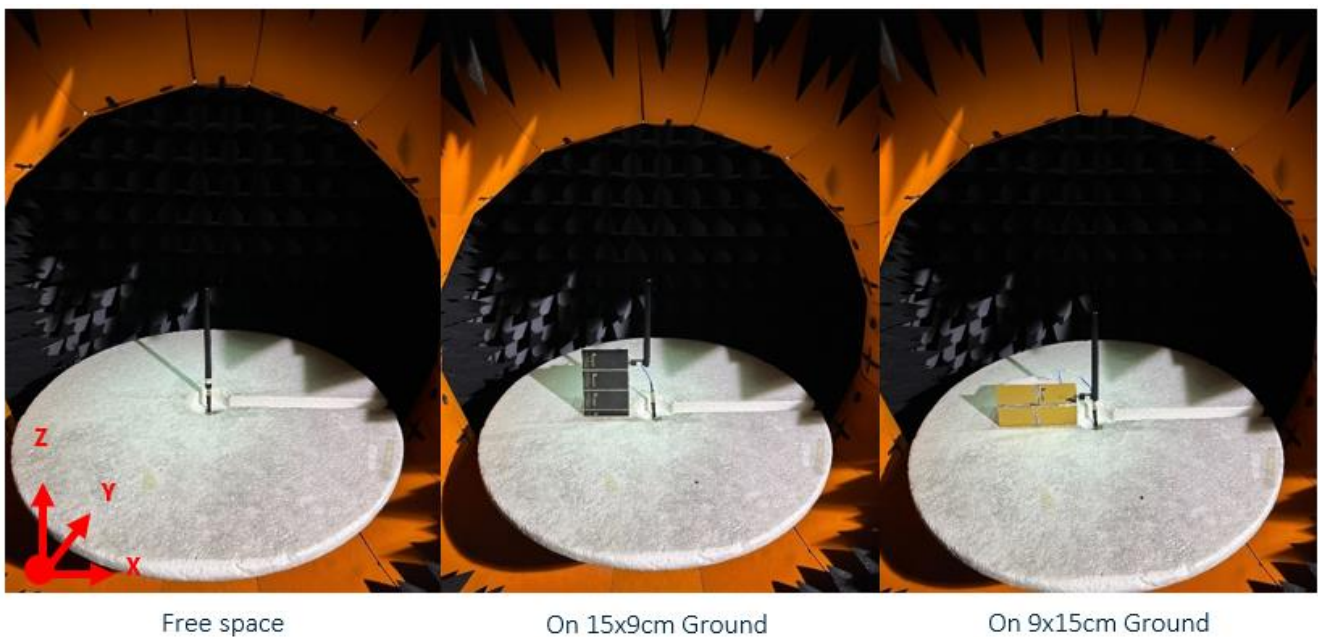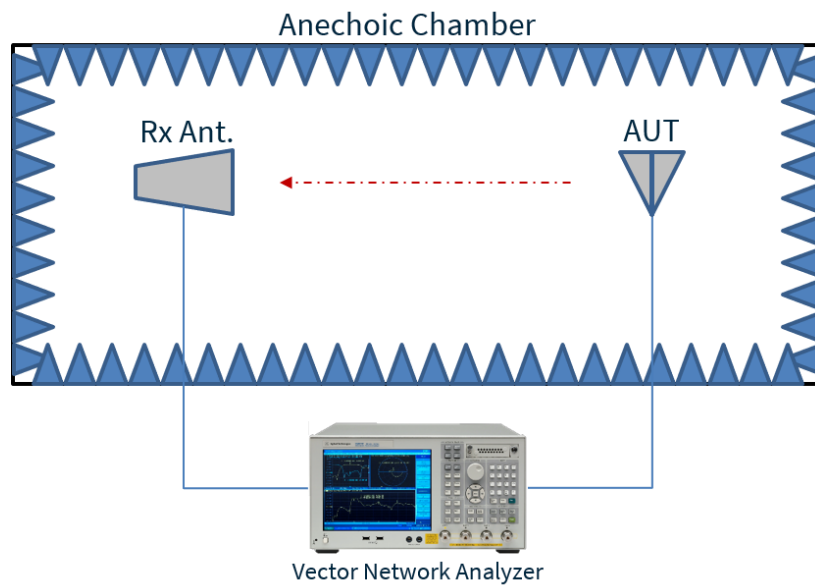


4.2 Free space - Patterns at 868 MHz

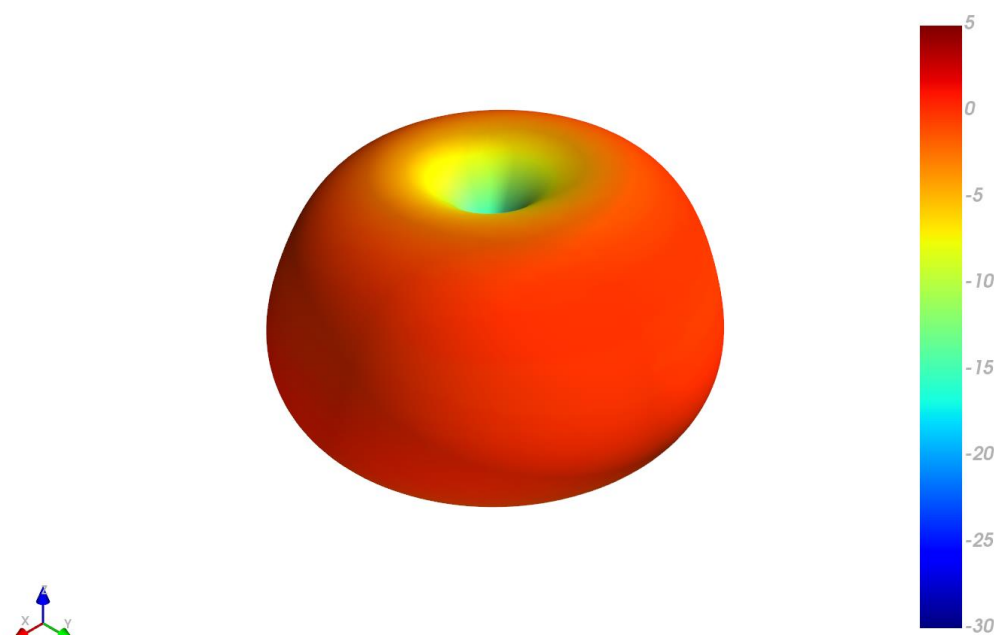


XZ Plane

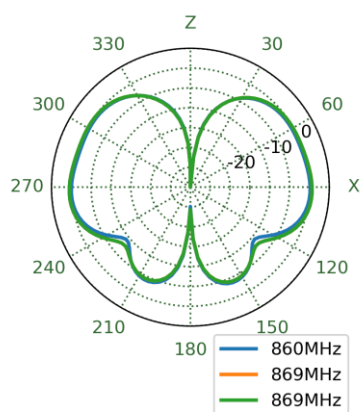


YZ Plane

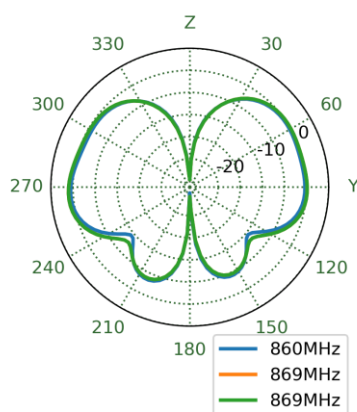


XY Plane

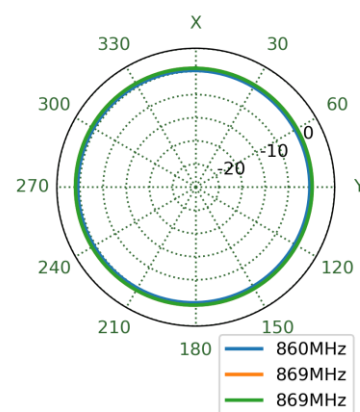


4.3 On 15x9cm Ground - Patterns at 868 MHz

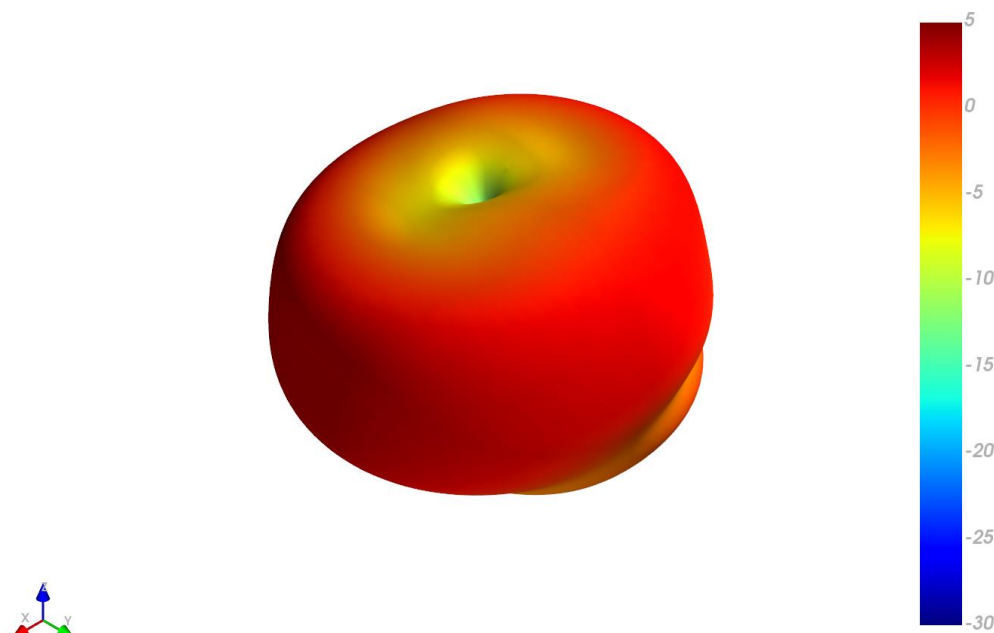


XZ Plane

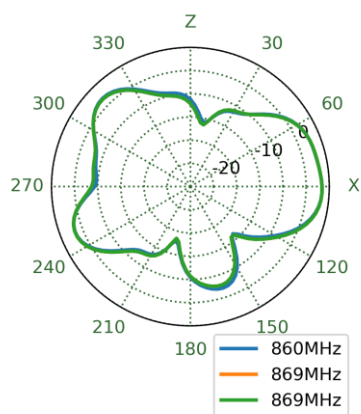


YZ Plane

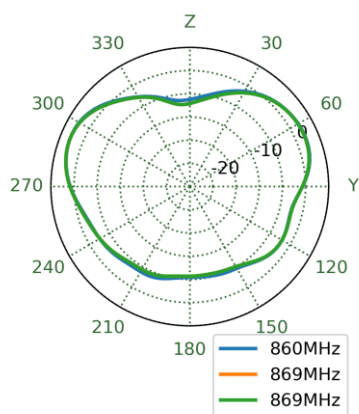


XY Plane

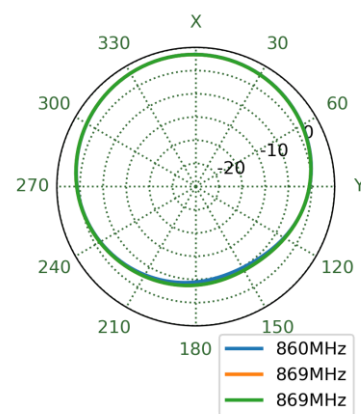


4.4 On 9x15cm Ground - Patterns at 868 MHz

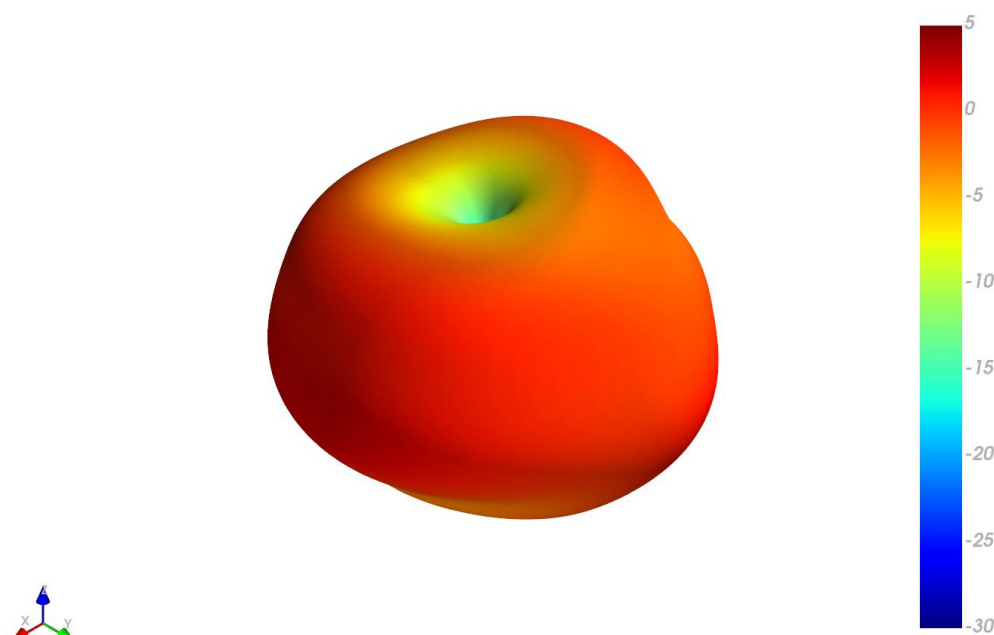


XZ Plane

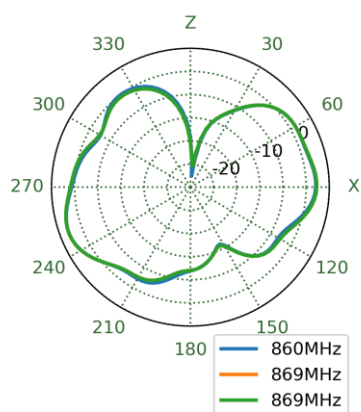


YZ Plane

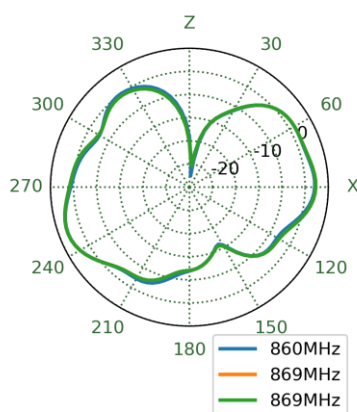

XY Plane

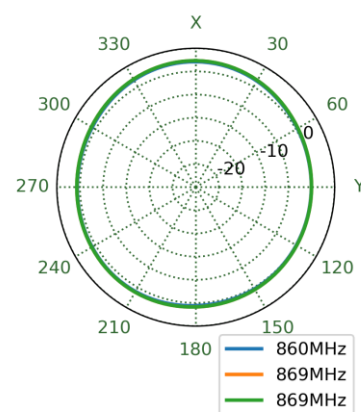

5. Mechanical Drawing

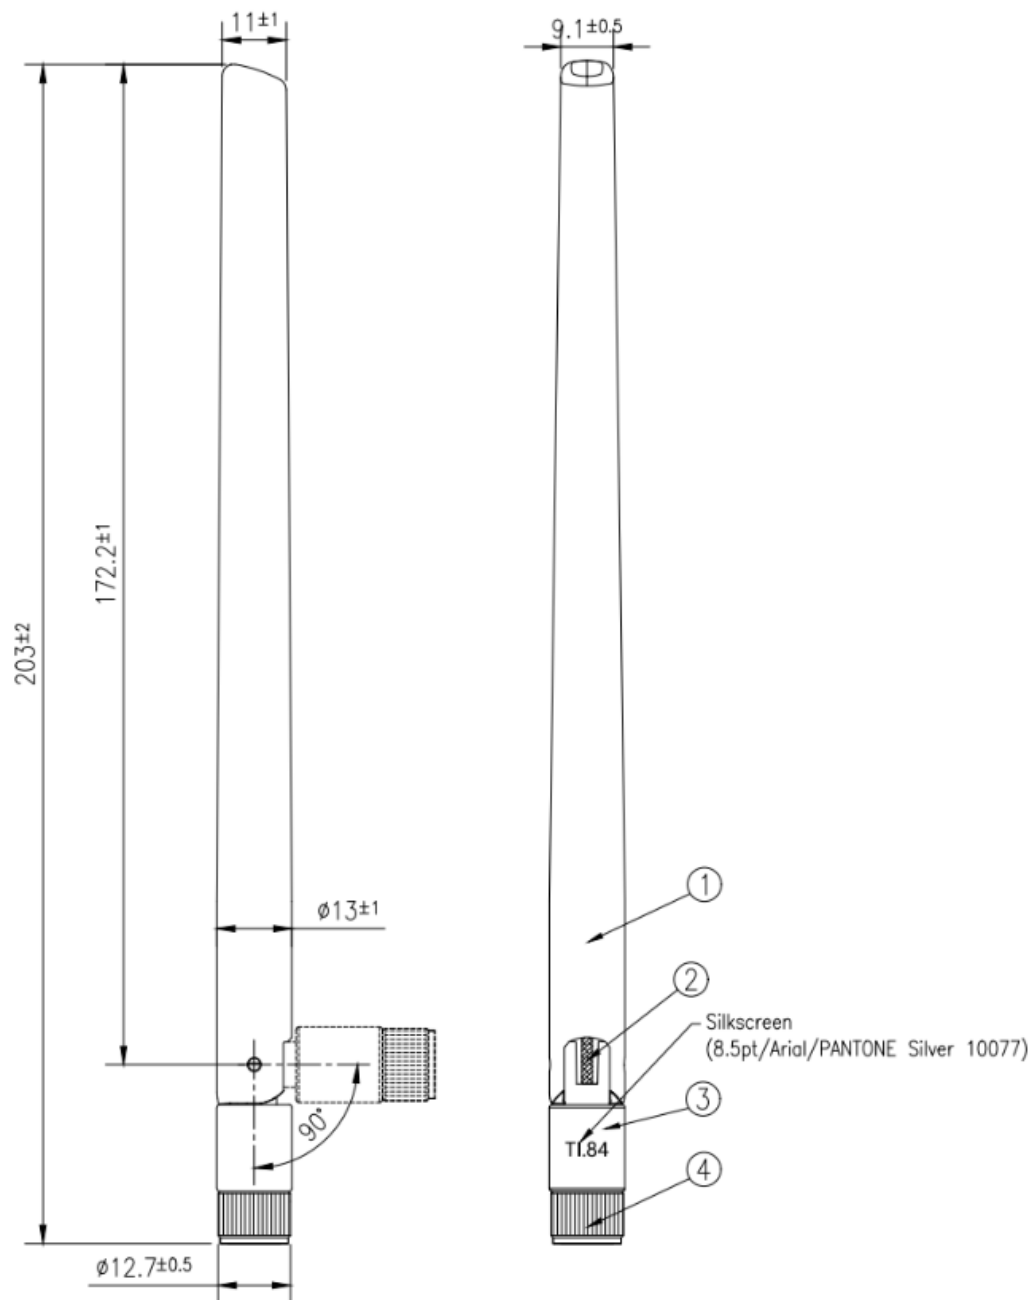

	Name	Material	Finish	QTY
1	Radome	PC+PBT	Black	1
2	RG178 coaxial cable	FEP	Brown	1
3	Lower Holder	PC+PBT	Black	1
4	SMA(M)	PC+PBT	Black	1

6. Packaging



☒ 1 PCS / Small PE Bag



☒ 50 PCS / PE Bag

☒ Weight (kg): 1.25 \pm 3%

☒ SPQ Label



☒ 300 PCS / Carton

☒ Carton(mm): 320x250x290

☒ Weight (kg): 8 \pm 3%

☒ Carton Label

Changelog for the datasheet

SPE-23-8-277 – TI.84.A113

Revision: C (Current Version)

Date: 2025-06-04

Notes: Updated packaging information

Author: Paul Liu

Previous Revisions

Revision: B (Current Version)

Date: 2025-02-24

Notes: Added packaging, New ISO logo, IP Rating and updated typo in spec table.

Author: Gary West

Revision: A (Original First Release)

Date: 2023-09-27

Notes: Initial Release

Author: Gary West



www.taoglas.com

