



TAOGLAS®



Datasheet

RJ45 ICM 2.5G Base-T Short Body

Part No:
TMJM4938HENL

Description:
RJ45 connector with integrated magnetics 2.5G Base-T
Single Port Tab-DOWN with right angle THT mount and LEDs

Features:
Short Body
Industrial grade
3Wire + Transformer
Current/Voltage Drive
Shielded
RoHS Compliant

1. Introduction	3
2. Specifications	4
3. Mechanical	5
4. Electrical	6
5. Packaging	7
<hr/>	
Changelog	8

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



Featuring a popular footprint and compatible package to industry RJ45 Integrated Connectors standards, the Taoglas TMJM4938HENL is an RJ45 Integrated Connector 2.5G Base-T Single Port Tab Down with shielded short body design that offers extra space.

Typical Applications Include:

- Industrial Automation
- Hubs
- Routers
- Switches
- Wireless Access Points

Taoglas Magnetics offer an extensive product line of RJ45 Integrated Connectors designed for commercial and industrial grade applications, supporting 10/100 Base-T (Atmos100 Series) and 1G Base-T (Atmos1000 series). These surface mount or through-hole components provide reliable performance and maintain signal integrity that meets IEEE 802.3 standards, and they are UL certified. The Power over Ethernet options are also available including PoE, PoE+ and PoE++.

The majority of Taoglas RJ45 ICMs are manufactured with fully automated winding, assembly & testing to ensure consistent performance, quality and reliability while ensuring cost competitiveness for its customers. These products are fully compliant with the REACH and RoHS directive, and compatible with all major PHY vendors.

For customized products or support with integration, contact your regional Taoglas customer support team for further information.

2. Specifications

Electrical Performance @25°C	
Inductance OCL	150uH Min @100KHz, 0.1V
Turns Ratio (±2%)	1CT:1CT
Insertion Loss (dB Max)	1~50MHz: -0.5
	50~125MHz: -1.0
Return Loss (dB Min)	1~40MHz: -20
	40~200MHz: -20+15*LOG (f/40)
Crosstalk (dB Min)	1~125MHz: -30
Common Mode Rejection Ratio (dB Min)	30~200MHz: -30
Common to Diff Rejection Ratio (dB Min)	10~125MHz: -45+f/35
Hipot	1500Vrms Min

Environmental Specifications	
Operating Temperature	-40°C TO +85°C


Material Specifications	
Housing	Thermoplastic PBT+30%G. F UL94V-0
Contact Material	Phosphor Bronze C5210R-EH Thickness=0.35mm
Pins	Brass C2680R-H Thickness=0.35mm
Shield	SUS 201-1/2H Thickness=0.2mm
Contact plating	Gold 6 micro-inches min. in contact area
Wave solder tip temperature	265°C Max, 5 Sec

Compliance	
	IEEE 802.3
	RoHS Compliant


Storage requirements	
Humidity	MSL - 1
Storage Temperature	-40°C TO +85°C

3. Mechanical

3.1 Mechanical Drawings

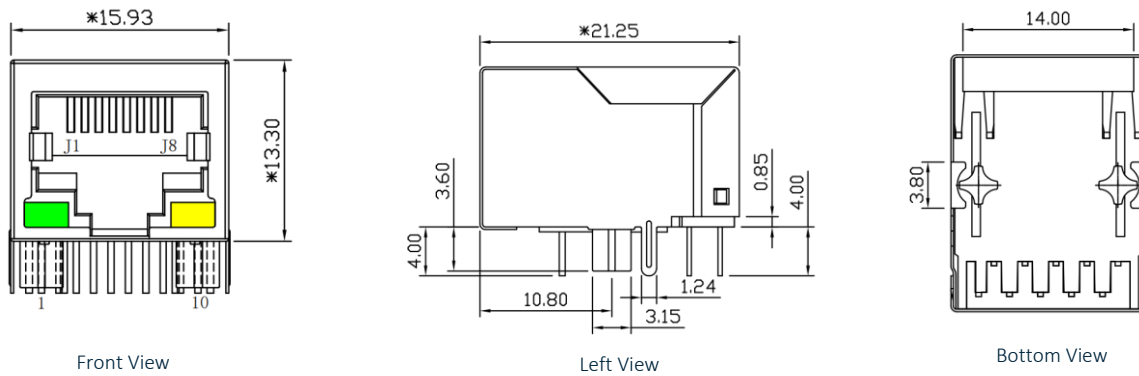


Mechanical Specifications	
Height	13.3mm
Width	15.93mm
Depth	21.25mm
Mounting Style	Through Hole (THT)
Mounting Angle	Right Angle



Bottom View

Dimensions are in millimeters with the following tolerances: X.XX = ± 0.25

3.2 PCB Layout

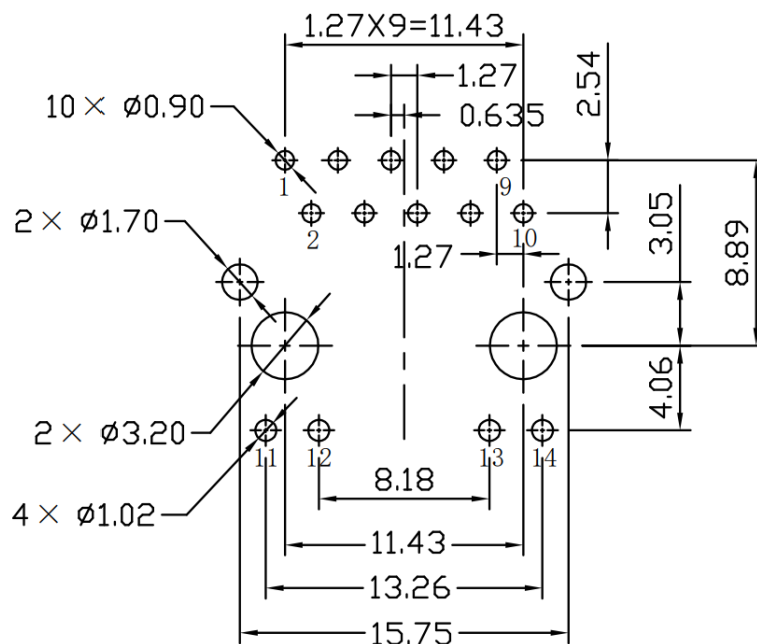


Suggested PCB Layout (Top View)

Dimensions are in millimeters with the following tolerances: X.XX = ± 0.10


4. Electrical

4.1 Electrical Drawings

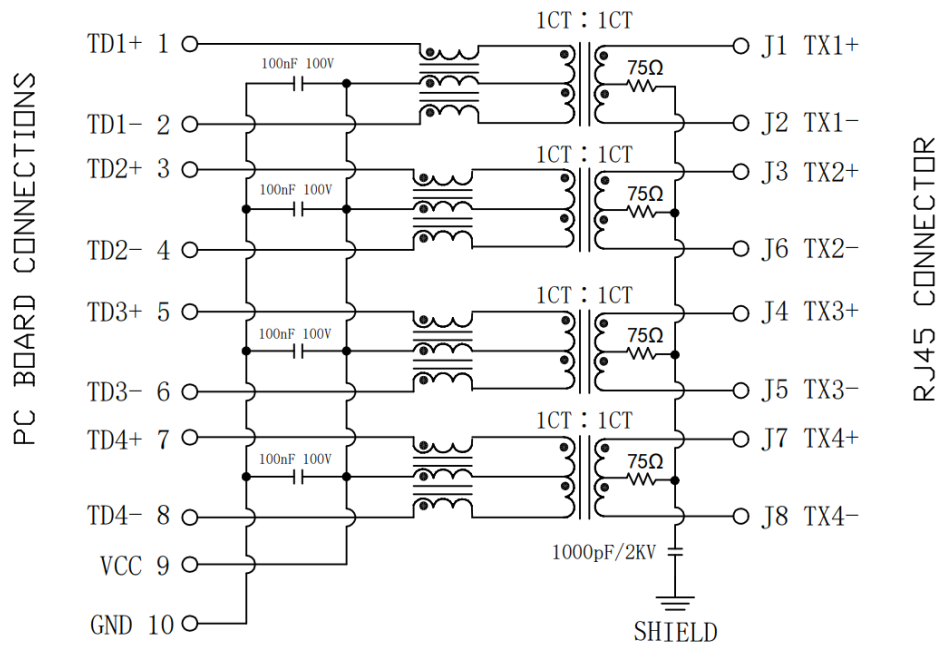


LED Electrical Specification

Standard LED	Wavelength (nm)	V_F ($I_F=20\text{mA}$)	I_R ($V_R=5\text{v}$)
Green	565	1.8~2.6v	10 μA Max
Yellow	585	1.8~2.6v	10 μA Max



4.2 Profile of Wave Solder

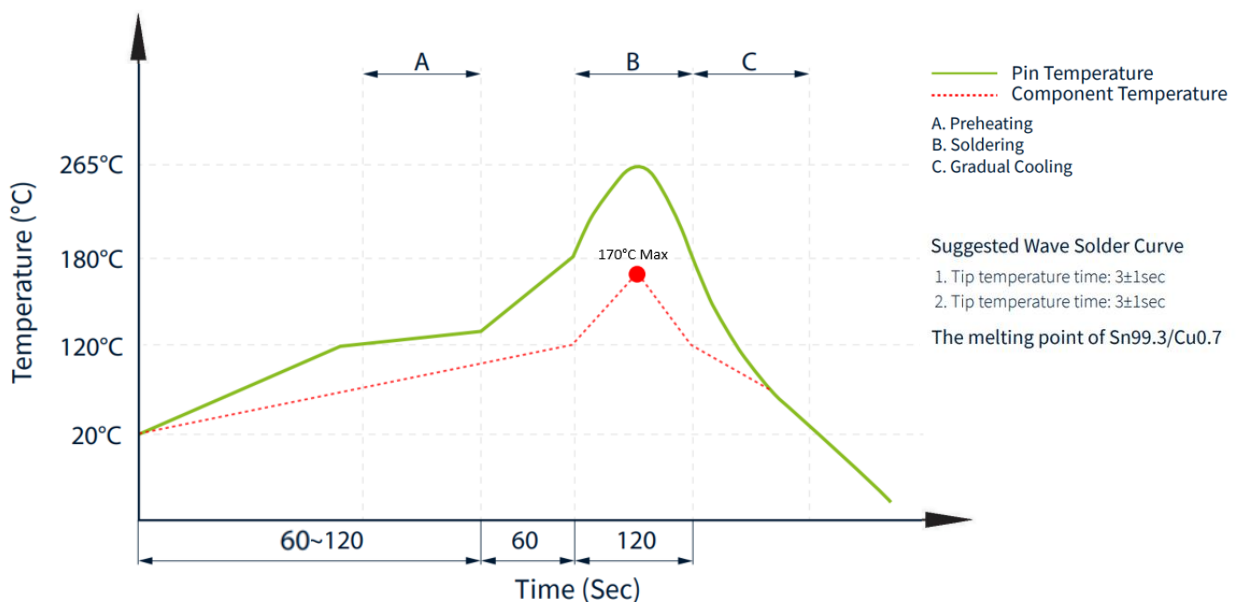


5. Packaging

5.1 SPQ

50 pcs/tray

Tray dimension: 299*163*23 mm

Tray Weight: 370g

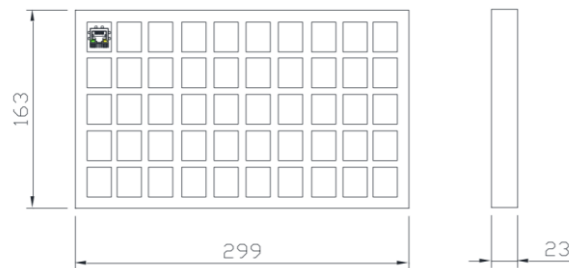

1 Carton = 24 trays = 1200 pcs

Carton dimensions: 320*300*310mm

Carton Weight: 9kg



5.2 Label

Taoglas Limited	
P/N NO: XXXXXXXX	
PO: XXXXXXXX	B/N: XXXXXXXX
QYT: XXX PCS	DC: XXXX
DATE: XXXX-XX-XX	

Carton Label (8x4cm)

Changelog

Changelog for the datasheet

SPE-23-8-164 – TMJM4938HENL

Revision: A (Original First Release)

Date:	2023-07-01
Notes:	
Author:	Javier Vasena

Previous Revisions



www.taoglas.com

