





















### 4.3 3D Radiation Patterns


2400 MHz

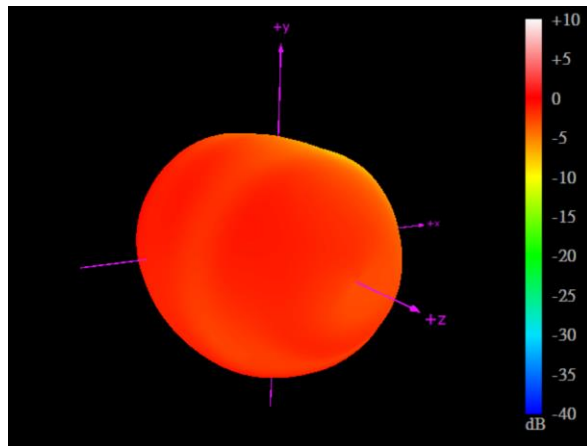


2450 MHz

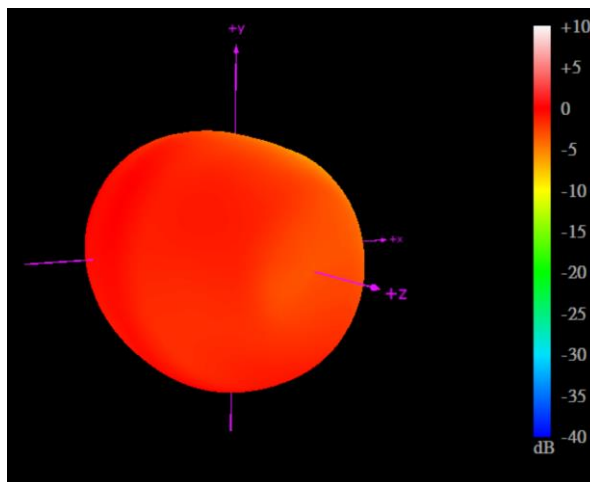


2500 MHz

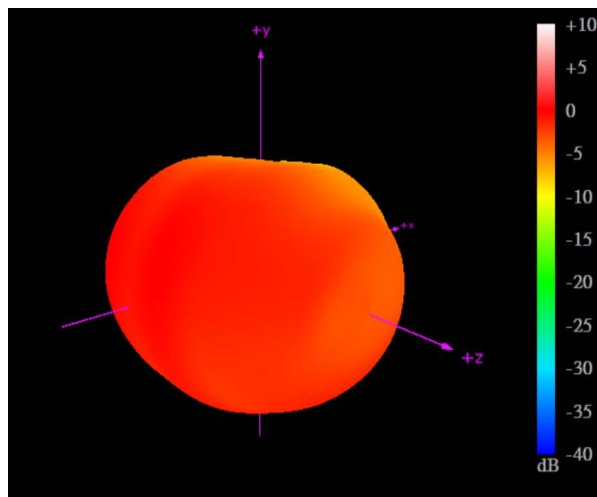


### 4.3 Axial Ratio

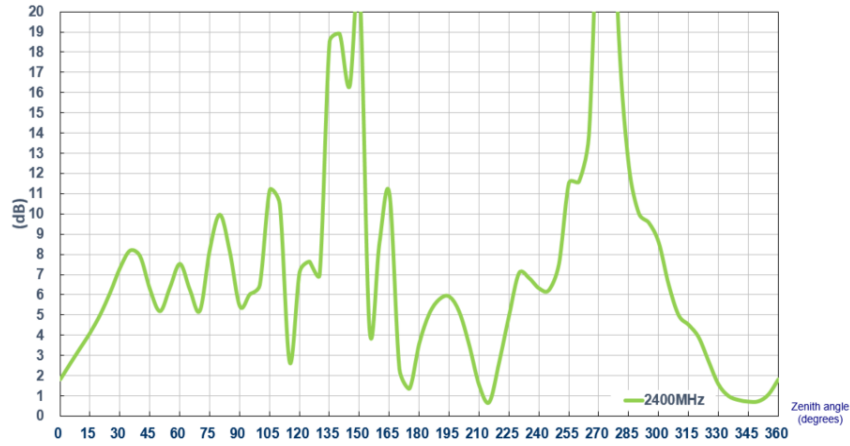

0° is toward Zenith

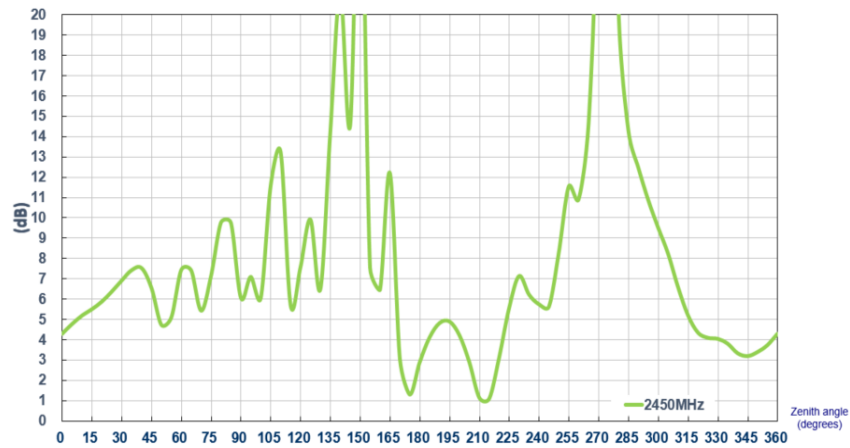


0° is toward Zenith

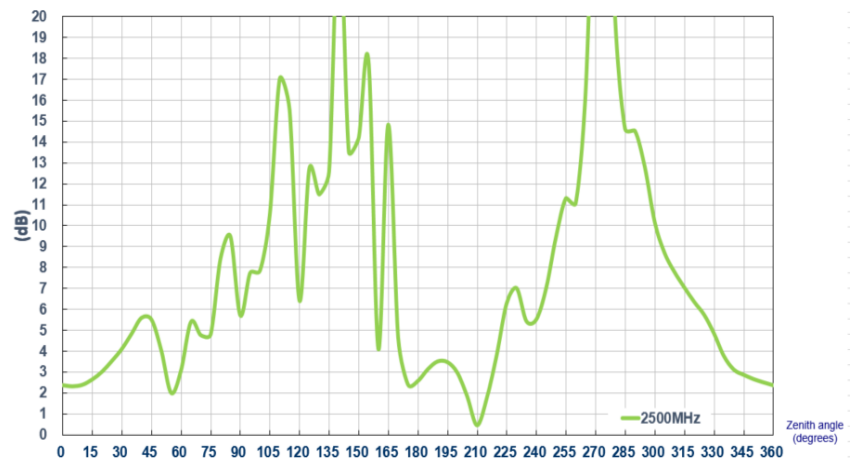

0° is toward Zenith


## 5. Mechanical Drawing (Unit: mm)

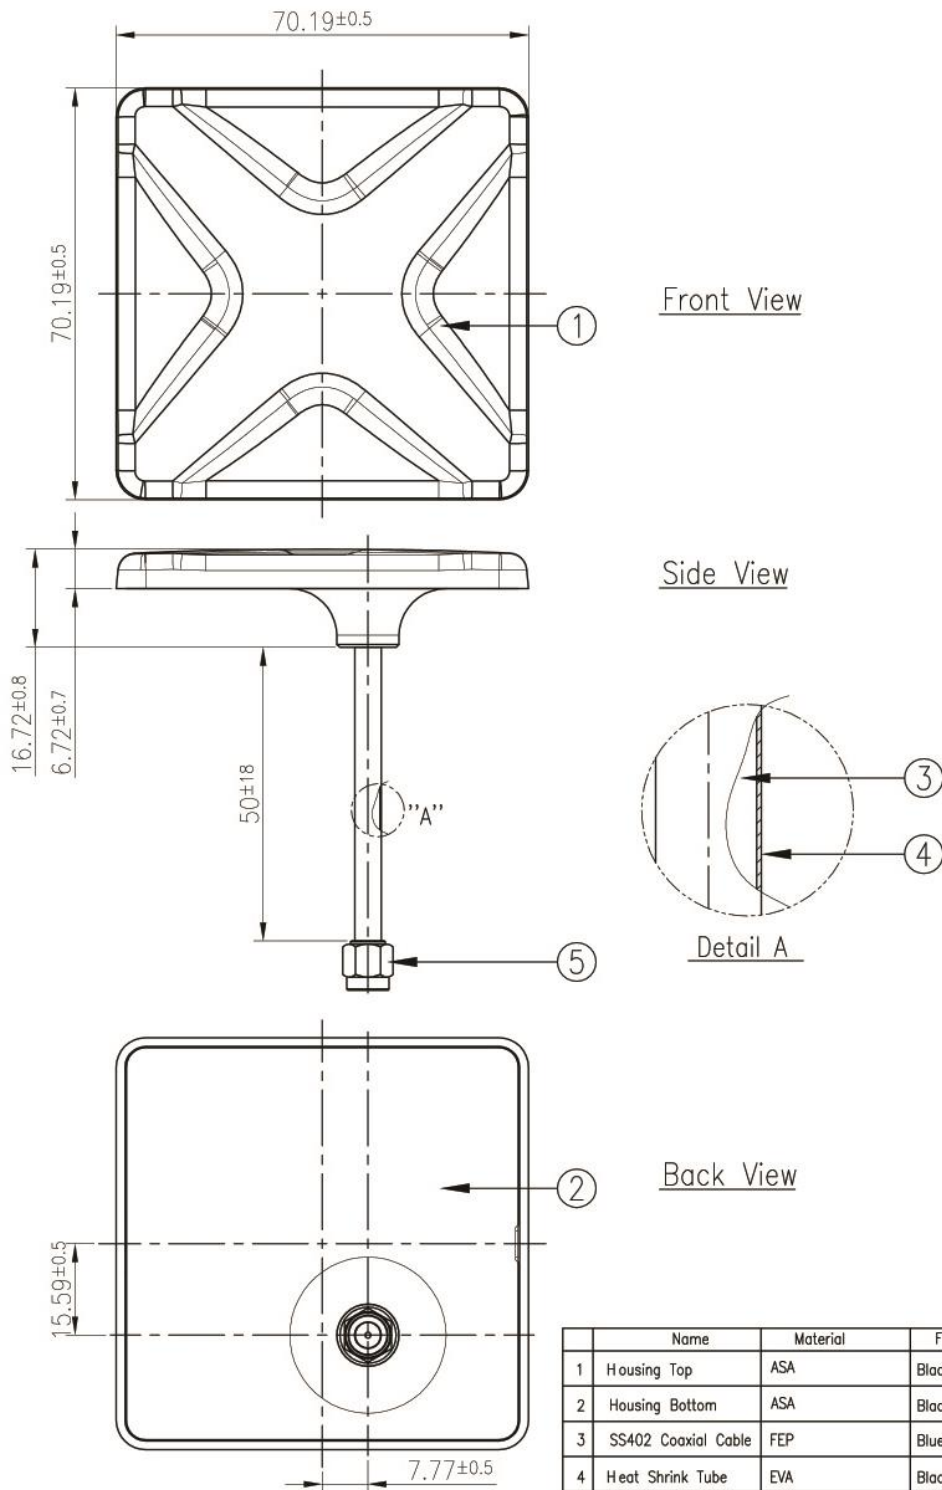


	Name	Material	Finish	QTY
1	Housing Top	ASA	Black	1
2	Housing Bottom	ASA	Black	1
3	SS402 Coaxial Cable	FEP	Blue	1
4	Heat Shrink Tube	EVA	Black	1
5	SMA(M)ST	Brass	Au Plated	1

## 6. Packaging


1 pcs WCM.02.005D111 per box  
 Box Dimensions - 75\*73\*85mm  
 Weight - 58g

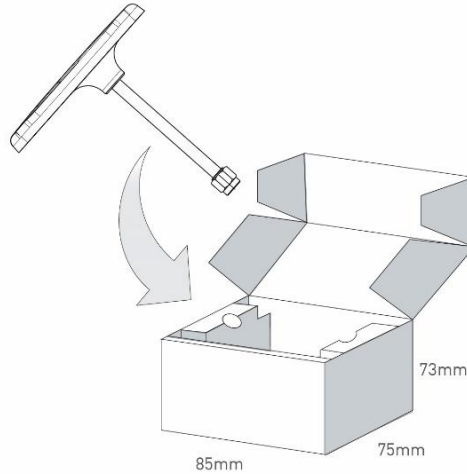

24pcs WCM.02.005D111 per carton  
 Carton Dimensions - 488\*193\*195mm  
 Weight - 1.5kg

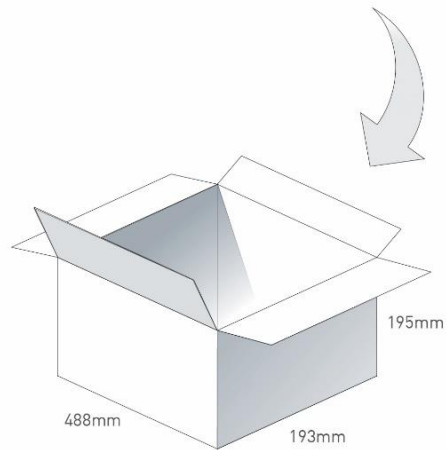

72 cartons per Pallet  
 Pallet Dimensions - 1200\*1000\*1400mm  
 12 Cartons per layer  
 6 Layers

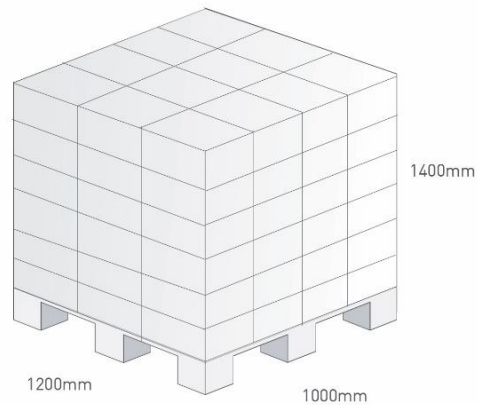

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.