



Hercules Wi-Fi® 6 Permanent Mount Antenna

Part No:

WS.03.B.305151

Description:

Hercules – Low Profile Wi-Fi® 6 Permanent Mount Antenna

Covering Frequencies 2.4 – 2.5 / 5.1 - 5.8 / 5.9 - 7.125GHz

Features:

Low Profile Permanent Mount Antenna

Covers 2.4/5.8GHz as well as Wi-Fi® 6 Frequencies: 5.9-7.125GHz

UV and Vandal Resistant ABS Housing

IP65 Rated Enclosure

Dimensions: Ø49 x 29mm

Connector: RP-SMA Male

Cable: 3m of TGC-200

RoHS & Reach Compliant



	Introduction	3
2.	Specifications	4
3.	Antenna Characteristics	5
4.	Radiation Patterns	8
5.	Mechanical Drawing	17
6.	Footprint	18
7.	Packaging	19
8.	Application Note	20
	Changelog	23

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

















1. Introduction



The Hercules WS.03 is a high efficiency, high gain permanent mount antenna designed to cover all Wi-Fi® bands including frequencies for Wi-Fi® 6, up to 7.125GHz. It has omni-directional gain across both bands ensures constant reception and transmission making the WS.03 an ideal solution for varied Wi-Fi® applications.

At only 29mm high, with a diameter of 49mm, the Hercules has been designed as a covert solution, for use in the most challenging of environments. With a durable UV-resistant ASA housing that is IP65 rated, the WS.03 is resistant to vandalism and is supplied with a heavy-duty thread for secure mounting.

Typical Applications Include:

- Remote Monitoring
- Gateways and Routers
- HD Video Streaming
- Smart Cities

Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free space can degrade by at least 1 or 2dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

The cable and connectors are fully customizable, for further information please contact your regional Taoglas customer support team.



2. Specifications

				Wi-Fi El	ectrical				
Band	Frequency (MHz)		Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max Input Power
2.4GHz		Free space	57.9	-2.37	4.85				
Wi-Fi	2400~2500	30x30cm Ground Plane	58.2	-2.35	3.25				
E OCU-		Free space	42.2	-3.74	5.25	F0.0	Lincor	Omni-	10\4/
5.8GHz Wi-Fi	5150~5850	30x30cm Ground Plane	43.8	-3.59	5.46	50 Ω	Linear	Directional	10W
7.1GHz	5925~7125	Free Space	72.5	-2.19	6.00				
Wi-Fi 6	3323 /123	Ground Plane	69.7	-2.07	8.23				


^{*}Tested on a 30x30cm Ground Plane & In Free Space.

	Mechanical
Height	29 mm
Planner Dimension	49 mm
Casing	ASA
Cable	3000mm of TGC-200
Connector	Reverse Polarity SMA Male
Base and Thread	Zinc Alloy
Thread Diameter	M18
Sealant	Silicon Rubber
Weight	130g
Recommended Mounting Torque	24.5N·m
Maximum Mounting Torque	29.4N·m
	Environmental
Temperature Range	-40°C to 85°C
Humidity Level	Non-condensing 65°C 95% RH
Ingress Protection	IP65




3. Antenna Characteristics

3.1 Return Loss

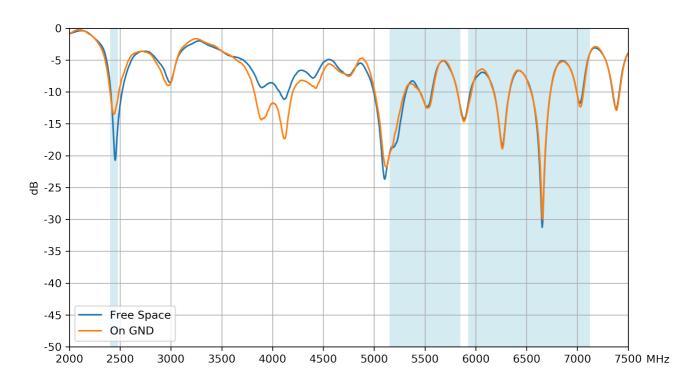


3.2 VSWR

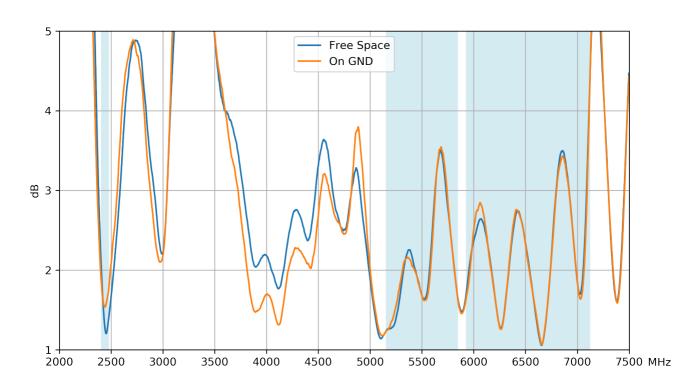




3.3 Efficiency

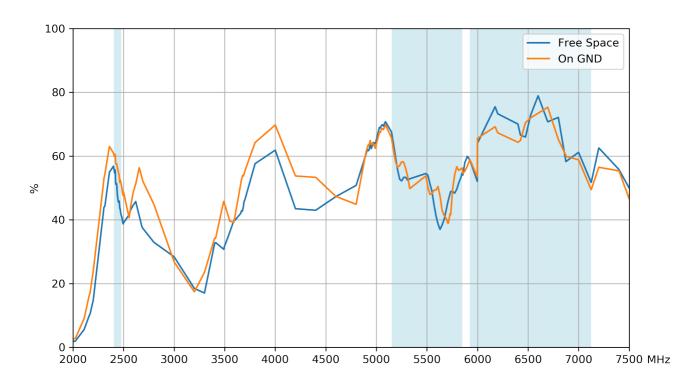


3.4 Average Gain

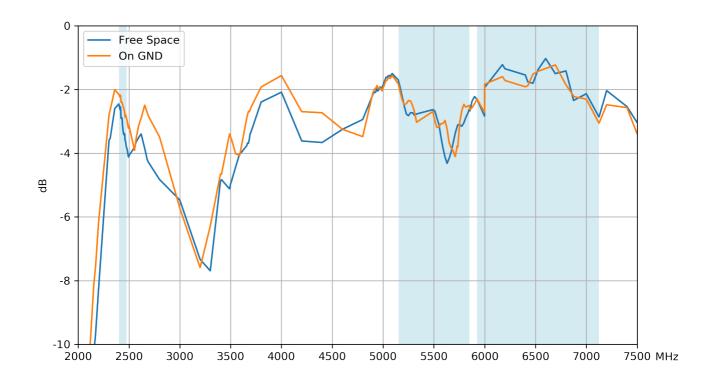




3.5 Peak Gain

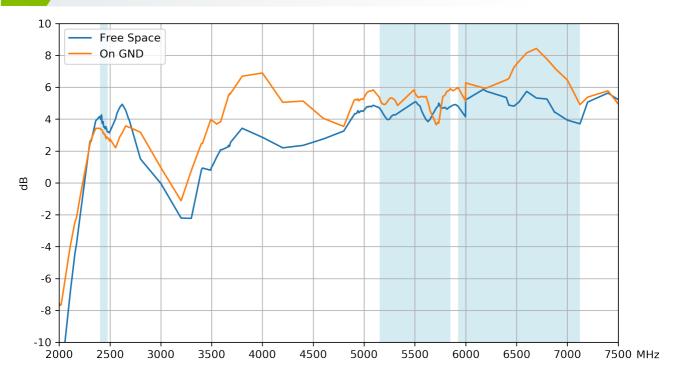



4. Radiation Patterns


4.1 Test Setups

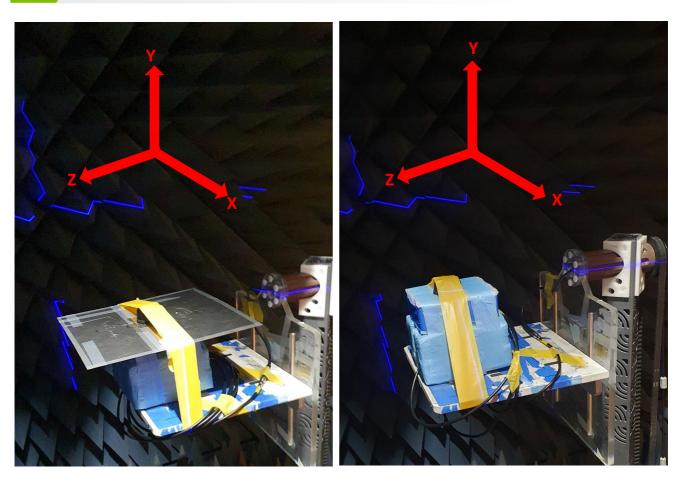




4.2 Free Space 3D and 2D Radiation Patterns


2450MHz

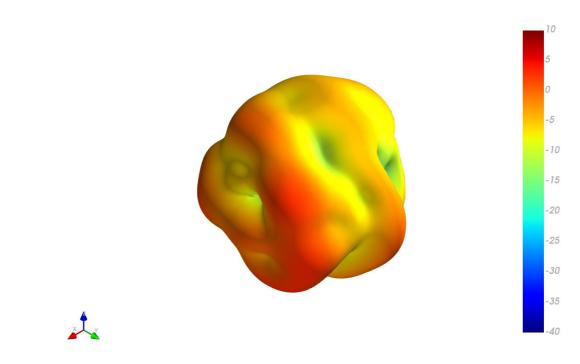


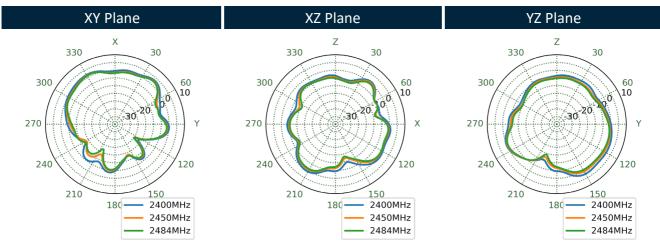




5550MHz

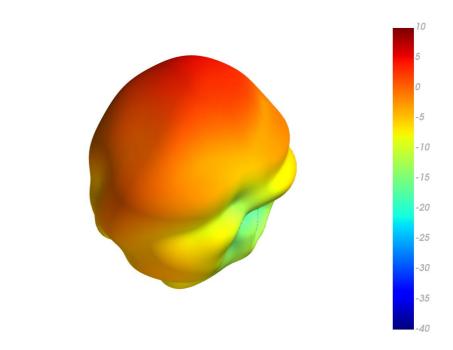


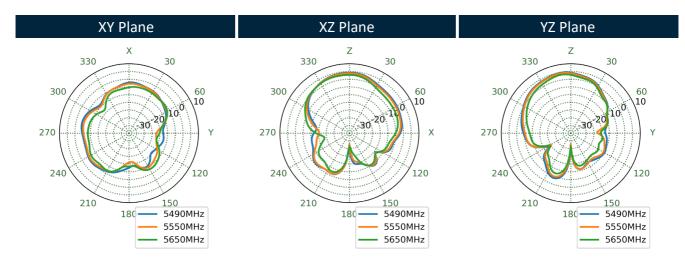




6175MHz

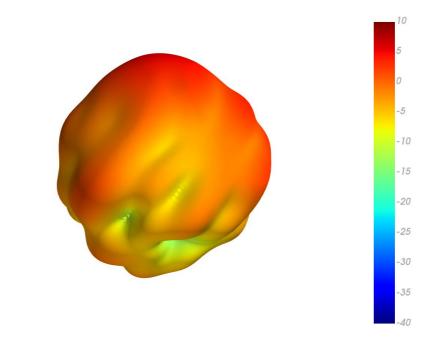


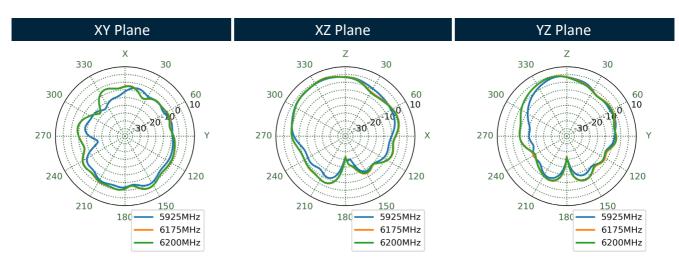



6425MHz

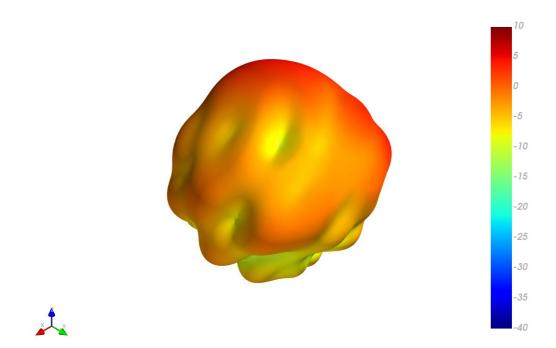


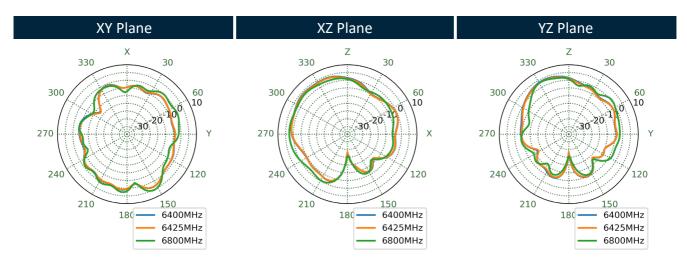




4.3 Ground Plane 3D and 2D Radiation Patterns


2450MHz

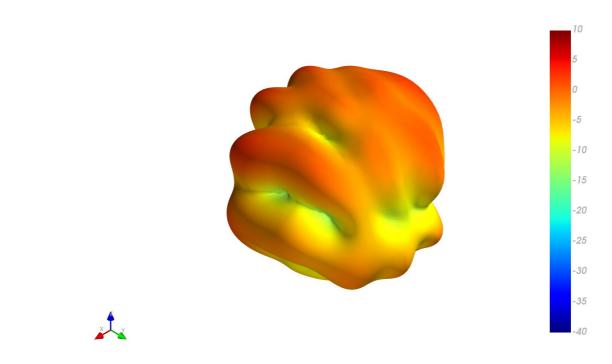


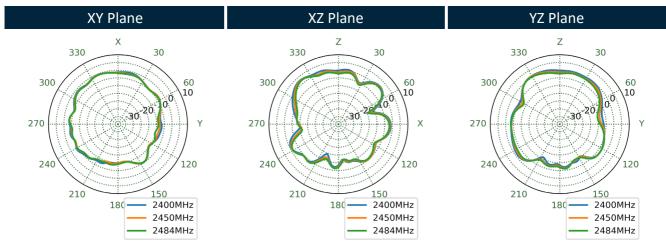




5550MHz

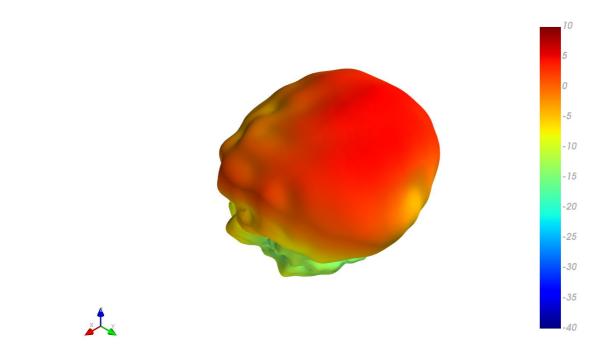


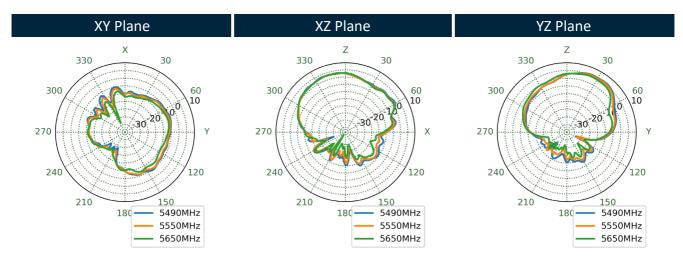




6175MHz

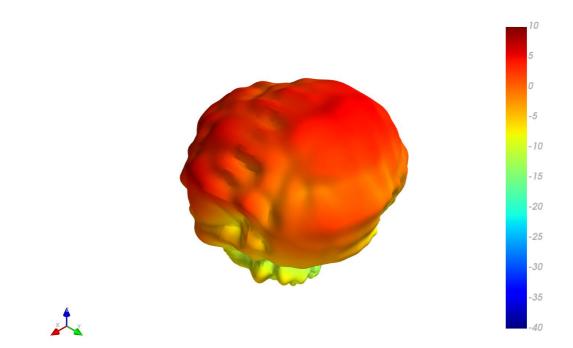


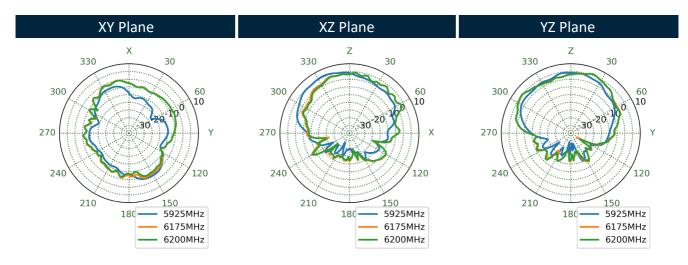




6425MHz

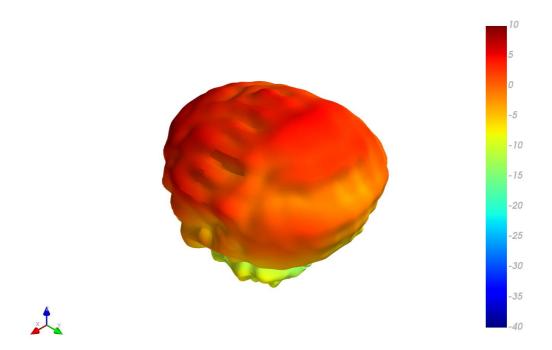

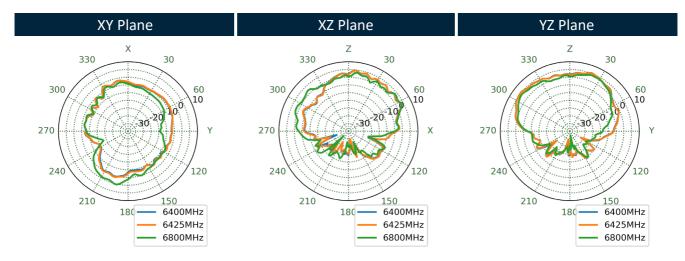




5. Mechanical Drawing (Units: mm)

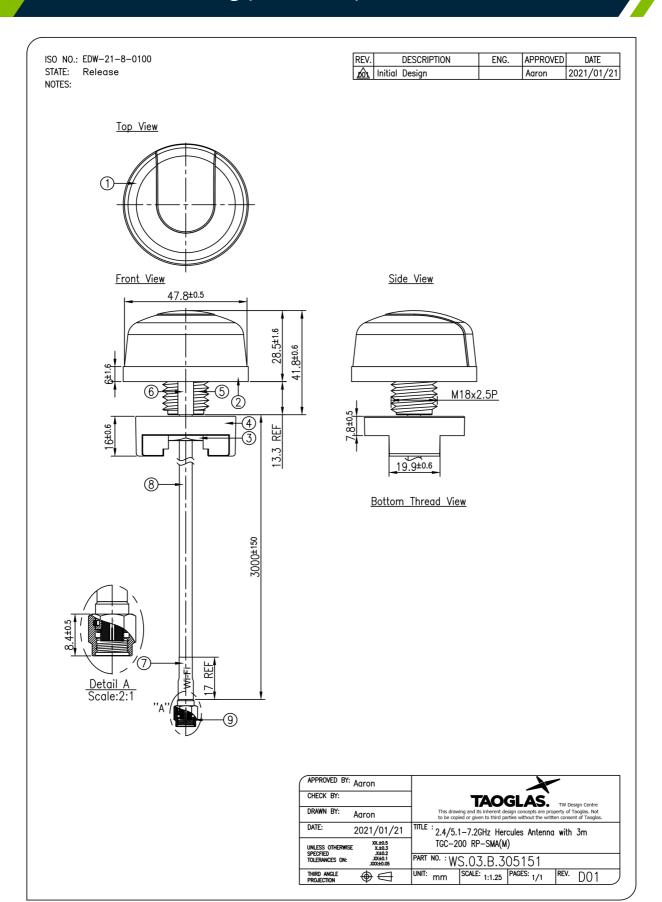



6. Installation Guidelines

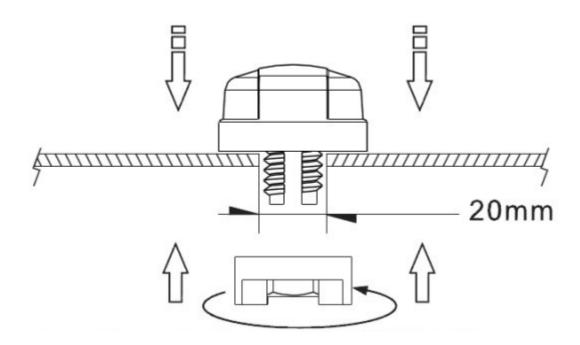




7. Packaging

1pc WS.03.B.305151 per PE Bag Weight - 130g






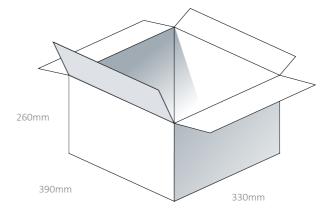




8. Application Note


8.1 Efficiency

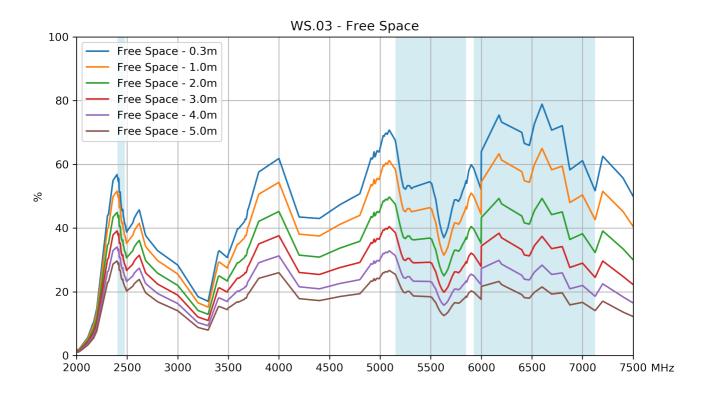


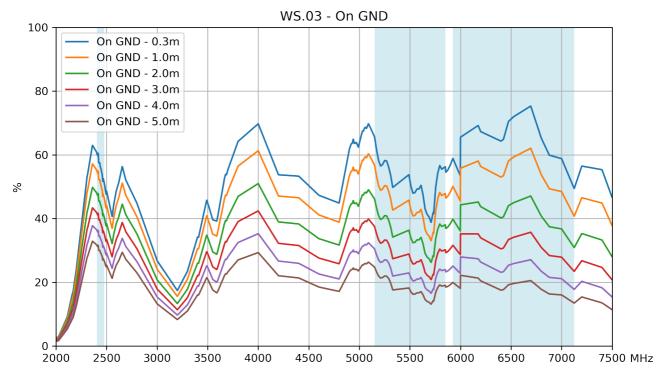




8.2 Average Gain

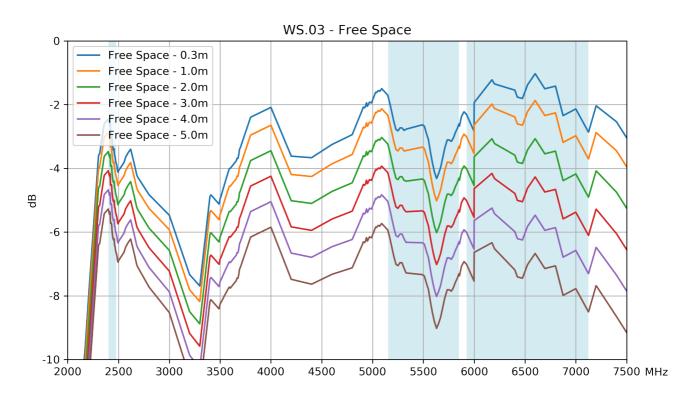


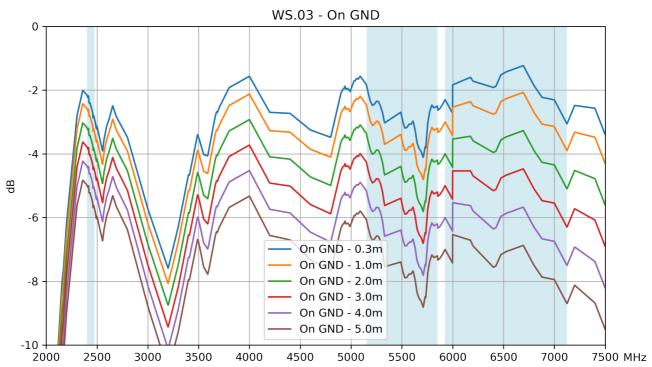



8.3 Peak Gain

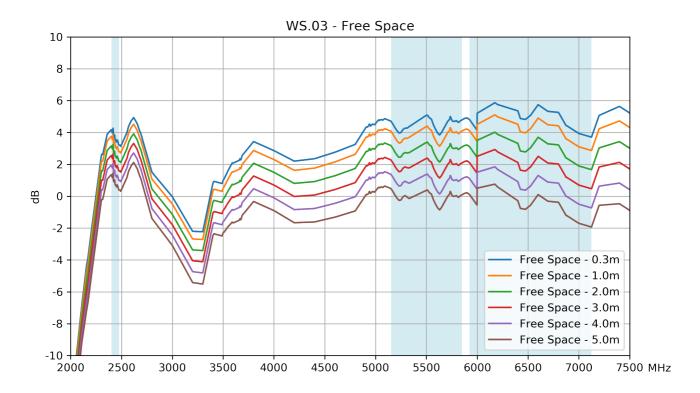

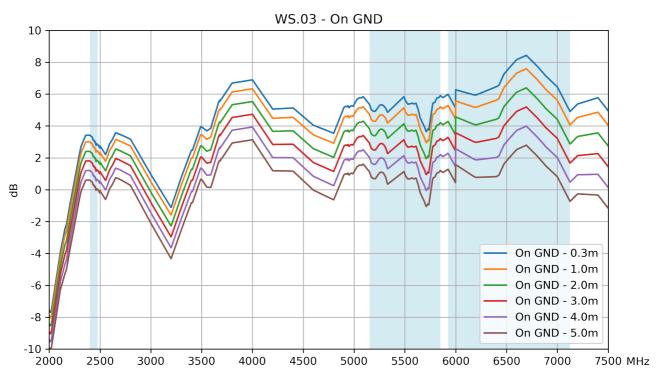



Changelog for the datasheet

SPE-21-8-022 - WS.03.B.305151

Date: 2022-12-14 Notes: Updated data	Revision: C (Current	Version)
Notes: Updated data	Date:	2022-12-14
	Notes:	Updated data
Author: Evan Murphy	Author:	Evan Murphy

Previous Revisions

evious itevisions	
Revision: B	
Date:	2021-11-22
Notes:	Updated IP65 rating
Author:	Erik Landi
Revision: A (Origina	ıl First Release)
Date:	2021-03-31
Notes:	
Author:	Jack Conroy



www.taoglas.com

