


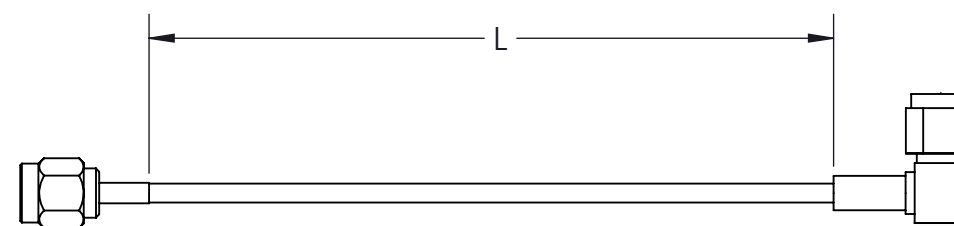
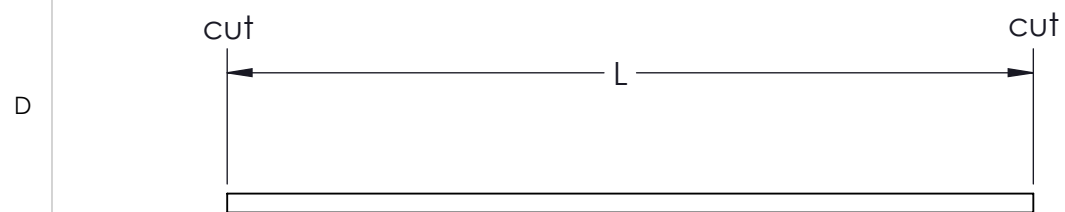


ISO NO.:


REVISIONS					
REV	ZONE	DESCRIPTION	ENG	APPROVED	ISSUED DATE

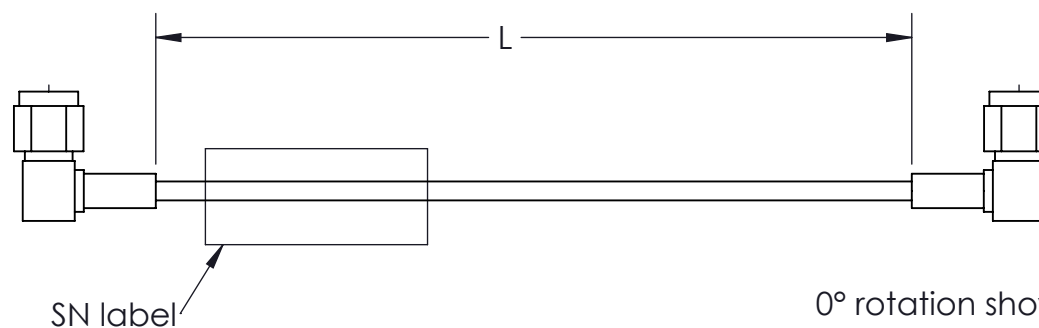




90° rotation

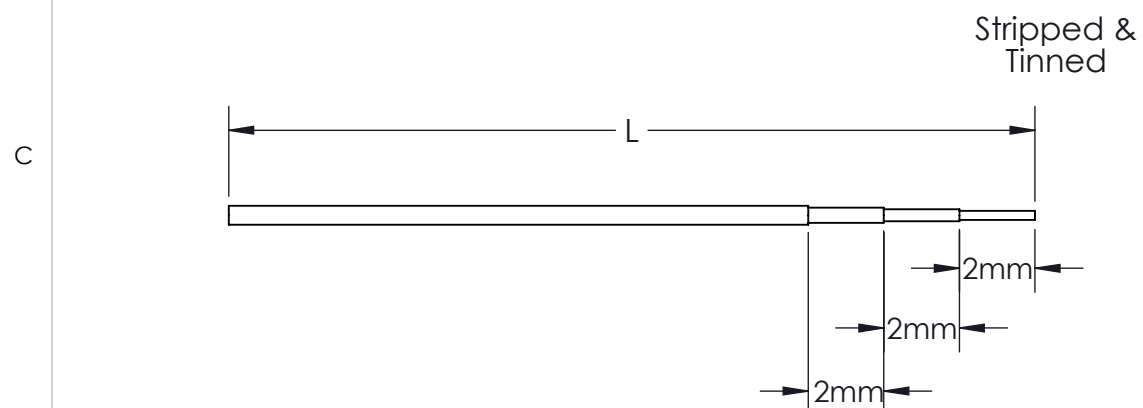

0° rotation shown



180° rotation

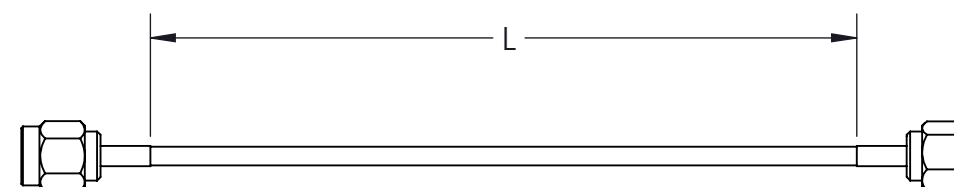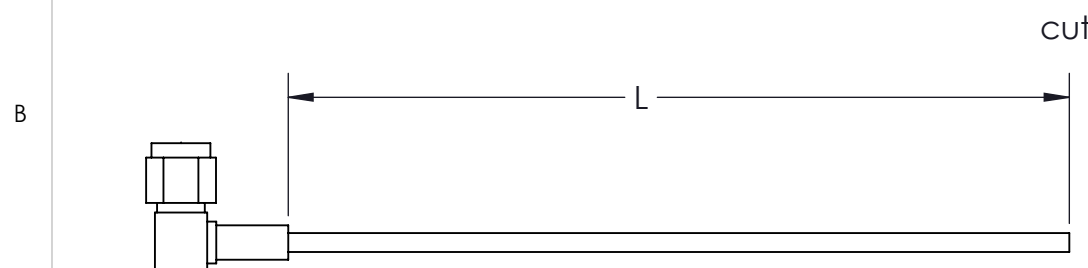

270° rotation

Applicable when two right angle connectors are selected on same cable assembly.

Length	Tolerance (-0/+X)
0 - 60cm (0 - 23.6in)	10mm (0.39in)
60cm - 1m (23.6 - 39.4in)	25mm (0.98in)
1m - 3m (39.4 - 118.1in)	50mm (1.97in)
3m - 6m (118.1 - 236.2in)	50mm (1.97in)
6m - 12m (236.2 - 472.4in)	50mm (1.97in)
12m - 18m (472.4 - 708.7in)	10cm (3.94in)
18m - 24m (708.7 - 944.9in)	20cm (7.87in)
24m - 30m (944.9 - 1181.1in)	30cm (11.8in)
> 30m (>1181.1in)	1.5% of length

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
UNLESS OTHERWISE SPECIFIED TOLERANCES ON STRIPPED & TINNED: +/-0.5mm on inner conductor +/- 1mm on dielectric & braiding	DRAWN	Megan	08/24/15
	CHECKED		
	ENG APPR.		
	CUSTOMER		
L = CABLE LENGTH AS SELECTED ON THE CABLE BUILDER APPLICATION	COMMENTS: DRAWING NOT TO SCALE		
	STANDARD LEAD TIME IS 3 WORKING DAYS PLUS SHIPPING TIME		
THIRD ANGLE PROJECTION			



PROPRIETARY AND CONFIDENTIAL  
THIS DRAWING AND ITS INHERENT DESIGN CONCEPTS ARE PROPERTY OF TADGLAS. NOT TO BE COPIED OR GIVEN TO THIRD PARTIES WITHOUT THE WRITTEN CONSENT OF TADGLAS.

TITLE: Master Cable Assembly Drawing

REV 01

PART NO.: SHEET 1 OF 1

Test Notes	
2 connectors	Tested on VNA
1 connector	Checked for continuity and short
0 connectors	No test